
DRY


WIDE RANGE & LONG TIME STORAGE



TECHNOLOGY

The **DRY** range offers a wide selection of 6V and 12V batteries, providing flexible options for various applications.
Supplied **with a separate acid pack**, these batteries **must be activated** before first use and periodically checked to ensure optimal performance.

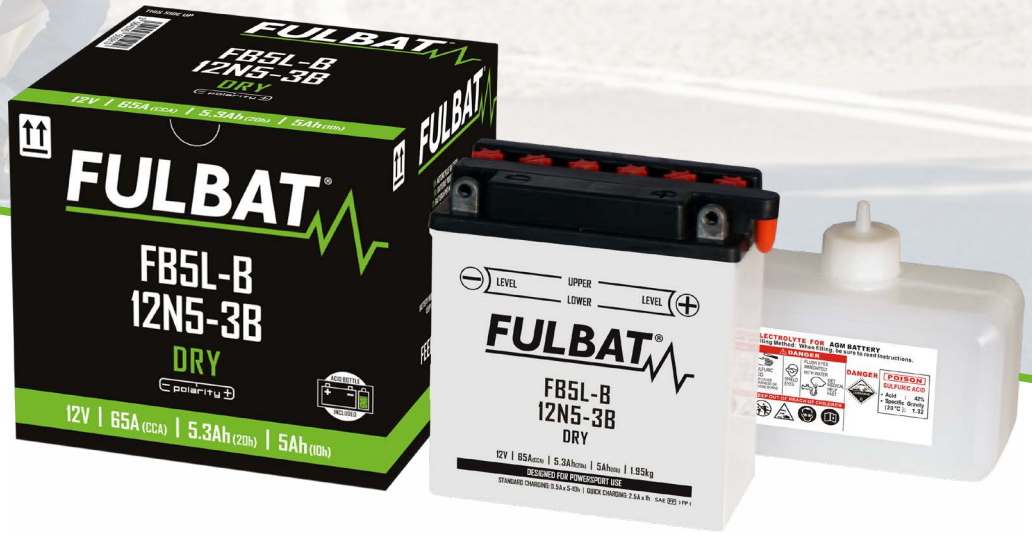



FEATURES

» **DRY charged construction:** *safe and easy to handle*
» **Acid pack included:** *to be filled before first use*
» **Periodic maintenance & refilling:** *ensures long-term reliability*
» **Upright installation only:** *no inclination*
» **Available in 6V and 12V:** *versatile selection for multiple applications*
» **Standard service life:** *dependable performance for everyday use*
» **Unlimited shelf life:** *long-term storage*

COMPATIBLE CHARGERS

» **FULLOAD F1:** *battery capacity up to 20Ah*
» **FULLOAD F4:** *battery capacity up to 80Ah*
» **FULLOAD F10:** *battery capacity up to 200Ah*
» **FULBANK F2:** *battery capacity up to 40Ah*

DESIGNATION	P/N	VOLTAGE (V)	CAPACITY Ah (20hr)	CAPACITY Ah (10hr)	CCA (A)	DIMENSIONS (+/- 2 mm)			POLARITY	TERMINAL
						L	W	H		
6N4-2A	550891	6	4.2	4	25	71	71	96		-
6N4-2A-4	550510	6	4.2	4	25	71	71	96		-
6N4B-2A	550514	6	4.2	4	35	102	48	96		-
6N6-3B	550518	6	6.3	6	50	99	57	111		
6N6-3B-1	550519	6	6.3	6	50	99	57	111		
6N11A-1B	550501	6	11.6	11	90	122	62	131		
6N11A-3A	550894	6	11.6	11	90	122	62	131		
B49-6	550893	6	8.4	8	80	91	83	160		
B38-6A	550896	6	13.7	13	105	119	83	161		
12N5.5-3B	550529	12	5.8	5.5	55	135	60	130		
12N5.5-4A	550530	12	5.8	5.5	55	135	60	130		
FB3L-A	550589	12	3.2	3	32	98	56	110		
FB3L-B	550588	12	3.2	3	32	98	56	110		
FB4L-B	550590	12	4.2	4	56	120	70	92		
FB5L-B (12N5-3B)	550591	12	5.3	5	65	120	60	130		
FB7L-B2 (12N7-3B)	550595	12	8.4	8	85	135	75	133		
FB7-A (12N7-4A)	550592	12	8.4	8	105	135	75	133		
FB7C-A	550593	12	8.4	8	85	130	90	114		
FB9-B (12N9-4B-1)	550596	12	9.5	9	115	135	75	139		
FB9L-B (12N9-3B)	550599	12	9.5	9	115	135	75	139		
FB10L-A2	550556	12	11.6	11	130	135	90	145		
FB10L-B2	550557	12	11.6	11	130	135	90	145		
FB10L-BP (FB10L-B)	550558	12	11.6	11	165	135	90	145		
FB12A-A (12N12A-4A-1)	550561	12	12.6	12	155	134	80	160		
FB12AL-A/A2	550564	12	12.6	12	155	134	80	160		
FB12A-B	550562	12	12.6	12	155	134	80	160		
FB12C-A	550566	12	12.6	12	155	134	80	175		
FB14-A2 (12N14-4A)	550567	12	14.7	14	175	134	89	166		
FB14L-A2 (12N14-3A)	550569	12	14.7	14	175	134	89	166		
FB14L-B2	550570	12	14.7	14	175	134	89	166		
FB14A-A2	550571	12	14.7	14	175	134	89	176		
FB16B-A1	550897	12	16.8	16	210	160	90	161		
FB16AL-A2	550576	12	16.8	16	210	207	71	164		
FB16CL-B	550579	12	20.0	19	240	175	100	175		
FB30L-B	550552	12	31.6	30	300	165	130	176		
FB30CL-B	550553	12	31.6	30	300	165	130	192		
F50-N18L-A/A2 /12N18-3A	550547	12	21.1	20	260	205	90	162		
F50-N18L-A3	550899	12	21.1	20	260	205	90	162		
51913	550542	12	19	-	210	186	82	171		
53030 (F60-N30L-A)	550544	12	30	-	300	186	130	171		
53034 (F60-N30-A)	550546	12	30	-	300	186	130	171		

Under European Union regulations effective February 1st, 2021, batteries with separate acid packs can no longer be sold to end users.
Only qualified professionals may purchase batteries supplied with electrolyte packs.

UPGRADE CROSS REFERENCE CHART











BATTERY MODEL EQUIVALENTS

DRY	MF	GEL	LITHIUM	SODIUM
6N4-2A - 6N4-2A-4		6N4-2A/A-4		
6N6-3B - 6N6-3B-1		6N6-3B/B-1		
B49-6		B49-6		
B38-6A		B38-6A		
6N11A-1B - 6N11A-3A		6N11A-1B/3A		
12N5.5-3B		12N5.5-3B		
12N5.5-4A		12N5.5-4A/4B		
FB3L-A - FB3L-B		FB3L-A/B		
FB4L-B		FB4L-B	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
FB5L-B - 12N5-3B		FB5L-B GEL		
12N7-4A - FB7-A		FB7-A		
FB7C-A		FB7C-A		
FB7L-B - FB7L-B2 - 12N7-3B		FB7L-B/B2	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
FB9-B - 12N9-4B1	FT9A-BS	FB9-B		
FB10L-A2 - FB10L-B2 - 12N10-3A/B		FB10L-A2/B2		
FB12AL-A/A2		FB12AL-A2		
FB12A-A -FB12A-B - 12N12A-4A-1		FB12A-A/B		
FB14A-A1 - FB14A-A2		FB14A-A2		
FB16AL-A2		FB16AL-A2		
FB16CL-B		FB16CL-B	FLTX20HL	
	FT4B-BS	FT4B-BS		
	FTR4A-BS	FTR4A-BS		
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
	FTX5L-BS	FTX5L-BS/FTZ6S	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
	FTX7A-BS	FTX7A-BS	FLTX7A/9 - FLTZ10S	
	FTX7L-BS	FTX7L-BS	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
	FTX9-BS	FTX9-BS	FLTX7A/9 - FLTZ10S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
	FT12A-BS	FT12A-BS	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
	FTX12-BS	FTX12-BS	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
	FTX14-BS	FTX14-BS - FHD14H-BS	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
	FTX14L-BS	FTX14L-BS GEL - FHD14HL-BS		
FB14-A2 - FB14-B2 - 12N14-4A	FTX14AH-BS	FTX14AH-BS / FB14-A2		
FB14L-A2 - FB14L-B2 - 12N14-3A	FTX14AHL-BS	FTX14AHL-BS / FB14L-A2		
	FTX16-BS	FTX16	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
FB16-B	FTX20-BS	FTX20-BS	FLTX20H	
	FTX20A-BS	FTX20A-BS	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
FB16L-B - FB18L-A	FTX20L-BS	FTX20HL-BS GEL - FHD20HL-BS	FLTX20HL	
F50-N18L-A/A2 /12N18-3A -F50-N18L-A3	FTX24HL-BS	FTX24HL-BS / F50-N18L-A/A2/A3		
FB30L-B	FIX30L-BS	FIX30L-BS GEL - FHD32HL-BS	FLTX30HL	
		FTZ7V	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
		FTZ7S GEL - FTZ8V	FLTX4L/5L/7L - FLTZ5S/6S/7S	FSTX4L/5L/7L - FSTZ5S/6S/7S
		FT7B-4	FLT7B/9B	FST7B/9B
		FT9B-4	FLT7B/9B	FST7B/9B
		FTZ10S	FLTX7A/9 - FLTZ10S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
		FTZ12S	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
		FT12B-4	FLT12B/14B	
		FTZ14S	FLTX12/14 - FLTZ12S/14S	FSTX7A/9/12/14 - FSTZ10S/12S/14S
		FT14B-4	FLT12B/14B	
51814 - 51913		NH12-20		
F60-N30L-A - 53030		53030	FLTX30HL	
F60-N30-A - 53034		53034		

Important: Before upgrading to LITHIUM or SODIUM, verify that the bike's voltage regulator limits output to 15V or less.