
CATERING EQUIPMENT

CATALOGUE

2027



QUICK NAVIGATION

FOOD PREPARATION	3
PACKAGING	27
COOKING EQUIPMENT	35
BEVERAGE	119
WASHING & HARDWARE	133
BUFFET & SERVING	151
REFRIGERATION & DISPLAY	165
TRANSPORT, TROLLEYS & EXTRAS	217
FURNITURE	235

WHAT DOES IT MEAN?



REFRIGERATED UNITS



HEATED UNITS



NEUTRAL UNITS



GAS UNITS



ELECTRIC UNITS



PACKAGING
DIMENSIONS



PIZZAS
PER DECK



BAKING TRAYS
PER DECK



Warranty Statement

Our product comes standard with a 1 year warranty. Products marked with a warranty stamp has an extended warranty as indicated. Warranties are in line with our standard terms and conditions. Please note that parts which naturally wear out over time through regular use (often called "wear and tear" parts) are not covered under this warranty. If you ever need help with servicing or replacement parts, our team will be happy to assist you.

Transform Your Dining Experience With Our
NEW Furniture Division

PAGE 235

TENSAI

F U R N I T U R E



CATAS
Testing Certification Research

**INFINITE STACK - DURABLE CONSTRUCTION - LIGHTWEIGHT
- ENHANCED COMFORT - VERSATILE USE - MODERN AESTHETIC**

SmartChef

Professional kitchen

Bowl Cutters



Mix



Grind



Chop



Puree

Relentless Performance
Made for Demanding Kitchens.

SECTION INDEX

Blenders	6-7
Bowl cutters	5
Burger patty presses	13
Cake Decorating Machines	21
Cake mixers	14-16
Chip cutters	9
Cold meat slicers	10
Dehydrators	22
Dough divider & rounders	20
Dough mixers	17-18
Dough rollers	19
Dough sheeters	20
Food Choppers	5
Food Dehydrators	22
Fry cutters	9
Hamburger presses	13
Immersion Blenders	7
Kitchen assistants	14-15
Meat Miners	11
Meat slicers	10
Mincers	11
Mixers	14-18

Pastry sheeters	20
Patty presses	13
Pizza dough rollers	19
Planetary mixers	14-16
Polony slicers	10
Potato chippers	9
Potato peelers	8
Sausage fillers	12
Scales	23
Slicers	10
Smoothie makers	6
Spiral dough mixers	17-18
Spiral potato cutters	9
Stick Blenders	7
Tomato slicers	9
Vegetable preparation machines	4



FEATURES

- Aluminium and magnesium alloy body
- Ventilated motor, allowing continuous operation
- Rounded edges for easy cleaning
- Feeder stick and cleaning brush included
- Fitted with a safety micro switch to stop operation when cover is opened
- Motor has thermal protection against over heating
- Removable hinged lid equipped with a large half moon or large round mouth
- Fitted with non-slip rubber feet



**HALF-MOON
FEEDER MOUTH**

SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	230 x 490 x 500mm high
WEIGHT	23kg
SPEED	375rpm - Single speed
FEEDER	Half moon 160 x 80mm
BLADES INCLUDED	2mm slicer 4mm slicer 2mm grater 3mm grater 7mm grater

ORDER CODE

VPS0001



**LARGE, ROUND
FEEDER MOUTH**

SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	230 x 490 x 500mm high
WEIGHT	23kg
SPEED	375rpm - Single speed
FEEDER	Round Ø190mm
BLADES INCLUDED	2mm slicer 4mm slicer 3mm grater 4mm grater 7mm grater

ORDER CODE

VPS0002



OPTIONAL BLADES

GRATING BLADES

- 3mm VPS1003
- 7mm VPS1007
- 4mm VPS1004

SLICING BLADES

- 2mm VPS2002
- 8mm VPS2008
- 14mm VPS2014
- 4mm VPS2004
- 10mm VPS2010

CURVED SLICING BLADES

- 1mm VPS3001
- 5mm VPS3005
- 2mm VPS3002

CHIPPING BLADES

must be used with a slicing disk

- 8mm VPS4008
- 10mm VPS4010

JULIENNE BLADES

- 2.5mm VPS5025
- 8mm VPS5008
- 4mm VPS5004
- 10mm VPS5010

DICING BLADES

must be used with a slicing disk

- 8mm VPS6008
- 12mm VPS6012
- 10mm VPS6010
- 20mm VPS6020

PARMESAN BLADES

ORDER CODE VPS7001

EJECTOR PLATE

ORDER CODE VPS9000





FEATURES

- Manufactured with food-grade 304 stainless steel and premium-grade plastic
- Stainless steel blade assembly
- Two speed settings
- Over-heat protection
- Magnetic safety switch that activates only when the lid is securely in place
- Detachable blades and bowl make cleaning easy and fast
- Supplied with a non-slip base mat

8 LITRE FOOD CHOPPER

SPECIFICATIONS

ELECTRICITY	1.2kW, 220V, Single Phase
DIMENSIONS	365 x 270 x 355mm high
WEIGHT	5kg
BOWL SIZE	8Lt
CAPACITY	3 to 4 Lt/kg
REVOLUTION	1100 / 3000 rpm

ORDER CODE

BCS1008



NEW

INTENDED FOR LIGHT COMMERCIAL USE

FEATURES

- Robust stainless steel body and bowl
- Lid is fitted with a large dosing cup to easily add liquid
- Fitted with a safety switch
- Transparent cover for easy viewing of product
- Easy removable cutting bowl and blades
- Fitted with (4x) non-slip feet




6 LITRE COUNTER TOP

SPECIFICATIONS

ELECTRICITY	1.8kW, 220V, Single Phase
DIMENSIONS	380 x 280 x 380mm high
WEIGHT	18kg
BOWL SIZE	6Lt
CAPACITY	2.5 Lt
REVOLUTION	1100 / 2800 rpm

ORDER CODE

BCS0006



9 LITRE COUNTER TOP

SPECIFICATIONS

ELECTRICITY	1.8kW, 220V, Single Phase
DIMENSIONS	470 x 240 x 400mm high
WEIGHT	20kg
BOWL SIZE	9Lt
CAPACITY	4 Lt
REVOLUTION	1100 / 2800 rpm

ORDER CODE

BCS0009



FEATURES

- Stainless steel construction and transparent lid
- Tilting system for easy discharge of the processed product
- Functions: Chop, grind and emulsify
- Blade assembly consisting of 4 blades
- Transparent cover with safety switch for easy viewing of product
- Fitted with 4 castors for easy mobility. 2 lockable

18 LITRE FLOOR STANDING

SPECIFICATIONS

ELECTRICITY	2.2kW, 230V, Single Phase
DIMENSIONS	620 x 450 x 945mm high
WEIGHT	68kg
SPEED	1400rpm - Single speed
BOWL SIZE	18 Litre
CAPACITY	10 Lt
TIMER	10 to 120 sec.

ORDER CODE

BCS0018



35 LITRE FLOOR STANDING

SPECIFICATIONS

ELECTRICITY	5.5kW, 380V, 3 Phase
DIMENSIONS	675 x 525 x 1050mm high
WEIGHT	102kg
SPEED	1400rpm - Single speed
BOWL SIZE	35 Litre
CAPACITY	19 Lt
TIMER	10 to 120 sec.

ORDER CODE

BCS0035



60 LITRE FLOOR STANDING

SPECIFICATIONS

ELECTRICITY	10kW, 380V, 3 Phase
DIMENSIONS	910 x 650 x 1270mm high
WEIGHT	185kg
SPEED	1400rpm - Single speed
BOWL SIZE	60 Litre
CAPACITY	30 Lt
TIMER	10 to 120 sec.

ORDER CODE

BCS0060





FEATURES

- Modern design ABS housing
- Fitted with a stainless steel blade assembly
- Housing fitted with non-slip feet
- RUSH and VORTEX SC fitted with a Polycarbonate soundproof cover as standard (*Optional extra for the VORTEX*)
- Durable food grade Polycarbonate jar
- Over-heat, auto shut-off safety function
- Industrial grade, heavy duty motor with pure copper coil
- Various speed control, time and pulse action
- Removable dosing cup and stir bar included



RUSH (WITH SOUND COVER)

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	246 x 270 x 490mm high (closed) 246 x 270 x 700mm high (open)
WEIGHT	9kg
MAX SPEED	13 500rpm - Touch control
JAR CAPACITY	1.8Lt
ORDER CODE	BSB2880C-C



TOUCH CONTROL



SMOOTH BLADE



DC MOTOR



The **SmartBlend RUSH** blenders are fitted with a powerful **DC motor** ensuring **precise speed control** with a **high torque-to-weight ratio**.

DC motors are designed to deliver power efficiently, minimizing energy waste and maximizing the **blending performance**. These motors are generally **quieter** than AC motors, making them a smarter option for commercial appliances.



VORTEX SC (WITH SOUND COVER)

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 540mm high (closed) 230 x 250 x 790mm high (open)
WEIGHT	9kg
MAX SPEED	23 500rpm - Touch control
JAR CAPACITY	2Lt
ORDER CODE	BSB1680C-C



TOUCH CONTROL



SERRATED BLADE



1 SMARTBLEND is the preferred blender of many of South Africa's leading franchise chains.

Renowned for its outstanding performance, proven reliability, and cost-effective operation, **SMARTBLEND** has earned a reputation as a dependable solution for demanding commercial environments.

Built to deliver consistent results day after day, it offers the perfect balance of efficiency, durability, and exceptional value.



VORTEX

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 520mm high
WEIGHT	6kg
MAX SPEED	23 500rpm - Manual control
JAR CAPACITY	2Lt

WITH SOUND COVER

ORDER CODE BSB1680M-C

WITHOUT SOUND COVER

ORDER CODE BSB1680



MANUAL CONTROL



SERRATED BLADE



STORM

SPECIFICATIONS

ELECTRICITY	1.1kW, 220V, Single Phase
DIMENSIONS	225 x 210 x 490mm high
WEIGHT	4kg
MAX SPEED	21 000rpm - Manual control
JAR CAPACITY	2Lt

ORDER CODE

BSB0112



MANUAL CONTROL



SERRATED BLADE



OPTIONAL EXTRAS



SOUND COVER VORTEX
BSB1680-S-COVER



1.8Lt JAR & TAMPER
RUSH
BSB2880-JAR1.8L



2Lt JAR & TAMPER
VORTEX SC, VORTEX
BSB1680-JAR2L

2Lt JAR & TAMPER
STORM
BSB0112-JAR2L

FEATURES

- Pure copper motor (ventilated)
- Multiple compatible tubes and whisk (not included)
- Durable plastic housing
- Optional support bracket available
- Adjustable speed settings



350W

SPECIFICATIONS

ELECTRICITY	0.35kW, 220V, Single Phase
DIMENSIONS	Ø96 x 370mm high
WEIGHT	2kg
SPEED	4 000 - 16 000rpm

ORDER CODE IBS0350

COMPATIBLE ATTACHMENTS (NOT INCLUDED)



IBS-T-0250
IBS-T-0300
IBS-T-0350



IBS-W-0250



500W

SPECIFICATIONS

ELECTRICITY	0.5kW, 220V, Single Phase
DIMENSIONS	Ø96 x 370mm high
WEIGHT	2.5kg
SPEED	4 000 - 16 000rpm

ORDER CODE IBS0500

COMPATIBLE ATTACHMENTS (NOT INCLUDED)



IBS-T-0350
IBS-T-0450



IBS-W-0250



750W

SPECIFICATIONS

ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	Ø116 x 396mm high
WEIGHT	3kg
SPEED	8 000 - 18 000rpm

ORDER CODE IBS0750

COMPATIBLE ATTACHMENTS (NOT INCLUDED)



IBS-T-0350
IBS-T-0450



IBS-W-0250



ATTACHMENTS

TUBES

SPECIFICATIONS

DIMENSIONS	Ø35 x 250mm
ORDER CODE	IBS-T-0250
DIMENSIONS	Ø35 x 300mm
ORDER CODE	IBS-T-0300
DIMENSIONS	Ø35 x 350mm
ORDER CODE	IBS-T-0350
DIMENSIONS	Ø35 x 450mm
ORDER CODE	IBS-T-0450

WHISK

SPECIFICATIONS

DIMENSIONS	90 x 250mm
ORDER CODE	IBS-W-0250

SUPPORT BRACKET

ORDER CODE IBS-SB





15 KG WITH TIMER

SPECIFICATIONS

ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	715 x 440 x 1420mm high
WEIGHT	60kg
CAPACITY	15kg
TIMER	0 to 5 min

ORDER CODE PPS0015

FEATURES

- Easy to clean, Stainless Steel body, stand and waste tray
- High-Efficiency abrasive peeling plate
- Transparent lid for easy monitoring
- Fitted with safety switch and emergency stop
- Fitted with water inlet for convenient operation and waste outlet for easy cleaning
- Non-slip feet for stable operation



6 KG

SPECIFICATIONS

ELECTRICITY	0.37kW, 220V, Single Phase
DIMENSIONS	570 x 335 x 690mm high
WEIGHT	30kg
CAPACITY	6kg
TIMER	No

ORDER CODE PPS0006



**PERFECTLY PEELED
POTATOES IN
PRACTICALLY
NO TIME.**

VEGETABLE CUTTERS



FEATURES

- Heavy-duty, cast aluminium frame and handle
- Clean and durable stainless steel "V" trough for smooth operation
- Screw holes on base of legs for permanent mounting to table or wall
- Supplied with 6, 9 and 13mm interchangeable block & blade sets

FRY CUTTER

SPECIFICATIONS

DIMENSIONS 430 x 220 x 330mm high
CUT SIZE 6/9/13mm
WEIGHT 3.5kg

ORDER CODE FCS0009

OPTIONAL WALL BRACKET

ORDER CODE WBS0000



FEATURES

- Manufactured from stainless steel
- Replaceable stainless steel blade
- Fixed shaft with hole for the skewer
- Easy to operate
- Gear release for easy adjustments
- Fitted with (4x) non-slip rubber feet

SPIRAL POTATO CUTTER

SPECIFICATIONS

DIMENSIONS 340 x 130 x 140mm high
WEIGHT 1kg

ORDER CODE SPC0001

SmartChef



FEATURES

- Heavy-duty, cast aluminium frame and handle
- Fitted with a heavy-duty spring
- Easy interchangeable block and blade
- Easy to operate
- Maximum potato size - 150mm

CHIPPERS

SPECIFICATIONS

DIMENSIONS 330 x 140 x 640mm high
WEIGHT 4kg

6 HOLE

HOLES / SIZE 6 x 6 / 14mm
ORDER CODE CHS0006

7 HOLE

HOLES / SIZE 7 x 7 / 12mm
ORDER CODE CHS0007

OPTIONAL CHIPPER BRIDGE

ORDER CODE CBS0000



FEATURES

- Robust stainless steel construction
- Smooth sliding action
- Easy to operate and clean
- 13 Blade assembly
- Fitted with (4x) suction-cup feet

TOMATO SLICERS

SPECIFICATIONS

DIMENSIONS 430 x 200 x 210mm high
WEIGHT 5kg
SLICE THICKNESS 4mm

ORDER CODE TSS0004



FEATURES

- Body manufactured from polished cast aluminium
- Integrated blade sharpener
- Adjustable slice thickness
- Belt driven
- Perspex protector guard
- Fitted with non-slip feet
- Stainless Steel blade - Not Teflon coated
- Waterproof emergency shut-off switch



195mm BLADE

SPECIFICATIONS

ELECTRICITY	0.12kW, 220V, Single Phase
DIMENSIONS	420 x 380 x 315mm high
WEIGHT	12kg
BLADE DIAMETER	195mm
SLICE THICKNESS	0.2 to 12mm
MAX SLICE WIDTH	150mm

ORDER CODE MSS0195



220mm BLADE

SPECIFICATIONS

ELECTRICITY	0.16kW, 220V, Single Phase
DIMENSIONS	480 x 395 x 360mm high
WEIGHT	15kg
BLADE DIAMETER	220mm
SLICE THICKNESS	0.2 to 12mm
MAX SLICE WIDTH	160mm

ORDER CODE MSS0220



250mm BLADE

SPECIFICATIONS

ELECTRICITY	0.18kW, 220V, Single Phase
DIMENSIONS	540 x 490 x 420mm high
WEIGHT	16kg
BLADE DIAMETER	250mm
SLICE THICKNESS	0.2 to 12mm
MAX SLICE WIDTH	180mm

ORDER CODE MSS0250



300mm BLADE

SPECIFICATIONS

ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	580 x 490 x 435mm high
WEIGHT	22kg
BLADE DIAMETER	300mm
SLICE THICKNESS	0.2 to 15mm
MAX SLICE WIDTH	200mm

ORDER CODE MSS0300





FEATURES


- The body and meat grinding components are constructed from stainless steel and comply with food hygiene standards
- The seamless stainless steel body is waterproof and easy to clean
- Meat is cut using blades rather than being extruded, resulting in better texture and taste
- The uniquely designed stainless steel grinding inlet allows for easy feeding of meat, simple disassembly, and increased output
- The meat grinding spindle features a double-seal design, ensuring safe and reliable operation while preventing contamination of food materials
- The air-cooled motor is designed for continuous operation

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	565 x 550 x 460mm high
WEIGHT	52kg
CAPACITY	350kg/h
PLATE DIAMETER	3 / 4 / 5mm

ORDER CODE

MMS0032

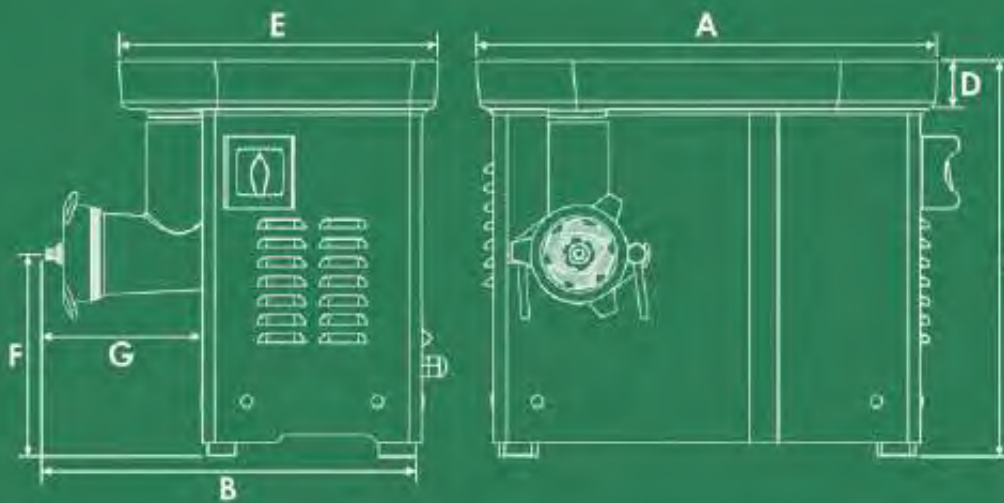

A	565mm
B	550mm
C	460mm
D	75mm
E	520mm
F	215mm
G	225mm

PLATES & TAMPER



FEATURES

- Body manufactured from Stainless Steel
- Two-speed gear system
- Air-Free Perfection: Integrated air release valve eliminates air pockets
- Removable Chamber: Effortlessly clean and refill
- Built to Last: Durable construction withstands demanding use
- Large-Scale Sausage Production in commercial kitchens

HORIZONTAL FILLERS



5 LITRE SPECIFICATIONS

DIMENSIONS 300 x 690 x 340mm high
CYLINDER DIM. Ø140 x 320mm
CAPACITY 5 Litre
WEIGHT 12kg
NOZZLES SUPPLIED 16/22/32/38mm

ORDER CODE

SFS0005



VERTICAL FILLERS



10 LITRE SPECIFICATIONS

DIMENSIONS 370 x 330 x 580mm high
CYLINDER DIM. Ø219 x 270mm
CAPACITY 10 Litre
WEIGHT 13kg
NOZZLES SUPPLIED 16/22/32/38mm

ORDER CODE

SFS0010



7 LITRE SPECIFICATIONS

DIMENSIONS 300 x 830 x 340mm high
CYLINDER DIM. Ø140 x 450mm
CAPACITY 7 Litre
WEIGHT 13kg
NOZZLES SUPPLIED 16/22/32/38mm

ORDER CODE

SFS0007



15 LITRE SPECIFICATIONS

DIMENSIONS 370 x 330 x 710mm high
CYLINDER DIM. Ø219 x 400mm
CAPACITY 15 Litre
WEIGHT 15kg
NOZZLES SUPPLIED 16/22/32/38mm

ORDER CODE

SFS0015



Make your own Sausages and Boerewors! With a manual crank, it's an **easy process** of applying and rolling out sausages. This kit also comes with a **wide variety** of filler sizes to suit your needs. Ideal for Butcheries, Farmers and Home Industries.



FEATURES

- The body is manufactured from heavy-duty aluminum alloy
- Manual / Hand operated - no electric power
- Fitted with a convenient liner holder
- Liner sheets not supplied
- The food tray is made of food grade stainless steel
- Fitted with quick release button for food tray
- Easy to clean
- Fitted with non-slip feet



100mm

SPECIFICATIONS

DIMENSIONS 210 x 275 x 290mm high
WEIGHT 5kg
PATTY DIAMETER 100mm Ø
MAX THICKNESS 30mm

ORDER CODE

HPS0100



130mm

SPECIFICATIONS

DIMENSIONS 210 x 275 x 290mm high
WEIGHT 5.5kg
PATTY DIAMETER 130mm Ø
MAX THICKNESS 30mm

ORDER CODE

HPS0130





ON THE MOTOR



SUPPLIED WITH

- 7L stainless steel beater bowl
- Polyethylene bowl cover
- Dough scraper & spatula
- 3.5L clear plastic beater bowl
- Dough roller
- Balloon whisk
- Dough hook
- Cookie beater

This unit is intended for **domestic** and **life commercial** use. Suitable for a coffee shop or small bakery.

FEATURES

- Cast aluminum body
- The open bowl makes it easy to add ingredients and see the dough/product
- The bowl rotates on the base
- The weighted base bottom creates stability
- Multi functional - more than 16 different functions
- Fitted with 12 minute timer
- Variable speed control
- Various attachments available as optional extras

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	270 x 360 x 370mm high
WEIGHT	13kg
DRY FLOUR CAPACITY	3kg
BOWL SIZE	7L / 5kg
PLANETARY SPEED	45 ~ 130rpm

ORDER CODE

AKM6230



AVAILABLE COLOURS



BLACK
AKM6230B



BLACK DIAMOND
AKM6230BD



BLACK CHROME
AKM6230BC



JUBILEE SILVER
AKM6230JS



MINERAL WHITE
AKM6230MW



HARMONY BEIGE
AKM6230HB



CREME
AKM6230C



RUSTIC MAROON
AKM6230RM



RED
AKM6230R



CORAL CRUSH
AKM6230CC



CLOUDY PINK
AKM6230CP



SUNBEAM YELLOW
AKM6230SY



FOREST GREEN
AKM6230FG



OCEAN BLUE
AKM6230OB

OPTIONAL EXTRAS



DELUXE PACKAGE INCLUDES

- 3 Sausage horns 10 / 20 / 25mm
- Feeder tray & feeder plug
- 4 x hole discs plates 2.5 / 4.5 / 6 / 8mm
- Mincer
- Grater
- Cookie attachment
- Citrus press
- Strainer
- Pasta discs
- Blender jug
- Splash guard for mincer

ORDER CODE

AKM920900051

INDIVIDUAL ATTACHMENTS



Meat mincer & sausage
horn 10 / 20 / 25mm
AKM920900057



Hole discs for mincer
2.5 / 4.5 / 6 / 8mm
AKM920900052/3/4/5



Grater attachment for
mincer
AKM920900034



Strainer attachment
for mincer
AKM920900033



Cookie attachment
for mincer
AKM920900035



Pasta discs for mincer
AKM920900036



1.5Lt Blender jug
AKM920900066



1.2Lt Citrus press
AKM920900026



Vegetable cutter
AKM920900043



Extra grating drums
AKM920900044



Pasta roller - Lasagne
AKM920900063



Pasta cutter - Fettuccine
AKM920900064



Pasta cutter - Spaghetti
AKM920900065



Flour and coffee grinder
AKM920900045



Flake mill
AKM920900046



Whisk Bowl 3,5 Litre
AKM920000196-50



Ice Cream Accessory
AKM920900072



Stainless steel bowl 7 Litre
AKM920900016





FEATURES

- Metal body with enamel coating and plastic motor cover
- Bowl can be lifted and lowered with the lever action lifting mechanism
- Fitted with safety guard
- 3 Speed options
- Supplied with 3 attachments:
 - Whisk for stirring liquids and beating eggs
 - Flat beater for mixing soft batter
 - Dough hook for mixing soft dough batter



10 LITRE BOWL

SPECIFICATIONS

ELECTRICITY 0.55kW, 220V, Single Phase
 DIMENSIONS 450 x 430 x 680mm high
 WEIGHT 50kg
 DRY FLOUR CAPACITY 2kg
 SPEED 110 / 178 / 355rpm
 DRIVE METHOD Belt driven

ORDER CODE

PMB1010



20 LITRE BOWL

SPECIFICATIONS

ELECTRICITY 0.73kW, 220V, Single Phase
 DIMENSIONS 500 x 525 x 835mm high
 WEIGHT 65kg
 DRY FLOUR CAPACITY 5kg
 SPEED 110 / 200 / 420rpm
 DRIVE METHOD Belt driven

ORDER CODE

PMB1020



40 LITRE BOWL

SPECIFICATIONS

ELECTRICITY 1.28kW, 220V, Single Phase
 DIMENSIONS 630 x 635 x 1000mm high
 WEIGHT 180kg
 DRY FLOUR CAPACITY 8kg
 SPEED 80 / 160 / 388rpm
 DRIVE METHOD Belt driven

ORDER CODE

PMB1040



SUPPLIED ATTACHMENTS




DOUGH HOOK



FLAT BEATER



WIRE WHISK

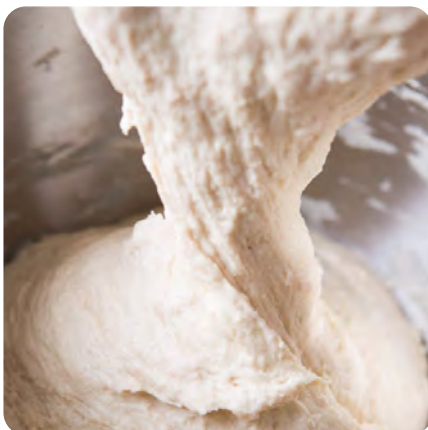

SPIRAL DOUGH MIXERS FLOOR STANDING

SmartChef

FEATURES

- Robust construction
- The particular shape of the spiral allows for a perfectly mixed dough
- Bowl, spiral, central column and protection grid is made from stainless steel
- Oil bath gear motor provides a particular silent transmission system
- Lift head models allows for bowl removal for easy cleaning
- Fitted with protection grid for increased safety
- Fitted with a 60 minute timer
- Fitted with an Emergency Stop switch
- Fitted with non-slip feet

LIFT HEAD MODELS



10 LITRE SINGLE SPEED

SPECIFICATIONS

ELECTRICITY 0.55kW, 220V, Single Phase
DIMENSIONS 575 x 310 x 585mm high
WEIGHT 60kg
DOUGH CAPACITY 4kg
SHAFT SPEED 90rpm
BOWL SPEED 9rpm

ORDER CODE DMB1110



20 LITRE TWO SPEED

SPECIFICATIONS

ELECTRICITY 1.1kW, 220V, Single Phase
DIMENSIONS 755 x 395 x 690mm high
WEIGHT 70kg
DOUGH CAPACITY 4kg
SHAFT SPEED 90 / 135rpm
BOWL SPEED 9 / 13.5rpm

ORDER CODE DMB1120



30 LITRE TWO SPEED

SPECIFICATIONS

ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS 810 x 445 x 715mm high
WEIGHT 98kg
DOUGH CAPACITY 12kg
SHAFT SPEED 90 / 135rpm
BOWL SPEED 9 / 13.5rpm

ORDER CODE DMB1130



FIXED HEAD MODELS



10 LITRE SINGLE SPEED

SPECIFICATIONS

ELECTRICITY 0.56kW, 220V, Single Phase
DIMENSIONS 600 x 315 x 630mm high
WEIGHT 60kg
DOUGH CAPACITY 4kg
SHAFT SPEED 159rpm
BOWL SPEED 21rpm

ORDER CODE DMB1010



20 LITRE TWO SPEED

SPECIFICATIONS

ELECTRICITY 1.1kW, 220V, Single Phase
DIMENSIONS 675 x 425 x 850mm high
WEIGHT 75kg
DOUGH CAPACITY 8kg
SHAFT SPEED 110 / 220rpm
BOWL SPEED 11 / 22rpm

ORDER CODE DMB1020



30 LITRE TWO SPEED

SPECIFICATIONS

ELECTRICITY 1.5kW, 220V, Single Phase
DIMENSIONS 725 x 430 x 885mm high
WEIGHT 114kg
DOUGH CAPACITY 12kg
SHAFT SPEED 110 / 220rpm
BOWL SPEED 11 / 22rpm

ORDER CODE DMB1030



50 LITRE TWO SPEED

SPECIFICATIONS

ELECTRICITY 2.2kW, 380V, 3 Phase + N
DIMENSIONS 770 x 550 x 850mm high
WEIGHT 160kg
DOUGH CAPACITY 20kg
SHAFT SPEED 110 / 220rpm
BOWL SPEED 11 / 22rpm

ORDER CODE DMB3050



SPIRAL DOUGH MIXERS FLOOR STANDING



prismafood
solutions



FEATURES

- Robust construction
- The particular shape of the spiral allows for a perfectly mixed dough
- Bowl, spiral, central column and protection grid is made from stainless steel
- Oil bath gear motor provides a particular silent transmission system
- Fitted with protection grid for increased safety
- Fitted with a 30 minute timer
- Fitted with castors for ease of movement and cleaning



20 LITRE

SPECIFICATIONS

ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	385 x 670 x 770mm high
WEIGHT	75kg
DOUGH CAPACITY	8kg
BOWL DIAMETER	360mm

ORDER CODE

DMP1020



30 LITRE

SPECIFICATIONS

DIMENSIONS	385 x 730 x 810mm high
WEIGHT	92kg
DOUGH CAPACITY	12kg
BOWL DIAMETER	400mm

SINGLE PHASE

ELECTRICITY	1.1kW, 220V, Single Phase
-------------	---------------------------

ORDER CODE

DMP1030



3 PHASE

ELECTRICITY	1.5kW, 380V, 3 Phase + N
-------------	--------------------------

ORDER CODE

DMP3030

50 LITRE

SPECIFICATIONS

ELECTRICITY	1.5kW, 380V, 3 Phase + N
DIMENSIONS	480 x 790 x 820mm high
WEIGHT	121kg
DOUGH CAPACITY	20kg
BOWL DIAMETER	450mm

ORDER CODE

DMP3050



FEATURES

- Machine body manufactured from stainless steel
- The working time can be set from 10 - 35 seconds
- Easy to operate
- PRP0050 - Supplied with an electric foot pedal
- Fitted with exclusive, patented automatic "Touch and Go" system
- Thickness adjustment knob on rollers
- Rollers are protected in transparent plexiglass for maximum safety and visibility
- Can be mounted onto a table for increased stability



DOUBLE ROLLER *TILETED*

SPECIFICATIONS

ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	585 x 435 x 790mm high
WEIGHT	36kg
PIZZA BASE DIAMETER	260 ~ 400mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	210 ~ 700g

ORDER CODE PRP0040

- Tilted upper roller** for producing round pizza bases
- Central swing bar** ensures an even dough shape



DOUBLE ROLLER *PARALLEL*

SPECIFICATIONS

ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	585 x 435 x 790mm high
WEIGHT	38kg
PIZZA BASE DIAMETER	260 ~ 400mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	220 ~ 900g

ORDER CODE PRP0041

- Parallel rollers.** Ideal for pizza on a tray (rectangular shape)



SINGLE ROLLER

SPECIFICATIONS

ELECTRICITY	0.25kW, 220V, Single Phase
DIMENSIONS	650 x 345 x 430mm high
WEIGHT	27kg
PIZZA BASE DIAMETER	260 ~ 450mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	210 ~ 700g

ORDER CODE PRP0050

- Foot pedal.** Electric foot pedal included.

SmartChef



FEATURES

- Machine body manufactured from stainless steel
- Adjustable roller gap for precise dough thickness
- Easy to operate
- Rollers are protected in transparent plexiglass for maximum safety and visibility
- Fitted with non-slip feet

- Tilted upper roller** for producing round pizza bases
- Central swing bar** ensures an even dough shape

SPECIFICATIONS

ELECTRICITY	0.37kW, 220V-240V, Single Phase
DIMENSIONS	535 x 500 x 730mm high
WEIGHT	41Kg
PIZZA BASE DIAMETER	100 ~ 400mm
BASE THICKNESS	1 ~ 5mm
DOUGH WEIGHT	50 ~ 500g

ORDER CODE

PRS0040



FEATURES

- Machine body manufactured from stainless steel
- Fitted with an emergency stop button
- Collapsable for space saving purposes
- Overload protection and open-phase protection function
- Adjustable dough thickness
- Fitted with (4x) casters, 2 lockable



520mm BELT

SPECIFICATIONS

ELECTRICITY
EXPANDED DIMENSIONS
STOWED DIMENSIONS
WEIGHT
MAX. DOUGH CAPACITY
BELT SIZE
ROLLER ADJUSTABLE GAP

1.1kW, 220V, Single Phase
2050 x 870 x 1225mm high
650 x 870 x 1450mm high
175kg
5kg
2000 x 520mm
1 ~ 35mm



ORDER CODE

PSB0520S

380mm BELT

SPECIFICATIONS

ELECTRICITY
EXPANDED DIMENSIONS
STOWED DIMENSIONS
WEIGHT
MAX. DOUGH CAPACITY
BELT SIZE
ROLLER ADJUSTABLE GAP

1.1kW, 220V, Single Phase
1650 x 730 x 1100mm high
650 x 730 x 1225mm high
150kg
2.5kg
1600 x 380mm
1 ~ 35mm



ORDER CODE

PSB0380S

DOUGH DIVIDER & ROUNDERS SEMI-AUTOMATIC



FEATURES

- Heavy duty, robust, cast iron construction
- Heat treated enamel finish resists rust, scratches and dents
- Self-lubricating, enclosed motor for food safety and low maintenance
- Dual stage, semi-automatic operation
- Stainless steel cutting knives, divides dough into 30 equal pieces
- Dough pieces can be adjusted between 30 and 100g
- Includes two divider rounder plates

SPECIFICATIONS

ELECTRICITY
DIMENSIONS
WEIGHT
OUTPUT
DOUGH WEIGHT
PROCESSING TIME

0.75kW, 220V, Single Phase
550 x 720 x 1350mm high
290kg
30pcs
30 ~ 100g per piece (3kg Max)
10 ~ 13 seconds

ORDER CODE

DDR-HLM-30S




**FEATURES**

- Machine body manufactured coated mild steel
- Adjustable horizontal and vertical ruled spatulas blades manufactured from 304 stainless steel
- Balanced 360mm turntable manufactured from Aluminium Alloy
- 11 Adjustable speed settings (*Manual control*)
- Suitable for 100 to 300mm cakes
- Fitted with non-slip feet

SPECIFICATIONS

ELECTRICITY	1.2kW, 220V, Single Phase
DIMENSIONS	380 x 510 x 610mm high
WEIGHT	27kg
TURN TABLE	Ø360mm
CAKE SIZE	Ø100 to Ø300mm
SPEED SETTINGS	11 (40 to 225rpm)

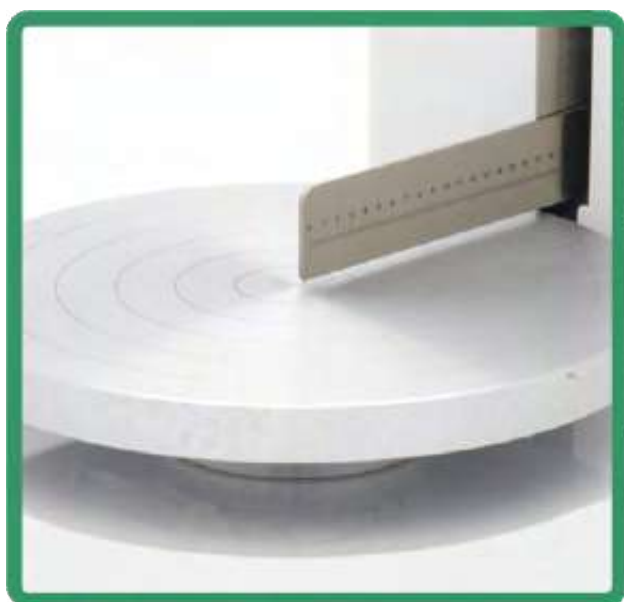ORDER CODE**CCS0030**



FEATURES


- Manufactured from Stainless steel
- Digital control panel and display
- Energy-saving operation with low power consumption
- Single fan circulates hot air evenly for efficient dehydration
- Internal lighting
- Supplied with 10 wire racks
- Fitted with non-slip feet
- Suitable for drying vegetables, fruits, herbs, beans, meat, fish, mushrooms, and more

SPECIFICATIONS

ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	305 x 370 x 385mm high
VOLUME	20Lt
WEIGHT	7kg
WIRE RACKS	(10x) 195 x 280mm
RUNNER SPACE	30mm
TEMPERATURE RANGE	30 to 90°C

ORDER CODE

FDS0010



HERBS & FLOWERS



FRUIT & VEGETABLES



MEAT & FISH



FEATURES

- Large, backlit LCD display
- Stainless steel platform and column with ABS housed indicator
- Fitted with an internal rechargeable battery with up to 80hr lifetime
- Fitted with a built-in spirit level
- Easy to operate
- Fitted with adjustable, device leveling feet



PLATFORM SCALE

SPECIFICATIONS

POWER SOURCE	220V or Internal battery
DIMENSIONS	400 x 500 x 600mm high
PLATFORM DIMENSIONS	400 x 500mm
MAX WEIGHT	150kg
ACCURACY	10g

ORDER CODE

SW-PSS0150

FEATURES

- Manufactured from 430 Stainless steel
- Water resistant. IP68 rated certified
- Dual backlit LED display (front and rear)
- Fitted with a built-in spirit level
- Waterproof rubber keypad and an all-sealed PC board
- Fully Enclosed 6V/4Ah rechargeable battery inside
- Automatic power-off timing function
- Fitted with height adjustable feet



WATER RESISTANT PORTION SCALE

SPECIFICATIONS

ELECTRICITY	220V or 6V Built-in battery
DIMENSIONS	295 x 245 x 125mm high
PLATFORM DIMENSIONS	230 x 190mm
WEIGHT	4.7kg
READABLE WEIGHT	15Kg
ACCURACY	0.5g

ORDER CODE

SW-PSS1015

DUAL DIGITAL DISPLAY



FEATURES

- Fitted with a maintenance-free rechargeable battery
- Automatic fault detection, automatic calibration
- Fitted with a built-in spirit level
- Supports a variety of weighing units
- Stainless steel weighing pan
- Overweight alarm function
- LCD display



PORTION SCALE

SPECIFICATIONS

POWER SOURCE	220V or Internal battery
DIMENSIONS	320 x 290 x 115mm high
PLATFORM DIMENSIONS	280 x 210mm
READABLE WEIGHT	15kg
ACCURACY	0.5g

ORDER CODE

SW-PSS0015

NOTES



SmartVac

Seal in the Freshness

SECTION INDEX

Continuous sealers	30
Double chamber vacuum sealers	28
Hand-press impulse sealers	31
Heat sealing machines	31
Horizontal continuous sealers	30
Impulse sealers	31
Sealers	28-31
Single chamber vacuum sealers	28-29
Vacuum pack sealers	28-29
Vertical continuous sealers	30



VACUUM SEALERS DOUBLE CHAMBER (FLOOR STANDING)



SmartVac



DOUBLE CHAMBER

Work in turns
Increased efficiency
More convenience



FEATURES

- External stainless steel structure and chamber
- Double alternating chambers increases productivity
- Spring loaded lid stabilising arms for easy operation
- Fitted with stainless steel lid handles
- High density lid gasket for superior sealing during routine work
- Waterproof digital control panel
- Automatic vacuum extraction and sealing
- Can seal multiple types of plastic materials
- Fitted with (4x) castors
- Service kit included

500mm SEALING BAR WITH GAS FLUSH

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	2kW / 0.8kW
DIMENSIONS	1250 x 600 x 970mm high
CHAMBER SIZE	550 x 600 x 150mm deep
SEALING BAR	(4x) 500 x 10mm
WEIGHT	186kg

ORDER CODE

VPS0500FS-GF



VACUUM SEALERS SINGLE CHAMBER (FLOOR STANDING)



VPS0600FS-GF

VPS0400

FEATURES

- External structure and chamber made from stainless steel
- Clear Plexiglas domed-lid allows for full view of process
- Wide lid opening for easy operation
- High density lid gasket for superior sealing during routine work
- Waterproof digital control panel
- Fitted with (4x) castors

600mm SEALING BAR WITH GAS FLUSH

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 1.5kW
DIMENSIONS	680 x 730 x 955mm high
CHAMBER SIZE	620 x 620 x 95mm deep + 60mm (lid height)
SEALING BAR	(2x) 600 x 10mm
WEIGHT	152kg

ORDER CODE

VPS0600FS-GF



450mm SEALING BAR WITH GAS FLUSH

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 0.8kW
DIMENSIONS	640 x 600 x 985mm high
CHAMBER SIZE	460 x 450 x 170mm deep + 60mm (lid height)
SEALING BAR	450 x 10mm
WEIGHT	80kg

ORDER CODE

VPS0450FS-GF



400mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 0.8kW
DIMENSIONS	490 x 530 x 880mm high
CHAMBER SIZE	440 x 420 x 90mm deep + 50mm (lid height)
SEALING BAR	(2x) 400 x 10mm
WEIGHT	62kg

WITH GAS FLUSH

ORDER CODE

VPS0400FS-GF

WITHOUT GAS FLUSH

ORDER CODE

VPS0400FS



VACUUM SEALERS SINGLE CHAMBER(COUNTERTOP)



SmartVac

FEATURES

- External stainless steel structure and chamber
- Wide lid opening for easy operation
- Waterproof digital control panel
- Service kit included
- Clear Plexiglas domed-lid allows for full view of process
- High density lid gasket for superior sealing during routine work
- Fitted with non-slip feet



VPS0450T-GF



VPS0300



VPS0260

450mm SEALING BAR WITH GAS FLUSH

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.9kW / 0.8kW
DIMENSIONS	530 x 570 x 500mm high
CHAMBER SIZE	470 x 450 x 170mm deep + 60mm (lid height)
SEALING BAR	450 x 10mm
WEIGHT	65kg
ORDER CODE	VPS0450T-GF



400mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.75kW / 0.8kW
DIMENSIONS	490 x 535 x 500mm high
CHAMBER SIZE	460 x 420 x 90mm deep + 50mm (lid height)
SEALING BAR	(2x) 400 x 10mm
WEIGHT	64kg
ORDER CODE	VPS0400T



300mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.3kW / 0.7kW
DIMENSIONS	370 x 500 x 375mm high
CHAMBER SIZE	320 x 380 x 75mm deep + 50mm (lid height)
SEALING BAR	300 x 8mm
WEIGHT	38kg

WITH GAS FLUSH

ORDER CODE VPS0300-GF

WITHOUT GAS FLUSH

ORDER CODE VPS0300



260mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
PUMP / SEAL POWER	0.12kW / 0.4kW
DIMENSIONS	420 x 310 x 350mm high
CHAMBER SIZE	270 x 320 x 80mm deep + 40mm (lid height)
SEALING BAR	260 x 8mm
WEIGHT	27kg
ORDER CODE	VPS0260



SmartVac EASY

300mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	220V, Single Phase
POWER	0.38kW
DIMENSIONS	360 x 450 x 265mm high
CHAMBER SIZE	330 x 340 x 90mm deep
SEALING BAR	300 x 20mm
WEIGHT	13kg
ORDER CODE	VPS-L030



This unit is intended for **domestic** and **lite commercial** use. Suitable for a coffee shop or small restaurant. ± 10 Vacuum seals per day



FEATURES

- This product performs continuous conveying, sealing and printing in a single operation.
- Fitted with an electronic constant temperature control system
- Fitted with a stepless speed adjusting transmission mechanism
- Pure aluminum turbine box, polyoxymethylene gear and a high-power 80W copper core motor ensures high power, stable performance, low noise and high efficiency
- Fitted with an emergency stop switch
- Fitted with a pure copper heating block to ensure a smooth, consistent seal
- The machine is supplied with an embossing wheel and a printing wheel as standard
- The sealing width is 6-12mm
- Fitted with non-slip feet
- The vertical continuous sealer allows you to package and seal bags that contain liquids
- Service toolkit included



VERTICAL SPECIFICATIONS

ELECTRICITY	0.85kW, 220V, Single Phase
DIMENSIONS	860 x 420 x 570mm high
WEIGHT	20kg
SEAL WIDTH	6 ~ 12mm
OUTPUT	0 ~ 12m/min
TEMPERATURE RANGE	0 ~ 300°C
MAX LOAD	5kg

ORDER CODE

SMS0880-LW



SERVICE TOOLKIT INCLUDED




HORIZONTAL SPECIFICATIONS

ELECTRICITY	0.85kW, 220V, Single Phase
DIMENSIONS	860 x 420 x 350mm high
WEIGHT	19kg
SEAL WIDTH	6 ~ 12mm
OUTPUT	0 ~ 12m/min
TEMPERATURE RANGE	0 ~ 300°C
MAX LOAD	5kg

ORDER CODE

SMS0880

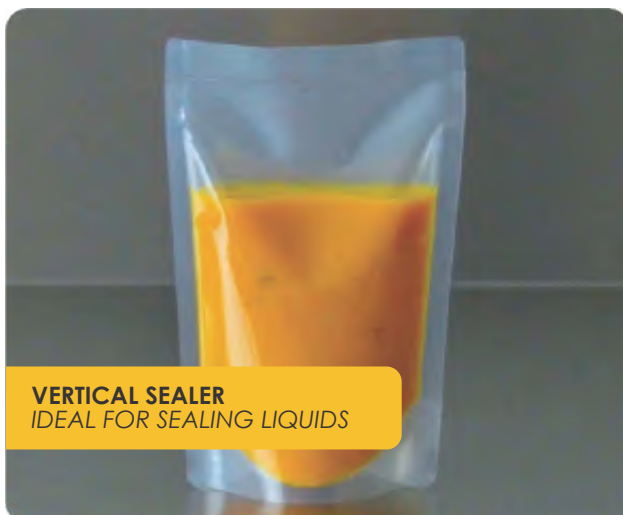

VERTICAL SEALER
IDEAL FOR SEALING LIQUIDS



HORIZONTAL SEALER
IDEAL FOR SEALING DRY FOODS



FEATURES

- Body is manufactured from heavy duty powder coated steel
- Fitted with a timer control and a LED indicator light
- No pre-heating required
- Seals a variety of plastic materials
- Light weight and portable
- Fitted with (4x) non-slip feet

400mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	0.6kW, 220V, Single Phase
DIMENSIONS	550 x 85 x 180mm high
WEIGHT	2.8kg
SEALING BAR	400mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1400



300mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	0.4kW, 220V, Single Phase
DIMENSIONS	450 x 85 x 180mm high
WEIGHT	2.5kg
SEALING BAR	300mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1300




200mm SEALING BAR

SPECIFICATIONS

ELECTRICITY	0.3W, 220V, Single Phase
DIMENSIONS	320 x 80 x 150mm high
WEIGHT	1.8kg
SEALING BAR	200mm
HEATING TIME	0.2 ~ 1.5sec

ORDER CODE

HSM1200



Steps To Seal:

- 1 Set the heat time button depending on the thickness of the bag.
- 2 Place the bag along the strip.
- 3 Push down on the handle, then wait for 1-5 seconds.
- 4 Slide the blade to cut the bag flat.
- 5 Lift the handle to see even and airtight seal.

SmartVac

NOTES

SmartChef

Professional kitchen

Pressure Fryer



THE SECRET TO PERFECT FRIED CHICKEN

Pressure frying technology delivers superior flavour, texture, and moisture retention.

COOKING EQUIPMENT

SECTION INDEX

Belgian waffle bakers	36
Boiling tables	65
BOLT ovens	79
Brat pans	74-75
Bubble waffle bakers	38
Burger baker	40
Charcoal ovens	112-113
Chef bases	69
Chicken holding cabinets	56
Chicken passes	55
Chip dumps	54
Combi steamers	82-89; 91
• Electric	82-85; 87; 89; 91
• Gas	86; 88
Cone bakers	39
Contact grills	43
Convection ovens	90; 92-93; 98-100
Conveyor toasters	42
Cooking ranges	64; 70-73
• Electric	72-73
• Gas	64; 70-71
Corndog baker	40
Crepe makers	39
Deck ovens	108-111
Electric	108-109
Gas	110-111
Dough proofers	101
Flat top griddles	58; 67
• Electric	58
• Gas	67
Food display warmers	55
Fryers	46-51
• Countertop	46
• Floor standing (Electric)	47
• Floor standing (Gas)	48-49
• Pressure	49-51
Heart shape waffle bakers	38
Hibachi grills	115
High-speed ovens	79
Holding cabinets	56
Hot passes	55
Induction cookers	62
Kamado grills	115

Lolly waffle bakers	38
Manual lift toasters	42
Microwave ovens	76-77
Oil filter carts	51
Packing stations	54
Pancake makers	39
Parilla grills	113
Pasta cookers	52
Pizza accessories	105
Pizza cutters	105
Pizza ovens	104; 106-107
Pizza spade	105
Popcorn machines	41
Pressure fryers	49-51
Radiant grillers	66
Rapped cooking ovens	79
Rice cookers	59
Round waffle bakers	37
Salamanders	57
Sandwich toasters	43
Snackwich baker	40
Sous-vide cookers	59
Square waffle bakers	37
Stands	68
Tilting pans	74-75
• Electric	74-75
• Gas	74
Toasters	42-43
• Conveyor	42
• Manual lift	42
• Sandwich	43
• Vertical	42
UFO burger baker	40
Vertical toasters	42
Waffle bakers	36-38
• Belgian	36
• Bubble	38
• Heart shape	38
• Lolly	38
• Round	37
• Square	37
Yakitori grills	115



FEATURES

- Body is manufactured from stainless steel
- Individually, manual controlled plates
- Fitted with non-slip feet
- Heavy duty cast aluminium baking plates with non-stick coating
- Fitted with a timer



BELGIAN - SQUARE DOUBLE

SPECIFICATIONS

ELECTRICITY	(2x) 1.6kW, 230V, Single Phase
DIMENSIONS	540 x 380 x 240mm high
WEIGHT	14kg
BAKING SURFACE	(2x) 220 x 220mm
WAFFLE SIZE	100 x 100mm
TEMP RANGE	50 to 300°C

ORDER CODE WBS0002



BELGIAN - SQUARE SINGLE

SPECIFICATIONS

ELECTRICITY	1.6kW, 230V, Single Phase
DIMENSIONS	285 x 380 x 240mm high
WEIGHT	8kg
BAKING SURFACE	220 x 220mm
WAFFLE SIZE	100 x 100mm
TEMP RANGE	50 to 300°C

ORDER CODE WBS0001



FEATURES

- Body is manufactured from stainless steel
- Individually controlled plates and timer (digital control)
- Removable drip-tray collects excess dough for easy cleaning
- Heavy duty cast aluminium baking plates with non-stick coating
- 180° rotation for even cooking and a crispier outside with a fluffy interior
- Fitted with non-slip feet



BELGIAN - ROUND DOUBLE ROTATING DIGITAL

SPECIFICATIONS

ELECTRICITY	(2x) 1.2kW, 230V, Single Phase
DIMENSIONS	500 x 530 x 315mm high
WEIGHT	15kg
BAKING SURFACE	(2x) 180mm Ø
TEMP RANGE	50 to 300°C

ORDER CODE WBS3002



BELGIAN - ROUND SINGLE ROTATING DIGITAL

SPECIFICATIONS

ELECTRICITY	1.2kW, 230V, Single Phase
DIMENSIONS	250 x 530 x 315mm high
WEIGHT	7kg
BAKING SURFACE	180mm Ø
TEMP RANGE	50 to 300°C

ORDER CODE WBS3001



FEATURES

- Body is manufactured from stainless steel
- Individually, manual controlled plates
- Fitted with non-slip feet
- Heavy duty cast aluminium baking plates with non-stick coating
- Fitted with a timer



SQUARE - DOUBLE

SPECIFICATIONS

ELECTRICITY (2x) 1.7kW, 230V, Single Phase
 DIMENSIONS 630 x 370 x 250mm high
 WEIGHT 18kg
 BAKING SURFACE (2x) 244 x 244mm
 WAFFLE SIZE 112 x 112mm
 TEMP RANGE 50 to 300°C



ORDER CODE

WBS4002

SQUARE - SINGLE

SPECIFICATIONS

ELECTRICITY 1.7kW, 230V, Single Phase
 DIMENSIONS 330 x 370 x 250mm high
 WEIGHT 8.5kg
 BAKING SURFACE 244 x 244mm
 WAFFLE SIZE 112 x 112mm
 TEMP RANGE 50 to 300°C



ORDER CODE

WBS4001

FEATURES

- Body is manufactured from stainless steel
- Individually, manual controlled plates
- Fitted with non-slip feet
- Heavy duty cast aluminium baking plates with non-stick coating
- Fitted with a timer



ROUND - DOUBLE

SPECIFICATIONS

ELECTRICITY (2x) 1.2kW, 230V, Single Phase
 DIMENSIONS 500 x 450 x 260mm high
 500 x 450 x 560mm high (open)
 WEIGHT 12kg
 BAKING SURFACE (2x) 170mm Ø
 TEMP RANGE 50 to 300°C



ORDER CODE

WBS1002

ROUND - SINGLE

SPECIFICATIONS

ELECTRICITY 1.2kW, 230V, Single Phase
 DIMENSIONS 250 x 450 x 260mm high
 250 x 450 x 560mm high (open)
 WEIGHT 6kg
 BAKING SURFACE 170mm Ø
 TEMP RANGE 50 to 300°C



ORDER CODE

WBS1001

FEATURES

- Body is manufactured from stainless steel
- Manual controlled thermostat
- Fitted with non-slip feet
- Heavy duty cast aluminium baking plates with non-stick coating
- Fitted with a timer



WAFFLE LOLLY WAFFLE ON A STICK

SPECIFICATIONS

ELECTRICITY	1.7kW, 230V, Single Phase
DIMENSIONS	330 x 370 x 240mm high
WEIGHT	10kg
CAPACITY	4 Rows
SINGLE WAFFLE SIZE	225 x 60 x 15mm
TEMP RANGE	50 to 300°C

ORDER CODE

WBS2001



HEART SHAPE WAFFLE BAKER

SPECIFICATIONS

ELECTRICITY	1.2kW, 230V, Single Phase
DIMENSIONS	250 x 450 x 260mm high
WEIGHT	6kg
BAKING SURFACE	170mm Ø
TEMP RANGE	50 to 300°C

ORDER CODE

WBS2004



BUBBLE WAFFLE BAKER

SPECIFICATIONS

ELECTRICITY	1.4kW, 230V, Single Phase
DIMENSIONS	220 x 570 x 280mm high
WEIGHT	5kg
BAKING SURFACE	180 x 215mm
TEMP RANGE	50 to 250°C

ORDER CODE

WBS2003



CONE BAKERS

SmartChef

FEATURES

- Body is manufactured from stainless steel
- Individually, manual controlled plates
- Fitted with non-slip feet
- Heavy duty cast aluminium baking plates with non-stick coating
- Fitted with a timer
- Cone roller moulds included



DOUBLE PLATE

SPECIFICATIONS

ELECTRICITY (2x) 1.2kW, 230V, Single Phase
 DIMENSIONS 500 x 450 x 260mm high
 WEIGHT 11kg
 BAKING SURFACE (2x) 210mm Ø
 TEMP RANGE 50 to 300°C

ORDER CODE CBS1002



SINGLE PLATE

SPECIFICATIONS

ELECTRICITY 1.2kW, 230V, Single Phase
 DIMENSIONS 250 x 450 x 260mm high
 WEIGHT 6.4kg
 BAKING SURFACE 210mm Ø
 TEMP RANGE 50 to 300°C

ORDER CODE CBS1001



CREPE MAKERS

SmartChef



FEATURES

- Body manufactured from stainless steel
- Cooking surface manufactured from cast aluminium with non-stick coating
- Stainless steel heating element
- Easy to clean
- Wooden batter spreader included

SPECIFICATIONS

ELECTRICITY 3kW, 220V, Single Phase
 DIMENSIONS 450 x 455 x 235mm high
 WEIGHT 16kg
 BAKING SURFACE 400mm Ø
 TEMP RANGE 50 to 300°C

ORDER CODE CMS0001



**BATTER
SPREADER
INCLUDED**

FEATURES

- Body manufactured from stainless steel
- Manual controlled thermostat
- Fitted with (4x) non-slip feet
- Baking plates manufactured from cast aluminium with non-stick coating
- Fitted with a timer



CORN DOG BAKER

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	390 x 340 x 246mm high
WEIGHT	8kg
TEMP RANGE	50 to 300°C
CAPACITY	6 Corn dogs
CORN DOG SIZE	140mm x 40mm Ø

ORDER CODE WBS2002



SNACKWICH BAKER

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	390 x 340 x 246mm high
WEIGHT	8kg
TEMP RANGE	50 to 300°C
PLATE SIZE	(2x) 135 x 70mm

ORDER CODE

SWS0002



UFO BURGER BAKER

SPECIFICATIONS

ELECTRICITY	1.2kW, 220V, Single Phase
DIMENSIONS	250 x 450 x 260mm high
WEIGHT	5kg
TEMP RANGE	50 to 300°C
PLATE DIAMETER	100mm Ø

ORDER CODE HTS0001



Become part of this **fast growing trend.**

Create “OUT OF THIS WORLD” snacks with the **NEW SMARTCHEF UFO Burger baker.**

- Body manufactured from stainless steel
- Baking plates manufactured from cast aluminium with non-stick coating
- Manual controlled thermostat
- Fitted with a timer
- Fitted with non-slip feet





FEATURES

- Constructed with an aluminum alloy frame.
- Fitted with tempered glass panels.
- Supplied with a stainless-steel kettle.
- Fitted with a crumb/kernel tray for easy cleaning.
- It offers safe, energy-efficient operation.
- Fitted with non-slip feet



12 Oz 340g

SPECIFICATIONS

ELECTRICITY	1.75kW, 220V, Single Phase
DIMENSIONS	510 x 420 x 765mm high
WEIGHT	25kg
TEMP RANGE	220 to 270°C
CORN PER BATCH	200g
OUTPUT CAPACITY	1 batch / 4 minutes

ORDER CODE

PMS0012



16 Oz 450g

SPECIFICATIONS

ELECTRICITY	2.3kW, 220V, Single Phase
DIMENSIONS	605 x 505 x 890mm high
WEIGHT	35kg
TEMP RANGE	220 to 270°C
CORN PER BATCH	250g
OUTPUT CAPACITY	1 batch / 4 minutes

ORDER CODE

PMS0016



FRESH POPCORN DAILY...



CONVEYOR TOASTERS

SmartChef

FEATURES

- Stainless steel construction
- Standby / bread / roll settings available
- Perfect for self-service application
- Fitted with (4x) device leveling legs
- Various conveyor speed settings
- Can be set to pass through or return to front operation
- Individual heat controls for top and bottom elements



450 SLICE WIDE MOUTH

SPECIFICATIONS

ELECTRICITY 2.6kW, 230V, Single Phase
 DIMENSIONS 470 x 420 x 400mm high
 WEIGHT 18kg
 CAPACITY Up to 450 slices per hour

ORDER CODE CTS0450



300 SLICE

SPECIFICATIONS

ELECTRICITY 1.94kW, 230V, Single Phase
 DIMENSIONS 350 x 420 x 400mm high
 WEIGHT 14kg
 CAPACITY Up to 300 slices per hour

ORDER CODE CTS0300



VERTICAL TOASTERS **NEW**

SmartChef



FEATURES

- Manufactured from AISI 201 stainless steel.
- Compact size for easy storage and mobility.
- Suitable for both hamburger buns and toast.
- Adjustable functions: set the desired bread thickness and temperature.
- Automatic conveyor belt: smoothly transports the buns and toast through the toaster.

SPECIFICATIONS

ELECTRICITY 1.8kW, 230V, Single Phase
 DIMENSIONS 455 x 380 x 620mm high
 WEIGHT 23kg
 TEMP RANGE 50 to 300°C
 CAPACITY 360 buns / 720 toast per hour

ORDER CODE VTS0001



MANUAL LIFT TOASTERS

SmartChef

FEATURES

- Stainless steel construction
- Fitted with a timer
- Fitted with (4x) non-slip feet
- 2, 4 or 6 slot operation can be chosen




6 SLICE

SPECIFICATIONS

ELECTRICITY 2.5kW, 230V, Single Phase
 DIMENSIONS 405 x 275 x 220mm high
 WEIGHT 6kg
 CAPACITY 2/4/6 slices

ORDER CODE TLS0006




4 SLICE

SPECIFICATIONS

ELECTRICITY 1.8kW, 230V, Single Phase
 DIMENSIONS 315 x 275 x 220mm high
 WEIGHT 5kg
 CAPACITY 2/4 slices

ORDER CODE TLS0004



9 SLICE SANDWICH TOASTERS

SmartChef

FEATURES

- Body manufactured from stainless steel
- Drip tray to collect excess fat
- Fitted with a heat resistant handle
- Fitted with (4x) non-slip feet
- Self-leveling top plate for a variety of product thickness
- Heating plates manufactured from cast aluminium with non-stick coating
- Available in "Full Flat", "Full Ribbed" and "Top Ribbed" models




SPECIFICATIONS

ELECTRICITY	2.2kW, 220V, Single Phase
DIMENSIONS	490 x 355 x 250mm high
WEIGHT	13kg
COOKING SURFACE	353 x 315mm
TEMP RANGE	50°C - 300°C

FULL FLAT
ORDER CODE STS1009

TOP RIBBED
ORDER CODE STS2009

FULL RIBBED
ORDER CODE STS3009

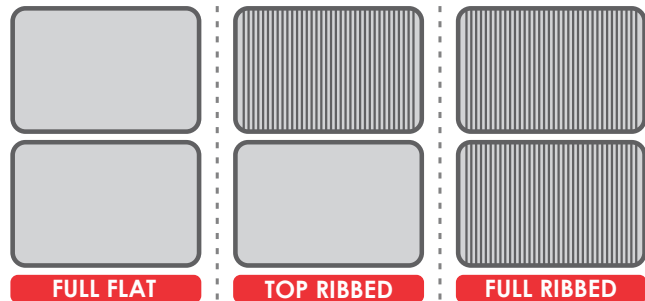

CONTACT GRILLS

SmartChef

FEATURES

- Body manufactured from stainless steel
- Drip tray to collect excess fat
- Fitted with a heat resistant handle
- Fitted with (4x) non-slip feet
- Self-leveling top plate for a variety of product thickness
- Heating plates manufactured from cast aluminium with non-stick coating
- Available in "Full Flat" and "Full Ribbed" models




SPECIFICATIONS

ELECTRICITY	2.2kW, 220V, Single Phase
DIMENSIONS	435 x 410 x 210mm high
WEIGHT	19kg
COOKING SURFACE	345 x 235mm
TEMP RANGE	50 to 300°C

FULL FLAT
ORDER CODE CGS0002

FULL RIBBED
ORDER CODE CGS1002

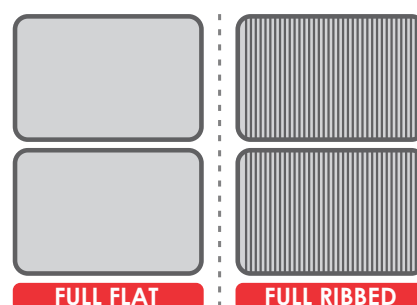





SmartChef

The Smart Choice When Performance Matters.

FEATURES

- Removable element box
- Removable oil tank for easy cleaning
- 2.5kW element per pan for fast recovery
- Fitted with safety thermostat
- Supplied with night cover and baskets
- Fitted with non-slip rubber feet



2 x 6Lt BINS

SPECIFICATIONS

ELECTRICITY (2x) 2.5kW, 230V, Single Phase
 DIMENSIONS 545 x 410 x 290mm high
 WEIGHT 10kg
 BIN CAPACITY (2x) 6Lt
 BIN DIMENSIONS GN1/2 x 150mm deep
 TEMP RANGE 50 to 190°C
 BASKETS INCLUDED (2x) 200 x 215 x 100mm deep
 BASKETS CAPACITY 4.3Lt

ORDER CODE FSC0602



1 x 6Lt BIN

SPECIFICATIONS

ELECTRICITY 2.5kW, 230V, Single Phase
 DIMENSIONS 265 x 410 x 290mm high
 WEIGHT 5kg
 BIN DIMENSIONS GN1/2 x 150mm deep
 BIN CAPACITY 6Lt
 TEMP RANGE 50 to 190°C
 BASKETS INCLUDED (1x) 200 x 215 x 100mm deep
 BASKETS CAPACITY 4.3Lt

ORDER CODE FSC0601



2 x 11Lt BINS

SPECIFICATIONS

ELECTRICITY (2x) 3.25kW, 230V, Single Phase
 DIMENSIONS 635 x 658 x 345mm high
 WEIGHT 12kg
 BIN CAPACITY (2x) 11Lt
 BIN DIMENSIONS GN2/3 x 200mm deep
 TEMP RANGE 50 to 190°C
 BASKETS INCLUDED (2x) 240 x 245 x 135mm deep
 BASKETS CAPACITY 8Lt

ORDER CODE FSC1102



1 x 11Lt BIN

SPECIFICATIONS

ELECTRICITY 3.25kW, 230V, Single Phase
 DIMENSIONS 325 x 658 x 345mm high
 WEIGHT 7kg
 BIN DIMENSIONS GN2/3 x 200mm deep
 BIN CAPACITY 11Lt
 TEMP RANGE 50 to 190°C
 BASKETS INCLUDED (1x) 240 x 245 x 135mm deep
 BASKETS CAPACITY 8Lt

ORDER CODE FSC1101



ADDITIONAL BASKETS

FOR 6 LITRE FRYERS
 ORDER CODE FBS0006

FOR 11 LITRE FRYERS
 ORDER CODE FBS0011





FEATURES

- High quality stainless steel body
- High power for fast heating and recovery
- Replaceable individual heating elements
- Supplied with night covers
- Fitted with control and safety thermostat
- Even heat distribution
- Supplied with chrome plated wire baskets with insulated plastic grips
- Fitted with (4x) 150mm, height adjustable, device leveling legs



2 x 30L BINS

SPECIFICATIONS

ELECTRICITY	36kW, 380V, 3 Phase + N
DIMENSIONS	800 x 825 x 900mm high (+260 mm splashback)
WEIGHT	85kg
TEMP RANGE	50 to 190°C
CAPACITY	2 x 30L
BASKETS INCLUDED	(4x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB-E-DZ-800G

4 x 15L BINS

SPECIFICATIONS

ELECTRICITY	36kW, 380V, 3 Phase + N
DIMENSIONS	800 x 825 x 900mm high (+260 mm splashback)
WEIGHT	85kg
TEMP RANGE	50 to 190°C
CAPACITY	4 x 15L
BASKETS INCLUDED	(4x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB-E-DZ-800G-4



1 x 30L BIN

SPECIFICATIONS

ELECTRICITY	18kW, 380V, 3 Phase + N
DIMENSIONS	400 x 825 x 900mm high (+260 mm splashback)
WEIGHT	48kg
TEMP RANGE	50 to 190°C
CAPACITY	30L
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB-E-DZ-400G

2 x 15L BINS

SPECIFICATIONS

ELECTRICITY	18kW, 380V, 3 Phase + N
DIMENSIONS	400 x 825 x 900mm high (+260 mm splashback)
WEIGHT	48kg
TEMP RANGE	50 to 190°C
CAPACITY	2 x 15L
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE

KB-E-DZ-400G-2



FEATURES

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame and standby pilots
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Safety valve with an automatic gas stabilizing function
- Self-reset high temperature limiting device
- Supplied with 2 nickel plated baskets with coated handles
- Supplied with wire mesh crumb screen and basket hanger
- Fitted with (4x) 150mm, height adjustable, device leveling legs



LPGSA Approved

35L BIN

SPECIFICATIONS

GAS CONSUMPTION	2.8 kg/h
BTU RATING	132 000
DIMENSIONS	536 x 765 x 920mm high (+210 mm splashback)
WEIGHT	76kg
TEMP RANGE	90 to 190°C
CAPACITY	35L
BASKETS INCLUDED	(2x) 235 x 335 x 150mm deep
BASKET CAPACITY	12L

ORDER CODE CR-ATFS-75

ADDITIONAL BASKETS

ORDER CODE FBS0035



LPGSA Approved

20L BIN

SPECIFICATIONS

GAS CONSUMPTION	1.68 kg/h
BTU RATING	79 000
DIMENSIONS	400 x 765 x 920mm high (+210 mm splashback)
WEIGHT	60kg
TEMP RANGE	90 to 190°C
CAPACITY	20L
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5L

ORDER CODE CR-ATFS-40

ADDITIONAL BASKETS

ORDER CODE FBS0020

GAS FRYERS FLOOR STANDING



SmartChef



FEATURES

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame and standby pilots
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Supplied with chrome plated wire baskets with insulated plastic grips
- Fitted with device leveling legs

35L BIN **NEW**

SPECIFICATIONS

GAS CONSUMPTION	3.25 kg/h
BTU RATING	150 000
CAPACITY	35Lt
DIMENSIONS	530 x 835 x 1145mm high
WEIGHT	79kg
TEMP RANGE	90 to 190°C
BASKETS INCLUDED	(2x) 235 x 335 x 150mm deep
BASKET CAPACITY	12Lt

ORDER CODE

FSG0075



ADDITIONAL BASKETS

235 x 335 x 150mm - Compatible with FSG0075
ORDER CODE FBS0035

160 x 335 x 150mm - Compatible with FSG0040
ORDER CODE FBS0020

20L BIN

SPECIFICATIONS

GAS CONSUMPTION	1.95 kg/h
BTU RATING	90 000
CAPACITY	20Lt
DIMENSIONS	380 x 835 x 1145mm high
WEIGHT	65kg
TEMP RANGE	90 to 190°C
BASKETS INCLUDED	(2x) 160 x 335 x 150mm deep
BASKET CAPACITY	7.5Lt

ORDER CODE

FSG0040



PRESSURE FRYERS

SmartChef



FEATURES

- Body manufactured from 304 Stainless steel
- Built-in filtration system makes oil recycling easy and energy efficient
- Counter-balance lid lift, stays locked until pressure drops to 1 psi
- 5 Tier auto-lift rack system. Compatible with standard half-racks
- **Functions:** electronic timing / automatic temperature and pressure control / exhausting and over-pressure protection
- Electronic control panel with 10 programable cooking functions
- Supplied with a cleaning kit
- Fitted with (4x) castors (2 lockable)
- Oil filter bags not included

55 LITRE **ELECTRIC**



SPECIFICATIONS

ELECTRICITY	17kW, 380V, 3 Phase + N
DIMENSIONS	610 x 1070 x 1550mm high
WEIGHT	344kg
TEMP RANGE	60 to 200°C
OPERATING PRESSURE	11psi
CAPACITY	55Lt
BASKETS INCLUDED	Hydraulic lift basket - 5 Layer 340 x 200 x 260mm deep
CAPACITY	8 chickens in pieces - 72pcs

ORDER CODE

PFS-PFE-5910



OPTIONAL EXTRAS

FILTER PAPER 100 PACK FPS0100

CLEANING KIT

CKF0003



FEATURES

- Body manufactured from 304 Stainless steel
- Built-in filtration system makes oil recycling easy and energy efficient
- Fitted with a pressure gauge
- **Functions:** electronic timing / automatic temperature and pressure control / exhausting and over-pressure protection
- Electronic control panel with 10 programable cooking functions
- Supplied with a cleaning kit
- Supplied with (1x) fryer baskets (3 Layer)
- Fitted with (4x) castors (2 lockable)
- Oil filter bags not included

25 LITRE ELECTRIC

SPECIFICATIONS

ELECTRICITY	13.5kW, 380V, 3 Phase + N
DIMENSIONS	470 x 920 x 1180mm high
WEIGHT	135kg
TEMP RANGE	60 to 200°C
OPERATING PRESSURE	12psi
CAPACITY	25Lt
BASKETS INCLUDED	(1x) 3 Layer basket 250 x 340 x 195mm deep
BASKET CAPACITY	16.5Lt 4 chickens in pieces - 36pcs

ORDER CODE

PFS-YXD-25D



3 PIECE CLEANING KIT INCLUDED AS STANDARD



STRAIGHT BRUSH



L-SHAPE BRUSH



LONG HANDLE BRUSH

25 LITRE GAS

SPECIFICATIONS

ELECTRICITY	0.65kW, 220V, Single Phase
GAS CONSUMPTION	0.48 kg/h
BTU RATING	23 000
DIMENSIONS	500 x 1030 x 1180mm high
WEIGHT	165kg
TEMP RANGE	60 to 200°C
OPERATING PRESSURE	12psi
CAPACITY	25Lt
BASKETS INCLUDED	(1x) 3 Layer basket 250 x 340 x 195mm deep
BASKET CAPACITY	16.5Lt 4 chickens in pieces - 36pcs

ORDER CODE

PFS-YXY-25D



3 LAYER BASKET

Maximize space and streamline food preparation processes

Layer spacing 70mm

OPTIONAL EXTRAS

REGULAR BASKET	PFS-YXD-BO	3 LAYER BASKET	PFS-YXD-B3	BASKET HANDLE	PFS-YXD-BH
FILTER PAPER 100 PACK	FPS0100	CLEANING KIT	CKF0003		

FEATURES

- Body manufactured from 304 Stainless steel
- Manual temperature control and timer
- Fitted with a pressure gauge
- Supplied with fryer basket
- Aluminum lid, rugged and lightweight, easy to open and close
- Four times pressure failure protection
- Fitted with an oil drainage tap with a safety locking mechanism
- Fitted with non-slip feet



16 LITRE - TABLE MODEL

SPECIFICATIONS

ELECTRICITY	3kW, 230V, Single Phase
DIMENSIONS	440 x 570 x 520mm high
WEIGHT	21kg
TEMP RANGE	60 to 200°C
OPERATING PRESSURE	8psi
CAPACITY	16Lt
BASKETS INCLUDED	(1x) 738 Ø x 195mm deep
BASKET CAPACITY	8.5Lt 2 chickens in pieces - 18pcs

ORDER CODE

PFS-YXDT-16



Four times pressure failure protection

- Vent valve
- Pressure valve
- Silicone sealing ring
- Elastic beam

ADDITIONAL BASKETS

ORDER CODE

PFS-YXDT-B

OIL FILTER CARTS

FEATURES

- Manufactured from Stainless steel
- High efficiency filtration prolongs the use cycle of oil, reducing cost and increasing profit
- Fitted with universal casters for easy mobility (two lockable)
- Oil filter bags not included



SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	440 x 755 x 620mm
WEIGHT	30kg
CAPACITY	40Lt

ORDER CODE

KB-E-LYC-1



ADDITIONAL OIL FILTER BAGS

ORDER CODE

OFB0002



FEATURES

- Body manufactured from 430 Stainless steel
- The tank is manufactured from AISI 316 Stainless Steel
- Fitted with a built-in water inlet and drainage for convenient operation
- Fitted with device leveling feet
- Baskets included

GAS

- Equipped with Flame-out protection

ELECTRIC

- Equipped with overheat and dry-boil protection
- Stainless Steel heating elements for fast heating

35 LITRE GAS

SPECIFICATIONS

ELECTRICITY	0.65kW, 220V, Single Phase
GAS CONSUMPTION	1.06 kg/h
BTU RATING	46 000
DIMENSIONS	400 x 900 x 1140mm high
WEIGHT	55kg
TANK DIMENSIONS	510 x 310 x 290mm deep
CAPACITY	35Lt
TEMP RANGE	30 to 190°C
BASKETS INCLUDED	(2x) 290 x 160 x 200mm deep (2x) 140 x 140 x 200mm deep

ORDER CODE

CR-AT9G4P



35 LITRE

SPECIFICATIONS

ELECTRICITY	10kW, 380V, 3 Phase + N
DIMENSIONS	400 x 900 x 1140mm high
WEIGHT	49kg
TANK DIMENSIONS	510 x 310 x 290mm deep
CAPACITY	35Lt
TEMP RANGE	30 to 190°C
BASKETS INCLUDED	(2x) 290 x 160 x 200mm deep (2x) 140 x 140 x 200mm deep

ORDER CODE

CR-AT9E4P



NOTES

FEATURES

- Manufactured from stainless steel
- Heating element provides even heat distribution
- Single warm light bulb attached to the top illuminates the food station for improved display
- Ideal for keeping fries warm and crispy
- Fitted with (4x) non-slip rubber feet



CHIP DUMP

SPECIFICATIONS

ELECTRICITY 1kW, 230V, Single Phase
 DIMENSIONS 345 x 605 x 550mm high
 WEIGHT 7kg
 TEMP RANGE 30 to 85°C

ORDER CODE

CDS1000



FEATURES

- Manufactured from heavy-duty stainless steel
- Fitted with a removable drainboard and oil collecting pan to drain and collect excess oil
- Fitted with a multi-slot packaging shelf
- Infrared heating tubes provide heat to keep your fried foods hot, crisp, and ready to serve at all times
- Two warm light bulbs attached to the top illuminates the food station for improved display
- Separate switches provide simplified operation for controlling the heat and lights individually
- Fitted with 4 non-slip feet



PACKING STATION

SPECIFICATIONS

ELECTRICITY 0.64kW, 220V, Single Phase
 DIMENSIONS 800 x 700 x 650mm high
 WEIGHT 31kg
 TEMP RANGE 30 to 85°C

ORDER CODE

CDS2000





FEATURES

- Suitable for holding chicken, burgers, fries, hot dogs, pizza, and more
- Full stainless steel construction for durability and easy cleaning
- Full-length water reservoir with automatic refill for consistent humidity
- Pass-through design for efficient kitchen-to-service flow
- Angled thermo-perspex flip doors for clear visibility and maximum heat retention
- Individually controlled heating zones for flexible temperature management
- Top tier (dry heat): Keeps fried foods crispy
- Bottom tier (humidified heat): Maintains moisture and heat
- Digital temperature display with thermostat control
- Reinforced frame structure for enhanced stability
- Integrated tong holder for organized, easy utensil access

INCLUDED 5 Trays and inner grids

1500mm

SPECIFICATIONS

ELECTRICITY	3.6kW, 230V, Single Phase
DIMENSIONS	1530 x 750 x 930mm high
CAPACITY	(2x) 660 x 440mm trays (top level) (3x) 660 x 440mm trays (bottom level)
WEIGHT	70kg
TEMP RANGE	30 to 85°C
ORDER CODE	HCS0150



1100mm

SPECIFICATIONS

ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	1100 x 750 x 930 mm high
CAPACITY	(3x) 440 x 320mm trays (top level) (2x) 660 x 440mm trays (bottom level)
WEIGHT	55kg
TEMP RANGE	30 to 85°C
ORDER CODE	HCS0110



OPTIONAL EXTRAS

CHICKEN TRAY 660 x 440mm SOLID
ORDER CODE HCS6646

CHICKEN TRAY 660 x 440mm PERFORATED
ORDER CODE HCS6646-P



COUNTER BASE - 1500mm

SPECIFICATIONS

DIMENSIONS	1550 x 800 x 810mm high
CUP DIAMETER	Ø99/ 89/ 79mm
ICE BIN DIMENSION	470 x 700 x 370mm high
WEIGHT	70kg
ORDER CODE	HCS0151



BUILT-IN CUP DISPENSER



120 LITRE ICE BIN





FEATURES

- The body is manufactured from Stainless Steel
- **HCS1006** - Single front facing door with multi-layered windows for easy access to products
- **HCS2015** - 4 glass doors. 2 front and 2 rear
- Magnetic door handles
- Adjustable and detachable shelf runners
- Built-in water pan for humidification
- 360° Hot air circulation, Consistent temperature control
- Trays and grids not included



15 TRAY

SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 610 x 800 x 1950mm high
 CAPACITY (15x) 660 x 440mm trays
 WEIGHT 140kg
 TEMP RANGE 30 to 85°C
 DOORS Front & Rear

ORDER CODE

HCS2015



6 TRAY

SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 610 x 840 x 1040mm high
 CAPACITY (6x) 660 x 440mm trays
 WEIGHT 80kg
 TEMP RANGE 30 to 85°C
 DOORS Front

ORDER CODE

HCS1006




OPTIONAL EXTRAS

CHICKEN TRAY 660 x 440mm SOLID
 ORDER CODE HCS6646

CHICKEN TRAY 660 x 440mm PERFORATED
 ORDER CODE HCS6646-P



HCS2015
 FRONT & REAR GLASS DOORS

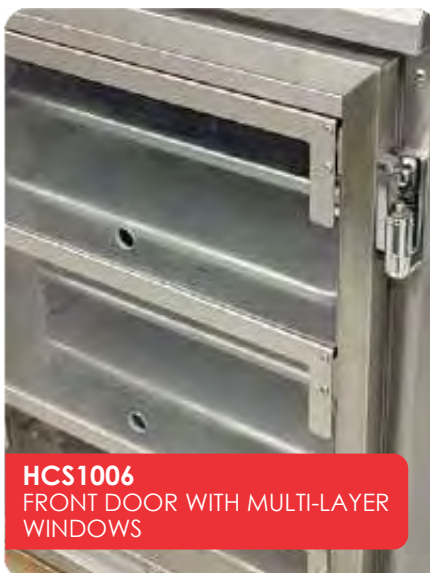

HCS1006
 FRONT DOOR WITH MULTI-LAYER
 WINDOWS



LARGE CAPACITY
 COMPATIBLE WITH 660 x 440mm
 TRAYS

SALAMANDERS

SmartChef

FEATURES

- Inner and outer casing manufactured from stainless steel
- Removable drip/crumb tray for easy cleaning
- The salamander can be used to toast, heat and grill
- 4 pre-set positions for removable grid
- Manual control thermostat
- Fitted with non-slip feet



610mm

SPECIFICATIONS

ELECTRICITY	2kW, 220V, Single Phase
DIMENSIONS	610 x 340 x 280mm high
WEIGHT	13.5kg
RUNNER SPACING	30mm
SHELF DIMENSIONS	450 x 250mm
TEMP RANGE	50 to 250°C

ORDER CODE

SES0936



800mm

SPECIFICATIONS

ELECTRICITY	4kW, 220V, Single Phase
DIMENSIONS	800 x 450 x 470mm high
WEIGHT	29kg
RUNNER SPACING	30mm
SHELF DIMENSIONS	640 x 360mm
TEMP RANGE	50 to 250°C

ORDER CODE

SES0937



GAS SALAMANDERS



LPGSA
Approved

Cook Rite

FEATURES

- High quality stainless steel structure
- 4 Position adjustable shelf (Lever lift)
- Manual control thermostat
- Thick steel plate for even heat distribution and heat retention
- Removable drip/crumb tray for easy cleaning
- (2x) 21 500 BTU high efficiency ceramic burners and standby pilots



SPECIFICATIONS

GAS CONSUMPTION	0.9 kg/h
BTU RATING	42 000
DIMENSIONS	915 x 455 x 440mm high
WEIGHT	65kg
RUNNER SPACING	95mm
SHELF DIMENSIONS	710 x 355mm
TEMP RANGE	80 to 260°C

ORDER CODE

CR-ATSB-36



FEATURES

- Durable stainless steel body with splash guard
- Fat drainage drawer for convenience
- Energy efficient
- Fitted with non-slip feet
- Sturdy cooking plate for even heat distribution and heat retention
- Individually controlled cooking zones with manual thermostat
- Easy to use and clean



730mm

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 730 x 470 x 240mm high
 WEIGHT 34kg
 COOKING SURFACE 728 x 400mm (0.3m²)
 TEMP RANGE 50 to 300°C

ORDER CODE FTS0730



550mm

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 550 x 430 x 240mm high
 WEIGHT 19kg
 COOKING SURFACE 548 x 350mm (0.2m²)
 TEMP RANGE 50 to 300°C

ORDER CODE FTS0550



600mm

SPECIFICATIONS

ELECTRICITY 3.6kW, 230V, Single Phase
 DIMENSIONS 670 x 520 x 290mm high
 WEIGHT 25kg
 COOKING SURFACE 635 x 365mm (0.23m²)
 TEMP RANGE 50 to 300°C

FULL FLAT

ORDER CODE FTS1600

HALF RIBBED

ORDER CODE FTS1600-HR




400mm

SPECIFICATIONS

ELECTRICITY 2.5kW, 230V, Single Phase
 DIMENSIONS 520 x 490 x 290mm high
 WEIGHT 20kg
 COOKING SURFACE 460 x 365mm (0.17m²)
 TEMP RANGE 50 to 300°C

ORDER CODE

FTS1400



FULL FLAT



HALF RIBBED



SOUS-VIDE COOKERS

SmartChef



FEATURES

- AISI 304 stainless steel structure
- Temperature sensor
- Fitted with a circulation pump
- Smart device with Wi-fi connection
- Accuracy +/- 0.1°C
- 5 minutes to 99 hours digital timer
- For low temperature vacuum cooking

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	70 x 145 x 340mm high
WEIGHT	1.3kg
TEMP RANGE	5 to 90°C
HEATING CAPACITY	20Lt to 30Lt

ORDER CODE SVS0130



ELECTRIC RICE COOKERS

SmartChef

FEATURES

- Painted steel exterior pot fitted with cool-touch plastic handles
- Removable interior cooking pot manufactured from high quality aluminium
- Cooking and keep-warm indicator lights
- Supplied with a food grade plastic rice spoon

- Stainless steel lid with cool-touch plastic handle
- Keep-warm function keeps food fresh before serving
- Fitted with (3x) plastic feet



SPECIFICATIONS

ELECTRICITY	1.6kW, 220V, Single Phase
DIMENSIONS	370Ø x 160mm high
WEIGHT	5kg
CAPACITY	4.2Lt
MAX RICE CAPACITY	3.5kg

ORDER CODE RCS0010





—— **Serious Equipment for Serious Kitchens** ——



Cook Rite

FEATURES

- Stainless steel body
- LED display
- 10 temperature settings
- Black crystal glass hob
- Timer: 0 - 180 minutes
- Electronic overheating protection
- Digital touch control
- 10 power levels (500 - 3500W)
- Fitted with non-slip feet

*Ferromagnetic compatible cookware only



4 PLATE

SPECIFICATIONS

ELECTRICITY 14kW, 380V, 3 Phase + N
DIMENSIONS 800 x 800 x 260mm high
COOKING SURFACE (4x) 299 x 299mm
WEIGHT 35kg
TEMP RANGE 60 to 240°C

ORDER CODE ISC1004



2 PLATE

SPECIFICATIONS

ELECTRICITY 7kW, 380V, 3 Phase + N
DIMENSIONS 355 x 800 x 260mm high
COOKING SURFACE (2x) 299 x 299mm
WEIGHT 20kg
TEMP RANGE 60 to 240°C

ORDER CODE ISC1002



SINGLE PLATE

SPECIFICATIONS

ELECTRICITY 3.5kW, 230V, Single Phase
DIMENSIONS 330 x 425 x 105mm high
WEIGHT 5kg
TEMP RANGE 60 to 240°C

ORDER CODE ISC1001



WOK COOKER

SPECIFICATIONS

ELECTRICITY 3.5kW, 230V, Single Phase
DIMENSIONS 425 x 330 x 135mm high
WEIGHT 6kg
TEMP RANGE 60 to 240°C

ORDER CODE ISC2001



INDUCTION COOKWARE FERROMAGNETIC



WOK PAN

SPECIFICATIONS

DIAMETER Ø400mm
WEIGHT 3kg

ORDER CODE ISC-W40-1



STAINLESS STEEL WOK PAN WITH LID

SPECIFICATIONS

DIAMETER Ø360mm
WEIGHT 4kg

ORDER CODE ISC-SSWOK




What is INDUCTION COOKING?



Induction cooking operates on a simple yet ingenious principle of **electromagnetic induction**, transforming the way we prepare meals in the kitchen. Beneath the sleek surface of an induction cooktop lies a coil of copper wire through which a high-frequency alternating current passes. When a compatible ferromagnetic pot or pan is placed on the cooktop, the **magnetic field** induces an electric current within the cookware, generating heat directly within the vessel. This direct heating method eliminates the need for an intermediary surface to transfer heat, resulting in **rapid and precise** temperature control. As a result, induction cooking offers an **efficient and responsive** cooking experience, reducing both cooking times and energy consumption.

One of the most significant benefits of induction cooking is its **remarkable efficiency**. By heating the cookware directly, rather than relying on radiant heat or gas flames, induction cooktops waste **minimal energy**. This efficiency not only saves on electricity bills but also **reduces the environmental footprint** of cooking. Furthermore, the precise temperature control of induction cooking allows for more **consistent and uniform results**, whether you're simmering delicate sauces or searing meats to perfection. Additionally, the **instantaneous response** of induction cooktops to changes in temperature settings provides a level of precision unmatched by conventional cooking methods, empowering chefs to exercise **greater control** over their culinary creations.

Beyond efficiency and precision, induction cooking offers a range of practical benefits that **enhance safety** and convenience in the kitchen. Because induction cooktops only generate heat within the cookware itself, the surrounding surface remains relatively **cool to the touch**, reducing the risk of burns and making them safer for households with children. Furthermore, induction cooktops are **easier to clean** than traditional stoves, as spills are less likely to bake onto the surface. With its blend of efficiency, precision, and safety, induction cooking has emerged as a **modern solution** for both home cooks and professional chefs, revolutionizing the way we approach culinary endeavors.

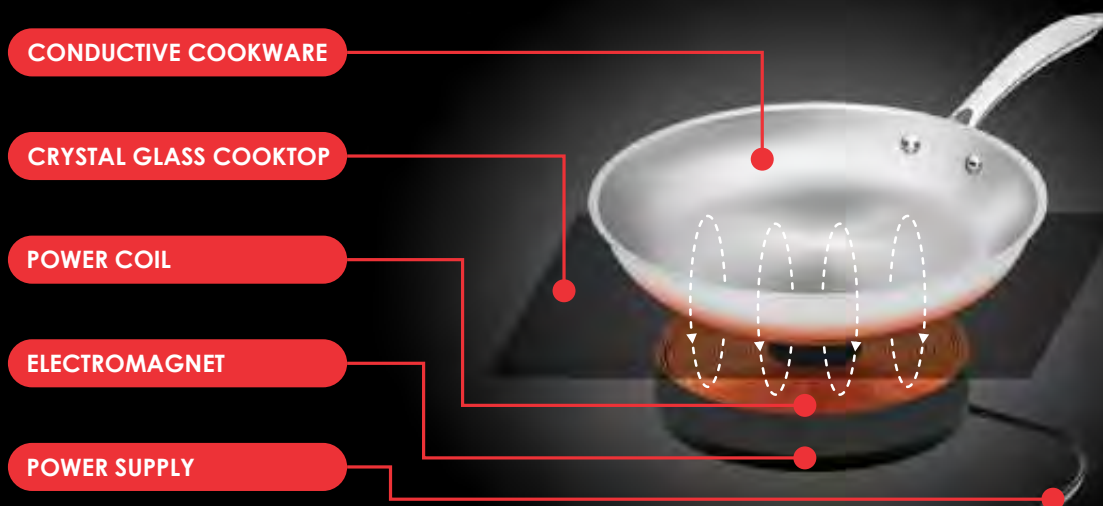

FEATURES

- Exterior body manufactured from 304 Stainless steel
- Standby pilot flame on each burner
- Flame failure protection valves
- 3/4" NPT rear gas connection and regulator provided
- Supplied with 1 chrome oven rack
- Enamel oven interior for easy cleaning
- Removable drip trays provided under burners to catch grease drippings
- Improved 2 piece burner assembly protects the pilots for easy cleaning
- Stainless steel kick plate & 515mm splashback with top shelf
- Fitted with device leveling legs (*Front*) and swivel castors (*Rear*)



LPGSA Approved



6 BURNER WITH GAS OVEN

SPECIFICATIONS

BURNER CONSUMPTION	(6x) 0.56 kg/h
OVEN CONSUMPTION	0.6 kg/h
TOTAL GAS CONSUMPTION	3.96kg/h
BTU RATING	156 000 + 27 000
DIMENSIONS	915 x 815 x 910mm high (+ 515mm splashback)
WEIGHT	185kg
GRATE DIM	(6x) 300 x 300mm
OVEN INTERNAL DIM	670 x 660 x 355mm high
OVEN GRID SUPPLIED	(1x) 665 x 642mm
RUNNER SPACING	40mm
TEMP RANGE	80 to 280°C

ORDER CODE CR-AT80G6B-O

ADDITIONAL OVEN GRIDS

CR-GRID-6B

4 BURNER WITH GAS OVEN

SPECIFICATIONS

BURNER CONSUMPTION	(4x) 0.56 kg/h
OVEN CONSUMPTION	0.6 kg/h
TOTAL GAS CONSUMPTION	2.76kg/h
BTU RATING	104 000 + 24 000
DIMENSIONS	610 x 815 x 910mm high (+ 515mm splashback)
WEIGHT	137kg
GRATE DIM	(4x) 300 x 300mm
OVEN INTERNAL DIM	510 x 660 x 355mm high
OVEN GRID SUPPLIED	(1x) 500 x 642mm
RUNNER SPACING	40mm
TEMP RANGE	80 to 280°C


ORDER CODE CR-AT80G4B-O


ADDITIONAL OVEN GRIDS

CR-GRID-4B



**NEW & IMPROVED
BURNER ASSEMBLY
PROTECTS PILOT
ASSEMBLY FROM
GREASE AND DIRT**

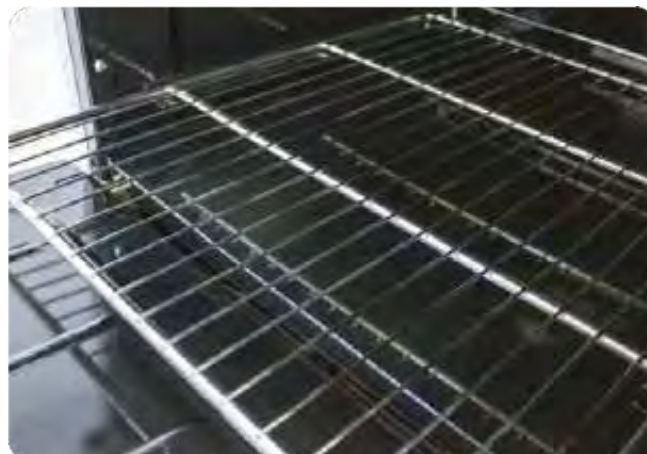



LPGSA Approved

FEATURES

- Exterior body manufactured from 304 Stainless steel
- Standby pilot flame on each burner
- Flame failure protection valves
- 260mm Splashback with ventilation grid
- Removable drip trays provided under burners to catch grease drippings
- Improved 2 piece burner assembly protects the pilots for easy cleaning
- 3/4" NPT rear gas connection and regulator provided
- Fitted with device leveling legs



6 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(6x) 0.56 kg/h
TOTAL GAS CONSUMPTION	3.36 kg/h
BTU RATING	156 000
DIMENSIONS	900 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	65kg
GRATE DIMENSIONS	(6x) 300 x 300mm

ORDER CODE

CR-AT80G6B-C

OPTIONAL STAND

DIMENSIONS	915 x 710 x 650mm high
ORDER CODE	CR-ATSE-2836



4 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(4x) 0.56 kg/h
TOTAL GAS CONSUMPTION	2.24 kg/h
BTU RATING	104 000
DIMENSIONS	600 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	45kg
GRATE DIMENSIONS	(4x) 300 x 300mm

ORDER CODE

CR-AT80G4B-C

OPTIONAL STAND

DIMENSIONS	610 x 710 x 650mm high
ORDER CODE	CR-ATSE-2824



2 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(2x) 0.56 kg/h
TOTAL GAS CONSUMPTION	1.12 kg/h
BTU RATING	52 000
DIMENSIONS	300 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	25kg
GRATE DIMENSIONS	(2x) 300 x 300mm

ORDER CODE

CR-AT80G2B-C





LPGSA Approved

FEATURES

- Exterior body manufactured from 304 Stainless steel
- Individual spark ignition on burners
- Flame failure protection valves
- Features a full-length Stainless steel drip tray
- 260mm Splashback with ventilation grid
- Heavy-duty cast iron grids
- 3 Way pilots on burners
- Stainless steel radiant cover plates protects burners from grease and dirt
- 70mm high side splash guards
- Fitted with device levelling legs



900mm - 3 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(3x) 0.48 kg/h
TOTAL GAS CONSUMPTION	1.44 kg/h
BTU RATING	69 000
DIMENSIONS	900 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	85kg
COOKING SURFACE	880 x 530mm (0.47m ²)

ORDER CODE

CR-AT80G9C-C

OPTIONAL STAND

DIMENSIONS	915 x 710 x 650mm high
ORDER CODE	CR-ATSE-2836



600mm - 2 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(2x) 0.48 kg/h
TOTAL GAS CONSUMPTION	0.96 kg/h
BTU RATING	46 000
DIMENSIONS	600 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	65kg
COOKING SURFACE	590 x 530mm (0.31m ²)

ORDER CODE

CR-AT80G6C-C

OPTIONAL STAND

DIMENSIONS	610 x 710 x 650mm high
ORDER CODE	CR-ATSE-2824




300mm - 1 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(1x) 0.48 kg/h
TOTAL GAS CONSUMPTION	0.48 kg/h
BTU RATING	23 000
DIMENSIONS	300 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	45kg
COOKING SURFACE	300 x 530mm (0.16m ²)

ORDER CODE

CR-AT80G3C-C

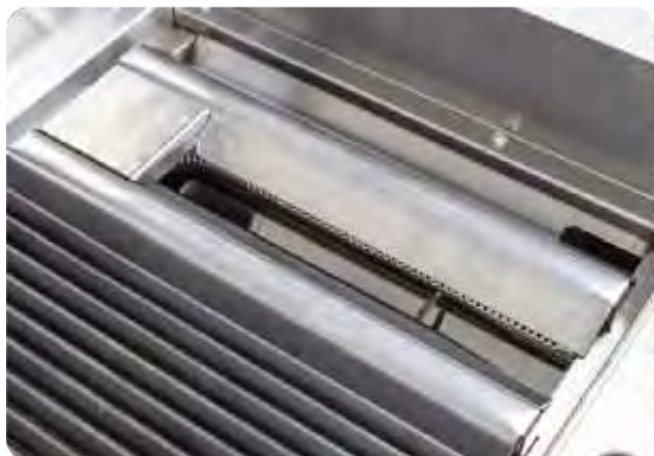



LPGSA Approved

FEATURES

- Exterior body manufactured from 304 Stainless steel
- Heavy duty, 15mm thick polished griddle plate
- 260mm Splashback with ventilation grid
- Individual spark ignition on burners
- Features a Stainless steel drip tray
- Fitted with device levelling legs
- 3 Way pilots on burners
- 70mm high side splash guards



900mm - 3 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(3x) 0.48 kg/h
TOTAL GAS CONSUMPTION	1.44 kg/h
BTU RATING	72 000
DIMENSIONS	900 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	105kg
COOKING SURFACE	880 x 515mm (0.45m ²)

ORDER CODE

CR-AT80G9G-C

OPTIONAL STAND

DIMENSIONS	915 x 710 x 650mm high
ORDER CODE	CR-ATSE-2836



600mm - 2 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(2x) 0.48 kg/h
TOTAL GAS CONSUMPTION	0.96 kg/h
BTU RATING	48 000
DIMENSIONS	600 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	73kg
COOKING SURFACE	590 x 515mm (0.3m ²)

ORDER CODE

CR-AT80G6G-C

OPTIONAL STAND

DIMENSIONS	610 x 710 x 650mm high
ORDER CODE	CR-ATSE-2824



300mm - 1 BURNER

SPECIFICATIONS

BURNER GAS CONSUMPTION	(1x) 0.48 kg/h
TOTAL GAS CONSUMPTION	0.48 kg/h
BTU RATING	24 000
DIMENSIONS	300 x 800 x 360mm high (+ 260mm splashback)
WEIGHT	55kg
COOKING SURFACE	300 x 515mm (0.15m ²)

ORDER CODE

CR-AT80G3G-C



FEATURES

- Sturdy, stainless steel top surface and under shelf
- Safety hemmed edge around the sides and back to keep equipment and other content from sliding off
- Added "H-shape" reinforced rib underneath the top surface makes it able to support more evenly distributed weight
- Adjustable under shelf and bullet feet provide additional storage space, as well as optimum stability
- Supplied flat-packed. Assembly required
- Tools are included for easy assembly



1220mm

SPECIFICATIONS

MODEL
DIMENSIONS
WEIGHT

CookRite ATSE-2848
1220 x 710 x 650mm high
29kg

ORDER CODE

CR-ATSE-2848



915mm

SPECIFICATIONS

MODEL
DIMENSIONS
WEIGHT

CookRite ATSE-2836
915 x 710 x 650mm high
24kg

ORDER CODE

CR-ATSE-2836



610mm

SPECIFICATIONS

MODEL
DIMENSIONS
WEIGHT

CookRite ATSE-2824
610 x 710 x 650mm high
18kg

ORDER CODE

CR-ATSE-2824



FEATURES

- Stainless steel exterior and interior
- Carel digital controller
- Gravity fed self closing drawers
- Magnetic drawer gaskets
- Stainless steel inserts not included
- One-Piece heavy duty reinforced stainless steel top
- Recessed door handles
- Heavy Duty stainless steel drawer slides and rollers
- Fitted with device leveling feet
- Insulated top to block heat transfer from cooking equipment



1800mm

SPECIFICATIONS

ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 1840 x 814 x 675mm high
WEIGHT 136kg
NUMBER OF DRAWERS 4
PANS PER DRAWER (2x) 1/1GN 100mm deep
TEMP RANGE 2 to 5°C
REFRIGERANT GAS R290

ORDER CODE

PCY-MGF8453





1200mm

SPECIFICATIONS

ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 1230 x 814 x 675mm high
WEIGHT 117kg
NUMBER OF DRAWERS 2
PANS PER DRAWER (2x) 1/1GN + (3x) 1/6GN 100mm deep
TEMP RANGE 2 to 5°C
REFRIGERANT GAS R290

ORDER CODE

PCY-MGF8450

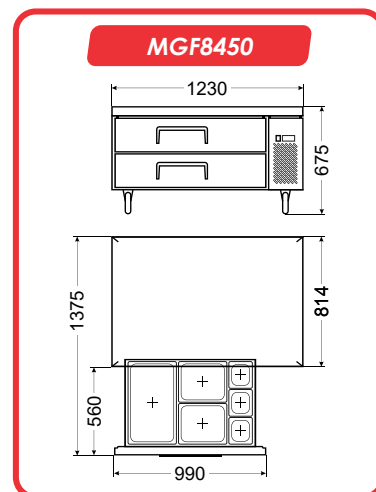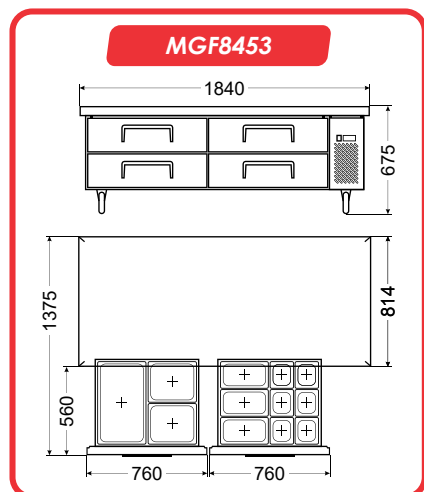

*inserts not included



*inserts not included



*inserts not included

FEATURES

- Body and panelling manufactured of stainless steel
- Standby pilot flame on each burner
- Top grids manufactured from cast iron
- Fitted with device leveling legs

- Each burner operates independently from each other providing heat economy
- Automatic flame failure safety switch (*If the flame goes out, gas valve is cut off*)
- Supplied with (1x) 1/1 GN oven grid



6 BURNER

WITH 1/1 GN ELECTRIC CONVECTION OVEN
& CABINET

SPECIFICATIONS

BURNER GAS CONSUMPTION	(6x) 0.55 kg/h
TOTAL GAS CONSUMPTION	3.30 kg/h
BTU RATING	126 000
ELECTRICITY	3kW, 240V, Single Phase
DIMENSIONS	1200 x 700 x 920mm high
WEIGHT	110kg
GRATE DIMENSIONS	(6x) 360 x 290mm
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
INTERNAL CABINET DIM	355 x 537 x 425mm high
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-6BG-EOC/700



4 BURNER


WITH 1/1 GN ELECTRIC CONVECTION OVEN

SPECIFICATIONS

BURNER GAS CONSUMPTION	(4x) 0.55 kg/h
TOTAL GAS CONSUMPTION	2.20 kg/h
BTU RATING	84 000
ELECTRICITY	3kW, 240V, Single Phase
DIMENSIONS	800 x 700 x 920mm high
WEIGHT	97kg
GRATE DIMENSIONS	(4x) 360 x 290mm
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-4BG-EOC-700



ADDITIONAL OVEN GRIDS

530 x 325mm

ORDER CODE OGS0011



GAS COOKING RANGES 900 SERIES

arisco®

FEATURES

- Body and panelling manufactured of stainless steel
- Standby pilot flame on each burner
- Top grids manufactured from cast iron
- Fitted with device leveling legs
- Each burner operates independently from each other providing heat economy
- Automatic flame failure safety switch *(If the flame goes out, gas valve is cut off)*
- Supplied with (1x) 2/1 GN oven grid




4 BURNER WITH 2/1GN GAS OVEN

SPECIFICATIONS

BURNER GAS CONSUMPTION	(4x) 0.63 kg/h
OVEN GAS CONSUMPTION	0.58 kg/h
TOTAL GAS CONSUMPTION	3.10 kg/h
BTU RATING	108 000 + 25 000
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	158kg
GRATE DIMENSIONS	(4x) 380 x 330mm
INTERNAL OVEN DIM	610 x 700 x 280mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-GR922




4 BURNER WITH 2/1GN ELECTRIC CONVECTION OVEN

SPECIFICATIONS

BURNER GAS CONSUMPTION	(4x) 0.63 kg/h
TOTAL GAS CONSUMPTION	2.52 kg/h
BTU RATING	108 000
ELECTRICITY	7.5kW, 380V, 3 Phase + N
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	158kg
GRATE DIMENSIONS	(4x) 380 x 330mm
INTERNAL OVEN DIM	610 x 700 x 280mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-GR922E



ADDITIONAL OVEN GRIDS 650 x 530mm

ORDER CODE OGS0021

ELECTRIC COOKING RANGES 700 SERIES

arisco®

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 220mm round plates
- Each plate operates independently from each other providing heat economy
- Fitted with a 1/1 GN electric convection oven
- Controlled by thermostats against overheating
- Fitted with (4x) device leveling legs
- Supplied with (1x) 1/1 GN oven grid



4 PLATE WITH 1/1GN CONVECTION OVEN

SPECIFICATIONS

ELECTRICITY	13.4kW, 380V, 3 Phase + N
DIMENSIONS	800 x 700 x 900mm high
WEIGHT	88kg
PLATE DIAMETER	220mm Ø
INTERNAL OVEN DIM	610 x 405 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-ER722



FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 220mm round plates
- Each plate operates independently from each other providing heat economy
- Controlled by thermostats against overheating
- On an open stainless steel neutral cabinet
- Fitted with (4x) device leveling legs



4 PLATE WITH NEUTRAL CABINET

SPECIFICATIONS

ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	800 x 700 x 900mm high
WEIGHT	53kg
PLATE DIAMETER	220mm Ø
INTERNAL CABINET DIM	710 x 537 x 425mm high

ORDER CODE

ARI-ER721S-D721



ADDITIONAL OVEN GRIDS 530 x 325mm

ORDER CODE OGS0011



ELECTRIC COOKING RANGES 900 SERIES

arisco

FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 300 x 300mm square plates
- Each plate operates independently from each other providing heat economy
- Fitted with a 2/1 GN electric convection oven
- Controlled by thermostats against overheating
- Fitted with (4x) device leveling legs
- Supplied with (1x) 2/1 GN oven grid



4 PLATE WITH 2/1 GN CONVECTION OVEN

SPECIFICATIONS

ELECTRICITY	22kW, 380V, 3 Phase + N
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	149kg
PLATE DIMENSIONS	300 x 300mm
INTERNAL OVEN DIM	610 x 615 x 302mm high
RUNNER SPACING	48mm - 4 levels
OVEN TEMP RANGE	50 to 300°C

ORDER CODE

ARI-ER922



FEATURES

- Body and panelling manufactured of stainless steel
- Fitted with (4x) 300 x 300mm square plates
- Each plate operates independently from each other providing heat economy
- Controlled by thermostats against overheating
- On an open stainless steel neutral cabinet
- Fitted with (4x) device leveling legs



4 PLATE WITH NEUTRAL CABINET

SPECIFICATIONS

ELECTRICITY	16kW, 380V, 3 Phase + N
DIMENSIONS	850 x 900 x 900mm high
WEIGHT	108kg
PLATE DIMENSIONS	300 x 300mm
INTERNAL CABINET DIM	825 x 790 x 425mm high

ORDER CODE

ARI-ER921



ADDITIONAL OVEN GRIDS

650 x 530mm

ORDER CODE OGS0021



FEATURES

- 304 stainless steel tank for easy cleaning
- Safety cutout switch - when tank is lifted burners/elements shut off
- Precise thermostatic temperature control
- Gas models are fitted with stainless steel burners and pilot light
- Fitted with (4x) device leveling legs
- 10mm, 316-L stainless steel base plate
- Easy to use analogue controls
- Fitted with water fill tap
- Manual tank lift mechanism
- Fitted with counterbalanced hinged lid



120 LITRE *ELECTRIC*

SPECIFICATIONS

ELECTRICITY	12kW, 380V, 3 Phase + N
DIMENSIONS	1000 x 900 x 900mm high
WEIGHT	163kg
PAN CAPACITY	95Lt
COOKING SURFACE	915 x 605mm (0.55m ²)
TEMP RANGE	50 to 300°C

ORDER CODE

ARI-EP922



120 LITRE *GAS*

SPECIFICATIONS

GAS CONSUMPTION	1.66 kg/h
BTU RATING	65 000
DIMENSIONS	1000 x 900 x 900mm high
WEIGHT	163kg
PAN CAPACITY	95Lt
COOKING SURFACE	915 x 605mm (0.55m ²)
TEMP RANGE	100 to 300°C

ORDER CODE

ARI-GP922



SmartWave

17 Litre Digital

Microwave



**Powerful performance
with intelligent features.**

FEATURES

- Body is manufactured from Stainless steel
- Fitted with a single magnetron
- Digital control panel with LED display
- 5 power levels, 3 cooking stages
- Superior performance with low power consumption
- Includes interior lighting
- Programmable menu for 100 dishes
- The "x2" function calculates the time required to cook several servings at the same time



25 LITRE - DIGITAL CONTROL

SPECIFICATIONS

ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	511 x 432 x 311mm high
INTERNAL DIMENSIONS	327 x 346 x 200mm high
MAX DISH SIZE	Ø305mm
CHAMBER SIZE	25Lt
WEIGHT	15kg



ORDER CODE

MWS2510



FEATURES

- Body is manufactured from Stainless steel
- Fitted with a single magnetron
- Manual (Electromechanical) control panel
- 1 power level, 1 cooking stage
- Superior performance with low power consumption
- Includes interior lighting
- Fitted with a 6-minute timer and reminder alarm



25 LITRE - DIAL CONTROL

SPECIFICATIONS

ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	511 x 432 x 311mm high
INTERNAL DIMENSIONS	327 x 346 x 200mm high
MAX DISH SIZE	Ø305mm
CHAMBER SIZE	25Lt
WEIGHT	15kg



ORDER CODE

MWS2510-M



FEATURES

- Body is manufactured from Stainless steel
- Fitted with a single magnetron
- Digital control panel with LED display
- 5 power levels, 3 cooking stages
- Superior performance with low power consumption
- Includes interior lighting
- Programmable menu for 100 dishes
- The "x2" function calculates the time required to cook several servings at the same time



34 LITRE - DIGITAL CONTROL

SPECIFICATIONS

ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	553 x 488 x 343mm high
INTERNAL DIMENSIONS	360 x 390 x 225mm high
MAX DISH SIZE	Ø340mm
CHAMBER SIZE	34Lt
WEIGHT	19kg

ORDER CODE

MWS3410



FEATURES

- Body is manufactured from Stainless steel
- Fitted with 2 magnetrons
- Digital control panel with LED display
- 11 power levels, 3 cooking stages
- Fast cooking function
- Includes interior lighting
- Programmable menu for 100 dishes
- The "x2 & x3" functions calculates the time required to cook several servings at the same time



17 LITRE - DIGITAL CONTROL

SPECIFICATIONS

ELECTRICITY	1.8kW, 220V, Single Phase
DIMENSIONS	420 x 563 x 340mm high
INTERNAL DIMENSIONS	330 x 305 x 150mm high
MAX DISH SIZE	Ø285mm
CHAMBER SIZE	17Lt
WEIGHT	30kg

ORDER CODE

MWS1718



SmartWave

BOLT

High Speed Oven

The ultimate
solution for fast,
efficient and
delicious cooking.



SmartWave Bolt delivers outstanding performance that sets it apart from standard cooking appliances thanks to its engineered structure, custom-designed components, and upgraded interior features.

Whether you're running a convenience store, a commercial kitchen, a chain outlet, or catering at an event, Bolt is built to exceed expectations. Its high efficiency, user-friendly operation, and exceptional durability make it the perfect choice for demanding environments.



FEATURES

- Body is manufactured from powder coated mild steel
- Provides even heat distribution while saving energy
- Fitted with a single magnetron with inverter technology
- Air filters remove easily for quick cleaning
- Includes interior lighting
- Full colour, touch-screen control panel and display
- Programmable menu for 1024 dishes
- 6 cooking stages for versatile applications
- Supplied with a range of accessories

BOLT

SPECIFICATIONS

ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	400 x 690 x 610mm high
INTERNAL DIMENSIONS	314 x 343 x 173mm high
MAX DISH SIZE	Ø294mm
CHAMBER SIZE	18.7Lt
WEIGHT	60kg
TEMP RANGE	100 to 275°C
TIMER	0 to 60min

ORDER CODE

BOLT3000



INCLUDED ACCESSORIES



Pizza Stone



Teflon Liner



Stainless Steel Shovel



Lifting Clip



Base Basket Perforated Teflon Coated



Grid Grilling



Solid Bottom Tray Teflon Coated



Programable for over 1000 dishes



High-performance cooking



Microwave



Grill



Convection

[illegible]

NOTES



FEATURES

- Patented fan guard system *Airflowlogic™*
- Patented system for direct steam *Humilogic™*
- Patented system for cooking chamber drying *Drylogic™*
- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- 10 Levels of direct steam, controlled by a touch control panel situated on the right hand side of the door
- Fitted with quick selection knob for the touch screen
- Fitted with 4 bidirectional fan motors for even heat distribution
- 500 Programmable recipe
- Delayed start function up to 23 hours and 59 minutes
- Supplied with multipoint core probe
- Supplied with 20 pan gastronomy trolley with handle
- Cleaning chemicals not included
- IPX5 protection rating against water
- 42 Language settings for the control panel
- Humidity management software installed
- Automatic washing system integrated
- Trays and grids not included

**** It is essential that all combi steamers be installed with a water softening filtration system**



20 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY	31kW, 380V, 3 Phase + N
DIMENSIONS	930 x 1035 x 1900mm high
WEIGHT	247kg
CHAMBER DIMENSIONS	710 x 551 x 1440mm high
TEMP RANGE	30 to 270°C
NUMBER OF PROGRAMS	500
NO. OF COOKING STEPS	10 Programmable
PRE-HEAT FUNCTION	Programable

ORDER CODE

MKF2011TS



Supplied with 20 pan gastronomy trolley with handle

CAPACITY	(20x) 1/1GN Pans
RUNNER SPACING	66mm
ORDER CODE	EKCR20TC

OPTIONAL

Convert your oven to a 16 tray baking oven by changing trolleys

CAPACITY	(16x) 600 x 400 baking trays
RUNNER SPACING	80mm
ORDER CODE	EKCR16TC



STANDARD WITH BUILT-IN SELF CLEAN SYSTEM

OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

- 1/1 GN PAN - 55mm
- 1/1 GN PAN - 55mm (perforated)
- 1/1 GN PAN - 40mm
- 1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

- 1/1GN (Stainless steel)
- 600 x 400 x 30mm
- 600 x 400 x 30mm (Teflon coated)
- 600 x 400 x 10mm

BTS2011
BTA3064
BTA3064-T
BTA1064

GRIDS

1/1 GN GRID OGS0011

CLEANING

CLEANING DETERGENT MKF-MKDET



FEATURES

- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam, controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Fitted with 4 bidirectional fan motors for even heat distribution
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied with 20 pan gastronomy trolley with handle
- Supplied without trays and grids
- Cleaning chemicals not included

**** It is essential that all combi steamers be installed with a water softening filtration system**



20 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY
DIMENSIONS
WEIGHT
CHAMBER DIMENSIONS
TEMP RANGE
PRE-HEAT FUNCTION

31kW, 380V, 3 Phase + N
930 x 1041 x 1900mm high
247kg
710 x 551 x 1440mm high
100 to 270°C
Manual

ORDER CODE

MKF2011S



Supplied with 20 pan gastronomy trolley with handle

CAPACITY (20x) 1/1GN Pans
RUNNER SPACING 66mm
ORDER CODE EKF-EKCR20TC

OPTIONAL

Convert your oven to a 16 tray baking oven by changing trolleys

CAPACITY (16x) 600 x 400 baking trays
RUNNER SPACING 80mm
ORDER CODE EKF-EKCR16TC



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

1/1 GN PAN - 55mm
1/1 GN PAN - 55mm (perforated)
1/1 GN PAN - 40mm
1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

1/1GN (Stainless steel)
600 x 400 x 30mm
600 x 400 x 30mm (Teflon coated)
600 x 400 x 10mm

BTS2011
BTA3064
BTA3064-T
BTA1064

GRIDS

1/1 GN GRID OGS0011

CLEANING

CLEANING DETERGENT MKF-MKDET



FEATURES

- Patented technology Airflowlogic™ / Humilogic™ / Drylogic™
- Outer casing manufactured from AISI 304 stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- 10 Levels of direct steam, controlled by a touch control panel situated on the right hand side of the door
- IPX5 protection rating against water
- 42 Language settings for the control panel
- Humidity management software installed
- Fitted with a Wi-fi communication system
- Automatic washing system integrated
- Stand, trays and grids NOT included
- Fitted with quick selection knob for the touch screen
- 500 Programmable recipes
- Fitted with 2 bidirectional fan motors for even heat distribution
- Delayed start function up to 23 hours and 59 minutes
- Cleaning chemicals not included
- Multipoint core probe included

**** It is essential that all combi steamers be installed with a water softening filtration system**



STANDARD WITH BUILT-IN SELF CLEAN SYSTEM

11 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 850 x 1130mm high
WEIGHT	114kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	30 to 270°C
NO. OF PROGRAMS	500
NO. OF COOKING STEPS	10 Programmable
PRE-HEAT FUNCTION	Programmable

ORDER CODE

MKF1111TS



7 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY	11.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 850 x 850mm high
WEIGHT	96kg
CAPACITY	(7x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	30 to 270°C
NO. OF PROGRAMS	500
NO. OF COOKING STEPS	10 Programmable
PRE-HEAT FUNCTION	Programmable

ORDER CODE

MKF711TS



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

- 1/1 GN PAN - 55mm
- 1/1 GN PAN - 55mm (perforated)
- 1/1 GN PAN - 40mm
- 1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

- 1/1GN (Stainless steel)

BTS2011

GRIDS

- 1/1 GN GRID

OGS0011

STANDS

- Stand for MKF1111TS
- Stand for MKF711TS

MKF-MKTS1111-L
MKF-MKTS711-L

CLEANING

- CLEANING DETERGENT

MKF-MKDET



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam, controlled by a manual control panel situated on the right hand side of the door
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- Cleaning chemicals not included
- Fitted with a condensate collection bowl, with drain on door
- Supplied without stand
- Fitted with 2 bidirectional fan motors for even heat distribution

**** It is essential that all combi steamers be installed with a water softening filtration system**



11 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 855 x 1130mm high
WEIGHT	114kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF1111S



7 PAN GASTRONOMY

SPECIFICATIONS

ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	730 x 855 x 850mm high
WEIGHT	96kg
CAPACITY	(7x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF711S



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

1/1 GN PAN - 55mm
1/1 GN PAN - 55mm (perforated)
1/1 GN PAN - 40mm
1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

1/1GN (Stainless steel)

BTS2011

GRIDS

1/1 GN GRID

OGS0011

STANDS

Stand for MKF1111TS
Stand for MKF711TS

MKF-MKTS1111-L
MKF-MKTS711-L

CLEANING

MANUAL SPRAY KIT


EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam, controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- Cleaning chemicals not included
- IPX4 protection rating against water
- Supplied without stand
- Fitted with bidirectional fan motors for even heat distribution

**** It is essential that all combi steamers be installed with a water softening filtration system**



11 PAN GASTRONOMY

SPECIFICATIONS

GAS CONSUMPTION	1.4 kg/h
BTU RATING	61 000
ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	730 x 855 x 1231mm high
WEIGHT	141kg
CAPACITY	(11x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(3x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF1111GS



7 PAN GASTRONOMY

SPECIFICATIONS

GAS CONSUMPTION	1.0 kg/h
BTU RATING	46 000
ELECTRICITY	0.5kW, 220V, Single Phase
DIMENSIONS	730 x 855 x 850mm high
WEIGHT	109kg
CAPACITY	(7x) 1/1 GN pans
RUNNER SPACING	68mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF711GS



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

1/1 GN PAN - 55mm	GNF8055
1/1 GN PAN - 55mm (perforated)	GNF8055.P
1/1 GN PAN - 40mm	GNF8040
1/1 GN PAN - 40mm (perforated)	GNF8040.P

BAKING TRAYS

1/1GN (Stainless steel)	BTS2011
-------------------------	---------

GRIDS

1/1 GN GRID	OGS0011
-------------	---------

STANDS

Stand for MKF1111TS	MKF-MKTS1111-L
Stand for MKF711TS	MKF-MKTS711-L

CLEANING

MANUAL SPRAY KIT	EKF-EKKD
------------------	----------



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam, controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- Cleaning chemicals not included
- IPX4 protection rating against water
- Supplied without stand
- Fitted with bidirectional fan motors for even heat distribution

**** It is essential that all combi steamers be installed with a water softening filtration system**



10 TRAY BAKERY

SPECIFICATIONS

ELECTRICITY	15.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 1130mm high
WEIGHT	140kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(3x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF1064S



6 TRAY BAKERY

SPECIFICATIONS

ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	108kg
CAPACITY	(6x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF664S



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

BAKING TRAYS

600 x 400 x 30mm
600 x 400 x 30mm (Teflon coated)
600 x 400 x 10mm

BTA3064
BTA3064-T
BTA1064

GRIDS

600 x 400mm Grid

OGS0064

STANDS

Stand for MKF1064S
Stand for MKF664S

MKF-MKTS1064-L
MKF-MKTS664-L

CLEANING

MANUAL SPRAY KIT


EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- 5 Levels of direct steam, controlled by a manual control panel situated on the right hand side of the door
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- Cleaning chemicals not included
- IPX4 protection rating against water
- Supplied without stand
- Fitted with bidirectional fan motors for even heat distribution

**** It is essential that all combi steamers be installed with a water softening filtration system**



10 TRAY BAKERY

SPECIFICATIONS

GAS CONSUMPTION	1.4 kg/h
BTU RATING	61 000
ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	850 x 1041 x 1231mm high
WEIGHT	158kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(3x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF1064GS



6 TRAY BAKERY

SPECIFICATIONS

GAS CONSUMPTION	1.0 kg/h
BTU RATING	46 000
ELECTRICITY	0.5kW, 220V, Single Phase
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	123kg
CAPACITY	(6x) 600 x 400mm trays
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF664GS



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

BAKING TRAYS

600 x 400 x 30mm
600 x 400 x 30mm (Teflon coated)
600 x 400 x 10mm

BTA3064
BTA3064-T
BTA1064

STANDS

Stand for MKF1064S
Stand for MKF664S

MKF-MKTS1064-L
MKF-MKTS664-L

GRIDS

600 x 400mm Grid

OGS0064

CLEANING

MANUAL SPRAY KIT

EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured AISI 304 stainless steel
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Direct steam levels, manually controlled (10 to 100%)
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- 100 Programmable recipes
- Fitted with a bidirectional fan motor for even heat distribution
- Manual cleaning
- Cleaning chemicals not included
- Supplied without stand
- Trays and grids not included

**** It is essential that all combi steamers be installed with a water softening filtration system**



TOUCH CONTROL

SPECIFICATIONS

ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	550 x 755 x 662mm high
CHAMBER DIMENSIONS	350 x 390 x 450mm high
WEIGHT	42kg
CAPACITY	(5x) 2/3 GN
RUNNER SPACING	80mm
TEMP RANGE	30 to 270°C
NUMBER OF FANS	(1x) bidirectional
NO. OF PROGRAMS	100
NO. OF COOKING STEPS	5 Programmable
PRE-HEAT FUNCTION	Programable

ORDER CODE

EKF523NTUD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured AISI 304 stainless steel
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- 5 Levels of direct steam levels, manually controlled
- IPX4 protection rating against water
- Timer for cooking from 10 to 120 minutes / infinity
- Fitted with a bidirectional fan motor for even heat distribution
- Cleaning chemicals not included
- Supplied without stand
- Trays and grids not included

**** It is essential that all combi steamers be installed with a water softening filtration system**



MANUAL CONTROL

SPECIFICATIONS

ELECTRICITY	3.2kW, 230V, Single Phase
DIMENSIONS	550 x 755 x 665mm high
CHAMBER DIMENSIONS	350 x 390 x 450mm high
WEIGHT	41kg
CAPACITY	(5x) 2/3 GN
RUNNER SPACING	80mm
TEMP RANGE	100 to 270°C
NUMBER OF FANS	(1x) bidirectional
PRE-HEAT FUNCTION	Manual

ORDER CODE

EKF523NUD



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

- 2/3 GN PAN - 20mm
- 2/3 GN PAN - 65mm
- 2/3 GN PAN - 40mm (Perforated)
- 1/3 GN PAN - 40mm
- 1/3 GN PAN - 65mm

- GN2T8020
- GN2T8065
- GN2T8040.P
- GNT8040
- GNT8065

STANDS

Stand for EKF523N Ovens

SOE0423

CLEANING

MANUAL SPRAY KIT

EKF-EKKD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Manual control panel situated on the right hand side of the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- IPX4 protection rating against water
- Fitted with 2 bidirectional fan motors for even heat distribution
- Trays and grids not included
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without stand
- Chemicals not included



6 TRAY

SPECIFICATIONS

ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	108kg
CAPACITY	(6x) 600 x 400mm pans
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C
PRE-HEAT FUNCTION	Manual

ORDER CODE

MKF664SP



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

BAKING TRAYS

600 x 400 x 30mm
600 x 400 x 30mm (Teflon coated)
600 x 400 x 10mm

BTA3064
BTA3064-T
BTA1064

GRIDS

600 x 400mm Grid

OGS0064

STAND

Stand for MKF664SP

MKF-MKTS664-L



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED bar fitted into the door
- Available in bottom or right hand hinged door models
- 5 Levels of direct steam, controlled by a electromechanical control panel situated below the door
- The side supports and drip tray can easily be removed for cleaning
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX4 protection rating against water
 - Trays and grids not included
 - Cleaning chemicals not included
- Supplied without stand

**** It is essential that all combi steamers be installed with a water softening filtration system**



4 PAN - MANUAL CONTROL

SPECIFICATIONS

ELECTRICITY	6.4kW, 380V, 3 Phase + N
DIMENSIONS	790 x 785 x 635mm high
CHAMBER DIMENSIONS	660 x 430 x 380mm high
WEIGHT	57kg
CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays
RUNNER SPACING	73mm
TEMP RANGE	100 to 270°C
NUMBER OF FANS	(2x) bidirectional
PRE-HEAT FUNCTION	Manual

ORDER CODE

EKF416NUD



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

1/1 GN PAN - 65mm
1/1 GN PAN - 65mm (perforated)

GNF8065
GNF8065.P

GRIDS

1/1 GN GRID
600 x 400mm GRID

OGS0011
OGS0064

BAKING TRAYS

1/1 GN (Stainless steel)
600 x 400 x 30mm
600 x 400 x 30mm (Teflon coated)
600 x 400 x 10mm

BTS2011
BTA3064
BTA3064-T
BTA1064

OVEN STAND

ORDER CODE

SOE0416

CLEANING

MANUAL SPRAY KIT

EKF-EKDD



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 430 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel fitted at the bottom of the door
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX4 protection rating against water
- Supplied without stand
- Cleaning chemicals not included
- Bottom hinged door
- Trays and grids not included

**** It is essential that a water softening filtration system is installed with these units**



HUMIDIFICATION (PULSE)

4 PAN WITH HUMIDIFICATION

SPECIFICATIONS

ELECTRICITY	3.4kW, 220V, Single Phase
DIMENSIONS	790 x 750 x 635mm high
CHAMBER DIMENSIONS	660 x 445 x 380mm high
WEIGHT	51kg
CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays
RUNNER SPACING	73mm
TEMP RANGE	100 to 270°C
NUMBER OF FANS	(2x) bidirectional
PRE-HEAT FUNCTION	Manual

ORDER CODE

EKF416N



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- Available in bottom or right hand hinged door models
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel situated at the bottom of the door
- Fitted with a bidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without stand
- Trays and grids not included
- Cleaning chemicals not included

4 PAN

SPECIFICATIONS

ELECTRICITY	6.2kW, 380V, 2 Phase + N
DIMENSIONS	790 x 750 x 635mm high
CHAMBER DIMENSIONS	660 x 445 x 380mm high
WEIGHT	51kg
CAPACITY	(4x) 1/1 GN Pans (4x) 600 x 400mm trays
RUNNER SPACE	73mm
TEMP RANGE	100 to 270°C
NUMBER OF FANS	(2x) bidirectional
PRE-HEAT FUNCTION	Manual

RIGHT HAND HINGED DOOR

ORDER CODE

EKF416NALP

BOTTOM HINGED DOOR

ORDER CODE

EKF416NP



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

INSERTS

- 1/1 GN PAN - 55mm
- 1/1 GN PAN - 55mm (perforated)
- 1/1 GN PAN - 40mm
- 1/1 GN PAN - 40mm (perforated)

GNF8055
GNF8055.P
GNF8040
GNF8040.P

BAKING TRAYS

- 1/1 GN (Stainless steel)
- 600 x 400 x 30mm deep
- 600 x 400 x 30mm deep (Teflon coated)
- 600 x 400 x 10mm deep

BTS2011
BTA3064
BTA3064-T
BTA1064

OVEN GRIDS

- 1/1 GN GRID
- 600 x 400mm GRID

OGS0011
OGS0064

OVEN STANDS


ORDER CODE

SOE0416



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the bottom of the door
- Fitted with 1 unidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without stand
- Grids not included
- Supplied with (4x) 430 x 345mm baking trays
- Cleaning chemicals not included



**9 FUNCTION
SETTINGS**

4 PAN MULTI-FUNCTIONAL

SPECIFICATIONS

ELECTRICITY	2.8kW, 220V, Single Phase
DIMENSIONS	590 x 695 x 590mm high
CHAMBER DIMENSIONS	450 x 395 x 330mm high
WEIGHT	35kg
CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMP RANGE	50 to 300°C
NUMBER OF FANS	(1x) bidirectional
PRE-HEAT FUNCTION	Manual

ORDER CODE

EKF423NM



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the top of the door
- Fitted with a unidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without grids
- Supplied with (4x) 430 x 345mm baking trays
- Cleaning chemical not included
- Supplied without stand



4 PAN MANUAL CONTROL

SPECIFICATIONS

ELECTRICITY	3.1kW, 220V, Single Phase
DIMENSIONS	590 x 640 x 590mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	450 x 395 x 330mm high
CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMP RANGE	100 to 270°C
NUMBER OF FANS	(1x) bidirectional
PRE-HEAT FUNCTION	Manual

ORDER CODE

EKF423NP



OPTIONAL EXTRAS (FULL SPECS • PAGE 94 - 95)

BAKING TRAYS

435 x 315 x 10mm

BTA1043

OVEN STANDS

ORDER CODE

SOE0423

OPTIONAL EXTRAS - EKA COMBI STEAMERS & CONVECTION OVENS

FULL SPECIFICATIONS

PUSH-IN TROLLEYS



FEATURES

- Manufactured from AISI 304 Stainless steel
- Fitted with removable handle
- Fitted with 4 robust castors, 2 lockable



20 PAN PUSH-IN GASTRONOMY TROLLEY

SPECIFICATIONS

DIMENSIONS	740 x 561 x 1750mm high
WEIGHT	34kg
CAPACITY	(20x) 1/1 GN pans
RUNNER SPACING	66mm

ORDER CODE EKCR20TC

16 TRAY PUSH-IN BAKING TROLLEY

SPECIFICATIONS

DIMENSIONS	740 x 561 x 1750mm high
WEIGHT	34kg
CAPACITY	(16x) 600 x 400mm baking tray
RUNNER SPACING	80mm

ORDER CODE EKCR16TC

COMPATIBLE WITH THE FOLLOWING MODELS

- EKA MKF 2011 TS
- EKA MKF 2011 S

INSERTS

- 1/1GN - 40mm deep
- 1/1GN - 40mm (perforated)
- 1/1GN - 55mm deep
- 1/1GN - 55mm (perforated)
- 1/1GN - 65mm deep
- 1/1GN - 65mm (perforated)
- 2/3 GN - 20mm deep
- 2/3 GN - 65mm deep
- 2/3 GN - 40mm (perforated)
- 1/3 GN - 40mm deep
- 1/3 GN - 65mm deep

- GNF8040
- GNF8040.P
- GNF8055
- GNF8055.P
- GNF8065
- GNF8065.P
- GN2T8020
- GN2T8065
- GN2T8040.P
- GNT8040
- GNT8065

GRIDS

- OVEN GRID - 1/1 GN
- OVEN GRID - 600 x 400mm

- OGS0011
- OGS0064



BAKING TRAYS

- 435 x 315 x 10mm deep
- 600 x 400 x 10mm deep
- 600 x 400 x 20mm deep
- 600 x 400 x 30mm deep
- 600 x 400 x 30mm deep (Teflon coated)

- BTA1043
- BTA1064
- BTA2064
- BTA3064
- BTA3064-T

CLEANING & FLUSHING



MANUAL SPRAY KIT
ORDER CODE

EKF-EKCD



CLEANING DETERGENT for Millennial Touch Ovens
ORDER CODE

MKF-MKDET

OVEN STANDS

FEATURES

- Runners to accommodate GN Pans, 600 x 400mm or 435 x 315mm baking trays
- Manufactured from 1.2mm thick, 430 Stainless steel
- Fitted with 4 height adjustable plastic feet



HEIGHT
ADJUSTABLE FEET



STURDY STAINLESS STEEL
CONSTRUCTION

11 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 600 x 730 x 750mm high
WEIGHT 23kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MKF 1111 TS
EKA MKF 1111 S
EKA MKF 1111 GS



ORDER CODE MKF-MKTS1111-L

7 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 600 x 730 x 900mm high
WEIGHT 28kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MKF 711 TS
EKA MKF 711 S
EKA MKF 711 GS



ORDER CODE MKF-MKTS711-L

10 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 790 x 850 x 750mm high
WEIGHT 30kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MFK 1064 S
EKA MFK 1064 GS



ORDER CODE MKF-MKTS1064-L

6 PAN MILLENNIAL OVENS

SPECIFICATIONS

DIMENSIONS 790 x 850 x 900mm high
WEIGHT 35kg
RUNNER SPACING 40mm
COMPATIBLE WITH EKA MFK 664 S
EKA MFK 664 SP
EKA MFK 664 GS



ORDER CODE MKF-MKTS664-L

4 PAN EVOLUTION OVENS

SPECIFICATIONS

DIMENSIONS 800 x 750 x 850mm high
WEIGHT 19kg
RUNNER SPACING 70mm
COMPATIBLE WITH EKA EKF 416 NUD
EKA EKF 416 N
EKA EKF 416 NP
EKA EKF 416 NALP



ORDER CODE SOE0416

4 PAN CONVECTION OVENS

SPECIFICATIONS

DIMENSIONS 600 x 700 x 850mm high
WEIGHT 17kg
RUNNER SPACING 70mm
COMPATIBLE WITH EKA EKF 423 NM
EKA EKF 423 NP
EKA EKF 523 NTUD
EKA EKF 523 NUD



ORDER CODE SOE0423



MODEL	EKA MKF 2011 TS	EKA MKF 2011 S	EKA MKF 1111 TS	
CAPACITY	(20x) 1/1 GN Pans or *(16x) 600 x 400mm Baking Trays	(20x) 1/1 GN Pans or *(16x) 600 x 400mm Baking Trays	(11x) 1/1 GN Pans	
RUNNER SPACING	66mm	66mm	68mm	
ELEC / BTU RATING	31kW, 380V, 3 Phase + N	31kW, 380V, 3 Phase + N	15.4kW, 380V, 3 Phase + N	
CONTROL PANEL	Touch Control with Quick Selection knob	Manual Control	Touch Control with Quick Selection knob	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	✓	✓	
STEAM METHOD	Direct Steam - 10 Levels	Direct Steam - 5 Levels	Direct Steam - 10 Levels	

*16 pan capacity available with optional 16 pan trolley



MODEL	EKA MKF 711 TS	EKA MKF 711 S	EKA MKF 711 GS	
CAPACITY	(7x) 1/1 GN Pans	(7x) 1/1 GN Pans	(7x) 1/1 GN Pans	
RUNNER SPACING	68mm	68mm	68mm	
ELEC / BTU RATING	11.4kW, 380V, 3 Phase + N	11.4kW, 380V, 3 Phase + N	0.5kW, 220V, Single Phase / 46 000	
CONTROL PANEL	Touch Control with Quick Selection knob	Manual Control	Manual Control	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	✓	✓	
STEAM METHOD	Direct Steam - 10 Levels	Direct Steam - 5 Levels	Direct Steam - 5 Levels	



MODEL	EKA EKF 523 NUD	EKA EKF 416N	EKA EKF 416 NP / NALP	
CAPACITY	(5x) 2/3 GN Pans	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	(4x) 1/1 GN Pans (4x) 600 x 400mm Baking Trays	
RUNNER SPACING	80mm	73mm	73mm	
ELEC / BTU RATING	3.2kW, 230V, Single Phase	3.4kW, 230V, Single Phase	6.2kW, 380V, 3 Phase + N	
CONTROL PANEL	Manual Control	Manual Control	Manual Control	
BAKING	✓	✓	✓	
ROASTING	✓	✓	✓	
STEAMING	✓	-	-	
STEAM METHOD	Direct Steam - 5 Levels	Indirect steam with button	-	



	EKA MKF 1111 S	EKA MKF 1111 GS	EKA MKF 1064 S	EKA MKF 1064 GS
	(11x) 1/1 GN Pans	(11x) 1/1 GN Pans	(10x) 600 x 400mm Baking Trays	(10x) 600 x 400mm Baking Trays
	68mm	68mm	80mm	80mm
	15.4kW, 380V, 3 Phase + N	0.7kW, 220V, Single Phase / 60 000	15.4kW, 380V, 3 Phase + N	0.7kW, 220V, Single Phase / 61 000
	Manual Control	Manual Control	Manual Control	Manual Control
	✓	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	✓	✓
	Direct Steam - 5 Levels	Direct Steam - 5 Levels	Direct Steam - 5 Levels	Direct Steam - 5 Levels



	EKA MKF 664 S	EKA MKF 664 GS	EKA MKF 664 SP	EKA EKF 523 NTUD
	(6x) 600 x 400mm Baking Trays	(6x) 600 x 400mm Baking Trays	(6x) 600 x 400mm Baking Trays	(5x) 2/3 GN Pans
	80mm	80mm	80mm	80mm
	10.4kW, 380V, 3 Phase + N	0.7kW, 220V, Single Phase / 46 000	10.4kW, 380V, 3 Phase + N	3.2kW, 230V, Single Phase
	Manual Control	Manual Control	Manual Control	Touch Control
	✓	✓	✓	✓
	✓	✓	✓	✓
	✓	✓	-	✓
	Direct Steam - 5 Levels	Direct Steam - 5 Levels	-	Direct Steam - 5 Levels



	EKA EKF 423 NM	EKA EKF 423 NP
	(4x) 430 x 345mm Baking Trays	(4x) 430 x 345mm Baking Trays
	73mm	73mm
	2.6kW, 240V, Single Phase	2.6kW, 240V, Single Phase
	Manual Control	Manual Control
	✓	✓
	✓	✓
	-	-
	-	-



ELECTRIC



GAS



HUMIDIFICATION



1.3 LITRE WATER TANK

OPTIONAL EXTRAS

BAKING TRAY 2/3 GN

BTA3023

FEATURES

- Body manufactured from high-quality Stainless Steel AISI 304
- Tempered glass door with latch handle
- 1.3 Litre water tank. No direct water connection required
- 4 Selectable function settings
- Halogen internal lighting
- Humidity control function
- Supplied with (2x) 2/3GN pans, oven grid and drip tray
- Small footprint. Ideal for kitchens with limited space

MINI 3 PAN 2/3GN

SPECIFICATIONS

ELECTRICITY	2.5kW, 230V, Single Phase
DIMENSIONS	550 x 470 x 380mm high
CHAMBER DIM	360 x 330 x 260mm high
WEIGHT	20kg
CAPACITY	(3x) 2/3 GN Pans
RUNNER SPACING	75mm
TEMP RANGE	50 to 200°C
TIMER	0 to 120min / Stay on
NO. OF FANS	1

ORDER CODE

COS-M-2303



SUPPLIED WITH



2 x 2/3GN pans



Drip pan



1 x Oven grid



FEATURES

- 430 Stainless Steel construction. Durable and easy to clean
- Double tempered glass door. Retains heat and improves safety
- Accurate temperature control for top and bottom elements
- Internal lighting to view your culinary creations
- 3 Cooking functions: Grill, convection and rotisserie
- Supplied with: Rotisserie set, (1x) 430 x 300mm pan, (2x) oven grids

4 PAN WITH GRILL & ROTISSERIE

SPECIFICATIONS

ELECTRICITY	2.7kW, 230V, Single Phase
DIMENSIONS	590 x 380 x 360mm high
CHAMBER DIM	450 x 320 x 255mm high
WEIGHT	15.5kg
CAPACITY	(4x) 430 x 300mm pans
RUNNER SPACING	75mm
TEMP RANGE	50 to 250°C
TIMER	0 to 120min / Stay on
NO. OF FANS	1

ORDER CODE

COS-GR-4530-03



SUPPLIED WITH

- 1x 430x300mm pan
- 2x Oven grids
- Rotisserie set



FEATURES

- 430 Stainless Steel construction. Durable and easy to clean
- Accurate timer and temperature control for perfect cooking results
- Supplied with baking trays
- Double tempered glass door. Retains heat and improves safety
- Internal lighting to view your culinary creations



**HUMIDIFICATION
(PULSE)**

4 PAN 1/1GN + HUMIDIFICATION

SPECIFICATIONS

ELECTRICITY	2.9kW, 230V, Single Phase
DIMENSIONS	675 x 525 x 500mm high
CHAMBER DIM	550 x 360 x 330mm high
WEIGHT	29kg
CAPACITY	(4x) 1/1 GN Trays
RUNNER SPACING	75mm
TEMP RANGE	50 to 250°C
TIMER	0 to 120min / Stay on
NO. OF FANS	2



ORDER CODE COS-GN-1104-H

OPTIONAL EXTRAS

BAKING TRAY 1/1 GN BTS2011



4 PAN 2/3GN

SPECIFICATIONS

ELECTRICITY	2.5kW, 230V, Single Phase
DIMENSIONS	495 x 525 x 500mm high
CHAMBER DIM	375 x 360 x 330mm high
WEIGHT	20kg
CAPACITY	(4x) 2/3 GN Trays
RUNNER SPACING	75mm
TEMP RANGE	50 to 250°C
TIMER	0 to 120min / Stay on
NO. OF FANS	1



ORDER CODE COS-GN-2304

OPTIONAL EXTRAS

BAKING TRAY 2/3 GN BTA3023



4 PAN 1/2GN

SPECIFICATIONS

ELECTRICITY	2.1kW, 230V, Single Phase
DIMENSIONS	415 x 525 x 500mm high
CHAMBER DIM	295 x 360 x 330mm high
WEIGHT	18kg
CAPACITY	(4x) 1/2 GN Trays
RUNNER SPACING	75mm
TEMP RANGE	50 to 250°C
TIMER	0 to 120min / Stay on
NO. OF FANS	1



ORDER CODE COS-GN-1204

OPTIONAL EXTRAS

BAKING TRAY 265 x 325 BTA2012



4 PAN 435 x 315mm PANS

SPECIFICATIONS

ELECTRICITY	2.7kW, 230V, Single Phase
DIMENSIONS	600 x 600 x 570mm high
CHAMBER DIM	460 x 370 x 360mm high
WEIGHT	51kg
CAPACITY	(4x) 435 x 315mm Trays
RUNNER SPACING	75mm
TEMP RANGE	50 to 300°C
TIMER	0 to 120min
NO. OF FANS	2



ORDER CODE COS0004

OPTIONAL EXTRAS

BAKING TRAY 435 x 315 BTA1043



FEATURES

- Manufactured from 201 stainless steel
- Doors are fitted with tempered glass
- Internal lighting for improved view of the product
- Fitted with a heavy duty door handle
- Fitted with bi-directional fans
- Adjustable air duct, for more baking varieties
- Timer and Steam function
- 6 Tray oven stackable with 10 tray proofer



10 TRAY

SPECIFICATIONS

ELECTRICITY 18kW, 380V, 3 Phase + N
 DIMENSIONS 930 x 1320 x 1550mm high
 WEIGHT 250kg
 CAPACITY (10x) 600 x 400mm trays
 RUNNER SPACING 80mm
 TEMP RANGE 90 to 300°C

ORDER CODE

COB-RX10D



6 TRAY

SPECIFICATIONS

ELECTRICITY 9kW, 380V, 3 Phase + N
 DIMENSIONS 910 x 1370 x 890mm high
 WEIGHT 170kg
 CAPACITY (6x) 600 x 400mm trays
 RUNNER SPACING 80mm
 TEMP RANGE 90 to 300°C

ORDER CODE

COB-RX6D



OPTIONAL STAND

DIMENSIONS 920 x 1000 x 480mm high
 RUNNER SPACING 40mm

ORDER CODE

SOB0010

OPTIONAL STAND

DIMENSIONS 910 x 1000 x 770mm high
 RUNNER SPACING 40mm

ORDER CODE

SOB0006



OPTIONAL EXTRAS

BAKING TRAYS

600 x 400 x 30mm
 600 x 400 x 10mm
 600 x 400 x 30mm (Teflon coated)

BTA3064
 BTA1064
 BTA3064-T

OVEN GRIDS

600 x 400mm

OGS0064

**FEATURES**

- Manufactured from 201 stainless steel
- Polyurethane foam insulation
- Fitted with a fan circulation system, more uniform proofing effect
- Automatic hydration system - inlet and outlet
- Micro-computer /digital display control panel with timing function
- Big tempered glass windows for improved viewing of the proofing process
- Fitted with (4x) castors

32 TRAY**SPECIFICATIONS**

ELECTRICITY	2.8kW, 230V, Single Phase
DIMENSIONS	980 x 700 x 1900mm high
WEIGHT	85kg
CAPACITY	(32x) 600 x 400mm trays
TEMP RANGE	20 to 85°C
HUMIDITY	80 to 90%

ORDER CODE**PCB0032****16 TRAY****SPECIFICATIONS**


ELECTRICITY	2.6kW, 230V, Single Phase
DIMENSIONS	480 x 700 x 1900mm high
WEIGHT	52kg
CAPACITY	(16x) 600 x 400mm trays
TEMP RANGE	20 to 85°C
HUMIDITY	80 to 90%

ORDER CODE**PCB0016****FEATURES**

- Manufactured from 201 stainless steel
- Polyurethane foam insulation
- Fitted with a fan circulation system, more uniform proofing effect
- Automatic hydration system - inlet and outlet
- Manual control panel with timing function
- Tempered glass window for improved viewing of the proofing process
- Fitted with (4x) castors
- Stackable with the BakeMark RX6D convection oven

10 TRAY**SPECIFICATIONS**

ELECTRICITY	2.4kW, 230V, Single Phase
DIMENSIONS	945 x 1220 x 680mm high
WEIGHT	65kg
CAPACITY	(10x) 600 x 400mm trays
RUNNER SPACING	80mm
TEMP RANGE	20 to 85°C
HUMIDITY	80 to 90%

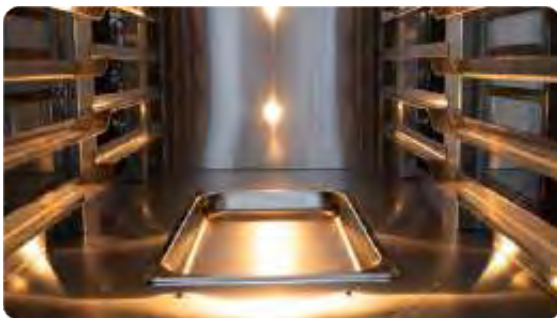ORDER CODE**PCB0010****OPTIONAL EXTRAS****BAKING TRAYS**

600 x 400 x 30mm
 600 x 400 x 10mm
 600 x 400 x 30mm (Teflon coated)

BTA3064
BTA1064
BTA3064-T

OVEN GRIDS

600 x 400mm

OGS0064

SmartChef



Professional kitchen

Pizzaria Essentials

Your Complete Pizza Preparation Solution

Pizza spades



Pizza cutters/scrapers



Pizza ovens



Dough mixers





FEATURES

- Front panel manufactured from 430 stainless steel
- Digital control panel and timer
- Internal chamber lighting
- Fitted with tempered glass viewing windows
- Chamber and exterior side plates manufactured from aluminized steel
- Top and bottom heating elements are individually controlled
- Fitted with a bottom hinged door for easy loading
- Fitted with a pizza stone base



DOUBLE DECK

SPECIFICATIONS

ELECTRICITY (2x) 8.8kW, 380V, 3 Phase + N
 DIMENSIONS 1450 x 835 x 705mm high
 WEIGHT 130kg
 CHAMBER DIMENSIONS (2x) 1052 x 725 x 140mm high
 CAPACITY PER DECK (6x) 30cm Pizza
 TEMP RANGE 30 to 450°C

ORDER CODE

POS0066-LD



**6 PIZZAS
PER DECK**



DOUBLE DECK

SPECIFICATIONS

ELECTRICITY (2x) 4.7kW, 380V, 3 Phase + N
 DIMENSIONS 1100 x 835 x 705mm high
 WEIGHT 100kg
 CHAMBER DIMENSIONS (2x) 702 x 725 x 140mm high
 CAPACITY PER DECK (4x) 30cm Pizza
 TEMP RANGE 30 to 450°C

ORDER CODE

POS0044-D



**4 PIZZAS
PER DECK**



SINGLE DECK

SPECIFICATIONS

ELECTRICITY 4.7kW, 380V, 3 Phase + N
 DIMENSIONS 1100 x 835 x 405mm high
 WEIGHT 60kg
 CHAMBER DIMENSIONS (1x) 702 x 725 x 140mm high
 CAPACITY PER DECK (4x) 30cm Pizza
 TEMP RANGE 30 to 450°C

ORDER CODE

POS0004-D



**4 PIZZAS
PER DECK**



***SHOWN WITH OPTIONAL STAND**

STANDS

SPECIFICATIONS

DIMENSIONS 1450 x 835 x 860mm high
 COMPATIBLE WITH POS0066-LD
 ORDER CODE **POS-S-0066L**

DIMENSIONS 1100 x 835 x 860mm high
 COMPATIBLE WITH POS0044-D
 ORDER CODE **POS-S-0044**

DIMENSIONS 1100 x 835 x 1060mm high
 COMPATIBLE WITH POS0004-D
 ORDER CODE **POS-S-0004**



PIZZA SPADES

360mm

PADDLE

HANDEL

ORDER CODE

Ø330mm

360mm

POS-P-3336

900mm

PADDLE

HANDEL

ORDER CODE

Ø300mm

900mm

POS-P-3090

1200mm

PADDLE

HANDEL

ORDER CODE

Ø300mm

1200mm

POS-P-30120



PIZZA CUTTERS

WHEEL

BLADE SIZE

ORDER CODE

Ø100mm

POS-C-W



SCRAPER

BLADE SIZE

ORDER CODE

95 x 110mm

POS-C-S



ROCKER

BLADE SIZE

ORDER CODE

?? x ??mm

POS-C-R



WIRE BRUSHES

600mm

BRUSH

HANDEL

ORDER CODE

160mm

600mm

POS-B-1660

800mm

BRUSH

HANDEL

ORDER CODE

160mm

800mm

POS-B-1680



OIL CAN CONE

DIMENSIONS

CAPACITY

ORDER CODE

Ø105 x 195mm

500ml

OCC0500

FEATURES

- Body manufactured from stainless steel
- Fitted with a ceramic pizza stone base
- Fitted with non-slip rubber feet
- Individually controlled heating elements
- Bottom hinged door for easy loading
- Internal chamber lighting
- Tempered glass viewing window



DOUBLE DECK

SPECIFICATIONS

ELECTRICITY 3kW, 240V, Single Phase
 DIMENSIONS 600 x 470 x 470mm high
 WEIGHT 27kg
 CHAMBER DIMENSIONS (2x) 400 x 400 x 155mm high
 CAPACITY PER DECK (1x) 30cm Pizza
 TEMP RANGE 30 to 350°C

ORDER CODE

POS2102



SINGLE DECK

SPECIFICATIONS

ELECTRICITY 2kW, 240V, Single Phase
 DIMENSIONS 600 x 470 x 305mm high
 WEIGHT 18kg
 CHAMBER DIMENSIONS (1x) 400 x 400 x 155mm high
 CAPACITY PER DECK (1x) 30cm Pizza
 TEMP RANGE 30 to 350°C

ORDER CODE

POS1101





FEATURES

- Robust stainless steel construction
- Bottom hinged doors for easy loading
- Additional internal height for baking
- Ceramic base for pizza and artisan breads
- Expanded glass viewing window on oven door
- Top and bottom element controlled individually
- Fitted with a dial thermostat
- Compatible with 600 x 400mm baking trays



**ONE OVEN FOR PIZZA
AND ARTISAN BREADS**



DIAL THERMOMETER



CERAMIC STONE BASE

DOUBLE DECK OVEN - 8 TRAY

SPECIFICATIONS

ELECTRICITY	20.4kW, 380V, 3 Phase + N
DIMENSIONS	1500 x 1080 x 745mm high
WEIGHT	225kg
CHAMBER DIMENSIONS	(2x) 1230 x 840 x 175mm high
CAPACITY PER DECK	(4x) 600 x 400mm trays (6x) 40cm Pizzas
TEMP RANGE	50 to 500°C

ORDER CODE

DOP0066



DOUBLE DECK OVEN - 4 TRAY

SPECIFICATIONS

ELECTRICITY	14kW, 380V, 3 Phase + N
DIMENSIONS	1100 x 1080 x 745mm high
WEIGHT	172kg
CHAMBER DIMENSIONS	(2x) 820 x 840 x 175mm high
CAPACITY PER DECK	(2x) 600 x 400mm trays (4x) 40cm Pizzas
TEMP RANGE	50 to 500°C

ORDER CODE

DOP0044



OPTIONAL STANDS

SPECIFICATIONS

DIMENSIONS	1520 x 982 x 960mm high
WEIGHT	44kg
COMPATIBLE WITH	DOP0066

ORDER CODE

SDP0066



OPTIONAL STANDS

SPECIFICATIONS

DIMENSIONS	1117 x 982 x 960mm high
WEIGHT	39kg
COMPATIBLE WITH	DOP0044

ORDER CODE

SDP0044



FEATURES

- Robust Stainless Steel construction
- Fitted with glass viewing windows
- Timer with buzzer individually controlled per deck
- Steam injection humidification
- Fitted with Ceramic stone base
- Bottom hinged doors for easy loading
- Digital control panel
- Top and bottom elements individually controlled for each deck
- Individually controlled internal lighting per deck
- Fitted with castors

**** It is essential that all humidification ovens be installed with a water softening filtration system**



3 DECK, 9 TRAY ⚡

SPECIFICATIONS

ELECTRICITY	33kW, 380V, 3 Phase + N
DIMENSIONS	1655 x 970 x 1485mm high
WEIGHT	230kg
CHAMBER DIMENSIONS	(3x) 1300 x 620 x 220mm
CAPACITY PER DECK	(3x) 600 x 400mm trays
TEMP RANGE	30 to 300°C
PROGRAMMABLE	Yes (12)

ORDER CODE

DOB3309-H



**3 TRAYS
PER DECK**



OPTIONAL EXTRAS

BAKING TRAYS

600 x 400 x 30mm
600 x 400 x 10mm
600 x 400 x 30mm (Teflon coated)

BTA3064
BTA1064
BTA3064-T

CERAMIC STONE BASES

AVAILABLE ON REQUEST

FEATURES

- Robust Stainless Steel construction
- Fitted with glass viewing windows
- Timer with buzzer individually controlled per deck
- Individually controlled internal lighting per deck
- Bottom hinged doors for easy loading
- Manual control panel
- Top and bottom elements individually controlled for each deck
- **Ceramic stone bases available on request**



3 DECK, 9 TRAY

SPECIFICATIONS

ELECTRICITY 27kW, 380V, 3 Phase + N
 DIMENSIONS 1645 x 805 x 1335mm high
 WEIGHT 230kg
 CHAMBER DIMENSIONS (3x) 1300 x 620 x 220mm
 CAPACITY PER DECK (3x) 600 x 400mm trays
 TEMP RANGE 30 to 300°C

ORDER CODE

DOB3309



**3 TRAYS
PER DECK**



2 DECK, 4 TRAY

SPECIFICATIONS

ELECTRICITY 14kW, 380V, 3 Phase + N
 DIMENSIONS 1220 x 805 x 1130mm high
 WEIGHT 125kg
 CHAMBER DIMENSIONS (2x) 860 x 620 x 220mm
 CAPACITY PER DECK (2x) 600 x 400mm tray
 TEMP RANGE 30 to 300°C

ORDER CODE

DOB2204



**2 TRAYS
PER DECK**



2 DECK, 2 TRAY

SPECIFICATIONS

ELECTRICITY 6kW, 380V, 3 Phase + N
 DIMENSIONS 925 x 630 x 755mm high
 WEIGHT 50kg
 CHAMBER DIMENSIONS (2x) 620 x 420 x 160mm
 CAPACITY PER DECK (1x) 600 x 400mm tray
 TEMP RANGE 30 to 300°C

ORDER CODE

DOB2102



**1 TRAY
PER DECK**



1 DECK, 1 TRAY

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 925 x 630 x 410mm high
 WEIGHT 35kg
 CHAMBER DIMENSIONS (1x) 620 x 420 x 160mm
 CAPACITY PER DECK (1x) 600 x 400mm tray
 TEMP RANGE 30 to 300°C

ORDER CODE

DOB1101



**1 TRAY
PER DECK**



OPTIONAL EXTRAS


BAKING TRAYS

600 x 400 x 30mm
 600 x 400 x 10mm
 600 x 400 x 30mm (Teflon coated)

BTA3064
 BTA1064
 BTA3064-T

CERAMIC STONE BASES

AVAILABLE ON REQUEST



LPGSA Approved



FEATURES

- Body manufactured from 0.8mm, 430 grade stainless steel
- Flame-out protection function
- Gas burner manufactured from SS304 stainless steel
- Fitted with timer to control
- Manual temperature control with digital display
- Fitted with heat resisting lighting
- Aluminum plated chambers for increased thermal radiation
- Double electromagnetic valve control
- Bottom hinged door with double tempered glass windows
- Electricity required for control operations
- Ceramic stone bases available on request



3 DECK, 9 TRAY

SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
GAS CONSUMPTION	2.4 kg/h
BTU RATING	113 000
DIMENSIONS	1750 x 965 x 1720mm high
WEIGHT	370kg
CHAMBER DIMENSIONS	(3x) 1330 x 710 x 185mm high
CAPACITY PER DECK	(3x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE

DOB-3309G



**3 TRAYS
PER DECK**



2 DECK, 6 TRAY

SPECIFICATIONS

ELECTRICITY	0.15 kW, 220V, Single Phase
GAS CONSUMPTION	1.6 kg/h
BTU RATING	75 000
DIMENSIONS	1750 x 965 x 1375mm high
WEIGHT	260kg
CHAMBER DIMENSIONS	(3x) 1330 x 710 x 185mm high
CAPACITY PER DECK	(3x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE

DOB-2306G



**3 TRAYS
PER DECK**



1 DECK, 3 TRAY

SPECIFICATIONS

ELECTRICITY	0.075kW, 220V, Single Phase
GAS CONSUMPTION	0.8 kg/h
BTU RATING	37 000
DIMENSIONS	1750 x 965 x 650mm high
WEIGHT	160kg
CHAMBER DIMENSIONS	1330 x 710 x 185mm high
CAPACITY PER DECK	(3x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE

DOB-1303G



**3 TRAYS
PER DECK**





3 DECK, 6 TRAY

SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
GAS CONSUMPTION	1.8 kg/h
BTU RATING	84 000
DIMENSIONS	1395 x 965 x 1720mm high
WEIGHT	320kg
CHAMBER DIMENSIONS	(3x) 870 x 665 x 185mm high
CAPACITY PER DECK	(2x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE **DOB-3206G**



**2 TRAYS
PER DECK**



2 DECK, 4 TRAY

SPECIFICATIONS

ELECTRICITY	0.15kW, 220V, Single Phase
GAS CONSUMPTION	1.2 kg/h
BTU RATING	56 000
DIMENSIONS	1395 x 965 x 1250mm high
WEIGHT	200kg
CHAMBER DIMENSIONS	(2x) 870 x 665 x 185mm high
CAPACITY PER DECK	(2x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE **DOB-2204G**



**2 TRAYS
PER DECK**



1 DECK, 2 TRAY

SPECIFICATIONS

ELECTRICITY	0.075kW, 220V, Single Phase
GAS CONSUMPTION	0.6 kg/h
BTU RATING	28 000
DIMENSIONS	1395 x 965 x 710mm high
WEIGHT	110kg
CHAMBER DIMENSIONS	870 x 665 x 185mm high
CAPACITY PER DECK	(2x) 600 x 400mm trays
TEMP RANGE	30 to 400°C

ORDER CODE **DOB-1202G**



**2 TRAYS
PER DECK**



OPTIONAL EXTRAS



BAKING TRAYS

600 x 400 x 30mm
600 x 400 x 10mm
600 x 400 x 30mm (Teflon coated)

BTA3064
BTA1064
BTA3064-T

CERAMIC STONE BASES

AVAILABLE ON REQUEST

FEATURES

- Oven body manufactured from stainless steel
- Double cast iron frame
- Fitted with a bottom hinged cast iron door
- Fitted with dial thermometer
- **Included:** 2 x grill grates, 2 x top grids, tong, grill tong, ash shovel, fire poker, grill scraper, grill brush
- Improved exterior casing offers better thermal insulation and extra ventilation
- Fitted with removable ash drawer and grease collector for easy cleaning
- Improved heat containment for lower charcoal consumption
- Available in black, red, blue and stainless steel



PRO 980mm OVEN (ON CABINET)

SPECIFICATIONS

DIMENSIONS	985 x 775 x 1685mm high
WEIGHT	390kg
INTERNAL DIMENSIONS	740 x 595 x 270mm high
GRILL RACK DIMENSIONS	735 x 590mm
CAPACITY	100kg meat per hour
WORKING TEMPERATURE	250 to 350°C
CHARCOAL CONSUMPTION	*15 to 17kg per day

BLACK	COR-ROC76-B
RED	COR-ROC76-R
BLUE	COR-ROC76-U
STAINLESS STEEL	COR-ROC76-S

* Depends on the charcoal quality



PRO 780mm OVEN (ON CABINET)

SPECIFICATIONS

DIMENSIONS	785 x 775 x 1685mm high
WEIGHT	312kg
INTERNAL DIMENSIONS	540 x 595 x 270mm high
GRILL RACK DIMENSIONS	535 x 590mm
CAPACITY	70kg meat per hour
WORKING TEMPERATURE	250 to 350°C
CHARCOAL CONSUMPTION	*10 to 12kg per day

BLACK	COR-ROC56-B
RED	COR-ROC56-R
BLUE	COR-ROC56-U
STAINLESS STEEL	COR-ROC56-S

* Depends on the charcoal quality



PRO 980mm OVEN

SPECIFICATIONS

DIMENSIONS	985 x 777 x 1095mm high
WEIGHT	342kg
INTERNAL DIMENSIONS	740 x 595 x 270mm high
GRILL RACK DIMENSIONS	735 x 590mm
CAPACITY	100kg meat per hour
WORKING TEMPERATURE	250 to 350°C
CHARCOAL CONSUMPTION	*15 to 17kg per day

BLACK	COR-R76-B
RED	COR-R76-R
BLUE	COR-R76-U
STAINLESS STEEL	COR-R76-S

* Depends on the charcoal quality



PRO 780mm OVEN

SPECIFICATIONS

DIMENSIONS	785 x 775 x 1095mm high
WEIGHT	280kg
INTERNAL DIMENSIONS	540 x 595 x 270mm high
GRILL RACK DIMENSIONS	535 x 590mm
CAPACITY	70kg meat per hour
WORKING TEMPERATURE	250 to 350°C
CHARCOAL CONSUMPTION	*10 to 12kg per day

BLACK	COR-R56-B
RED	COR-R56-R
BLUE	COR-R56-U
STAINLESS STEEL	COR-R56-S

* Depends on the charcoal quality



SEMI-PRO 580mm OVEN

SPECIFICATIONS

DIMENSIONS	585 x 577 x 1095mm high
WEIGHT	150kg
INTERNAL DIMENSIONS	340 x 395 x 270mm high
GRILL RACK DIMENSIONS	335 x 390mm
CAPACITY	30kg meat per hour
WORKING TEMPERATURE	250 to 350°C
CHARCOAL CONSUMPTION	*10 to 12kg per day


BLACK

COR-R34-B


* Depends on the charcoal quality

INCLUDED


All charcoal ovens come fully accessorised for an enhanced user experience.



2 x Grill grates



2 x Top Grids (GN)



Tong



Grill tong



Ash shovel



Grill scraper



Fire poker



Grill brush

PROFESSIONAL PARILLA GRILL **NEW**



FEATURES

- Manufactured from stainless steel
- Fitted with removable ash drawer and grease collector for easy cleaning
- Smooth operating wheel system to raise and lower grids
- Upper racks to allow grilled meat to "rest"
- Mounted on a Stainless Steel holding cabinet with castors
- **Included:** "V" grill grates, upper racks, ash shovel, fire poker, grill scraper, charcoal starter

SPECIFICATIONS

DIMENSIONS	1270 x 825 x 1550mm high
WEIGHT	230kg
GRILL RACK DIMENSIONS	(2x) 500 x 620mm
WORKING TEMPERATURE	200 to 250°C
CHARCOAL CONSUMPTION	*18 to 22kg per day

ORDER CODE

COR-GP2GC-S

* Depends on the charcoal quality



The **perfect synergy** of performance and reliability even for the most demanding commercial kitchens. The combination of **Roaster Ovens and Parillas** provides a versatile and robust solution, ergonomically designed, to measure up with the most challenging culinary situations with precision and ease.

PHENIX

• KAMADO GRILLS •

- **Durable Construction** - Made from high quality, sturdy materials for long-term use.
- **Spacious Workspace** - Plenty of room for grilling tools, ingredients and prep work.
- **Heat-Resistant Surface** - Safely supports your Kamado grill during high-heat cooking.
- **Weatherproof Design** - Built to withstand outdoor conditions year-round.
- **Sleek & Modern Look** - Enhances your outdoor cooking space with a stylish finish.

ACCESSORIES




DIVIDE & CONQUER SYSTEM



PIZZA STONE



CHICKEN SITTER



GLOVES



RAIN JACKET



GRID TONGS



ASH SCRAPER



HEAT DEFLECTOR



CHARCOAL STARTER

PHENIX


YAKITORI / HIBACHI GRILL



- **Authentic Japanese Grilling**
Perfect for skewers, meats, seafood & more
- **Charcoal Operated**
Achieve rich, smoky flavours with ease
- **Durable & Portable**
High quality materials for long lasting use
- **Easy to Clean**
Removable grill grates for hassle-free maintenance



CHARCOAL GRID



GRID



6 x YAKITORI SKEWERS



GRID LIFTER





JUMBO PHOENIX 27"

SPECIFICATIONS

ASSEMBLED DIMENSIONS	760 x 760 x 1280mm high
BODY DIAMETER	Exterior - 670mm Ø Interior - 620mm Ø
WEIGHT	125kg
GRILL DIMENSIONS	580mm Ø

BLACK
RED

KGP6827-BLACK
KGP6827-RED

INCLUDED ACCESSORIES

Divide & Conquer system | Rain Cover | Heat Deflector
Pizza stone | Grid tong | Ash scraper | Chicken sitter | Gloves

OPTIONAL EXTRAS

Charcoal starter **KGP-00CTS**



ON CERAMIC BODY



ON MECHANICAL COMPONENTS



LARGE PHOENIX 23"

SPECIFICATIONS

ASSEMBLED DIMENSIONS	650 x 650 x 1180mm high
BODY DIAMETER	Exterior - 580mm Ø Interior - 530mm Ø
WEIGHT	95kg
GRILL DIMENSIONS	510mm Ø

BLACK
RED

KGP5923-BLACK
KGP5923-RED

INCLUDED ACCESSORIES

Divide & Conquer system | Rain Cover | Pizza stone
Grid tong | Ash scraper | Chicken sitter | Gloves

OPTIONAL EXTRAS

Charcoal starter **KGP-00CTS**
Heat Deflector **KGP-23HD**



MINI PHOENIX 16" COUNTER-TOP

SPECIFICATIONS

ASSEMBLED DIMENSIONS	540 x 540 x 550mm high
BODY DIAMETER	Exterior - 400mm Ø Interior - 380mm Ø
GRILL DIAMETER	330mm Ø
WEIGHT	38kg

BLACK
RED

KGP4116-BLACK
KGP4116-RED

INCLUDED ACCESSORIES

Rain Cover | Pizza stone | Grid tong | Ash scraper
Chicken sitter | Gloves

OPTIONAL EXTRAS

Divide & Conquer system **KGP-16SCG**
Charcoal starter **KGP-00CTS**
Heat Deflector **KGP-16HD**



YAKITORI / HIBACHI GRILL

SPECIFICATIONS

DIMENSIONS	500 x 225 x 170mm high
GRID DIMENSIONS	350 x 170mm
WEIGHT	11kg

ORDER CODE

KGP25H

INCLUDED ACCESSORIES

Grid | Charcoal grid | 6 x Yakitori skewers | Grid lifter
Wood board as stand

[illegible]

[illegible]



Milkshake / Frappe Machine



From classic favourites to signature creations, deliver the perfect blend every time.

SECTION INDEX

Blenders	123	Ice crushers	124
Coffee brewers	121-122	Juice dispensers	125
Frappe mixers	124	Milkshake machines	124
Frozen drinks dispensers	126-127	Slush machines	126-127
Gelato machines	128	Smoothie makers	123
Granita machines	127	Soft serve machines	129
Hot beverage dispensers	122	Urns	120
Hot chocolate machines	122	Water boilers	120
Hot water urns	120		
Ice cream machines	128-129		
• Gelato	128		
• Soft serve	129		





FEATURES

- Manufactured from 304 Stainless Steel
- Built-in, concealed heating element with "dry-boil" protection
- Fitted with an adjustable thermostat (30 ~ 110°C), with "keep warm" function
- Waterproof on/off switch for improved safety
- Fitted with cool-touch handles
- Equipped with a "twist-lock" lid to avoid spilling
- Fitted with a non-drip tap and clear water gauge
- Available with a thermal insulation jacket or without

10 LITRE

SPECIFICATIONS


ELECTRICITY	1.3kW, 220V, Single Phase
DIMENSIONS	Ø220 x 492mm high
WEIGHT	3kg
CAPACITY	10L (± 40 cups)
TEMPERATURE RANGE	30 to 110°C

WITH THERMAL JACKET

ORDER CODE **WBB0110-J**

WITHOUT THERMAL JACKET

ORDER CODE **WBB0110**

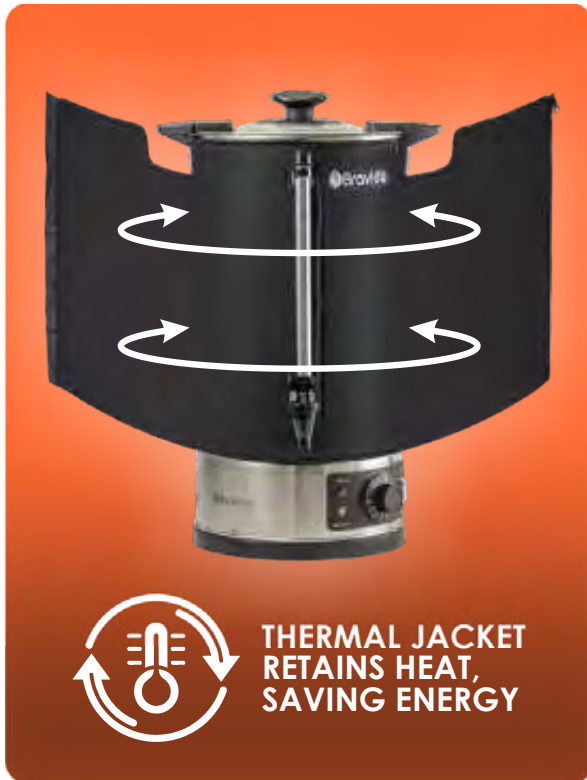

20 LITRE

SPECIFICATIONS

ELECTRICITY	2.2kW, 220V, Single Phase
DIMENSIONS	Ø270 x 587mm high
WEIGHT	4kg
CAPACITY	20L (± 80 cups)
TEMPERATURE RANGE	30 to 110°C

WITH THERMAL JACKET

ORDER CODE **WBB0120-J**

WITHOUT THERMAL JACKET

ORDER CODE **WBB0120**



30 LITRE

SPECIFICATIONS

ELECTRICITY	2.5kW, 220V, Single Phase
DIMENSIONS	Ø380 x 610mm high
WEIGHT	5kg
CAPACITY	30L (± 120 cups)
TEMPERATURE RANGE	30 to 110°C

WITH THERMAL JACKET

ORDER CODE **WBB0130-J**

WITHOUT THERMAL JACKET

ORDER CODE **WBB0130**



FEATURES

- Manufactured from 304 Stainless Steel
- Waterproof on/off switch for improved safety
- Equipped with a "twist-lock" lid to avoid spilling
- Supplied with an internal, stainless steel coffee strainer
- Built-in, concealed heating element with "dry-boil" protection
- Fitted with cool-touch handles
- Fitted with a non-drip tap and clear water gauge
- Supplied with a thermal insulation jacket to reduce energy consumption



SUPPLIED WITH A
STAINLESS STEEL
COFFEE STRAINER



13.5 LITRE


SPECIFICATIONS

ELECTRICITY
DIMENSIONS
WEIGHT
CAPACITY
TEMPERATURE RANGE

1.5kW, 220V, Single Phase
Ø270 x 515mm high
5kg
13.5Lt (± 50 cups)
30 to 90°C

ORDER CODE

WBB0213-J



THERMAL JACKET
RETAINS HEAT,
SAVING ENERGY



COFFEE BREWERS



FEATURES

- Polypropylene with black rubber coated and stainless steel casing
- Coffee is kept at optimal temperature
- Supplied with 1 x 1.8L glass jug
- Two separate Teflon coated heating plates
- Suitable for 110mm / 250mm filters
- Dry-boil and overheating protection

SPECIFICATIONS

ELECTRICITY	2.1kW, 230V, Single Phase
DIMENSIONS	200 x 350 x 400mm high
CAPACITY	1.8Lt
WEIGHT	6kg
BREWING TEMP	93 to 96°C
HEATING PLATE TEMP	80°C
BREWING TIME	100 cups/hr

ORDER CODE

CM81018



ADDITIONAL JUG

CAPACITY	1.8Lt
ORDER CODE	CMJ0018



HOT BEVERAGE DISPENSERS



FEATURES

- Ideal for chocolate, coffee, tea & milk
- Mix-only or Heat-and-mix function
- Digital control panel with temperature display
- Disassembles for easy cleaning
- Fitted with non-drip tap
- Fitted with a drip tray



5 LITRE

SPECIFICATIONS

ELECTRICITY	0.44kW, 230V, Single Phase
DIMENSIONS	400 x 320 x 470mm high
WEIGHT	6kg
CAPACITY	5Lt
TEMP RANGE	30 to 90°C

ORDER CODE

HC80005



10 LITRE

SPECIFICATIONS

ELECTRICITY	0.54kW, 230V, Single Phase
DIMENSIONS	400 x 320 x 570mm high
WEIGHT	7kg
CAPACITY	10Lt
TEMP RANGE	30 to 90°C

ORDER CODE

HC80010





FEATURES

- Modern design ABS housing
- Fitted with a stainless steel blade assembly
- Housing fitted with non-slip feet
- RUSH and VORTEX SC fitted with a Polycarbonate soundproof cover as standard (Optional extra for the VORTEX)
- Durable food grade Polycarbonate jar
- Over-heat, auto shut-off safety function
- Industrial grade, heavy duty motor with pure copper coil
- Various speed control, time and pulse action
- Removable dosing cup and stir bar included



RUSH (WITH SOUND COVER)

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	246 x 270 x 490mm high (closed) 246 x 270 x 700mm high (open)
WEIGHT	9kg
MAX SPEED	13 500rpm - Touch control
JAR CAPACITY	1.8Lt
ORDER CODE	BSB2880C-C



TOUCH CONTROL



SMOOTH BLADE



DC MOTOR



The SmartBlend RUSH blenders are fitted with a powerful DC motor ensuring precise speed control with a high torque-to-weight ratio.

DC motors are designed to deliver power efficiently, minimizing energy waste and maximizing the blending performance. These motors are generally quieter than AC motors, making them a smarter option for commercial appliances.



VORTEX SC (WITH SOUND COVER)

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 540mm high (closed) 230 x 250 x 790mm high (open)
WEIGHT	9kg
MAX SPEED	23 500rpm - Touch control
JAR CAPACITY	2Lt
ORDER CODE	BSB1680C-C



TOUCH CONTROL



SERRATED BLADE



1 SMARTBLEND is the preferred blender of many of South Africa's leading franchise chains.

Renowned for its outstanding performance, proven reliability, and cost-effective operation, SMARTBLEND has earned a reputation as a dependable solution for demanding commercial environments.

Built to deliver consistent results day after day, it offers the perfect balance of efficiency, durability, and exceptional value.



VORTEX

SPECIFICATIONS

ELECTRICITY	1.68kW, 220V, Single Phase
DIMENSIONS	230 x 250 x 520mm high
WEIGHT	6kg
MAX SPEED	23 500rpm - Manual control
JAR CAPACITY	2Lt

WITH SOUND COVER

ORDER CODE BSB1680M-C

WITHOUT SOUND COVER

ORDER CODE BSB1680



MANUAL CONTROL



SERRATED BLADE



STORM

SPECIFICATIONS

ELECTRICITY	1.1kW, 220V, Single Phase
DIMENSIONS	225 x 210 x 490mm high
WEIGHT	4kg
MAX SPEED	21 000rpm - Manual control
JAR CAPACITY	2Lt

ORDER CODE

BSB0112



MANUAL CONTROL



SERRATED BLADE



OPTIONAL EXTRAS



SOUND COVER VORTEX
BSB1680-S-COVER



1.8Lt JAR & TAMPER
RUSH
BSB2880-JAR1.8L



2Lt JAR & TAMPER
VORTEX SC, VORTEX
BSB1680-JAR2L

2Lt JAR & TAMPER
STORM
BSB0112-JAR2L

FEATURES

- Manufactured from durable, food-grade ABS material
- Motor ventilation grooves prevents over heating
- Fitted with non-slip feet
- Fitted with a two speed on/off switch
- Fitted with a powerful 400W motor with automatic thermal cut-off
- Supplied with a stainless steel mixing cup. Optional ABS cup available
- Available in a variety of colours to complement any bar or kitchen theme



SPECIFICATIONS

ELECTRICITY 0.4kW, 220V, Single Phase
 DIMENSIONS 170 x 175 x 465mm high
 WEIGHT 4kg
 SPEED 14 000 / 20 000rpm
 CUP CAPACITY 1 000ml



MMJ0001
 MMJ0002
 MMJ0003
 MMJ0004
 MMJ0005



SPECIFICATIONS

ELECTRICITY 0.4kW, 220V, Single Phase
 DIMENSIONS 175 x 195 x 485mm high
 WEIGHT 4.5kg
 SPEED 15 000 / 20 000rpm
 CUP CAPACITY 1 000ml



MMJ0006
 MMJ0007
 MMJ0008
 MMJ0009



ADDITIONAL MIXING CUPS



1Lt STAINLESS STEEL CUP
 ORDER CODE MMJ1000



1Lt POLYCARBONATE CUP
 ORDER CODE MMJ2000

ICE CRUSHERS



FEATURES

- Stainless steel body cover
- Front face cover manufactured from ABS
- Transparent feed cover manufactured from polycarbonate
- 2Lt transparent ice bucket with water draining grate
- Isolating double-wall housing prevents immediate melting of ice
- Fitted with a 120W motor with thermal protection
- Fitted with Auto-stop safety micro switches on feed cover and ice bucket
- Blades manufactured from heavy-duty stainless steel
- Fitted with non-slip feet

SPECIFICATIONS

ELECTRICITY 0.12kW, 220V, Single Phase
 DIMENSIONS 190 x 300 x 400mm high
 WEIGHT 7kg
 SPEED 40 rpm
 CRUSH CAPACITY 40 kg/h
 BUCKET CAPACITY 2Lt

ORDER CODE

ICJ0001



FEATURES

- Body manufactured from high quality stainless steel
- Electromagnetic drive shaft
- Stainless steel, weighted dispensing tap mechanism
- High resistance, non-toxic polycarbonate tank
- Supplied with drip trays
- Fitted with non-slip feet



3 x 12L JUICE DISPENSER

SPECIFICATIONS

ELECTRICITY	0.38kW, 220V, Single Phase
DIMENSIONS	610 x 410 x 660mm high
WEIGHT	36kg
CAPACITY	(3x) 12L
TEMP RANGE	7 to 12 °C
REFRIGERANT GAS	R134a

ORDER CODE

JDP0312



2 x 12L JUICE DISPENSER

SPECIFICATIONS

ELECTRICITY	0.28kW, 220V, Single Phase
DIMENSIONS	410 x 410 x 660mm high
WEIGHT	25kg
CAPACITY	(2x) 12L
TEMP RANGE	7 to 12 °C
REFRIGERANT GAS	R134a

ORDER CODE

JDP0212



FEATURES

- 304 Stainless steel body panel
- Electromagnetic drive shaft
- Fitted with an all red copper condenser
- Night-mode setting to save energy
- Includes drip trays
- Durable, high density PC tanks with brandable lids
- Imported European brand compressor, durable, energy saving & low noise
- Dual beater mixing system (inner and outer cooling cylinder) to avoid "ice jam"
- Energy saving LED Lighting on each tank lid for improved aesthetics
- Fitted with non-slip feet



3 x 10 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.8kW, 220V, Single Phase
 DIMENSIONS 610 x 510 x 770mm high
 WEIGHT 63kg
 VOLUME (3x) 10Lt
 TEMP RANGE -2 to -3°C
 REFRIGERANT GAS R404a

ORDER CODE SMP0310



2 x 10 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.6kW, 220V, Single Phase
 DIMENSIONS 430 x 510 x 770mm high
 WEIGHT 41kg
 VOLUME (2x) 10Lt
 TEMP RANGE -2 to -3°C
 REFRIGERANT GAS R404a

ORDER CODE SMP0210



1 x 10 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.6kW, 220V, Single Phase
 DIMENSIONS 220 x 510 x 770mm high
 WEIGHT 28kg
 VOLUME (1x) 10Lt
 TEMP RANGE -2 to -3°C
 REFRIGERANT GAS R404a

ORDER CODE SMP0110



FEATURES

- Bottom housing manufactured from stainless steel
- Durable PVC tanks
- Easy to use touch control panel.
- Three operation settings - Margarita, Slush, and Cold drinks
- LCD display clearly shows the machine operation status
- Independent control system for each tank
- LED lighting for easy nighttime operation and improved aesthetics
- Motor current and compressor overload protection
- Large vents for fast heat dissipation and improved cooling efficiency

* Recommended for **life commercial** use only.
 Small and compact design for fewer and smaller servings.



2 x 3 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.4kW, 220V, Single Phase
 DIMENSIONS 390 x 490 x 545mm high
 VOLUME (2x) 3Lt
 WEIGHT 27kg
 TEMP RANGE -5 to 10°C
 REFRIGERANT GAS R290

ORDER CODE SMP0203



1 x 3 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.3kW, 220V, Single Phase
 DIMENSIONS 240 x 490 x 545mm high
 VOLUME (1x) 3Lt
 WEIGHT 19kg
 TEMP RANGE -5 to 10°C
 REFRIGERANT GAS R290

ORDER CODE SMP0103



FEATURES

- Strong stainless steel and polycarbonate construction
- Fuss-free automatic defrosting
- Can make alcoholic drinks up to 20% ABV (alcohol by volume)
- Slush and juice function
- Powerful cooling compressor
- Intuitive digital display and controls
- Can make slush from fresh fruit juice
- Colour changeable LED lighting (60 colours available)



3 x 12 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 1.0kW, 220V, Single Phase
 DIMENSIONS 720 x 610 x 940mm high
 WEIGHT 78kg
 VOLUME (3x) 12Lt
 TEMP RANGE -12 to 7°C
 REFRIGERANT GAS R290

ORDER CODE SMP0312



2 x 12 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.8kW, 220V, Single Phase
 DIMENSIONS 500 x 610 x 940mm high
 WEIGHT 57kg
 VOLUME (2x) 12Lt
 TEMP RANGE -12 to 7°C
 REFRIGERANT GAS R290

ORDER CODE SMP0212



1 x 12 LITRE SLUSH MACHINE

SPECIFICATIONS

ELECTRICITY 0.4kW, 220V, Single Phase
 DIMENSIONS 280 x 610 x 940mm high
 WEIGHT 35kg
 VOLUME (1x) 12Lt
 TEMP RANGE -12 to 7°C
 REFRIGERANT GAS R290

ORDER CODE SMP0112



GRANITA MACHINES

PATTY

FEATURES

- Powder coated steel central body
- Double layer anti-condensation tank
- Touch control panel with LED display
- Electronic temperature regulator
- Preparation time for creams: 25 minutes
- External surface in ABS
- Automatic power regulation to prevent overload
- Digital thermometer
- Moderate noise level
- Preparation time for granitas: 15 minutes



3 LITRE GRANITA MACHINE

SPECIFICATIONS

ELECTRICITY 0.2kW, 220V, Single Phase
 DIMENSIONS 200 x 500 x 450mm high
 WEIGHT 15kg
 VOLUME 3Lt
 TEMP RANGE -8 to -2°C
 REFRIGERANT GAS R290

ORDER CODE SMP1003



GELATO MACHINES COUNTERTOP



FEATURES

- Body manufactured from stainless steel
- Compact design uses less workspace
- Transparent polycarbonate feeder hopper located in the front of the machine for easy and accurate operation
- Large stainless steel freezing cylinder increases output and "fluffiness" of the ice cream
- Retractable, rotating mixer blade inside the cylinder further improves the smoothness of the ice cream
- Fitted with a powerful, energy saving compressor
- Fitted with a digital, waterproof control panel
- Fitted with (4x) non-slip feet

SPECIFICATIONS

ELECTRICITY	1kW, 220V, Single Phase
DIMENSIONS	500 x 705 x 800mm high
WEIGHT	100kg
HOPPER SIZE	5.1Lt
CAPACITY	3.5Lt per batch
REFRIGERANT GAS	R404a
HOURLY OUTPUT	5Lt/hour

ORDER CODE

ICM-BQ12T



OPTIONAL EXTRAS

ICE CREAM INSERT 7 LITRE

GNI8120



TRANSPARENT HOPPER



LARGE FREEZER CYLINDER
WITH ROTATING BLADE



WATERPROOF
DIGITAL CONTROL PANEL





FEATURES

- Unique mixing shaft manufactured with stainless steel axes with non-toxic corkscrew plastic scrapers
- Fitted with 2 hoppers with clear plastic lids for easy viewing
- The air pump allows the production a lighter, "fluffier", and creamier ice cream
- Quick recovery time
- Low noise and vibrations
- Easy to disassemble and clean
- Fitted with removable plastic drip tray
- 2 Flavour options with mix on centre lever
- **SSM0002** - Fitted with refrigerated hopper
- **SSM0001** - Fitted with neutral hopper



FLOOR STANDING

SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 550 x 750 x 1330mm high
 WEIGHT 140kg
 HOPPER CAPACITY (2x) 5.8Lt
 OUTPUT PER HOUR 120 - 180 cones
 REFRIGERANT GAS R404a

ORDER CODE

SSM0002



REFRIGERATED
HOPPER



AIR PUMP

COUNTER TOP

SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 550 x 750 x 870mm high
 WEIGHT 120kg
 HOPPER CAPACITY (2x) 5.8Lt
 OUTPUT PER HOUR 90 - 120 cones
 REFRIGERANT GAS R404a

ORDER CODE

SSM0001



REFRIGERATED
HOPPER



AIR PUMP



[illegible]

NOTES

A commercial kitchen scene featuring Swash dishwashing equipment. In the center is a tall, stainless steel dish rack with a Swash logo on its upper door. To its left is a stainless steel sink with a high-arch faucet and a small potted herb plant. To the right of the rack is a stainless steel cabinet with a Swash logo and a control panel. Further right is another stainless steel cabinet with a Swash logo and a control panel. Above the cabinets are stainless steel shelves holding stacks of white plates and bowls, and small potted herb plants. The background is a white subway tile wall and a large window showing a tropical outdoor scene with palm trees.

Swash

CLEANER. FASTER. SMARTER.

Keep your kitchen moving with powerful
commercial dishwashing performance.

SECTION INDEX

Basins	146
Basket trolleys	138
Dishwasher baskets	136
Dishwashers	134-135
• Front loading	134
• Glass washers	134
• Hoodtype	135
Front loading dishwashers	134
Glass rinsers	144
Glass washers	134
Hand wash basins	146
Hoodtype dishwashers	135
Hose reels	145
Kitchen taps/faucets	141-143
Knee operated basins	146
Pitcher rinsers	144
Pre-rinse sprays	140-141
Taps	141-143



FEATURES

- Durable AISI stainless steel body designed for long-lasting performance in demanding commercial kitchens
- User-friendly electronic controls with clear cycle selection and status display for simple operation
- Powerful wash and rinse arms ensure outstanding cleaning results on every cycle
- High-temperature final rinse promotes hygienic cleaning and quick drying
- Double-Walled door helps retain heat while reducing operating noise
- Door safety switch and thermal protection provide safe and reliable operation
- Optimised water and energy consumption to reduce operating costs
- Supplied with baskets




GLASSWASHER

SPECIFICATIONS

ELECTRICITY	3.6kW, 230V, 50Hz, Single Phase
DIMENSIONS	460 x 550 x 720mm high
MAX WASH HEIGHT	280mm
BASKET DIMENSIONS	400mm x 400mm
RACK PER/H (ACTUAL)	60 (50)
WASH CYCLE	60/90/120
WATER CONSUMPTION/WASH	3Lt
WASH TANK CAPACITY	15Lt
BOILER TANK CAPACITY	2.8Lt
WASH TEMPERATURE	55 to 60°C
RINSE TEMPERATURE	80 to 85°C
INLET WATER PRESSURE REQ	200 to 400kPa
INLET WATER TEMPERATURE	10 to 60°C
DRAIN PUMP	No
WASH PUMP	0.55kW
WASH TANK HEATING	2.0kW
RINSE BOILER HEATING RESISTOR	3.0kW

ORDER CODE

DWS-CSG40C



← INCLUDED

- Open Rack Basket



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS



FRONT LOADING DISHWASHER

SPECIFICATIONS

ELECTRICITY	3.6kW, 230V, 50Hz, Single Phase
DIMENSIONS	600 x 600 x 820mm high
MAX WASH HEIGHT	320mm
BASKET DIMENSIONS	500mm x 500mm
RACK PER/H (ACTUAL)	60 (50)
WASH CYCLE	60/90/120
WATER CONSUMPTION/WASH	3Lt
WASH TANK CAPACITY	25Lt
BOILER TANK CAPACITY	3.0Lt
WASH TEMPERATURE	55 to 60°C
RINSE TEMPERATURE	80 to 85°C
INLET WATER PRESSURE REQ	200 to 400kPa
INLET WATER TEMPERATURE	10 to 60°C
WASH PUMP	0.55kW
WASH TANK HEATING	2.0kW
RINSE BOILER HEATING RESISTOR	3.0kW

DRAIN PUMP

Yes

ORDER CODE

DWS-CSG50C-DP

DRAIN PUMP

No - Gravity Drain

ORDER CODE

DWS-CSG50C



← INCLUDED

- Open Rack Basket
- 25 Peg Rack Basket
- 8 Division Cutlery Basket



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS

FEATURES

- Durable AISI stainless steel body designed for long-lasting performance in demanding commercial kitchens
- User-friendly electronic controls with clear cycle selection and status display for simple operation
- Powerful wash and rinse arms ensure outstanding cleaning results on every cycle
- High-temperature final rinse promotes hygienic cleaning and quick drying
- Ergonomic lift-up hood provides quick and easy loading and unloading, improving workflow efficiency
- Hood safety switch prevents operation while the hood is open for enhanced operator safety
- Optimised water and energy consumption to reduce operating costs
- Supplied with baskets



HOODTYPE DISHWASHER

SPECIFICATIONS

ELECTRICITY	9kW, 380V, 50Hz, 3 Phase + N
DIMENSIONS	690 x 725 x 1505mm High
MAX WASH HEIGHT	400mm
BASKET DIMENSIONS	500mm x 500mm
RACK PER/H (ACTUAL)	60 (50)
WASH CYCLE	60/90/120
WATER CONSUMPTION/WASH	3Lt
WASH TANK CAPACITY	24Lt
BOILER TANK CAPACITY	8Lt
WASH TEMPERATURE	55 to 60°C
RINSE TEMPERATURE	80 to 85°C
INLET WATER PRESSURE REQ	200 to 400kPa
INLET WATER TEMPERATURE	10 to 60°C
WASH PUMP	0.6kW
WASH TANK HEATING	2.0kW
RINSE BOILER HEATING RESISTOR	6.0kW

DRAIN PUMP	Yes
ORDER CODE	DWS-CSZ60C-DP

DRAIN PUMP	No - Gravity Drain
ORDER CODE	DWS-CSZ60C

↓ INCLUDED ↓

- Open Rack Basket
- 25 Peg Rack Basket
- 8 Division Cutlery Basket



* WASTE POINT, NOT HIGHER THAN 100mm ABOVE FLOOR LEVEL IS REQUIRED FOR ALL GRAVITY DRAIN MODELS

DISHWASHER BASKETS

DISHWASHER BASKETS & EXTENDERS

FEATURES

- **Open Profile** - Allows top-to-bottom and side-to-side washing, making the glassware cleaner. Allows more air to circulate through the racks and allows for faster drying and safer storing
- **Tight Connection** - Snap-fit extenders will not loosen or rust over time like screws and will not come apart
- **Convenient Handle** - The handles on all four sides of the racks are convenient for safe handling
- **Guide Cards Groove** - Different coloured cards can be inserted to facilitate identifying storing items and improve work efficiency

OPEN BASKET

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-OB0000

OPEN EXTENDER

DIMENSIONS 500 x 500 x 45mm deep
ORDER CODE DWB-EX0000

25 COMPARTMENT BASKET

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-GR0025

25 COMPARTMENT EXTENDER

DIMENSIONS 500 x 500 x 45mm deep
ORDER CODE DWB-GR0025E

25 PEG PLATE RACK

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-AP0025

OPEN CUTLERY BASKET

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-CR0000

1 COMP. CUTLERY BASKET

DIMENSIONS 107 x 107 x 139mm deep
ORDER CODE DWB-CH0001

16 COMPARTMENT BASKET

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-GR0016

16 COMPARTMENT EXTENDER

DIMENSIONS 500 x 500 x 45mm deep
ORDER CODE DWB-GR0016E

36 COMPARTMENT BASKET

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-GR0036

36 COMPARTMENT EXTENDER

DIMENSIONS 500 x 500 x 45mm deep
ORDER CODE DWB-GR0036E

64 PEG PLATE RACK

DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-AP0064

RACK COVER

DIMENSIONS 505 x 505 x 26mm high
ORDER CODE DWB-RC0000

8 COMP. CUTLERY BASKET

DIMENSIONS 427 x 208 x 151mm high
ORDER CODE DWB-CH0008

20 COMPARTMENT BASKET


DIMENSIONS 500 x 500 x 100mm deep
ORDER CODE DWB-GR0020



GLASSWASHER BASKETS

FEATURES

- **Open Profile** - Allows top-to-bottom and side-to-side washing, making the glassware cleaner. Allows more air to circulate through the racks and makes faster drying and safer storing
- **Convenient Handle** - The handles on all four sides of the racks are convenient for safe handling

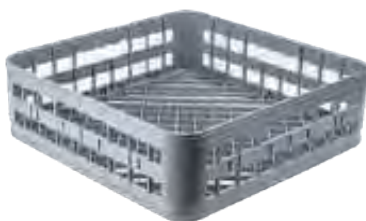

OPEN BASKET

DIMENSIONS 390 x 390 x 120mm deep
ORDER CODE DWB-4001




36 PEG GLASS RACK

DIMENSIONS 390 x 390 x 120mm deep
ORDER CODE DWB-4002



Glass Rack Sizing Guide Instruction

1. Place glass upside down on top of the middle circle of the sizing guide, center of the glass should be over the center of the guide.
2. Look down on the base of the glass.
3. Note the smallest square on the guide where the largest outside diameter of the glass lines up completely within the square without touching it. That is the number of compartments your rack needs to have.
4. Place lip of glass against the base line of the vertical guide on the right-hand side of the page with the base/foot of the glass pointing straight up towards the top of the page.
5. While holding the glass against the vertical guide, note where the base/foot of the glass lines up on the vertical guide. The next line above the base/foot on the guide indicates the number of extenders your rack will require.
6. Glasses with a maximum height exceeding 242mm will need more than five extenders. Each extender adds approximately 40mm of additional height to the inside compartment of the rack.

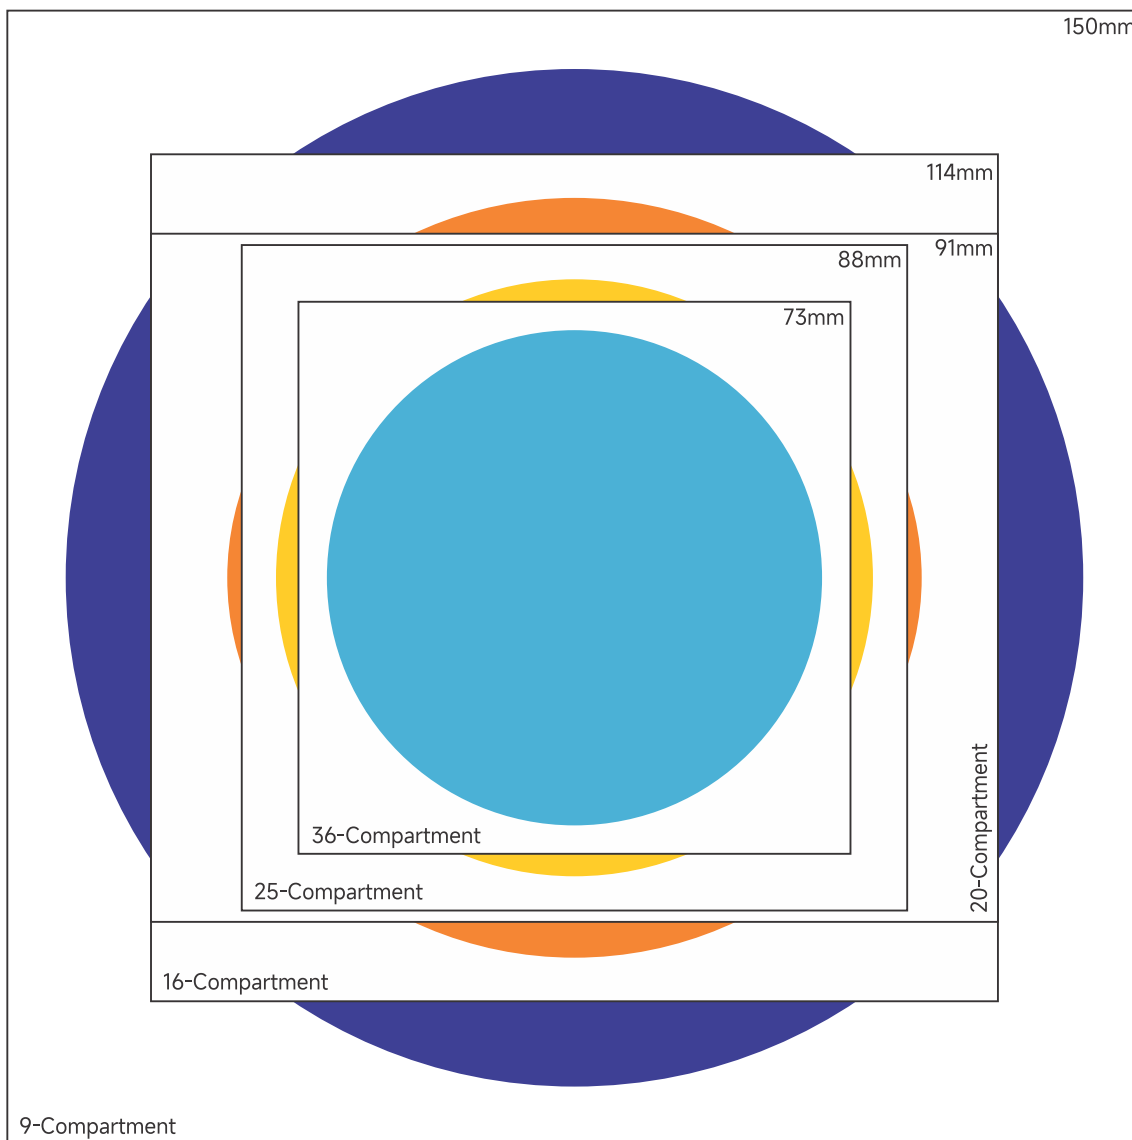

FEATURES

- Can be used for air drying cutlery and crockery
- Frame manufactured from 25mm stainless steel tubing
- Fitted with tray stops on each end
- Baskets not included
- Ideal for the transportation of cutlery and crockery
- L-shaped stainless steel runners
- Fitted with 4 castors, 2 lockable (100mm Ø)
- Supplied flat-packed



***BASKETS NOT INCLUDED**

4 TIER TROLLEY

SPECIFICATIONS

DIMENSIONS	560 x 510 x 1000mm high
SHELVES	4
RUNNER SPACING	200mm
BASKET COMPATIBILITY	500 x 500mm baskets
LOADING CAPACITY	115kg
WEIGHT	12kg

ORDER CODE

DBT0004



***BASKETS NOT INCLUDED**

7 TIER TROLLEY

SPECIFICATIONS

DIMENSIONS	560 x 510 x 1700mm high
SHELVES	7
RUNNER SPACING	200mm
BASKET COMPATIBILITY	500 x 500mm baskets
LOADING CAPACITY	200kg
WEIGHT	14kg

ORDER CODE

DBT0007



RACK DOLLY WITH HANDLE



***BASKETS NOT INCLUDED**

SPECIFICATIONS

DIMENSIONS	540 x 540 x 785 mm high
BASKET COMPATIBILITY	500 x 500mm baskets
LOADING CAPACITY	150kg

ORDER CODE

DWB-RD0000





Reliable water delivery for professional
food preparation and cleaning.



- Single Hole Base • 18" Flexible Inlet Hoses

DECK MOUNTED PRE-RINSE SPRAY


SPECIFICATIONS

HEIGHT	1100mm
INLET	In-Line Check Valves - G 1/2 (BSPP) Male
OUTLET	1.15 GPM Spray Valve
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5PR-2S00



REDUCE WATER
CONSUMPTION
BY UP TO 60 %

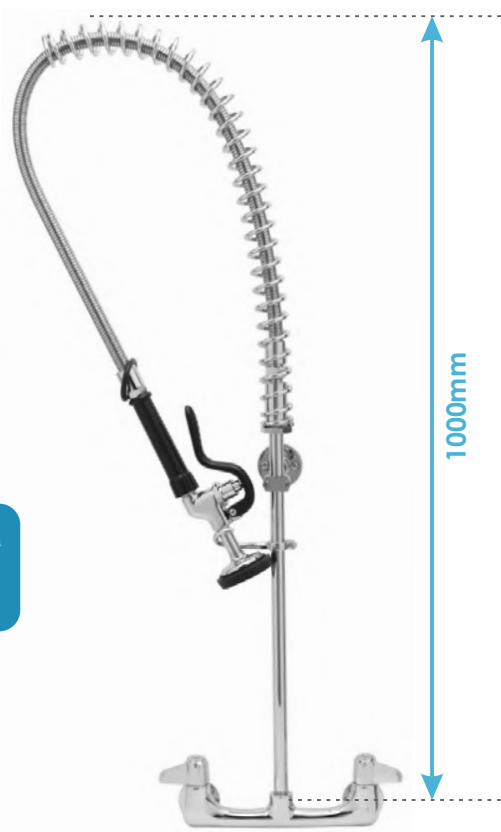

- 8" Wall Mounted Base

WALL MOUNTED PRE-RINSE SPRAY

SPECIFICATIONS

HEIGHT	1000mm
INLET	In-Line Check Valves - 1/2" NPT Female
OUTLET	1.15 GPM Spray Valve
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5PR-8W00



- Add-On for Pre-Rinse • 12" Swing Nozzle Equip

PRE-RINSE ADD-ON-FAUCET

SPECIFICATIONS

INLET	3/8" NPT Male
OUTLET	4.52 GPM Laminar Flow Device
HANDLE	Euro Lever
CARTRIDGE	Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5AFL12





630mm



REDUCE WATER CONSUMPTION BY UP TO 60 %



530mm

- Single Hole Base
- 8" Add-on Faucet
- 18" Flexible Inlet Hoses
- 628 mm Low-Profile Height

- 8" Wall mounted base
- 628 mm Low-Profile Height
- 8" Add-on Faucet

DECK MOUNTED MINI PRE-RINSE SPRAY WITH 8" FAUCET

SPECIFICATIONS

HEIGHT	630mm
INLET	In-Line Check Valves - G 1/2 (BSPP) Male
SPRAY OUTLET	1.15 GPM Spray Valve
NOZZLE	3.83 GPM 8" Add-On-Faucet Swing Nozzle
HANDLE	Euro Leve
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5MPH-2SLN-08



WALL MOUNTED MINI PRE-RINSE SPRAY WITH 8" FAUCET

SPECIFICATIONS

HEIGHT	530mm
INLET	In-Line Check Valves - 1/2" NPT Female
SPRAY OUTLET	1.15 GPM Spray Valve
NOZZLE	4.62 GPM 8" Add-On-Faucet Swing Nozzle
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5MPH-8WLN-08



KITCHEN FAUCETS



- 6" Wall Mount Faucet
- 12" Swing Nozzle

WALL MOUNTED KITCHEN FAUCET

SPECIFICATIONS

INLET	G 1/2 (BSPP) Male Offset Inlets
OUTLET	3.96 GPM Laminar Flow Device
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-EU-6WF12



- Single Hole Base
- 9" Swivel Nozzle
- 19" Flexible Inlet Hoses

SINGLE LEVER KITCHEN FAUCET

SPECIFICATIONS

INLET	G 1/2" Female
OUTLET	Full Flow Aerator
HANDLE	Single Lever
CARTRIDGE	Single Lever Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-EA-1DF09-LH





- Single Hole Base
- 18" Flexible Inlet Hoses
- 8" Swing Nozzle

DECK MOUNTED KITCHEN FAUCET

SPECIFICATIONS

INLET	5/8" OD Copper Tubing or 1/2" NPSM Male
OUTLET	4.65 GPM Laminar Flow Device
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5F-2SLX08



- Single Hole Base
- 18" Flexible Inlet Hoses
- 5.5" Swivel Gooseneck Nozzle

DECK MOUNTED GOOSENECK FAUCET

SPECIFICATIONS

INLET	5/8" OD Copper Tubing or 1/2" NPSM Male
OUTLET	2.2 GPM Aerator
HANDLE	Euro Lever
CARTRIDGE	Quarter-Turn Ceramic
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-5F-2SLX05A



- Single Control
- 18" Double Joint Nozzle
- Insulated On-Off Control

WALL MOUNTED POT FILLER

SPECIFICATIONS

INLET	5/8" OD Copper Tubing or 1/2" NPSM Male
OUTLET	4.24 GPM Heat Resistant On-Off Volume Control
HANDLE	4-Arm
CARTRIDGE	Compression
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE TS-B-0592





- Single Hole Base
- 8" Nozzle Single Lever
- 18" Flexible Inlet Hoses
- High Rise

HIGH SPOUT BAR FAUCET SINGLE LEVER

SPECIFICATIONS

INLET G 1/2" Female
OUTLET 3.96 GPM Full Flow Aerator
HANDLE Single Lever
CARTRIDGE Single Lever Ceramic
PRESSURE RATING 20 to 125 psi
TEMP. RATING 4 to 60°C

ORDER CODE TS-EA-1DF08-300



- Single Hole Base
- Up to 70% water saving
- Vandal Resistant

LOW FLOW SENSOR FAUCET

SPECIFICATIONS

INLET Flexible Supply Hoses G 1/2" Female
OUTLET 0.5 GPM Vandal Resistant Spray Device
NOZZLE 5.5" Cast Spout
FEATURE Check Valve
PRESSURE RATING 20 to 125 psi
TEMP. RATING 4 to 60°C

ORDER CODE

TS-CEF-1DS-VF05





180 x 170mm

SPECIFICATIONS

INLET	1/2" BSP Drain inlet spigot
WASH MOUTH	114mm Ø
PRESSURE RATING	14.5 psi
CUT-OUT SIZE	157 x 144mm

ORDER CODE

TS-EX-RINSER-1









630 x 220mm

SPECIFICATIONS

INLET	1/2" BSP Drain inlet spigot
WASH MOUTH	114mm Ø
PRESSURE RATING	14.5 psi
CUT-OUT SIZE	180 x 610mm

ORDER CODE

TS-EX-RINSER-3

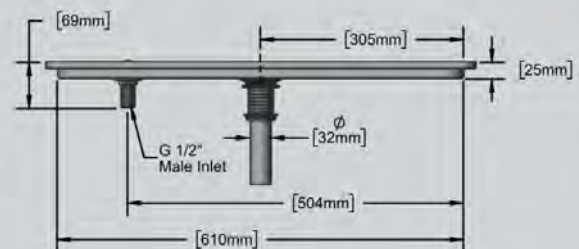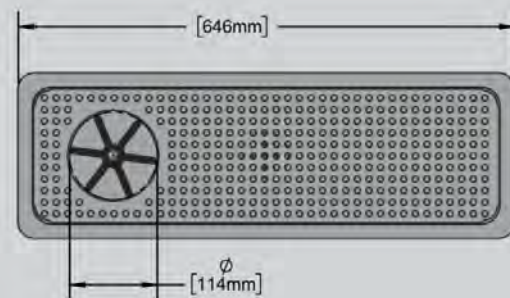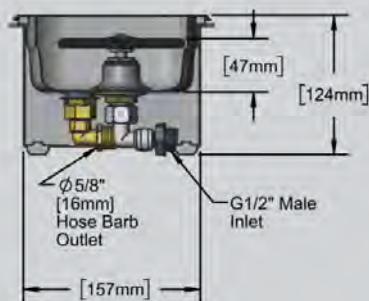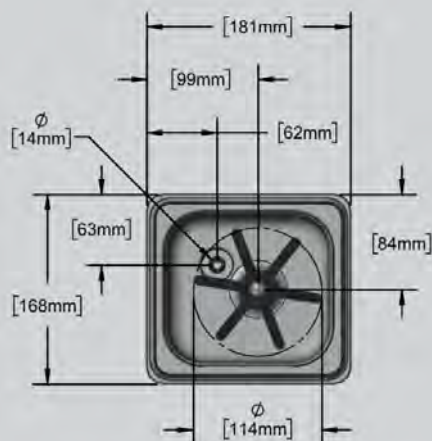



10m STAINLESS STEEL

SPECIFICATIONS

INLET	3/8" NPT female inlet
HOSE SIZE	3/8 x 35 in
HOSE LENGTH	10.7m
SPRAY VALVE	Front trigger water gun
SPRAY VALVE FLOW	15.5 L/min
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 93°C

ORDER CODE

TS-B-7132-05



10m EPOXY COATED

SPECIFICATIONS

INLET	3/8" NPT female inlet
HOSE SIZE	3/8 x 35 in
HOSE LENGTH	10.7m
SPRAY VALVE	Front trigger water gun
SPRAY VALVE FLOW	15.5 L/min
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 93°C

ORDER CODE

TS-B-7232-05



15m EPOXY COATED (ECONO MODEL)

SPECIFICATIONS

INLET	3/8" NPT female inlet
HOSE SIZE	3/8 x 50 in
HOSE LENGTH	15.2m
SPRAY VALVE	Front trigger water gun
SPRAY VALVE FLOW	15.5 L/min
PRESSURE RATING	20 to 125 psi
TEMP. RATING	4 to 60°C

ORDER CODE

TS-5HR-242-12



UNIVERSAL SWING BRACKET FOR HOSE REELS

DIMENSIONS	121 x 279 x 209mm
WEIGHT	3.5kg

FEATURES

Designed for one person installation
Easy Install stainless steel wall mount swing bracket
Fits all T&S 3/8" and 1/2" hose reels
Includes reel-to-bracket mounting hardware
Positive stops built in to bracket to keep hose reel from hitting or damaging wall

ORDER CODE

TS-G019430-45



KNEE OPERATED WITH SPLASHBACK

SPECIFICATIONS

DIMENSIONS 400 x 330 x 570mm high
WEIGHT 7kg

ORDER CODE HWS0001

FEATURES

- Manufactured from AISI 304 stainless steel
- Hot and cold water supply
- Adjustable mixer with non-return valve
- Fitted with a "swan-neck" faucet
- Smooth rounded corners for increased esthetics



KNEE OPERATED

SPECIFICATIONS

DIMENSIONS 400 x 330 x 250mm high
WEIGHT 5kg

ORDER CODE HWS0002



FEATURES

- Manufactured from 304 stainless steel
- Smooth rounded corners for increased esthetics
- Faucets and hardware not included

STANDARD

SPECIFICATIONS

DIMENSIONS 380 x 300 x 190mm high
WEIGHT 2.5kg

ORDER CODE HWS0000



SmartChef



Professional kitchen

Hand Wash Basin

[illegible]

NOTES



inoxserv

LUXERIOUS BUFFET WARE

CHAFING DISHES • SOUP STATIONS • CEREAL DISPENSERS • JUICE DISPENSERS • URNS

SECTION INDEX

Bain maries	157
Cereal dispensers	160
Chafing dish heating elements	153
Chafing dish stands	152-153
Chafing dishes	152-156
• Econo series	155
• Electric	156
• Induction series	152-153
• PC cover series	156
• Window series	155
Delux coffee urns	158
Electric chafing dishes	156
Heat lamps	159
Heating elements for chafing dishes	153
Hot water urns	158
Induction chafing dishes	152-153
Induction warmers	154
Juice dispensers	161
Soup kettles	155; 157
Soup warmers	153
Urn	158



CHAFING DISHES INDUCTION SERIES

inoxserv



REMOVABLE LID



INDUCTION HEATING



CAPSULATED
BOTTOM



REMOVABLE LID WITH TRANSPARENT GLASS

- It provides a clear view of food, even when closed
- It is easy to remove for cleaning and storage purposes
- It provides a water internal recycle system around the lid edge

- It is easy to open and it engages at various opening angles
- The lid movement is controlled by a long-life damping hinge

COMPATIBLE HEAT SOURCES

- **Induction warmer** - Table top - Counter sunk - In stand
- **Electric heater** - In stand
- **Chafing fuel** - In stand

CAPSULATED BOTTOM

- Provides even heat distribution
- Minimises heat loss improving energy efficiency
- Durable and Long-Lasting



CHAFING DISH WITH HYDRAULIC GLASS LID RECTANGULAR

SPECIFICATIONS

DIMENSIONS 580 x 440 x 330mm high
CAPACITY 8.5Ltr
HEAT SOURCE Induction warmer
Heating element
Chafing fuel

SUPPLIED WITH (1x) 1/1 GN pan - 65mm deep
Serving spoon holder

ORDER CODE BEI-S60593

*STAND AND HEAT SOURCE NOT INCLUDED



CHAFING DISH WITH HYDRAULIC GLASS LID SQUARE

SPECIFICATIONS

DIMENSIONS 400 x 440 x 320mm high
CAPACITY 4.8Ltr
HEAT SOURCE Induction warmer
Heating element
Chafing fuel

SUPPLIED WITH (1x) 2/3 GN pan - 65mm deep
Serving spoon holder

ORDER CODE BEI-S60293

*STAND AND HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - RECTANGULAR

SPECIFICATIONS

DIMENSIONS 565 x 330 x 155mm high
HEAT SOURCE Induction warmer > ISC-BT-70T
Heating element > BEI-S305T
Chafing fuel

SUPPLIED WITH (2x) Chafing fuel holders

ORDER CODE BEI-S60590

*HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - SQUARE

SPECIFICATIONS

DIMENSIONS 385 x 385 x 155mm high
HEAT SOURCE Induction warmer > ISC-BT-70T
Heating element > BEI-S305T
Chafing fuel

SUPPLIED WITH (1x) Chafing fuel holders

ORDER CODE BEI-S60290

*HEAT SOURCE NOT INCLUDED



CHAFING DISHES INDUCTION SERIES

inoxserv



CHAFING DISH WITH HYDRAULIC GLASS LID ROUND

SPECIFICATIONS

DIMENSIONS	440 x 480 x 320mm high
CAPACITY	5Lt
HEAT SOURCE	Induction warmer Heating element Chafing fuel
SUPPLIED WITH	(1x) Round pan - 65mm deep Serving spoon holder

ORDER CODE BEI-S50293

*STAND AND HEAT SOURCE NOT INCLUDED



SOUP STATION WITH HYDRAULIC GLASS LID

SPECIFICATIONS

DIMENSIONS	410 x 490 x 410mm high
CAPACITY	10Lt
HEAT SOURCE	Induction warmer Heating element Chafing fuel
SUPPLIED WITH	(1x) Round pan - 210mm deep Serving spoon holder

ORDER CODE BEI-S50288

*STAND AND HEAT SOURCE NOT INCLUDED



STAND FOR CHAFING DISH - ROUND

SPECIFICATIONS

DIMENSIONS	300 x 300 x 155mm high
HEAT SOURCE	Induction warmer > ISC-BT-70T Heating element > BEI-S205T Chafing fuel
SUPPLIED WITH	(1x) Chafing fuel holders

ORDER CODE BEI-S50290

*HEAT SOURCE NOT INCLUDED



STAND FOR BUFFET SOUP STATION

SPECIFICATIONS

DIMENSIONS	315 x 315 x 155mm high
HEAT SOURCE	Induction warmer > ISC-BT-70T Heating element > BEI-S205T Chafing fuel
SUPPLIED WITH	(1x) Chafing fuel holders

ORDER CODE BEI-S50280

*HEAT SOURCE NOT INCLUDED



ELECTRIC HEATER - IN STAND



HEATING ELEMENT WITH CONTROLLER - 250mm

SPECIFICATIONS

ELECTRICITY	0.38kW, 230V, Single Phase
DIMENSIONS	250 x 200mm
COMPATIBLE WITH	Oblong - BEI-S60590 Square - BEI-S60290

ORDER CODE BEI-S305T



HEATING ELEMENT WITH CONTROLLER - 175mm

SPECIFICATIONS

ELECTRICITY	0.33kW, 230V, Single Phase
DIMENSIONS	175 x 200mm
COMPATIBLE WITH	Round - BEI-S50290 Soup Station - BEI-S50280

ORDER CODE BEI-S205T

DROP IN / COUNTERSUNK MODELS - TOUCH CONTROL



SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 305 x 375 x 75mm high
 TEMP RANGE 60 to 240°C
 COMPATIBLE WITH BEI-S60593
 BEI-S60293
 BEI-S50293
 BEI-S50288



ORDER CODE

ISC0001





SPECIFICATIONS

ELECTRICITY 1kW, 230V, Single Phase
 DIMENSIONS Ø245 x 60mm high
 TEMP RANGE 60 to 240°C
 COMPATIBLE WITH BEI-S60593
 BEI-S60293
 BEI-S50293
 BEI-S50288



ORDER CODE

ISC0002

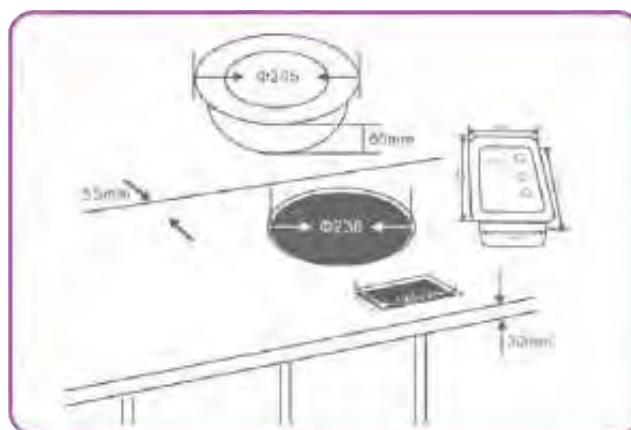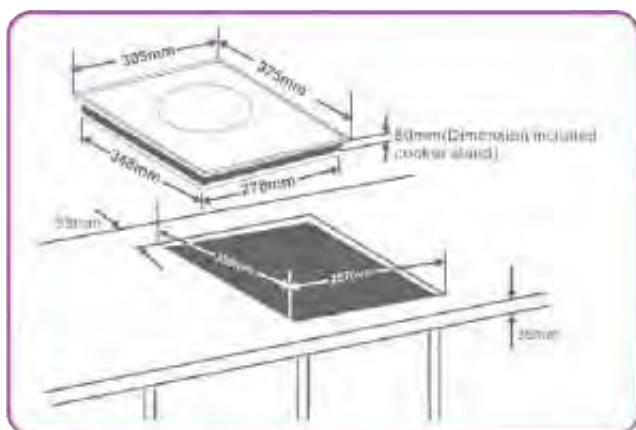

IN-STAND MODEL - TOUCH CONTROL



SPECIFICATIONS

ELECTRICITY 1kW, 230V, Single Phase
 DIMENSIONS Ø180 x 70mm high
 TEMP RANGE 60 to 240°C
 COMPATIBLE WITH BEI-S60590
 BEI-S60290
 BEI-S50290
 BEI-S50280



ORDER CODE

ISC0003

TABLE TOP MODEL - MANUAL CONTROL



SPECIFICATIONS

ELECTRICITY 2kW, 230V, Single Phase
 DIMENSIONS 460 x 315 x 60mm high
 TEMP RANGE 60 to 240°C
 COMPATIBLE WITH BEI-S60593
 BEI-S60293
 BEI-S50293
 BEI-S50288



ORDER CODE

ISC0004

CHAFING DISHES WINDOW / ECONOMIC SERIES

inoxserv



CHAFING DISH WINDOW SERIES RECTANGULAR

SPECIFICATIONS

DIMENSIONS 645 x 475 x 435mm high
CAPACITY 8.5Lt
HEAT SOURCE Chafing fuel
SUPPLIED WITH (1x) 1/1GN pan - 65mm deep
Stand
(2x) Chafing fuel holders

ORDER CODE BEI-KS61363-2



CHAFING DISH WINDOW SERIES ROUND

SPECIFICATIONS

DIMENSIONS Ø530 x 450mm high
CAPACITY 5Lt
HEAT SOURCE Chafing fuel
SUPPLIED WITH (1x) Round pan - 65mm deep
Stand
(1x) Chafing fuel holder

ORDER CODE BEI-KS51363



CHAFING DISH ECONO SERIES RECTANGULAR

SPECIFICATIONS

DIMENSIONS 645 x 475 x 435mm high
CAPACITY 8.5Lt
HEAT SOURCE Chafing fuel
SUPPLIED WITH (1x) 1/1GN pan - 65mm deep
Stand
(2x) Chafing fuel holders

ORDER CODE BEI-AT61363-2



CHAFING DISH ECONO SERIES ROUND

SPECIFICATIONS

DIMENSIONS Ø530 x 450mm high
CAPACITY 5Lt
HEAT SOURCE Chafing fuel
SUPPLIED WITH (1x) Round pan - 65mm deep
Stand
(1x) Chafing fuel holder

ORDER CODE BEI-AT51363



ELECTRIC SOUP KETTLE

SPECIFICATIONS

ELECTRICITY 0.9kW, 230V, Single Phase
DIMENSIONS Ø330 x 330mm high
CAPACITY 9Lt
SUPPLIED WITH (1x) Round pan - 200mm deep

ORDER CODE BEI-AT51388



CHAFING DISHES - ELECTRIC

inoxserv



FEATURES

- Durable plastic body. Stainless steel GN pan and lid
- Users can adjust the water temperature in electric water pan by using the temperature control knob
- The unit is equipped with an indicating light
- Water line indicator to ensure the heating element is fully covered with water
- Heating element recessed in water tank - Low water level
- Dry-boil protection

SPECIFICATIONS

ELECTRICITY 0.9kW, 230V, Single Phase
 DIMENSIONS 580 x 347 x 289mm high
 CAPACITY (1x) 1/1 GN x 100mm Pan
 WEIGHT 5kg

ORDER CODE

BEI-ZCK100P



CHAFING DISHES - PC COVER SERIES

inoxserv



COLD DISPLAY

SPECIFICATIONS

DIMENSIONS 565 x 365 x 300mm high
 PAN DIMENSIONS 475 x 270 x 40mm deep
 SUPPLIED WITH (2x) Freezer packs

ORDER CODE

BEI-SC62140-1



FEATURES

- Stainless steel body
- Stainless steel pan
- Polycarbonate roll-top cover



HEATED DISPLAY

SPECIFICATIONS

ELECTRICITY 1kW, 230V, Single Phase
 DIMENSIONS 565 x 365 x 300mm high
 PAN DIMENSIONS 475 x 270 x 60mm deep

ORDER CODE

BEI-SK62160-1



NEUTRAL DISPLAY

SPECIFICATIONS

DIMENSIONS 565 x 365 x 300mm high
 PAN DIMENSIONS 475 x 270 x 60mm deep

ORDER CODE

BEI-KS62160-1



ELECTRIC SOUP KETTLES

inoxserv



FEATURES

- Available in black or Stainless steel
- 304 stainless steel seamless insert
- Fitted with a hinged lid
- Stainless steel base (powder coated/polished)
- Temperature control via thermostat
- Fitted with non-slip feet



SPECIFICATIONS

ELECTRICITY 0.4kW, 220V, Single Phase
 DIMENSIONS Ø 330mm x 380mm high
 WEIGHT 4kg
 TEMPERATURE RANGE 30 to 95°C
 CAPACITY 10Lt

BLACK

SKI0010

STAINLESS STEEL

SKI1010



BAIN MARIES

SmartChef



FEATURES

- Manufactured from stainless steel
- Manual temperature control
- Fitted with a drainage tap
- Fitted with non-slip feet
- The compact dimensions allows these unit to fit comfortably into most commercial kitchen spaces and worktops
- Inserts and lids not included




1 DIVISION

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 440 x 720 x 275mm high
 COMPATIBILITY GN1/1; GN1/2; GN1/3
 WEIGHT 10kg

ORDER CODE

BMS0001

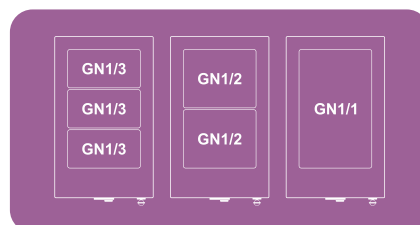


2 DIVISION

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 725 x 720 x 275mm high
 COMPATIBILITY GN1/1; GN1/2; GN1/3
 WEIGHT 17kg

ORDER CODE

BMS0002

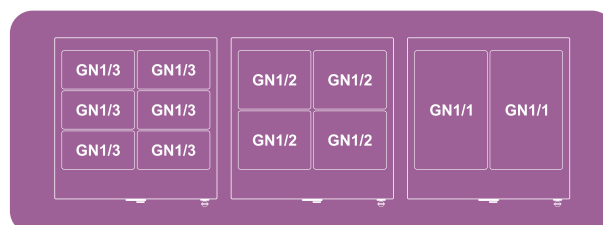


3 DIVISION

SPECIFICATIONS

ELECTRICITY 3kW, 230V, Single Phase
 DIMENSIONS 1070 x 720 x 275mm high
 COMPATIBILITY GN1/1; GN1/2; GN1/3
 WEIGHT 27kg

ORDER CODE

BMS0003

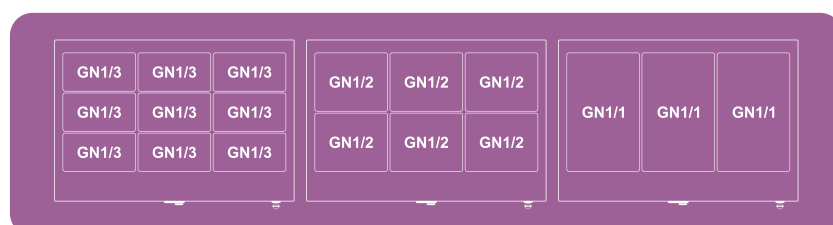

FEATURES

- Full stainless steel construction
- Conveniently placed handles with removable stainless steel base for easy refilling
- High polished steel finish
- Supplied with removable stand
- Chafing fuel holder included



12 LITRE

SPECIFICATIONS

DIMENSIONS 350 x 310 x 500mm high
CAPACITY 12Lt
HEAT SOURCE Induction / Chafing fuel

ORDER CODE BEI-AT80012



19 LITRE

SPECIFICATIONS

DIMENSIONS 350 x 310 x 620mm high
CAPACITY 19Lt
HEAT SOURCE Induction / Chafing fuel

ORDER CODE BEI-AT80019



FEATURES

- Lampshade made from aluminium
- Adjustable lamp height
- Supplied with 250W infrared bulb



CONE SHAPE SPECIFICATIONS

ELECTRICITY 0.25kW, 230V, Single Phase
SHADE DIMENSIONS Ø270 x 220mm high
ADJUSTABLE HEIGHT 700 to 2000mm
BULB TYPE E27 screw fitting

STAINLESS STEEL	HLS-HL270RC-S
COPPER	HLS-HL270RC-C
BLACK	HLS-HL270RC-B



BOWL SHAPE SPECIFICATIONS

ELECTRICITY 0.25kW, 230V, Single Phase
SHADE DIMENSIONS Ø275 x 250mm high
ADJUSTABLE HEIGHT 700 to 2000mm
BULB TYPE E27 screw fitting

STAINLESS STEEL	HLS-HL290RC-S
COPPER	HLS-HL290RC-C
BLACK	HLS-HL290RC-B

COUNTERTOP HEAT LAMPS

FEATURES

- Lampshade made from aluminium
- Adjustable lamp height
- Frame manufactured from coated steel
- Supplied with 250W infrared bulb



DOUBLE LAMP SPECIFICATIONS

ELECTRICITY 0.5kW, 230V
DIMENSIONS 660 x 350 x 600mm high
SHADE DIMENSIONS Ø175 x 210mm high
WEIGHT 2kg
ADJUSTABLE HEIGHT 600 to 800mm
BULB TYPE E27 screw fitting

ORDER CODE HLS-PL500



DOUBLE LAMP SPECIFICATIONS

ELECTRICITY 0.5kW, 230V
DIMENSIONS 480 x 400 x 600mm high
SHADE DIMENSIONS Ø175 x 210mm high
WEIGHT 1.8kg
ADJUSTABLE HEIGHT 600 to 800mm
BULB TYPE E27 screw fitting

ORDER CODE HLS-WL500



SINGLE LAMP SPECIFICATIONS

ELECTRICITY 0.25kW, 230V
DIMENSIONS 350 x 400 x 600mm high
SHADE DIMENSIONS Ø175 x 210mm high
WEIGHT 1.3kg
ADJUSTABLE HEIGHT 600 to 800mm
BULB TYPE E27 screw fitting

ORDER CODE HLS-PL250AS

LEVER PORTION CONTROL

FEATURES

- Modern cereal dispenser ideal for self service buffets
- High quality polycarbonate body and stainless steel fittings
- Features a stainless steel base for a premium look
- The easy to use lever mechanism provides measured portions
- The polycarbonate body can be removed for easy cleaning



CEREAL DISPENSER - DOUBLE

SPECIFICATIONS

DIMENSIONS 450 x 420 x 620mm high
CAPACITY (2x) 7Lt

ORDER CODE BEI-AT90123-2



CEREAL DISPENSER - SINGLE

SPECIFICATIONS

DIMENSIONS 230 x 420 x 620mm high
CAPACITY 7Lt

ORDER CODE BEI-AT90123



ROTATION PORTION CONTROL

FEATURES

- Elegant cereal dispenser suitable for top quality buffet environment
- Easy to use turning paddle for measured portions
- Stainless steel and acrylic body
- Easy to disassemble for cleaning



CEREAL DISPENSER - DOUBLE

SPECIFICATIONS

DIMENSIONS 480 x 380 x 660mm high
CAPACITY (2x) 9Lt

ORDER CODE

BEI-AT90133-2



CEREAL DISPENSER - SINGLE

SPECIFICATIONS

DIMENSIONS 230 x 380 x 660mm high
CAPACITY 9Lt

ORDER CODE

BEI-AT90133



FEATURES

- Modern juice dispenser ideal for self service buffets
- High quality polycarbonate body and stainless steel fittings
- Features a stainless steel base for a premium look
- Easy to use tap mechanism and includes drip tray base
- Includes an ice pack to help keep juices cool
- The polycarbonate body can be removed for easy cleaning



DOUBLE WITH FREEZER PACK

SPECIFICATIONS

DIMENSIONS 450 x 365 x 535mm high
CAPACITY (2x) 7Lt
SUPPLIED WITH (2x) Freezer packs

ORDER CODE BEI-AT90212-2



SINGLE WITH FREEZER PACK

SPECIFICATIONS

DIMENSIONS 230 x 365 x 535mm high
CAPACITY 7Lt
SUPPLIED WITH (1x) Freezer pack

ORDER CODE BEI-AT90212



FEATURES

- Elegant drinks dispenser suitable for top quality buffet environment
- Dispenser comes complete with removable 1 litre capacity ice chamber to keep drinks cool, which also avoids beverage dilution with melted ice
- Ice chamber can be removed and refilled while juice is inside the dispenser
- Stainless steel base and fittings, polycarbonate body
- Easy to use tap for self service



DOUBLE WITH CENTRE ICE TUBE

SPECIFICATIONS

DIMENSIONS 540 x 350 x 580mm high
CAPACITY (2x) 8Lt

ORDER CODE BEI-AT90512-2



SINGLE WITH CENTRE ICE TUBE

SPECIFICATIONS

DIMENSIONS 260 x 350 x 580mm high
CAPACITY 8Lt

ORDER CODE BEI-AT90512



[illegible]

NOTES



Pour into
the *MOMENT*.

POLARCAB **VINO**

*Premium wine cabinets
designed to showcase every bottle beautifully.*

REFRIGERATION & DISPLAY

SECTION INDEX

Back bar coolers	187-191
Bar coolers	191
Beverage coolers	187-193
Blast chillers	170
Bottle coolers	187-193
Chef bases	176
Display cases - countertop	210-211
Display cabinets - floor standing	205-209
Heated	211
Refrigerated	210
Glass top freezers	184
Horizontal display cabinets	205-209
• Refrigerated	205-209
• Heated	206-208
• Neutral	206; 208-209
Horizontal glass top freezers	184
Ice cream scoop freezers	185
Ice machines	166-168
• Modular	166
• Self-contained	167-168

Island freezers	184
Meat & cheese coolers	195
Meat agers	197
Multi-deck fridges	198-199
Open cooler merchandisers	198-199
Pie warmers	212
Pizza ingredient fridges	182-183
Pizza worktop fridges	177-178
Refrigerated glass display cases	203-204
Saladette fridges	178-179
Shock freezers	170
Stainless steel worktop fridges	180-181
Sushi display fridges	183
Upright bottle coolers	191-193
Upright display cases	203-204
Upright display freezers	186
Upright display fridges	186
Upright storage freezers	171-173
Upright storage fridges	171-173
Wine coolers	193-196





FEATURES

- Durable - Body panels manufactured from 304 stainless steel
- Patented Siphon Drainage - Prevents scale build-up, ensures crystal-clear ice
- Cold Light - Easy ice access in low light
- Easy Maintenance - Quick panel removal for fast servicing
- Bin is fitted with adjustable feet
- High efficiency SECOP compressor
- High thermal conductive evaporator
- Digital control panel and display
- Soft closing bin lid



500KG

SPECIFICATIONS

ELECTRICITY 2.3kW, 230V, Single Phase
Dedicated circuit and isolator recommended
 DIMENSIONS 760 x 600 x 700mm high
 WEIGHT 85kg
 PRODUCTION CAPACITY 500kg/24h
 ICE TYPE Classic cube - 8gr
 REFRIGERANT GAS R404a

ORDER CODE

IMP-E500



BIN

DIMENSIONS 760 x 860 x 1180mm high
 STORAGE CAPACITY 200kg / 400Lt

ORDER CODE

IMP-B445



300KG

SPECIFICATIONS

ELECTRICITY 1.4kW, 230V, Single Phase
 DIMENSIONS 760 x 600 x 570mm high
 WEIGHT 65kg
 PRODUCTION CAPACITY 300kg/24h
 ICE TYPE Classic cube - 8gr
 REFRIGERANT GAS R404a

ORDER CODE

IMP-E300



BIN

DIMENSIONS 760 x 860 x 1180mm high
 STORAGE CAPACITY 200kg / 400Lt

ORDER CODE

IMP-B445



200KG

SPECIFICATIONS

ELECTRICITY 1.1kW, 230V, Single Phase
 DIMENSIONS 560 x 600 x 570mm high
 WEIGHT 50kg
 PRODUCTION CAPACITY 200kg/24h
 ICE TYPE Classic cube - 8gr
 REFRIGERANT GAS R404a

ORDER CODE

IMP-E200



BIN

DIMENSIONS 560 x 860 x 1180mm high
 STORAGE CAPACITY 140kg / 280Lt

ORDER CODE

IMP-B305



CLASSIC SQUARE CUBE



FEATURES

- Durable - Body panels are manufactured from 304 stainless steel
- Patented Siphon Drainage - Prevents scale build-up, ensures crystal-clear ice
- Cold Light - Easy ice access in low light
- Easy Maintenance - Quick panel removal for fast servicing
- Water filter kit included
- High efficiency SECOP compressor
- High thermal conductive evaporator
- Fitted with adjustable feet
- Digital control panel and display



40KG

SPECIFICATIONS

ELECTRICITY	0.3kW, 230V, Single Phase
DIMENSIONS	500 x 450 x 800mm high
WEIGHT	40kg
PRODUCTION CAPACITY	40kg/24h
STORAGE CAPACITY	15kg
ICE TYPE	Classic cube - 8gr
REFRIGERANT GAS	R404a

WITH DRAIN PUMP

ORDER CODE IMP-E040.D

GRAVITY DRAIN

ORDER CODE IMP-E040



60KG

SPECIFICATIONS

ELECTRICITY	0.4kW, 230V, Single Phase
DIMENSIONS	500 x 590 x 850mm high
WEIGHT	50kg
PRODUCTION CAPACITY	60kg/24h
STORAGE CAPACITY	18kg
ICE TYPE	Classic cube - 8gr
REFRIGERANT GAS	R404a

WITH DRAIN PUMP

ORDER CODE IMP-E060.D

GRAVITY DRAIN

ORDER CODE IMP-E060



100KG

SPECIFICATIONS

ELECTRICITY	0.6kW, 230V, Single Phase
DIMENSIONS	660 x 685 x 920mm high
WEIGHT	66kg
PRODUCTION CAPACITY	100kg/24h
STORAGE CAPACITY	36kg
ICE TYPE	Classic cube - 8gr
REFRIGERANT GAS	R404a

WITH DRAIN PUMP

ORDER CODE IMP-E100.D

GRAVITY DRAIN

ORDER CODE IMP-E100



CLASSIC SQUARE CUBE





FEATURES

- Air cooled system with side ventilation
- Stainless steel housing and door
- Under counter design with adjustable feet
- Overload protection
- Self-checking function. Faults are indicated by flashing lights on the display panel


28KG BULLET CUBE

SPECIFICATIONS

ELECTRICITY	0.38kW, 220V, Single Phase
DIMENSIONS	398 x 510 x 608mm high
WEIGHT	31Kg
PRODUCTION CAPACITY	28kg/24h
STORAGE CAPACITY	9kg
ICE TYPE	Hollow/Bullet - 8g
REFRIGERANT GAS	R290

ORDER CODE

IMP-B028



HOLLOW CUBE



GOURMET CUBE

30KG GOURMET CUBE **NEW**

SPECIFICATIONS

ELECTRICITY	0.48kW, 220V, Single Phase
DIMENSIONS	398 x 530 x 720mm high
WEIGHT	37Kg
PRODUCTION CAPACITY	30kg/24h
STORAGE CAPACITY	13kg
ICE TYPE	Gourmet - 16g
REFRIGERANT GAS	R290

ORDER CODE

IMP-G030





Ice Machines



**Exceptional performance.
Outstanding reliability.**



FEATURES

- Manufactured from 304 Stainless steel
- Electronic controller with cooling performance management system
- Self closing doors with magnetic door gasket
- Accommodates GN 1/1 pans and 600 x 400mm baking trays (*not included*)
- Combination chill / freezer
- Supplied with food temperature probe
- Recessed safety door handle



10 PAN

SPECIFICATIONS

ELECTRICITY	2.5kW, 230V, Single Phase
<i>Dedicated circuit and isolator recommended</i>	
DIMENSIONS	750 x 830 x 1435mm high
WEIGHT	140kg
RUNNER SPACING	65mm
CAPACITY	(10x) 1/1 GN trays (55mm deep) (10x) 600 x 400mm trays
BLAST CHILL PERFORMANCE	50kg: 90 to 3°C in 90min
SHOCK FREEZE PERFORMANCE	30kg: 90 to -18°C in 240min
REFRIGERANT GAS	R290

ORDER CODE

PCY-EBF-10



5 PAN

SPECIFICATIONS

ELECTRICITY	1.3kW, 230V, Single Phase
DIMENSIONS	750 x 815 x 870mm high
WEIGHT	89kg
RUNNER SPACING	65mm
CAPACITY	(5x) 1/1 GN trays (55mm deep) (5x) 600 x 400mm trays
BLAST CHILL PERFORMANCE	25kg: 90 to 3°C in 90min
SHOCK FREEZE PERFORMANCE	15kg: 90 to -18°C in 240min
REFRIGERANT GAS	R290

ORDER CODE

PCY-EBF-05



3 PAN

SPECIFICATIONS

ELECTRICITY	1.1kW, 230V, Single Phase
DIMENSIONS	755 x 832 x 581mm high
WEIGHT	72kg
RUNNER SPACING	65mm
CAPACITY	(3x) 1/1 GN trays (55mm deep) (3x) 600 x 400mm trays
BLAST CHILL PERFORMANCE	15kg: 90 to 3°C in 90min
SHOCK FREEZE PERFORMANCE	9kg: 90 to -18°C in 240min
REFRIGERANT GAS	R290

ORDER CODE

PCY-EBF-03



FEATURES

- Complete structure manufactured from stainless steel
- Sturdy U-rail, wire shelves
- Fitted with interior LED lighting
- Automatic defrost function
- Fitted with 4 castors, 2 lockable
- Fitted with lockable, self-closing doors
- The adjustable support rails can also be used for GN pans
- Ventilated cooling
- Digital Dixell / Carel thermostat
- Additional shelf runners available



DOUBLE DOOR FRIDGE

SPECIFICATIONS

ELECTRICITY	0.35kW, 230V, Single Phase
DIMENSIONS	1315 x 845 x 2130mm high
WEIGHT	175kg
INTERNAL DIMENSIONS	1194 x 685 x 1550mm high
CAPACITY	1240Lt
RUNNER SPACING	100mm
GRID SHELVES SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCY-MBF8117



SINGLE DOOR FRIDGE

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	730 x 845 x 2130mm high
WEIGHT	115kg
INTERNAL DIMENSIONS	610 x 685 x 1550mm high
CAPACITY	670Lt
RUNNER SPACING	100mm
GRID SHELVES SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCY-MBF8116



DOUBLE DOOR FREEZER

SPECIFICATIONS

ELECTRICITY	0.98kW, 230V, Single Phase
DIMENSIONS	1315 x 845 x 2130mm high
WEIGHT	185kg
INTERNAL DIMENSIONS	1194 x 685 x 1550mm high
CAPACITY	1240Lt
RUNNER SPACING	100mm
GRID SHELVES SUPPLIED	(6x) 530 x 630mm
TEMPERATURE RANGE	-22 to -17°C
REFRIGERANT GAS	R290

ORDER CODE

PCY-MBF8114



SINGLE DOOR FREEZER

SPECIFICATIONS

ELECTRICITY	0.6kW, 230V, Single Phase
DIMENSIONS	730 x 845 x 2130mm high
WEIGHT	120kg
INTERNAL DIMENSIONS	610 x 685 x 1550mm high
CAPACITY	670Lt
RUNNER SPACING	100mm
GRID SHELVES SUPPLIED	(3x) 530 x 630mm
TEMPERATURE RANGE	-22 to -17°C
REFRIGERANT GAS	R290

ORDER CODE

PCY-MBF8113



OPTIONAL EXTRAS

GRIDS

2/1 GN GRIDS 530 x 630mm
ORDER CODE

PCY-MBF811-X001

SHELF RUNNERS

LEFT SIDE
RIGHT SIDE

XPCY-80037407
XPCY-80037408

REFRIGERATED STAINLESS STEEL STORAGE CABINETS



FEATURES

- Stainless steel exterior body
- Plastic coated grid shelves
- Interior LED lighting
- Automatic defrost cycle
- Fitted with device leveling feet
- ABS interior lining
- Dixell / Carel digital thermostat
- Self-closing door with lock
- Available in stainless steel or double glazed glass doors



580 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.32kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 460 x 1627mm high
GROSS VOLUME	580Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	103kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R290

ORDER CODE

PCG-SF58VS



580 LITRE FRIDGE

SPECIFICATIONS

ELECTRICITY	0.24kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 460 x 1627mm high
GROSS VOLUME	580Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	93kg
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SR58VS



300 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	82kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R290

ORDER CODE

PCG-SF30VS



300 LITRE FRIDGE

SPECIFICATIONS

ELECTRICITY	0.18kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	70kg
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SR30VS



120 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.17kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 850mm high
INTERNAL DIMENSIONS	460 x 410 x 465mm high
GROSS VOLUME	120Lt
RUNNERS	4 (85mm spacing)
GRID SUPPLIED	2
WEIGHT	47kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SF12VS



120 LITRE FRIDGE

SPECIFICATIONS

ELECTRICITY	0.14kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 850mm high
INTERNAL DIMENSIONS	460 x 410 x 465mm high
GROSS VOLUME	120Lt
RUNNERS	4 (85mm spacing)
GRID SUPPLIED	2
WEIGHT	43kg
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SR12S



REFRIGERATED STAINLESS STEEL STORAGE CABINETS (GLASS DOORS)



580 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.32kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 460 x 1627mm high
GROSS VOLUME	580Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	103kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R290

ORDER CODE

PCG-SF58VGS



580 LITRE FRIDGE

SPECIFICATIONS

ELECTRICITY	0.24kW, 220V, Single Phase
DIMENSIONS	775 x 750 x 1860mm high
INTERNAL DIMENSIONS	635 x 460 x 1627mm high
GROSS VOLUME	580Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	90kg
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SR58VGS



300 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1850mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	82kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R290

ORDER CODE

PCG-SF30VGS



300 LITRE FRIDGE

SPECIFICATIONS

ELECTRICITY	0.18kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 1860mm high
INTERNAL DIMENSIONS	460 x 460 x 1627mm high
GROSS VOLUME	300Lt
RUNNERS	12 (85mm spacing)
GRID SUPPLIED	3
WEIGHT	70kg
TEMPERATURE RANGE	2 to 8°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SR30VGS



120 LITRE FREEZER

SPECIFICATIONS

ELECTRICITY	0.17kW, 220V, Single Phase
DIMENSIONS	600 x 600 x 850mm high
INTERNAL DIMENSIONS	460 x 410 x 465mm high
GROSS VOLUME	120Lt
RUNNERS	4 (85mm spacing)
GRID SUPPLIED	2
WEIGHT	47kg
TEMPERATURE RANGE	-18 to -10°C
REFRIGERANT GAS	R600a

ORDER CODE

PCG-SF12VGS



OPTIONAL EXTRAS

GRID SHELVES

FOR 120 LITRE SERIES
FOR 300 LITRE SERIES
FOR 580 LITRE SERIES

PCG-SRF-X120
PCG-SRF-X300
PCG-SRF-X580



POLARCA®

by



CHEF BASE



POLARCAB Chef Bases are built to maximize efficiency by combining refrigerated ingredient storage with a heavy-duty equipment stand. Keep fresh ingredients within arm's reach while supporting your griddle, charbroiler, or range — saving space, improving workflow, and helping your kitchen perform at its best.

FEATURES

- Stainless steel exterior and interior
- Carel digital controller
- Gravity fed self closing drawers
- Magnetic drawer gaskets
- Stainless steel inserts not included
- One-Piece heavy duty reinforced stainless steel top
- Recessed door handles
- Heavy Duty stainless steel drawer slides and rollers
- Fitted with device leveling feet
- Insulated top to block heat transfer from cooking equipment



1800mm

SPECIFICATIONS

ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 1840 x 814 x 675mm high
WEIGHT 136kg
NUMBER OF DRAWERS 4
PANS PER DRAWER (2x) 1/1GN 100mm deep
TEMP RANGE 2 to 5°C
REFRIGERANT GAS R290

ORDER CODE

PCY-MGF8453





1200mm

SPECIFICATIONS

ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 1230 x 814 x 675mm high
WEIGHT 117kg
NUMBER OF DRAWERS 2
PANS PER DRAWER (2x) 1/1GN + (3x) 1/6GN 100mm deep
TEMP RANGE 2 to 5°C
REFRIGERANT GAS R290

ORDER CODE

PCY-MGF8450

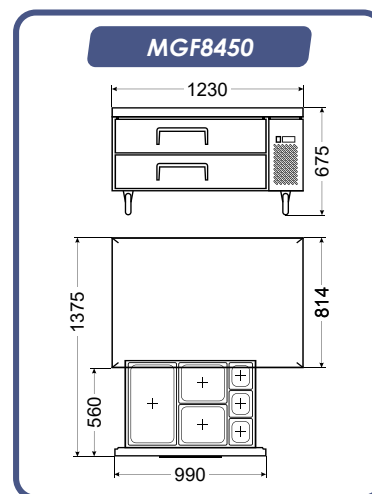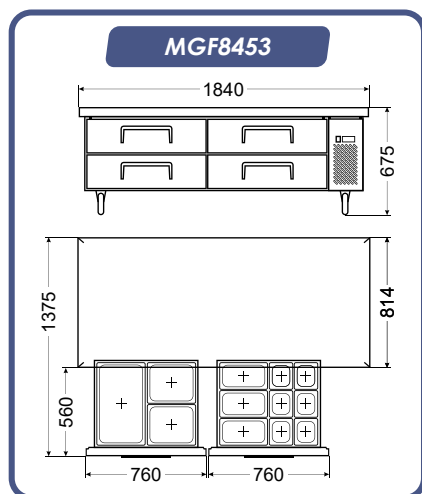

PIZZA MAKING FRIDGE GRANITE TOP & DRAWERS



FEATURES

- Heavy duty construction, exterior and interior of high grade 304 stainless steel and galvanised steel back
- Fitted with granite top
- Automatic defrost
- Self closing doors
- Fitted with 7 drawers (not refrigerated)
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Bottom mounted motor suitable for use in high temperature areas
- Fitted with durable castors

SPECIFICATIONS

ELECTRICITY	0.25kW, 230V, Single Phase
DIMENSIONS	2010 x 800 x 875mm high
WEIGHT	70kg
NUMBER OF DOORS	2
RUNNER SPACING	55mm
SHELVES SUPPLIED	(4x) GN 1/1 grids
GROSS VOLUME	420lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-EPF3480



NEW



**LARGE WORK-TOP &
STORAGE CAPACITY
FOR HIGH VOLUME STORES**

**ADD AN OPTIONAL
PIZZA INGREDIENT FRIDGE**

NEUTRAL DRAWERS

OPTIONAL DOUGH STORAGE BOXES

PCY-EPF3480-DB



PIZZA MAKING FRIDGE GRANITE TOP



POLAR CAB

FEATURES

- Heavy duty construction, exterior and interior of high grade 304 stainless steel and galvanised steel back
- Fitted with granite top
- Automatic defrost
- Self closing doors
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Bottom mounted motor suitable for use in high temperature areas
- Fitted with (4x) adjustable feet

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1030mm high
WEIGHT	190kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(6x) GN 1/1 grids
GROSS VOLUME	380Lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3852



ADD AN OPTIONAL
PIZZA INGREDIENT FRIDGE

SALADETTE GRANITE TOP WITH SNEEZE GUARD

FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Fitted with granite top
- Fitted with glass sneeze guard
- Automatic defrost
- Self closing doors
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Bottom mounted motor suitable for use in high temperature areas
- Insert pans not included
- Fitted with (4x) adjustable feet

SPECIFICATIONS

ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1100mm high
WEIGHT	170kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(6x) GN 1/1 grids
GROSS VOLUME	380Lt
DISPLAY CAPACITY	(7x) 1/3 GN pans
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3864



SALADETTE STAINLESS STEEL WORK-TOP WITH HINGED LID



POLAR CAB



FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Bottom mounted motor suitable for use in high temperature areas
- Automatic defrost
- Self closing doors
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Fitted with (4x) adjustable legs
- Insert pans not included

SPECIFICATIONS

ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 1040mm high
WEIGHT	105kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(6x) GN 1/1 grids
GROSS VOLUME	380L
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3853



SALADETTE CUTTING BOARD WITH HINGED LID

FEATURES

- Exterior and interior manufactured from 304 Stainless Steel and Galvanised steel back
- Bottom mounted motor suitable for use in high temperature areas
- Automatic defrost
- Self closing doors
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Fitted with (4x) adjustable legs
- Insert pans not included

SPECIFICATIONS

ELECTRICITY	0.31kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 890mm high
WEIGHT	87kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(6x) GN 1/1 grids
GROSS VOLUME	380L
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3850





FEATURES

- Exterior and interior of high grade 304 stainless steel
- Fitted with Stainless Steel work-top
- Self closing hinged doors
- Fitted with digital Dixell / Carel thermostat
- Fitted with (4x) adjustable feet
- Galvanised steel back
- Automatic defrost
- Efficient refrigeration system. Ventilated cooling
- Bottom mounted motor suitable for use in high temperature areas



3 DOOR

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 900mm high
WEIGHT	94kg
NUMBER OF DOORS	3
RUNNER SPACING	55mm
SHELVES SUPPLIED	(6x) GN 1/1 grids
GROSS VOLUME	380Lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3851

NEW



2 DOOR

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	900 x 700 x 900mm high
WEIGHT	72kg
NUMBER OF DOORS	2
RUNNER SPACING	55mm
SHELVES SUPPLIED	(4x) GN 1/1 grids
GROSS VOLUME	300Lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3801

NEW



STAINLESS STEEL WORK-TOP WITH REFRIGERATED DRAWERS



POLAR CAB



FEATURES

- Exterior and interior of high grade 304 stainless steel
- Fitted with Stainless Steel work-top
- Self closing hinged door
- Efficient refrigeration system. Ventilated cooling
- Fitted with digital Dixell / Carel thermostat
- Galvanised steel back
- Refrigerated drawers
- Automatic defrost
- Bottom mounted motor suitable for use in high temperature areas
- Fitted with (4x) adjustable feet



1 DOOR / 4 DRAWER

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	1365 x 700 x 900mm high
WEIGHT	104kg
NUMBER OF DOORS	1
RUNNER SPACING	55mm
SHELVES SUPPLIED	(2x) GN 1/1 grids
NUMBER OF DRAWERS	4
CAPACITY PER DRAWER	(1x) GN 1/1 x 150mm - 20kg
GROSS VOLUME	380Lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3851ZA32

NEW



1 DOOR / 2 DRAWER

SPECIFICATIONS

ELECTRICITY	0.22kW, 230V, Single Phase
DIMENSIONS	900 x 700 x 900mm high
WEIGHT	77kg
NUMBER OF DOORS	1
RUNNER SPACING	55mm
SHELVES SUPPLIED	(2x) GN 1/1 grid
NUMBER OF DRAWERS	2
CAPACITY PER DRAWER	(1x) GN 1/1 x 150mm - 20kg
GROSS VOLUME	300Lt
TEMPERATURE RANGE	2 to 8°C
CLIMATE CLASS	4
REFRIGERANT GAS	R134a

ORDER CODE

PCY-ESL3821

NEW





FEATURES

- Body is manufactured from high quality stainless steel
- Compact design to minimize footprint
- Low maintenance auto defrost function
- Fitted with digital temperature controller
- Glass panels and lids are easy to remove for cleaning
- Fitted with height adjustable feet
- Insert pans not included



ADD TO SALADETTE
AS AN OPTIONAL EXTRA



6 DIVISION 1/4 GN

SPECIFICATIONS

ELECTRICITY	0.2kW, 230V, Single Phase
WEIGHT	41kg
CAPACITY	(6x) 1/4 GN pans
TEMP RANGE	2 to 8°C
REFRIGERANT GAS	R134a


GLASS SNEEZE-GUARD

DIMENSIONS	1405 x 335 x 465mm high
ORDER CODE	PCY-ESL3861

STAINLESS STEEL LID

DIMENSIONS	1405 x 335 x 300mm high
ORDER CODE	PCY-ESL3861S

CONFIGURATION

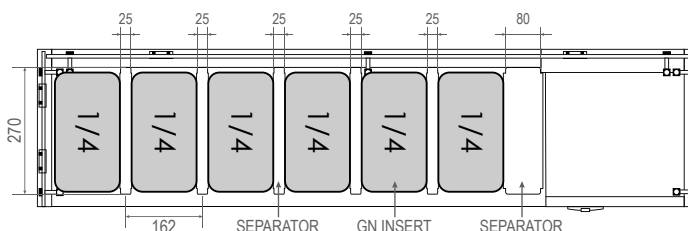

8 DIVISION 1/3 GN

SPECIFICATIONS

ELECTRICITY	0.2kW, 230V, Single Phase
WEIGHT	53kg
CAPACITY	(8x) 1/3 GN pans
TEMP RANGE	2 to 8°C
REFRIGERANT GAS	R134a


GLASS SNEEZE-GUARD

DIMENSIONS	1805 x 395 x 465mm high
ORDER CODE	PCY-ESL3888

STAINLESS STEEL LID

DIMENSIONS	1805 x 395 x 300mm high
ORDER CODE	PCY-ESL3888S

CONFIGURATION

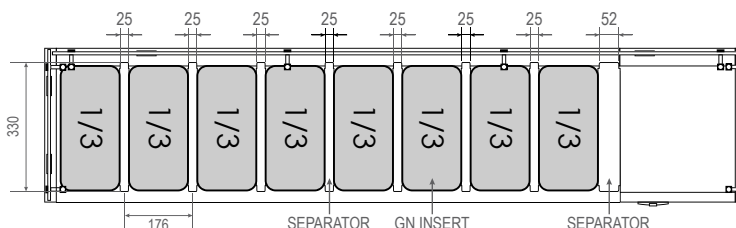

PIZZA INGREDIENT FRIDGES



FEATURES

- Body is manufactured from high quality stainless steel
- Compact design to minimize footprint
- Low maintenance auto defrost function
- Fitted with digital temperature controller
- Glass panels are easy to remove for cleaning
- Fitted with height adjustable feet
- Insert pans not included

9 DIVISION 1/3 GN


SPECIFICATIONS

ELECTRICITY 0.2kW, 230V, Single Phase
 DIMENSIONS 2005 x 395 x 465mm high
 WEIGHT 58kg
 CAPACITY (9x) 1/3 GN pans
 TEMP RANGE 2 to 8°C
 REFRIGERANT GAS R134a

ORDER CODE

PCY-ESL3890

CONFIGURATION

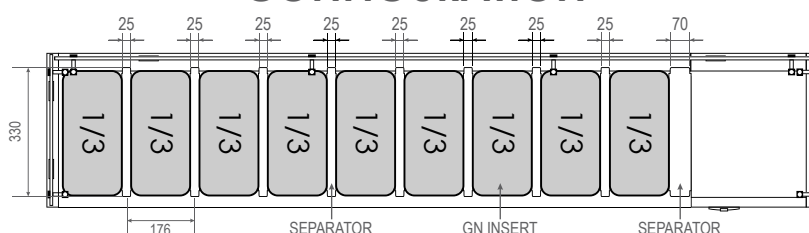

SUSHI DISPLAY FRIDGES



FEATURES

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Front Curved glass
- Sliding doors
- Direct cooling system
- Automatic defrost
- Top evaporator with basin to collect condensation
- Insert pans not included

6 DIVISION

SPECIFICATIONS

ELECTRICITY 0.16kW, 230V, Single Phase
 DIMENSIONS 1483 x 450 x 330mm high
 GROSS VOLUME 83Lt
 CAPACITY (6x) 1/3 GN Inserts
 40mm deep
 WEIGHT 39kg
 TEMP. RANGE 2 to 12°C
 REFRIGERANT GAS R290a

ORDER CODE

PCG-RTS-83L



7 DIVISION

SPECIFICATIONS

ELECTRICITY 0.16kW, 230V, Single Phase
 DIMENSIONS 1754 x 450 x 330mm high
 GROSS VOLUME 103Lt
 CAPACITY (6x) 1/3 + 1/2 GN Inserts
 40mm deep
 WEIGHT 44kg
 TEMP. RANGE 2 to 12°C
 REFRIGERANT GAS R290a

ORDER CODE

PCG-RTS-103L



[illegible]

NOTES

FEATURES

- Flat glass sliding top with locks
- Manual temperature control
- Baskets and defrost scraper included
- Low energy consumption
- Analog thermometer
- Fitted with device leveling feet
- 70mm thick insulation
- Manual defrost with drain outlet



97 LITRE

SPECIFICATIONS

ELECTRICITY	0.12kW, 220-240V, Single Phase
DIMENSIONS	545 x 555 x 810mm high
WEIGHT	30kg
TEMP RANGE	0 to -18°C
CAPACITY	97Lt
BASKET CAPACITY	2
BASKET SUPPLIED	1

ORDER CODE PCG-SD-100



197 LITRE

SPECIFICATIONS

ELECTRICITY	0.17kW, 220-240V, Single Phase
DIMENSIONS	895 x 555 x 810mm high
WEIGHT	34kg
TEMP RANGE	0 to -18°C
CAPACITY	197Lt
BASKET CAPACITY	4
BASKET SUPPLIED	1

ORDER CODE PCG-SD-200



ADDITIONAL BASKETS

ORDER CODE PCG-SD-X001

ISLAND FREEZERS

FEATURES

- Flat glass sliding top with locks
- Manual temperature control
- Baskets and defrost scraper included
- Low energy consumption
- Analog thermometer
- LED interior lighting
- 70mm thick insulation
- Manual defrost with drain outlet
- Fitted with castors



355 LITRE

SPECIFICATIONS

ELECTRICITY	0.21kW, 220-240V, Single Phase
DIMENSIONS	1270 x 680 x 850mm high
WEIGHT	58kg
TEMP RANGE	0 to -18°C
CAPACITY	355Lt
BASKET CAPACITY	4
BASKET SUPPLIED	4

CHARCOAL PCG-SD-420P

WHITE PCG-SD-420P-W



545 LITRE

SPECIFICATIONS

ELECTRICITY	0.25kW, 220-240V, Single Phase
DIMENSIONS	1810 x 680 x 850mm high
WEIGHT	76kg
TEMP RANGE	0 to -18°C
CAPACITY	545Lt
BASKET CAPACITY	6
BASKET SUPPLIED	6

CHARCOAL PCG-SD-620P

WHITE PCG-SD-620P-W



ICE CREAM SCOOP FREEZERS **NEW**

FLOOR STANDING



FEATURES

- Manufactured from sheet steel
- Mechanical Thermostat
- Storage space with a separate door
- Fitted with (4x) castors
- High efficiency compressor
- Digital temperature display
- LED illuminated canopy
- Inserts not included
- Air cooled condenser
- Stainless steel sockets for ice cream inserts
- Serving bench with a scoop washer system



12 DIVISION

SPECIFICATIONS

ELECTRICITY	0.25kW, 230V, Single Phase
DIMENSIONS	1720 x 838 x 1270mm high
WEIGHT	152kg
DISPLAY AREA	0.71m ²
GROSS VOLUME	575Lt
BIN CAPACITY	(12x) 360 x 165mm S/steel bins
TEMP RANGE	-22 to -15°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290

ORDER CODE

IDP0012



9 DIVISION

SPECIFICATIONS

ELECTRICITY	0.18kW, 230V, Single Phase
DIMENSIONS	1350 x 838 x 1270mm high
WEIGHT	123kg
DISPLAY AREA	0.53m ²
GROSS VOLUME	415Lt
BIN CAPACITY	(9x) 360 x 165mm S/steel bins
TEMP RANGE	-22 to -15°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290

ORDER CODE

IDP0009



6 DIVISION

SPECIFICATIONS

ELECTRICITY	0.18kW, 230V, Single Phase
DIMENSIONS	1080 x 838 x 1270mm high
WEIGHT	109kg
DISPLAY AREA	0.35m ²
GROSS VOLUME	325Lt
BIN CAPACITY	(6x) 360 x 165mm S/steel bins
TEMP RANGE	-22 to -15°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290

ORDER CODE

IDP0006



OPTIONAL EXTRAS

ICE CREAM INSERT
ORDER CODE

360 x 165 x 120mm deep
GNI8120





FEATURES

- Outer cabinet manufactured from coated mild steel
- Digital temperature controller with digital display
- Internal LED lighting
- Stylish and modern black interior and exterior
- Very small footprint. Ideal for establishments with limited floorspace
- Self-closing, double glazed door with lock
- Automatic defrost function
- Adjustable shelving
- Fitted with device leveling feet


UPRIGHT FRIDGE SLIM LINE

SPECIFICATIONS

ELECTRICITY	0.2kW, 240V, Single Phase
DIMENSIONS	420 x 540 x 1880mm high
INTERNAL DIMENSIONS	330 x 430 x 1500mm high
WEIGHT	44kg
GROSS VOLUME	212Lt
TEMP RANGE	2 to 10°C
REFRIGERATION GAS	R600a
SHELVES SUPPLIED	(5x) 320 x 360mm

ORDER NUMBER

URP0420




UPRIGHT FREEZER SLIM LINE

SPECIFICATIONS

ELECTRICITY	0.35kW, 240V, Single Phase
DIMENSIONS	420 x 600 x 1880mm high
INTERNAL DIMENSIONS	300 x 415 x 1470mm high
WEIGHT	65kg
GROSS VOLUME	183Lt
TEMP RANGE	-18 to -10°C
REFRIGERATION GAS	R290
SHELVES SUPPLIED	(5x) 290 x 325mm

ORDER NUMBER

UFP0420



FEATURES

- Outer cabinet manufactured from coated mild steel
- Self-closing, double glazed doors with locks
- Digital temperature controller with digital display
- Automatic defrost function
- Internal LED lighting
- Adjustable shelving
- Stylish and modern black interior and exterior
- Fitted with castors

DOUBLE GLASS DOOR FRIDGE

SPECIFICATIONS

ELECTRICITY	0.5kW, 240V, Single Phase
DIMENSIONS	940 x 625 x 1993mm high
INTERNAL DIMENSIONS	843 x 510 x 1522mm high
WEIGHT	107kg
GROSS VOLUME	654Lt
TEMP RANGE	2 to 10°C
REFRIGERATION GAS	R290
SHELVES SUPPLIED	(8x) 410 x 467mm

ORDER NUMBER

URP0940



FEATURES

- Outer cabinet manufactured from coated mild steel
- Self-closing, insulated doors
- Individually controlled zones with digital temperature controller with digital display
- Automatic defrost function
- Internal LED lighting
- Adjustable shelving
- Stylish and modern black interior and exterior
- Fitted with device leveling feet

DUAL FRIDGE/FREEZER

SPECIFICATIONS

ELECTRICITY	0.12kW, 240V, Single Phase
DIMENSIONS	650 x 630 x 860mm high
WEIGHT	40kg
VOLUME (FREEZER)	67Lt
VOLUME (FRIDGE)	48Lt
TEMP RANGE (FREEZER)	-20 to -18°C
TEMP RANGE (FRIDGE)	2 to 10°C
REFRIGERATION GAS	R290
SHELVES SUPPLIED	(1x) 516 x 406mm (Freezer) (1x) 556 x 257mm (Fridge)

ORDER NUMBER

DFP0001





FEATURES

- Black units - Outer cabinet manufactured from coated mild steel
- High pressure injected 40mm cyclopentane insulation
- 14W square fan assisted condenser
- Automatic defrost function
- Self-closing doors are fitted with tempered glass
- Fitted with adjustable feet for easy leveling
- Stainless steel units - Outer cabinet manufactured from stainless steel
- Cabinet interior manufactured from compressed aluminium
- Fitted with a digital temperature control and display
- Smooth action sliding doors / hinged doors
- Standard with internal LED lights and locks



3 DOOR

SPECIFICATIONS

ELECTRICITY	0.67kW, 220V, Single Phase
EXTERNAL DIMENSIONS	1350 x 520 x 850mm high
INTERNAL DIMENSIONS	1260 x 385 x 700mm high
WEIGHT	80kg
GROSS VOLUME	320Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(6x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP2003
BBP1003
BBP3003



2 DOOR

SPECIFICATIONS

ELECTRICITY	0.23kW, 220V, Single Phase
EXTERNAL DIMENSIONS	900 x 520 x 850mm high
INTERNAL DIMENSIONS	820 x 385 x 700mm high
WEIGHT	62kg
GROSS VOLUME	198Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(4x) 400 x 345mm

SLIDING DOORS - BLACK
HINGED DOORS - BLACK
HINGED DOORS - S/STEEL

BBP2002
BBP1002
BBP3002



SINGLE DOOR

SPECIFICATIONS

ELECTRICITY	0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS	600 x 520 x 850mm high
INTERNAL DIMENSIONS	520 x 385 x 700mm high
WEIGHT	46kg
GROSS VOLUME	128Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(2x) 500 x 345mm

HINGED DOOR - BLACK

BBP1001



AVAILABLE IN

- Black or Stainless Steel
- Sliding or Hinged doors

The Legend is Growing...





FEATURES

- Body manufactured from pre-coated steel
- Self-closing, tempered glass doors with locks
- Adjustable shelves
- Moulded seamless black ABS interior
- Digital control panel with digital thermostat
- Fitted with device leveling feet
- Fan assisted cooling
- Interior LED lighting



3 DOOR

SPECIFICATIONS

ELECTRICITY 0.67kW, 220V, Single Phase
EXTERNAL DIMENSIONS 1360 x 520 x 830mm high
INTERNAL DIMENSIONS 1260 x 380 x 680mm high
WEIGHT 65kg
GROSS VOLUME 288Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R290
SHELVES SUPPLIED (6x) 490 x 350mm
(3x) Wine shelf

HINGED DOOR
SLIDING DOOR

BBP6003
BBP7003



2 DOOR

SPECIFICATIONS

ELECTRICITY 0.23kW, 220V, Single Phase
EXTERNAL DIMENSIONS 900 x 520 x 830mm high
INTERNAL DIMENSIONS 800 x 380 x 680mm high
WEIGHT 48kg
GROSS VOLUME 182Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R290
SHELVES SUPPLIED (4x) 490 x 350mm
(2x) Wine shelf

HINGED DOOR
SLIDING DOOR

BBP6002
BBP7002



HIGH

ELECTRICITY 0.67kW, 220V, Single Phase
EXTERNAL DIMENSIONS 1360 x 520 x 900mm high
INTERNAL DIMENSIONS 1260 x 380 x 750mm high
WEIGHT 70kg
GROSS VOLUME 320Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R290
SHELVES SUPPLIED (6x) 490 x 350mm

HINGED DOOR
SLIDING DOOR

BBP8003
BBP9003



HIGH

ELECTRICITY 0.23kW, 220V, Single Phase
EXTERNAL DIMENSIONS 900 x 520 x 900mm high
INTERNAL DIMENSIONS 800 x 380 x 750mm high
WEIGHT 52kg
GROSS VOLUME 203Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R290
SHELVES SUPPLIED (4x) 490 x 350mm

HINGED DOOR
SLIDING DOOR

BBP8002
BBP9002



SINGLE DOOR

SPECIFICATIONS

ELECTRICITY 0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS 600 x 520 x 830mm high
INTERNAL DIMENSIONS 510 x 380 x 680mm high
WEIGHT 32kg
GROSS VOLUME 114Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R600a
SHELVES SUPPLIED (2x) 490 x 340mm

HINGED DOOR

BBP6001



HIGH

ELECTRICITY 0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS 600 x 520 x 900mm high
INTERNAL DIMENSIONS 510 x 380 x 750mm high
WEIGHT 35kg
GROSS VOLUME 127Lt
TEMP RANGE 2 to 8°C
CLIMATE CLASS 4
REFRIGERANT GAS R600a
SHELVES SUPPLIED (2x) 490 x 350mm

HINGED DOOR

BBP8001



BAR COOLERS



POLAR CAB BLACK

FEATURES

- Outer cabinet manufactured from coated mild steel
- Digital temperature controller with digital display
- Internal LED lighting
- Fitted with device-leveling feet
- Hinged doors with tempered glass and locks
- Side-mounted compressor allows for more interior space
- Stylish and modern black interior and exterior



3 DOOR (HINGED)

SPECIFICATIONS


ELECTRICITY	0.3kW, 240V, Single Phase
EXTERNAL DIMENSIONS	1826 x 631 x 895mm high
INTERNAL DIMENSIONS	1400 x 455 x 740mm high
WEIGHT	90kg
GROSS VOLUME	526Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290
SHELVES SUPPLIED	(4x) 430 x 445mm (2x) 480 x 445mm

COMPRESSOR LEFT


BCP1003-L

COMPRESSOR RIGHT

BCP1003-R

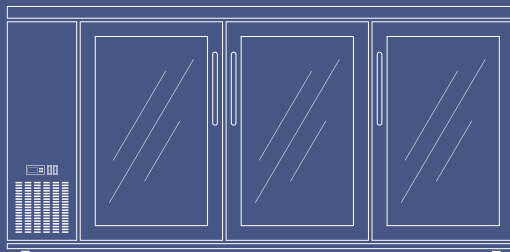

COMPRESSOR LEFT

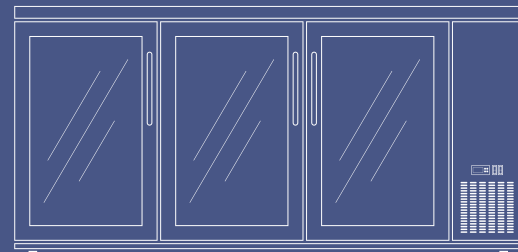

COMPRESSOR RIGHT

BEVERAGE COOLERS



POLAR CAB



FEATURES

- The body is manufactured from coated mild steel with an ABS interior
- The built-in fan ensures even cooling of your drinks
- Electro mechanical control panel for easy and precise temperature adjustment
- Automatic defrost function
- Adjustable shelves allows for plenty of storage space for drinks of different sizes
- Self-closing glass door with lock
- LED interior lighting
- Fitted with device leveling feet

BEVERAGE COOLER - 360 LITRE

SPECIFICATIONS

ELECTRICITY	0.18kW, 220V, Single Phase
EXTERNAL DIMENSIONS	620 x 635 x 1732mm high
WEIGHT	75kg
GROSS VOLUME	360Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERATION GAS	R600a
SHELVES SUPPLIED	(5x) 530 x 380mm

ORDER CODE

BCP0360-B



FEATURES

- The body is manufactured from coated mild steel with an ABS interior
- Electro mechanical control panel for easy and precise temperature adjustment
- Automatic defrost function
- Adjustable shelves allows for plenty of storage space for drinks of different sizes
- Fitted with 2 device leveling feet
- The built-in fan ensures even cooling of your drinks
- Digital temperature display
- LED interior lighting
- Self-closing glass door with lock
- Fitted with 2 rear castors



NEW



390 LITRE (WITH HOOD)

SPECIFICATIONS

ELECTRICITY	0.18kW, 240V, Single Phase
EXTERNAL DIMENSIONS	600 x 655 x 1950mm high
INTERNAL DIMENSIONS	505 x 460 x 1510mm high
WEIGHT	63kg
GROSS VOLUME	390Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290
SHELVES SUPPLIED	(5x) 493 x 360mm
CANOPY STICKER	585 x 185mm

ORDER CODE

BCP0390-B-HD



390 LITRE

SPECIFICATIONS

ELECTRICITY	0.18kW, 240V, Single Phase
EXTERNAL DIMENSIONS	600 x 655 x 1830mm high
INTERNAL DIMENSIONS	505 x 460 x 1510mm high
WEIGHT	62kg
GROSS VOLUME	390Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R290
SHELVES SUPPLIED	(5x) 493 x 360mm

ORDER CODE

BCP0390-B



CAPACITIES



BOTTLES

1 Litre	x	86
750ml	x	126
660ml	x	150
500ml	x	210
330ml	x	210



CANS

330ml	x	560
-------	---	-----

* Variable data depending on packaging





FEATURES

- Outer cabinet manufactured from coated mild steel
- Hinged door with tempered glass and lock
- Digital temperature control and display (URP0400-WC)
- Fitted with device-leveling feet
- Black ABS interior
- Manual temperature controller (URP0400/URP0400-SZ)
- Internal LED lighting
- Beverage cooler, Sub-zero cooler and Wine cooler available

BEVERAGE COOLER

SPECIFICATIONS

ELECTRICITY	0.2kW, 240V, Single Phase
EXTERNAL DIMENSIONS	600 x 650 x 1860mm high
INTERNAL DIMENSIONS	490 x 485 x 1555mm high
WEIGHT	80kg
GROSS VOLUME	360Lt
TEMP RANGE	2 to 10°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(5x) 510 x 414mm

ORDER CODE

URP0400



SUB-ZERO COOLER

SPECIFICATIONS

ELECTRICITY	0.3kW, 240V, Single Phase
EXTERNAL DIMENSIONS	600 x 620 x 1886mm high
INTERNAL DIMENSIONS	490 x 485 x 1555mm high
WEIGHT	87kg
GROSS VOLUME	360Lt
TEMP RANGE	-2 to 6°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(5x) 510 x 414mm

ORDER CODE

URP0400-SZ



WINE COOLER

SPECIFICATIONS


ELECTRICITY	0.2kW, 240V, Single Phase
EXTERNAL DIMENSIONS	600 x 650 x 1860mm high
INTERNAL DIMENSIONS	490 x 485 x 1555mm high
WEIGHT	80kg
GROSS VOLUME	360Lt
TEMP RANGE	5 / 8 / 16°C (Fan off) 3 to 16°C (Fan on)
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(5x) 510 x 414mm

ORDER CODE


URP0400-WC



FAN OFF TEMPERATURE

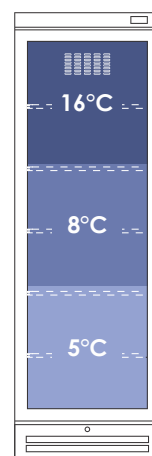

FAN ON TEMPERATURE

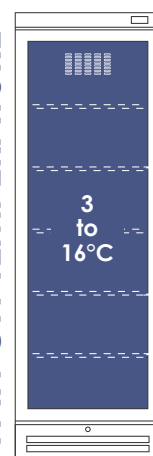

POLAR CAB VINO




PREMIUM REFRIGERATION

Create the perfect environment for every vintage, cut and delicacy.


NEW
FEATURES

- Outer cabinet manufactured from coated mild steel
- Frame less glass door (*reversible*)
- Dual temperature zones. Individually controlled
- Hanging bars and grid shelves
- AISI 304 Stainless steel interior
- Digital temperature controller and display
- Internal LED lighting
- Fitted with device-leveling feet


TEMPERATURE ZONES

MEAT & CHEESE COOLER (DUAL ZONE)
SPECIFICATIONS

ELECTRICITY	0.46kW, 240V, Single Phase
EXTERNAL DIMENSIONS	595 x 700 x 1805mm high
INTERNAL DIMENSIONS	515 x 540 x 850mm high (<i>top</i>) 515 x 540 x 695mm high (<i>bottom</i>)
WEIGHT	102kg
GROSS VOLUME	455L
TEMP. RANGE	2 to 20°C / 2 to 20°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(3x) Hanging bars (<i>top</i>) (6x) 535 x 510mm (<i>top</i>) (3x) 535 x 510mm (<i>bottom</i>)

ORDER CODE
URP1560-MC

NEW
FEATURES

- Outer cabinet manufactured from coated mild steel
- Frame less glass door (*reversible*)
- Dual temperature zones. Individually controlled
- Grid shelves with sliding system
- Black ABS interior
- Digital temperature controller and display
- Internal LED lighting
- Fitted with device-leveling feet

TEMPERATURE ZONES

WINE COOLER (DUAL ZONE)
SPECIFICATIONS

ELECTRICITY	0.5kW, 240V, Single Phase
EXTERNAL DIMENSIONS	595 x 700 x 1805mm high
INTERNAL DIMENSIONS	500 x 540 x 1630mm high
WEIGHT	110kg
GROSS VOLUME	423L
CAPACITY	116 bottles (750ml)
TEMP. RANGE	2 to 12°C / 12 to 20°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(9x) 452 x 535mm (1x) 452 x 380mm

ORDER CODE
URP1600-WC

BOTTLE TYPES


Bordeaux



Clavelin



Burgundy



Champagnotte



Rhône



Champagne



Imperial Bordeaux



Cuvée Reserve




Alsatian



FEATURES

- Outer cabinet manufactured from coated mild steel
- Frame less glass door (reversible)
- Digital temperature controller and display
- Grid shelves with sliding system
- Black ABS interior
- Dual temperature zones. Individually controlled
- Internal LED lighting
- Fitted with device-leveling feet

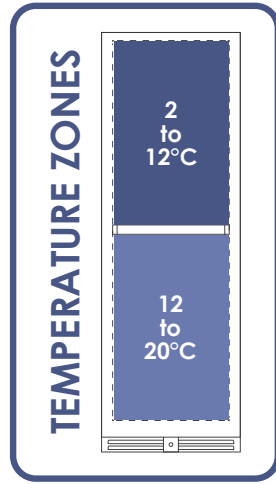

SLIM LINE (DUAL ZONE)

SPECIFICATIONS

ELECTRICITY	0.43kW, 240V, Single Phase
EXTERNAL DIMENSIONS	450 x 700 x 1800mm high
INTERNAL DIMENSIONS	360 x 540 x 1630mm high
WEIGHT	89kg
GROSS VOLUME	385Lt
CAPACITY	105 bottles (750ml)
TEMP. RANGE	2 to 12°C / 12 to 20°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(14x) 324 x 555mm (1x) 345 x 380mm

ORDER CODE

URP1450-WC



NEW

BOTTLE TYPES



Bordeaux



Alsation



Burgundy



Rhône



FEATURES

- Outer cabinet manufactured from coated mild steel
- Reversible glass door
- Digital temperature controller and display
- Equipped with a Hygrometer
- Black ABS interior
- Internal LED lighting
- Wooden shelves with sliding system
- Fitted with device-leveling feet

NEW



DIGITAL TEMP. CONTROL



HYGROMETER



BOTTLE TYPES



Bordeaux



Alsation

268 LITRE DUAL ZONE

SPECIFICATIONS

ELECTRICITY	0.37kW, 240V, Single Phase
EXTERNAL DIMENSIONS	540 x 550 x 1600mm high
INTERNAL DIMENSIONS	475 x 400 x 1520mm high
WEIGHT	72kg
GROSS VOLUME	268Lt
CAPACITY	86 bottles (750ml)
TEMP. RANGE	2 to 12°C / 12 to 16°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(13x) 435 x 430 mm (1x) 390 x 280 x 150mm (basket)

BLACK

WCP0062-B

WHITE

WCP0062-W



126 LITRE COMPACT

SPECIFICATIONS

ELECTRICITY	0.39kW, 240V, Single Phase
EXTERNAL DIMENSIONS	540 x 550 x 830mm high
INTERNAL DIMENSIONS	415 x 400 x 680mm high
WEIGHT	43kg
GROSS VOLUME	126Lt
CAPACITY	36 bottles (750ml)
TEMP. RANGE	2 to 20°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(5x) 435 x 430 mm (1x) 390 x 280 x 150mm (basket)

BLACK

WCP0040-B

WHITE

WCP0040-W





FEATURES

- Outer cabinet manufactured from coated mild steel
- 304 Stainless Steel interior
- Reversible glass door with lock provides flexibility and security
- Digital control and display for precise temperature & humidity control
- Built-in water tank with level indicator. No external water source required
- Automatic defrost system
- Front Venting – Allows built-in installation with no rear clearance required for operation
- UV sterilization functionality ensures that your meats remain free from harmful bacteria
- Internal LED lighting provides both style and functionality
- Supplied with adjustable grid shelves and meat hooks
- Fitted with adjustable, device-leveling feet

SPECIFICATIONS

ELECTRICITY	0.12kW, 240V, Single Phase
EXTERNAL DIMENSIONS	595 x 710 x 1720mm high
WEIGHT	92kg
GROSS VOLUME	352Lt
HUMIDITY	60 - 85%
TEMP. RANGE	1 to 25°C
CLIMATE CLASS	4
REFRIGERANT GAS	R600a
SHELVES SUPPLIED	(3x) 452 x 535mm

ORDER CODE

MAP0352



NEW



OPEN COOLER MERCHANDISERS

Galileo
by **POLARCARB**



NIGHT CURTAIN



LED LIGHTING

FEATURES

- High quality glass & stainless steel body
- Fitted with a Dixell digital temperature control and digital thermometer
- Heavy duty Embraco compressor
- 3 fixed stainless steel shelves allows for ample display surface
- LED lighting for each level for improved visibility and aesthetics
- Stainless steel front guard to protect against impact
- Includes retractable night curtain to save on energy consumption
- Fitted with (4x) castors for easy mobility and cleaning

SPECIFICATIONS

ELECTRICITY	1.3kW, 220V, Single Phase
DIMENSIONS	535 x 600 x 1830mm high
WEIGHT	110kg
DISPLAY SURFACE	0.55m ²
SHELF DIMENSIONS	(3x) 480 x 270mm (1x) 500 x 330mm (base)
TEMP RANGE	4 to 10°C
CLIMATE CLASS	3
REFRIGERANT GAS	R404

ORDER CODE

OCG-YLK240L



MULTI-DECK FRIDGES

POLARCARB



FEATURES

- The body is manufactured from coated mild steel
- Large adjustable shelves with ample space to showcase a wide range of products
- Integrated LED lighting for each shelf highlights products and creates an attractive lighting ambience
- The ventilated cooling system and digital thermostat maintains a constant temperature to ensure the freshness of your products
- Modern and practical design with a black exterior and interior
- Fitted with device leveling feet

1 METER

SPECIFICATIONS

ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	995 x 660 x 2000mm high
WEIGHT	190kg
DISPLAY SURFACE	1.4m ²
SHELF DIMENSIONS	(4x) 300 x 930mm 370 x 930 (base)
TEMP RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

OPEN (WITH NIGHT CURTAIN)

ORDER CODE

PCG-BLF1066

WITH GLASS DOORS

ORDER CODE

PCG-BLF1066GA




0.7 METER OPEN WITH NIGHT CURTAIN

SPECIFICATIONS

ELECTRICITY	0.75kW, 220V, Single Phase
DIMENSIONS	685 x 660 x 2000mm high
WEIGHT	190kg
DISPLAY SURFACE	0.87m ²
SHELF DIMENSIONS	(4x) 300 x 620mm 370 x 620 (base)
TEMP RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

PCG-BLF766



FEATURES

- High quality coated mild steel body
- Fitted with a digital temperature control and digital thermometer
- 5 Adjustable and tiltable shelves for dynamic display surface
- LED lighting for each level for improved visibility and aesthetics
- Fitted with device leveling feet
- Black coated sheet steel interior
- Heavy duty compressor
- Frameless hinged glass doors
- Automatic defrost



1.3 METER GLASS DOORS **NEW**

SPECIFICATIONS

ELECTRICITY	0.61kW, 220V, Single Phase
DIMENSIONS	1310 x 740 x 2010mm high
WEIGHT	240kg
DISPLAY SURFACE	3.44m ²
SHELF DIMENSIONS	(5x) 1250 x 450mm (1x) 1250 x 500mm (base)
TEMP RANGE	2 to 10°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

MDP1130



1 METER GLASS DOORS **NEW**

SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	1000 x 740 x 2010mm high
WEIGHT	210kg
DISPLAY SURFACE	2.6m ²
SHELF DIMENSIONS	(5x) 950 x 450mm (1x) 950 x 500mm (base)
TEMP RANGE	2 to 10°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

MDP1100



MULTI-DECK FRIDGES VARIANT



FEATURES

- Ventilated dynamic cooling
- Black coated display area, external body & side panels
- Automatic off-cycle defrosting
- Automatic evaporation of condensate
- Adjustable shelves with price strips and railing
- Electronic temperature controller with digital display
- LED lighting upper internal
- Energy saving EC fans
- Manual night blind (VL100.70L)
- Double glazed glass doors (VL100.70L.UD)
- Ecological polyurethane foam insulation

1 METER

SPECIFICATIONS

ELECTRICITY	0.6kW, 220V, Single Phase
DIMENSIONS	1070 x 720 x 2000mm high
WEIGHT	240kg
DISPLAY SURFACE	2.4m ²
TEMP RANGE	2 to 10°C
CLIMATE CLASS	3
REFRIGERANT	R290

OPEN (WITH NIGHT CURTAIN)

ORDER CODE

IGL9010

WITH GLASS DOORS

ORDER CODE

IGL9010-B



[illegible]

NOTES

Galileo
by POLARCAR



REDEFINING BEAUTIFUL PRODUCTS DISPLAY

FEATURES

- Plastic housing
- Double glazed glass all-round
- Digital thermostat
- Plastic coated adjustable grid shelves
- Self-closing glass door with lock
- Forced air-cooling
- Removable bottom plate, easy to clean
- LED interior lighting
- Automatic defrost



56 LITRE

SPECIFICATIONS

ELECTRICITY 0.15kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 854mm high
GROSS VOLUME 56Lt
SHELVES (2x) 300 x 290mm
230 x 240mm (base)
WEIGHT 37kg
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R600a

ORDER CODE

White PCG-SC-58W
Black PCG-SC-58B



74 LITRES

SPECIFICATIONS

ELECTRICITY 0.15kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 1004mm high
GROSS VOLUME 74Lt
SHELVES (3x) 300 x 290mm
230 x 240mm (base)
WEIGHT 42kg
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R600a

ORDER CODE

White PCG-SC-78W
Black PCG-SC-78B



92 LITRES

SPECIFICATIONS

ELECTRICITY 0.2kW, 230V, Single Phase
DIMENSIONS 434 x 398 x 1154mm high
GROSS VOLUME 92Lt
SHELVES (4x) 300 x 290mm
230 x 240mm (base)
WEIGHT 48kg
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R600a

ORDER CODE

White PCG-SC-98W
Black PCG-SC-98B



279 LITRES

SPECIFICATIONS

ELECTRICITY 0.3kW, 230V, Single Phase
DIMENSIONS 515 x 553 x 1800mm high
GROSS VOLUME 279Lt
SHELVES (5x) 370 x 400mm
330 x 360mm (base)
WEIGHT 86kg
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R600a

ORDER CODE

White PCG-SC-278W
Black PCG-SC-278B



FEATURES

- Circular stainless steel base
- Self-closing glass door
- Automatic defrost function
- Digital temperature control
- Curved, double glazed glass all-round
- Manual rotation, circular glass shelves with adjustable height
- LED internal lighting



4 TIER COUNTERTOP

SPECIFICATIONS

ELECTRICITY	0.21kW, 230V, Single Phase
DIMENSIONS	480 x 480 x 1030mm high
WEIGHT	50kg
VOLUME	100Lt
SHELVES	(3x) Ø335mm 150 x 270mm (base)
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R600a

ORDER CODE

DCG-ARC-100R



5 TIER FLOOR STANDING

SPECIFICATIONS

ELECTRICITY	0.46kW, 230V, Single Phase
DIMENSIONS	680 x 680 x 1750mm high
WEIGHT	140kg
VOLUME	400Lt
SHELVES	(4x) Ø535mm 350 x 470mm (base)
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290a

ORDER CODE

DCG-ARC-400R



REFRIGERATED DISPLAY CABINETS CURVED GLASS



Galileo
by POLARCARB

FEATURES

- Stainless steel base
- Supplied with 3 adjustable shelves
- LED internal lighting under each shelf
- Curved, double glazed glass panels
- Automatic defrost function
- Fitted with adjustable feet
- Sliding glass door
- Digital temperature control



**Front ventilated unit. 100mm
Spacing required when built in**

1.5 METER

SPECIFICATIONS

ELECTRICITY	0.8kW, 240V, Single Phase
DIMENSIONS	1500 x 750 x 1350mm high
WEIGHT	241kg
DISPLAY SURFACE	2.55m ²
SHELF DIMENSIONS	(3x) 1395 x 345mm (1x) 1500 x 740mm (base)
BASE HEIGHT	510mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WDF157D



1.2 METER

SPECIFICATIONS

ELECTRICITY	0.74kW, 240V, Single Phase
DIMENSIONS	1200 x 750 x 1350mm high
WEIGHT	203kg
DISPLAY SURFACE	2.02m ²
SHELF DIMENSIONS	(3x) 1095 x 345mm (1x) 1200 x 740mm (base)
BASE HEIGHT	510mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WDF127D



0.9 METER

SPECIFICATIONS

ELECTRICITY	0.53kW, 240V, Single Phase
DIMENSIONS	900 x 750 x 1350mm high
WEIGHT	173kg
DISPLAY SURFACE	1.48m ²
SHELF DIMENSIONS	(3x) 795 x 345mm (1x) 900 x 740mm (base)
BASE HEIGHT	510mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WDF097D



DISPLAY CABINETS SQUARE HIGH



Galileo
by POLARCA



FEATURES

REFRIGERATED

- Stainless steel decorative front panel
- Fitted with a SECOP compressor
- Heated front glass for de-fogging
- Fitted with sliding glass doors
- Fitted with adjustable feet
- LED lighting under each shelf
- Fitted with a Dixell electronic controller
- Automatic defrost function
- 3 adjustable stainless steel shelves

HEATED

- Stainless steel decorative front panel
- Fitted with a Dixell electronic controller
- 3 adjustable stainless steel shelves
- LED lighting under each shelf
- Fitted with sliding glass doors
- Fitted with adjustable feet

NEUTRAL

- Stainless steel decorative front panel
- Fitted with sliding glass doors
- Fitted with adjustable feet
- LED lighting under each shelf
- 3 adjustable stainless steel shelves



REFRIGERATED

1.5 METER



SPECIFICATIONS

ELECTRICITY	0.83kW, 220V, Single Phase
DIMENSIONS	1500 x 750 x 1350mm high
WEIGHT	298kg
DISPLAY SURFACE	2.55m ²
SHELF DIM	(3x) 1395 x 345mm
	(1x) 1500 x 740mm (base)
BASE HEIGHT	510mm
TEMP RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE DCG-WDF157Z

1.2 METER



SPECIFICATIONS

ELECTRICITY	0.74kW, 220V, Single Phase
DIMENSIONS	1200 x 750 x 1350mm high
WEIGHT	273kg
DISPLAY SURFACE	2.02m ²
SHELF DIM	(3x) 1095 x 345mm
	(1x) 1200 x 740mm (base)
BASE HEIGHT	510mm
TEMP RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE DCG-WDF127Z

0.9 METER



SPECIFICATIONS

ELECTRICITY	0.53kW, 220V, Single Phase
DIMENSIONS	900 x 750 x 1350mm high
WEIGHT	231kg
DISPLAY SURFACE	1.48m ²
SHELF DIMENSIONS	(3x) 795 x 345mm
	(1x) 900 x 740mm (base)
BASE HEIGHT	510mm
TEMP RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE DCG-WDF097Z



HEATED

0.9 METER



SPECIFICATIONS

ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	900 x 750 x 1350mm high
WEIGHT	220kg
DISPLAY SURFACE	1.48m ²
SHELF DIMENSIONS	(3x) 795 x 345mm
	(1x) 900 x 740mm (base)
BASE HEIGHT	510mm
TEMP RANGE	30 to 60°C

ORDER CODE DCG-WHF097Z



NEUTRAL

1.5 METER



SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	1500 x 750 x 1350mm high
WEIGHT	288kg
DISPLAY SURFACE	2.55m ²
SHELF DIM	(3x) 1395 x 345mm
	(1x) 1500 x 740mm (base)
BASE HEIGHT	510mm

ORDER CODE DCG-WDF157ZSA11

1.2 METER



SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	1200 x 750 x 1350mm high
WEIGHT	263kg
DISPLAY SURFACE	2.02m ²
SHELF DIM	(3x) 1095 x 345mm
	(1x) 1200 x 740mm (base)
BASE HEIGHT	510mm

ORDER CODE DCG-WDF127ZSA11

0.9 METER



SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	900 x 750 x 1350mm high
WEIGHT	221kg
DISPLAY SURFACE	1.48m ²
SHELF DIM	(3x) 795 x 345mm
	(1x) 900 x 740mm (base)
BASE HEIGHT	510mm

ORDER CODE DCG-WDF097ZSA11

REFRIGERATED DISPLAY CABINETS SQUARE



Galileo
by POLARCAR



! Front ventilated unit. 100mm Spacing required when built in

FEATURES

- Stainless steel decorative front panel
- Fitted with a Dixell electronic controller
- Fitted with self-closing, sliding glass door
- LED lighting under each shelf - Energy saving
- Electric heating front glass for de-fogging
- Supplied with 2 adjustable stainless steel shelves
- Fitted with a SECOP compressor
- Automatic defrost function
- Fitted with adjustable feet



REFRIGERATED

1.2 METER

SPECIFICATIONS

ELECTRICITY 0.7kW, 220V, Single Phase
DIMENSIONS 1200 x 750 x 1200mm high
WEIGHT 240kg
DISPLAY SURFACE 1.64m²
SHELF DIMENSIONS (2x) 1095 x 345mm
(1x) 1200 x 740mm (base)
BASE HEIGHT 510mm
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R290

ORDER CODE

DCG-WDF127F



0.9 METER

SPECIFICATIONS

ELECTRICITY 0.51kW, 220V, Single Phase
DIMENSIONS 900 x 750 x 1200mm high
WEIGHT 200kg
DISPLAY SURFACE 1.2m²
SHELF DIMENSIONS (2x) 795 x 345mm
(1x) 900 x 740mm (base)
BASE HEIGHT 510mm
TEMP RANGE 2 to 8°C
CLIMATE CLASS 3
REFRIGERANT GAS R290

ORDER CODE

DCG-WDF097F



HEATED

0.9 METER

SPECIFICATIONS

ELECTRICITY 3kW, 220V, Single Phase
DIMENSIONS 900 x 750 x 1200mm high
WEIGHT 190kg
DISPLAY SURFACE 1.2m²
SHELF DIMENSIONS (2x) 795 x 345mm
(1x) 900 x 740mm (base)
BASE HEIGHT 510mm
TEMP RANGE 30 to 60°C

ORDER CODE

DCG-WHF097F



DISPLAY CABINETS

SLIM LINE CUBE



FEATURES

- External body manufactured from stainless steel
- Frameless single glass panels and doors
- 2 Glass shelves with height and angle adjustable frames
- Sliding glass doors
- LED lighting under each shelf
- Automatic defrost on refrigerated units
- Digital temperature controller on refrigerated units
- Fitted with height adjustable feet



REFRIGERATED

1.3 METER

SPECIFICATIONS

ELECTRICITY	0.7kW, 220V, Single Phase
DIMENSIONS	1310 x 750 x 1250mm high
WEIGHT	230kg
DISPLAY SURFACE	1.7m ²
SHELF DIMENSIONS	(1x) 1270 x 420mm (1x) 1270 x 480mm (1x) 1270 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	5 to 15°C
CLIMATE CLASS	3
REFRIGERANT GAS	R134a

ORDER CODE

IGL8013-SL



0.9 METER

SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	910 x 750 x 1250mm high
WEIGHT	170kg
DISPLAY SURFACE	1.1m ²
SHELF DIMENSIONS	(1x) 870 x 420mm (1x) 870 x 480mm (1x) 880 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	5 to 15°C
CLIMATE CLASS	3
REFRIGERANT GAS	R134a

ORDER CODE

IGL8009-SL



0.6 METER

SPECIFICATIONS

ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	610 x 750 x 1250mm high
WEIGHT	120kg
DISPLAY SURFACE	0.76m ²
SHELF DIMENSIONS	(1x) 570 x 420mm (1x) 570 x 480mm (1x) 580 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	5 to 15°C
CLIMATE CLASS	3
REFRIGERANT GAS	R134a

ORDER CODE

IGL8006-SL



HEATED

1.3 METER

SPECIFICATIONS

ELECTRICITY	3.5kW, 220V, Single Phase
DIMENSIONS	1310 x 750 x 1250mm high
WEIGHT	220kg
DISPLAY SURFACE	1.7m ²
SHELF DIMENSIONS	(1x) 1270 x 420mm (1x) 1270 x 480mm (1x) 1270 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	30 to 60°C

ORDER CODE

IGL8113-SL



0.9 METER

SPECIFICATIONS

ELECTRICITY	3kW, 220V, Single Phase
DIMENSIONS	910 x 750 x 1250mm high
WEIGHT	160kg
DISPLAY SURFACE	1.1m ²
SHELF DIMENSIONS	(1x) 870 x 420mm (1x) 870 x 480mm (1x) 880 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	30 to 60°C

ORDER CODE

IGL8109-SL



0.6 METER

SPECIFICATIONS

ELECTRICITY	1.5kW, 220V, Single Phase
DIMENSIONS	610 x 750 x 1250mm high
WEIGHT	110kg
DISPLAY SURFACE	0.76m ²
SHELF DIMENSIONS	(1x) 570 x 420mm (1x) 570 x 480mm (1x) 580 x 440mm (base)
BASE HEIGHT	565mm
TEMP RANGE	30 to 60°C

ORDER CODE

IGL8106-SL



NEUTRAL

0.9 METER

SPECIFICATIONS

ELECTRICITY	0.05kW, 220V, Single Phase
DIMENSIONS	910 x 750 x 1250mm high
WEIGHT	150kg
DISPLAY SURFACE	1.1m ²
SHELF DIMENSIONS	(1x) 870 x 420mm (1x) 870 x 480mm (1x) 880 x 440mm (base)
BASE HEIGHT	565mm

ORDER CODE

IGL8209-SL



0.6 METER

SPECIFICATIONS

ELECTRICITY	0.05kW, 220V, Single Phase
DIMENSIONS	610 x 750 x 1250mm high
WEIGHT	100kg
DISPLAY SURFACE	0.76m ²
SHELF DIMENSIONS	(1x) 570 x 420mm (1x) 570 x 480mm (1x) 580 x 440mm (base)
BASE HEIGHT	565mm

ORDER CODE

IGL8206-SL





FEATURES

- External body manufactured from stainless steel
- Frameless single glass panels and doors
- 2 Glass shelves with height and angle adjustable frames
- Sliding glass doors
- LED lighting under each shelf
- Automatic defrost on refrigerated units
- Digital temperature controller on refrigerated units
- Fitted with height adjustable feet



REFRIGERATED

0.9 METER

SPECIFICATIONS

ELECTRICITY	0.55kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1250mm high
WEIGHT	170kg
DISPLAY SURFACE	1.3m ²
SHELF DIMENSIONS	(1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm (base)
BASE HEIGHT	565mm
TEMP RANGE	5 to 15°C
CLIMATE CLASS	3
REFRIGERANT GAS	R134a

ORDER CODE

IGL8009



NEUTRAL

0.9 METER

SPECIFICATIONS

ELECTRICITY	0.05kW, 220V, Single Phase
DIMENSIONS	910 x 840 x 1250mm high
WEIGHT	160kg
DISPLAY SURFACE	1.3m ²
SHELF DIMENSIONS	(1x) 870 x 425mm (1x) 870 x 515mm (1x) 880 x 525mm (base)
BASE HEIGHT	565mm

ORDER CODE

IGL8209



0.6 METER

SPECIFICATIONS

ELECTRICITY	0.05kW, 220V, Single Phase
DIMENSIONS	610 x 840 x 1250mm high
WEIGHT	110kg
DISPLAY SURFACE	0.87m ²
SHELF DIMENSIONS	(1x) 570 x 425mm (1x) 570 x 515mm (1x) 580 x 525mm (base)
BASE HEIGHT	565mm

ORDER CODE

IGL8206



FEATURES

- Stainless steel exterior & interior
- Digital temperature display
- LED interior lighting
- Fitted with a digital temperature controller
- (2x) rear sliding glass doors
- Fitted with (4x) leveling feet
- (2x) Stainless steel shelves
- Double glazed glass panels



0.9 METER CURVED

SPECIFICATIONS

ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	900 x 560 x 680mm high
WEIGHT	72kg
DISPLAY SURFACE	0.7m ²
SHELF DIMENSIONS	(1x) 830 x 230 (1x) 830 x 280 (1x) 830 x 285mm (base)
SHELF SPACING	130mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WTY130L



0.9 METER SQUARE

SPECIFICATIONS

ELECTRICITY	0.3kW, 220V, Single Phase
DIMENSIONS	900 x 560 x 670mm high
WEIGHT	75kg
DISPLAY SURFACE	1m ²
SHELF DIMENSIONS	(1x) 850 x 280mm (1x) 850 x 330mm (1x) 850 x 285mm (base)
SHELF SPACING	130mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WTF160L



0.7 METER CURVED

SPECIFICATIONS

ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	700 x 560 x 680mm high
WEIGHT	63kg
DISPLAY SURFACE	0.5m ²
SHELF DIMENSIONS	(1x) 640 x 230mm (1x) 640 x 280mm (1x) 640 x 285mm (base)
SHELF SPACING	130mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WTY110L




0.7 METER SQUARE

SPECIFICATIONS


ELECTRICITY	0.2kW, 220V, Single Phase
DIMENSIONS	700 x 560 x 670mm high
WEIGHT	65kg
DISPLAY SURFACE	0.7m ²
SHELF DIMENSIONS	(1x) 650 x 280mm (1x) 650 x 330mm (1x) 650 x 285mm (base)
SHELF SPACING	130mm
TEMP. RANGE	2 to 8°C
CLIMATE CLASS	3
REFRIGERANT GAS	R290

ORDER CODE

DCG-WTF120L

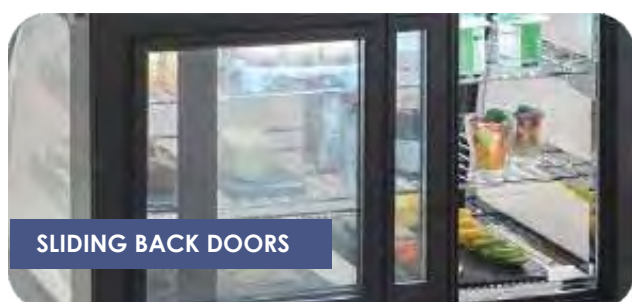

SLIDING BACK DOORS

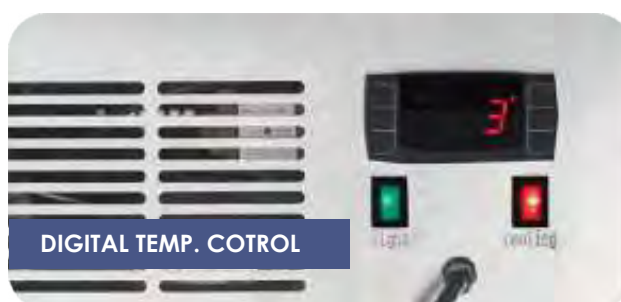

DIGITAL TEMP. CONTROL

FEATURES

- Stainless steel exterior & interior
- Manual temperature controller
- (2x) rear sliding glass doors
- Removable water pan to add humidity
- Digital temperature display
- Fitted with (4x) leveling feet
- (3x) Stainless steel shelves
- LED interior lighting - Energy saving and durable



0.9 METER CURVED

SPECIFICATIONS

ELECTRICITY	1.6kW, 220V, Single Phase
DIMENSIONS	900 x 570 x 678mm high
WEIGHT	49kg
DISPLAY SURFACE	0.86m ²
SHELF DIMENSIONS	(1x) 850 x 240mm (1x) 850 x 290mm (1x) 850 x 340mm
SHELF SPACING	130mm
TEMP RANGE	30 to 90°C

ORDER CODE

DCG-WHY160L



0.9 METER SQUARE

SPECIFICATIONS

ELECTRICITY	1.65kW, 220V, Single Phase
DIMENSIONS	900 x 570 x 678mm high
WEIGHT	55kg
DISPLAY SURFACE	0.86m ²
SHELF DIMENSIONS	(3x) 850 x 340mm
SHELF SPACING	130mm
TEMP RANGE	30 to 90°C

ORDER CODE

DCG-WHF200L



0.7 METER CURVED

SPECIFICATIONS

ELECTRICITY	1.2kW, 220V, Single Phase
DIMENSIONS	700 x 580 x 678mm high
WEIGHT	43kg
DISPLAY SURFACE	0.86m ²
SHELF DIMENSIONS	(1x) 650 x 240mm (1x) 650 x 290mm (1x) 650 x 340mm
SHELF SPACING	130mm
TEMP RANGE	30 to 90°C

ORDER CODE

DCG-WHY125L



0.7 METER SQUARE

SPECIFICATIONS

ELECTRICITY	1.25kW, 220V, Single Phase
DIMENSIONS	700 x 570 x 678mm high
WEIGHT	46kg
DISPLAY SURFACE	0.66m ²
SHELF DIMENSIONS	(3x) 650 x 340mm
SHELF SPACING	130mm
TEMP RANGE	30 to 90°C

ORDER CODE

DCG-WHF150L



REMOVABLE WATER PAN



STAINLESS STEEL GRID SHELVES



FEATURES

- Powder coated stainless steel exterior
- Front and rear sliding doors provide quick, easy access
- Internal lighting
- Front mounted temperature gauge for monitoring temperature
- Thermostatically controlled heater

- 430 Grade stainless steel interior and shelving racks
- Glass side panels for optimum display
- Humidity pan prevents drying out
- Adjustable shelves
- Fitted with (4x) non-slip feet



900mm

SPECIFICATIONS

ELECTRICITY 1.84kW, 220V, Single Phase
DIMENSIONS 900 x 480 x 610mm high
WEIGHT 50kg
TEMP RANGE 50 to 90°C
SHELF DIMENSIONS (3x) 815 x 360mm

ORDER CODE

PWS0002



660mm

SPECIFICATIONS

ELECTRICITY 1.84kW, 220V, Single Phase
DIMENSIONS 660 x 480 x 610mm high
WEIGHT 33kg
TEMP RANGE 50 to 90°C
SHELF DIMENSIONS (3x) 575 x 360mm

ORDER CODE

PWS0001



FEATURES

- Manufactured from 430 Grade stainless steel
- Internal lighting
- Adjustable shelves
- Thermostatically controlled heater

- Front sliding glass doors
- Humidity pan prevents drying out
- Front mounted temperature gauge for monitoring temperature
- Fitted with (4x) non-slip feet



640mm

SPECIFICATIONS

ELECTRICITY 1kW, 220V, Single Phase
DIMENSIONS 640 x 360 x 530mm high
WEIGHT 45kg
TEMP RANGE 50 to 90°C
SHELF DIMENSIONS (4x) 565 x 300mm

ORDER CODE

PWS0004





SmartChef

Pie Warmers

Serve It Hot. Serve It Fresh!



[illegible]

[illegible]

SmartChef

BAKERY TROLLEYS



STAINLESS
STEEL



DURABLE



SMOOTH
MOTION

TRANSPORT, TROLLEYS & EXTRAS

SECTION INDEX

Baking tray trolleys	222
Baking trays	228
Bin dollies	226
Bucket and tote trolleys	226
Bucket and wringer	225
Chrome shelving	227
Cleaning trolleys	225-226
Cooling racks	228
Food pan carriers	219
Food serving carts	218
Inserts	229-230
GN Inserts	229-230
Janitor trolleys	225

Laundry trolleys	225
Oven grids	228
Pans GN	229-230
Platform trolleys	224
Rack trolleys	222-223
Refuse bins	226
Serving carts	218
Shelving	227
Tea trolleys	220-221
• Plastic	221
• Stainless Steel	220
Water filters	231
Water softening system	231





FEATURES

- Constructed from light weight material
- Fitted with push handles
- Fitted with heavy duty swivel castors, 2 with brakes
- Modular design for easy replacement in case of damaged parts
- Fitted with removable latched doors
- Trays not included

24 TRAY TROLLEY

SPECIFICATIONS

DIMENSIONS	1500 x 750 x 1250mm high
WEIGHT	60kg
CAPACITY	(3x) 8 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACE	120mm

ORDER CODE PLA-1100-T3D-39



16 TRAY TROLLEY

SPECIFICATIONS

DIMENSIONS	1000 x 750 x 1250mm high
WEIGHT	40kg
CAPACITY	(2x) 8 Trays
TRAY SIZE	380 x 525mm (Tuff Tray No.14) 380 x 515mm (Camtray 1520)
RUNNER SPACE	120mm

ORDER CODE PLA-1100-D3D-39





FEATURES

- Double walled and internally foamed with CFC-Free polyurethane, providing optimum insulation with high resistance
- Fulfill all requirements of the food hygiene regulation
- Easy stackable for transport allowing for the multiple distribution of goods
- Side handles provide a convenient reliable and highly accessible means of transportation
- Its highly accessible design makes it easy to clean
- Integrated menu card holder
- GN Pans not included

6 PAN FRONT LOADING

SPECIFICATIONS

DIMENSIONS	450 x 625 x 575mm high
WEIGHT	10kg
INTERNAL DIMENSIONS	330 x 540 x 460mm high
LOAD CAPACITY	(6x) 65mm deep 1/1 GN pans (4x) 100mm deep 1/1 GN pans (3x) 150mm deep 1/1 GN pans Also holds 1/2 & 1/3 GN pans



ORDER CODE
ORDER CODE



AVA-100155-HD
AVA-100160-HD



LOADING EXAMPLE

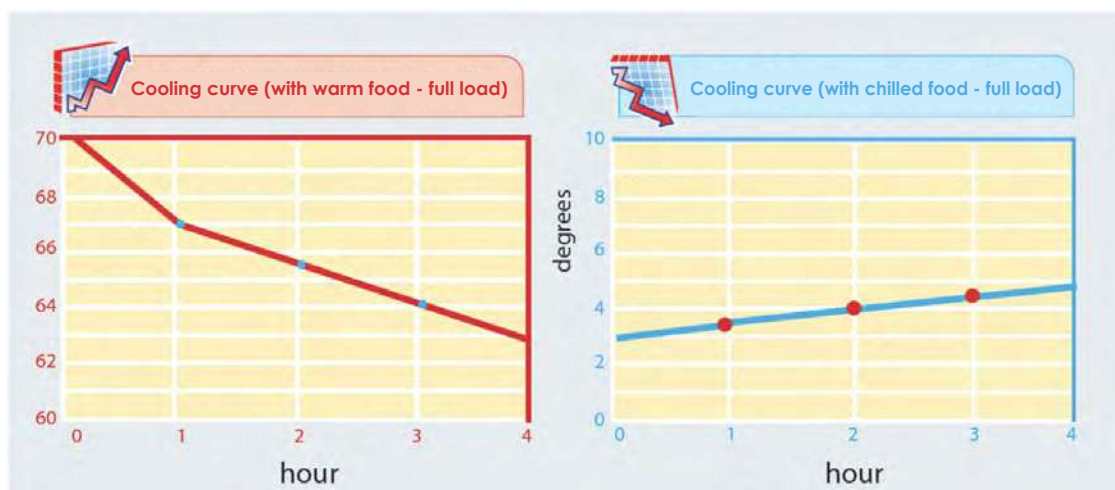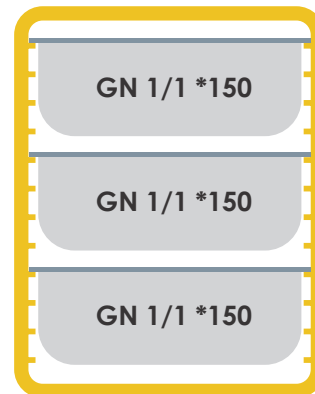

FEATURES

- Stainless steel frame
- Supplied flat-packed - Easy to assemble
- Fitted with 100mm diameter swivel castors, 2 lockable



2 TIER

SPECIFICATIONS

DIMENSIONS	860 x 540 x 940mm high
WEIGHT	13kg
SHELF DIMENSIONS	(2x) 830 x 430mm
WEIGHT CAPACITY	50kg per tier

ORDER CODE

TTT1002



3 TIER

SPECIFICATIONS

DIMENSIONS	860 x 540 x 940mm high
WEIGHT	15kg
SHELF DIMENSIONS	(3x) 830 x 430mm
WEIGHT CAPACITY	50kg per tier

ORDER CODE

TTT1003



5 TIER

SPECIFICATIONS

DIMENSIONS	860 x 540 x 1250mm high
WEIGHT	19kg
SHELF DIMENSIONS	(5x) 830 x 430mm
WEIGHT CAPACITY	50kg per tier

ORDER CODE

TTT1005



FEATURES

- Tiers manufactured from durable plastic
- Supplied flat-packed - Easy to assemble
- Pillars manufactured from aluminium
- Fitted with swivel castors, (2x) lockable
- Light weight and soft in motion
- Bins sold separate



3 TIER 1000mm

SPECIFICATIONS

DIMENSIONS	1040 x 510 x 970mm high
WEIGHT	12.5kg
SHELF DIMENSIONS	(3x) 1000 x 500mm
WEIGHT CAPACITY	30kg per tier

ORDER CODE

TTP0000



3 TIER 800mm

SPECIFICATIONS

DIMENSIONS	870 x 430 x 940mm high
WEIGHT	7kg
SHELF DIMENSIONS	(3x) 800 x 400mm
WEIGHT CAPACITY	20kg per tier

ORDER CODE

TTP00002



3 TIER ENCLOSED

SPECIFICATIONS

DIMENSIONS	1190 x 520 x 960mm high
WEIGHT	16kg
SHELF DIMENSIONS	(3x) 1000 x 500mm
WEIGHT CAPACITY	30kg per tier

ORDER CODE

TTP0003

OPTIONAL SIDE BINS



LARGE

SPECIFICATIONS

DIMENSIONS	330 x 240 x 560mm high
------------	------------------------

ORDER CODE

TTP0011

SMALL

SPECIFICATIONS

DIMENSIONS	330 x 240 x 170mm high
------------	------------------------

ORDER CODE

TTP0012



**Baking trays NOT included*

FEATURES

- Manufactured from high quality stainless steel
- Shelf locking mechanisms on both openings
- Compact design. Perfect for establishments with a smaller footprint
- Each shelf can load 5-7 kg weight
- Fitted with (4x) castors. 2 lockable
- Assembly required (Supplied flat packed)
- Baking trays not included
- Trolleys are NOT high temperature resistant

2 x 16 TIER BAKERY TRAY TROLLEY

SPECIFICATIONS

DIMENSIONS	750 x 550 x 1700mm high
WEIGHT	33kg
COMPATIBILITY	600 x 400mm baking trays
RUNNER SPACING	80mm

ORDER CODE

BTT2-16-64



16 TIER BAKERY TRAY TROLLEY

SPECIFICATIONS


DIMENSIONS	380 x 550 x 1700mm high
WEIGHT	20kg
COMPATIBILITY	600 x 400mm baking trays
RUNNER SPACING	80mm

ORDER CODE

BTT1-16-64



STAINLESS STEEL MULTI-FUNCTION RACK TROLLEY

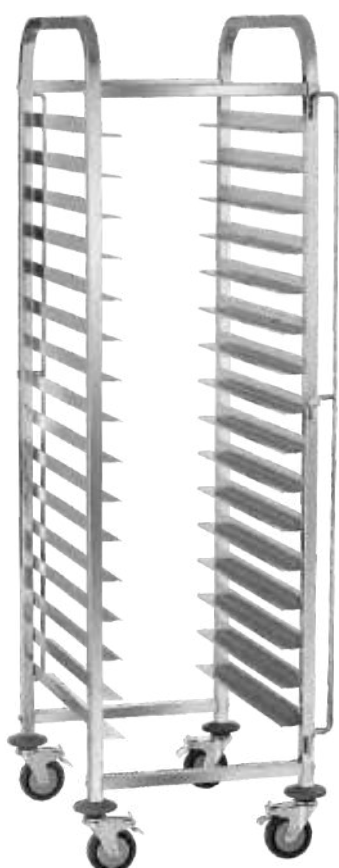

FEATURES

- Manufactured from high quality stainless steel
- Shelf locking mechanisms on both openings
- Fitted with (4x) castors. 2 lockable
- Assembly required (Supplied flat packed)
- Inserts and baking trays not included

16 TIER RACK TROLLEY

SPECIFICATIONS

DIMENSIONS	470 x 620 x 1700mm high
WEIGHT	26kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	600 x 400mm baking trays
	85mm

ORDER CODE

GNT1-16-16





FEATURES

- Manufactured from high quality stainless steel
- Shelf locking mechanisms on both openings
- Fitted with (4x) castors, 2 lockable
- Assembly required (Supplied flat packed)
- Insert pans not included

2 x 16 TIER RACK TROLLEY (1/1GN)

SPECIFICATIONS

DIMENSIONS	740 x 550 x 1700mm high
WEIGHT	33kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT2-16-11



16 TIER RACK TROLLEY (1/1GN)

SPECIFICATIONS

DIMENSIONS	380 x 550 x 1700mm high
WEIGHT	25kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT1-16-11



***Pans & inserts NOT included**

2 x 7 TIER RACK TROLLEY (1/1GN) WITH WORK TOP

SPECIFICATIONS

DIMENSIONS	735 x 550 x 1000mm high
WEIGHT	20kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	85mm

ORDER CODE

GNT2-7-11



7 TIER RACK TROLLEY (1/1GN) WITH WORK TOP

SPECIFICATIONS

DIMENSIONS	380 x 550 x 1000mm high
WEIGHT	12kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	85mm

ORDER CODE

GNT1-7-11



***Pans & inserts NOT included**



***Pans & inserts NOT included**

6 TIER RACK TROLLEY (1/1 GN)

SPECIFICATIONS

DIMENSIONS	380 x 550 x 1000mm high
WEIGHT	10kg
COMPATIBILITY	1/1 GN Pans
RUNNER SPACING	85mm

ORDER CODE

GNT1-6-11



***Pans & inserts NOT included**

7 TIER RACK TROLLEY (2/1GN) WITH WORK TOP

SPECIFICATIONS

DIMENSIONS	595 x 665 x 1000mm high
WEIGHT	12kg
COMPATIBILITY	2/1 GN Pans
RUNNER SPACING	80mm

ORDER CODE

GNT1-7-21



FEATURES

- Sturdy Plastic Platform – Provides a large surface area for transporting bulky or multiple items at once
- Smooth-Rolling Castors – With swivel wheels for easy manoeuvrability in tight kitchen or service areas
- Non-Slip Surface or Matting – Prevents items from sliding during transport
- Collapsible stainless steel Handle – Designed for a comfortable grip and easy storage
- High Load Capacity – Can carry substantial weight, making it suitable for bulk transport
- Low Loading Height – Makes it easier to load and unload heavy trays, boxes or crates



200kg

SPECIFICATIONS

DIMENSIONS 880 x 580 x 860mm high
WEIGHT 12kg
CAPACITY 200kg

ORDER CODE

PTP0001




100kg

SPECIFICATIONS

DIMENSIONS 730 x 490 x 830mm high
WEIGHT 9kg
CAPACITY 100kg

ORDER CODE

PTP0002

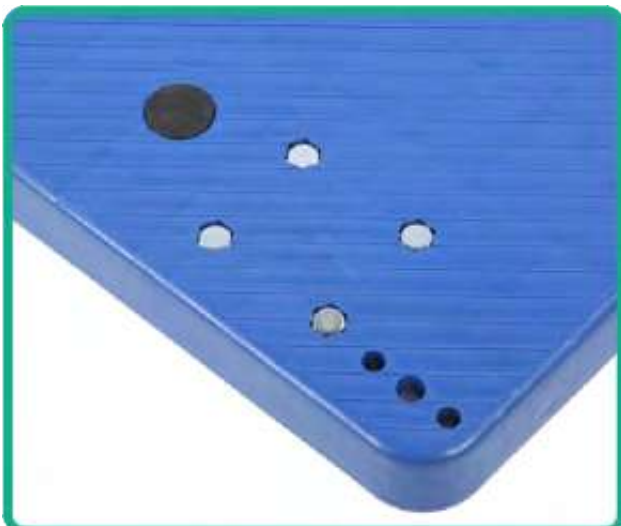

Why Caterers Love It

Transporting Ingredients

Move bulk food supplies (e.g., sacks of flour, crates of vegetables) from storage to prep areas.

Beverage Transport

Move heavy beverage cartons, kegs, or cases quickly and safely.

Equipment Relocation

Shift catering equipment, small appliances, or serving stations without strain

Event Setup & Breakdown

Assist in moving tables, chafing dishes, and décor for banquets or functions

Waste Removal

Transport large waste bins or recycling containers from service areas to disposal points

Stock Replenishment

Quickly restock shelves, fridges, or buffets during busy service periods.



HIGH QUALITY CANVAS BAG

FEATURES

- Frame manufactured 201 stainless steel round tubing
- High quality canvas bag included
- (10x) Metal clasp hooks to secure canvas bag to frame
- Easy to assemble (Supplied flatpacked)
- Fitted with 4 castors, 2 lockable

LAUNDRY TROLLEY

SPECIFICATIONS

DIMENSIONS	910 x 560 x 920mm high
BAG DIMENSIONS	850 x 550 x 600mm high
WEIGHT	8kg
LOADING CAPACITY	150kg

ORDER CODE

LDT0001



FEATURES

- Manufactured from polypropylene plastic
- Supplied with (1x) 60L PVC bag
- Easy to assemble (Supplied flatpacked)
- 3 Sturdy shelves plus built-in mop, broom holders and hooks to keep things organized
- Large front platform to hold an additional trash can or mop bucket and wringer
- Fitted with (2x) 80mm front wheels and (2x) 200mm rear wheels



JANITOR TROLLEY

SPECIFICATIONS

DIMENSIONS	1250 x 510 x 950mm high
BAG CAPACITY	60L
WEIGHT	12kg

ORDER CODE

JTP0001



JANITOR TROLLEY (WITH BUCKET & WRINGER SET)

SPECIFICATIONS

DIMENSIONS	1250 x 510 x 950mm high
BAG CAPACITY	60L
WEIGHT	14kg

ORDER CODE

JTP0002



BUCKET & WRINGER SET



1 x Wringer



1 x Wringer Bracket



2 x 25 Litre Mop Buckets



2 x 6 Litre Utility Buckets



FEATURES

- Large 60 litre bucket
- Manufactured from polypropylene plastic
- Steel bucket handle for increased durability
- Durable wringer with stainless steel handle
- Fitted with (4x) swing castors for improved mobility

MOBILE BUCKET & WRINGER

SPECIFICATIONS

DIMENSIONS	630 x 390 x 825mm high
BUCKET CAPACITY	36L
WEIGHT	5kg


ORDER CODE

BWS0036



CLEANING TROLLEYS

SmartChef



FEATURES

- Sturdy frame manufactured from stainless steel
- Supplied with high quality PVC tote baskets (3x) and bins (2x)
- Fitted with swivel castors (2x) lockable
- Assembly required (Supplied flat packed)

SPECIFICATIONS

DIMENSIONS	805 x 430 x 890mm high
WEIGHT	9kg
TOTES INCLUDED	(3x) 530 x 380 x 150mm deep
BINS INCLUDED	(2x) 205 x 110 x 300mm deep

ORDER CODE RTS0032



ADDITIONAL TOTES

DIMENSIONS 530 x 380 x 150mm deep

ORDER CODE DNT5338

REFUSE BINS & DOLLIES

SmartChef



FEATURES

- Manufactured from high quality PVC
- Lightweight yet robust construction
- Reinforced side handles provide a secure and comfortable grip
- Smooth moulded body is easy to clean
- Strong rolled rim adds extra structural strength
- Tight-fitting PVC lid with side handles reduces odours

FEATURES

- Manufactured from high quality PVC
- Twist-lock centre mechanism keeps the bin firmly in place
- Fitted with heavy-duty swivel castors
- Integrated side handles allow for comfortable lifting, positioning, and transport
- Smooth moulded surfaces are easy to clean and maintain
- Helps reduce manual lifting and improves workplace efficiency



SOLD SEPERATE

* BINS & DOLLIES SOLD SEPERATE

BIN 80 LITRE

SPECIFICATIONS

DIMENSIONS	Ø407 x 601mm high
WEIGHT	12kg
CAPACITY	80Lt

ORDER CODE RBP0080

BIN DOLLY

SPECIFICATIONS

DIMENSIONS	Ø400 x 103mm high
WEIGHT	12kg
CAPACITY	100kg

ORDER CODE RBP0080-D



FEATURES

- Shelves are manufactured from chrome plated steel
- Easy to assemble – no tools needed
- Sturdy construction makes them durable and versatile
- Shelf heights can be adjusted to suit your application
- Grid style shelves allow increased air circulation, prolonging the life of products
- Fitted with adjustable, unit leveling legs



ADJUSTABLE
SHELF HEIGHT



STURDY UNIT
LEVELING LEGS

4 TIER, 1800mm

SPECIFICATIONS

DIMENSIONS

1800 x 450 x 1800mm high

WEIGHT

20kg

SHELF DIMENSIONS

1800 x 450mm

ORDER CODE

SCS1800



4 TIER, 1500mm

SPECIFICATIONS

DIMENSIONS

1500 x 450 x 1800mm high

WEIGHT

15kg

SHELF DIMENSIONS

1500 x 450mm

ORDER CODE

SCS1500



4 TIER, 1200mm

SPECIFICATIONS

DIMENSIONS

1200 x 450 x 1800mm high

WEIGHT

10kg

SHELF DIMENSIONS

1200 x 450mm

ORDER CODE

SCS1200



4 TIER, 900mm

SPECIFICATIONS

DIMENSIONS

900 x 450 x 1800mm high

WEIGHT

8kg

SHELF DIMENSIONS

900 x 450mm

ORDER CODE

SCS0900



ADDITIONAL SHELVING



1800mm

ORDER CODE

SCS1801

1500mm

ORDER CODE

SCS1501

1200mm

ORDER CODE

SCS1201

900mm

ORDER CODE

SCS0901



BAKING TRAYS

1/1 GN STAINLESS STEEL

DIMENSIONS 530 x 325 x 20mm deep
ORDER CODE **BTS2011**

2/3 GN ALUMINIUM

DIMENSIONS 352 x 325 x 30mm deep
ORDER CODE **BTA3023**

1/2 GN ALUMINIUM

DIMENSIONS 265 x 325 x 20mm deep
ORDER CODE **BTA2012**

600 x 400 TEFLON COATED

DIMENSIONS 600 x 400 x 30mm deep
ORDER CODE **BTA3064-T**

600 x 400 ALUMINIUM

DIMENSIONS 600 x 400 x 30mm deep
ORDER CODE **BTA3064**

600 x 400 ALUMINIUM

DIMENSIONS 600 x 400 x 10mm deep
ORDER CODE **BTA1064**

435 x 315 ALUMINIUM

DIMENSIONS 435 x 315 x 10mm deep
ORDER CODE **BTA1043**

CHICKEN TRAY SOLID

DIMENSIONS 660 x 440mm
ORDER CODE **HCS6646**

CHICKEN TRAY PERFORATED

DIMENSIONS 660 x 440mm deep
ORDER CODE **HCS6646-P**



OVEN GRIDS

1/1 GN STAINLESS STEEL

DIMENSIONS 530 x 325mm
ORDER CODE **OGS0011**

2/1 GN STAINLESS STEEL

DIMENSIONS 650 x 530mm
ORDER CODE **OGS0021**

600 x 400 STAINLESS STEEL

DIMENSIONS 600 x 400mm
ORDER CODE **OGS0064**



FULL INSERTS

SPECIFICATIONS

DIMENSIONS 325 x 530 x 20mm deep
CAPACITY 1.9Lt
ORDER CODE **GNF8020**

DIMENSIONS 325 x 530 x 40mm deep
CAPACITY 5Lt
ORDER CODE **GNF8040**
ORDER CODE **GNF8040.P** (perforated)

DIMENSIONS 325 x 530 x 55mm deep
CAPACITY 7.4Lt
ORDER CODE **GNF8055**
ORDER CODE **GNF8055.P** (perforated)

DIMENSIONS 325 x 530 x 65mm deep
CAPACITY 9.4Lt
ORDER CODE **GNF8065**
ORDER CODE **GNF8065.P** (perforated)

DIMENSIONS 325 x 530 x 100mm deep
CAPACITY 15Lt
ORDER CODE **GNF8100**

DIMENSIONS 325 x 530 x 150mm deep
CAPACITY 24Lt
ORDER CODE **GNF8150**



FULL LID

SPECIFICATIONS

DIMENSIONS 325 x 530mm
ORDER CODE **GNF8000**

HERMETIC SEAL LID

SPECIFICATIONS

DIMENSIONS 325 x 530mm
ORDER CODE **PLA-HSL-11**

1/2 INSERTS

SPECIFICATIONS

DIMENSIONS 265 x 325 x 65mm deep
CAPACITY 3.5Lt
ORDER CODE **GNH8065**

DIMENSIONS 265 x 325 x 100mm deep
CAPACITY 5.5Lt
ORDER CODE **GNH8100**

DIMENSIONS 265 x 325 x 150mm deep
CAPACITY 8.5Lt
ORDER CODE **GNH8150**



1/2 LID

SPECIFICATIONS

DIMENSIONS 265 x 325mm
ORDER CODE **GNH8000**

2/3 INSERTS

SPECIFICATIONS

DIMENSIONS 325 x 352 x 20mm deep
CAPACITY 1.25Lt
ORDER CODE **GN2T8020**

DIMENSIONS 325 x 352 x 40mm deep
CAPACITY 4.5Lt
ORDER CODE **GN2T8040.P** (perforated)

DIMENSIONS 325 x 352 x 65mm deep
CAPACITY 5.25Lt
ORDER CODE **GN2T8065**

DIMENSIONS 325 x 352 x 150mm deep
CAPACITY 11.5Lt
ORDER CODE **GN2T8150**



2/3 LID

SPECIFICATIONS

DIMENSIONS 325 x 352mm
ORDER CODE **GN2T8000**

1/3 INSERTS

SPECIFICATIONS

DIMENSIONS 175 x 325 x 40mm deep
CAPACITY 1.5Lt
ORDER CODE **GNT8040**

DIMENSIONS 175 x 325 x 65mm deep
CAPACITY 2.25Lt
ORDER CODE **GNT8065**

DIMENSIONS 175 x 325 x 100mm deep
CAPACITY 3.5Lt
ORDER CODE **GNT8100**

DIMENSIONS 175 x 325 x 150mm deep
CAPACITY 5.5Lt
ORDER CODE **GNT8150**



1/3 LID

SPECIFICATIONS

DIMENSIONS 175 x 325mm
ORDER CODE **GNT8000**



2/4 INSERTS

SPECIFICATIONS

DIMENSIONS 162 x 530 x 65mm deep
CAPACITY 5.5Lt
ORDER CODE GNHL6065



1/4 INSERTS

SPECIFICATIONS

DIMENSIONS 162 x 265 x 65mm deep
CAPACITY 1.5Lt
ORDER CODE GNQ8065

DIMENSIONS 162 x 265 x 150mm deep
CAPACITY 3.75Lt
ORDER CODE GNQ8150

1/4 LID

SPECIFICATIONS

DIMENSIONS 162 x 265mm
ORDER CODE GNQ8000



1/6 INSERTS

SPECIFICATIONS

DIMENSIONS 160 x 175 x 65mm deep
CAPACITY 1Lt
ORDER CODE GNS8065

DIMENSIONS 160 x 175 x 100mm deep
CAPACITY 1.5Lt
ORDER CODE GNS8100

DIMENSIONS 160 x 175 x 150mm deep
CAPACITY 2.25Lt
ORDER CODE GNS8150

1/6 LID

SPECIFICATIONS

DIMENSIONS 160 x 175mm
ORDER CODE GNS8000



1/9 INSERTS

SPECIFICATIONS

DIMENSIONS 108 x 175 x 100mm deep
CAPACITY 0.8Lt
ORDER CODE GNN8100

1/9 LID

SPECIFICATIONS

DIMENSIONS 108 x 175mm
ORDER CODE GNN8000

inoxserv



Stainless Steel




Smooth Finish



Easy to Clean



Rust Resistant

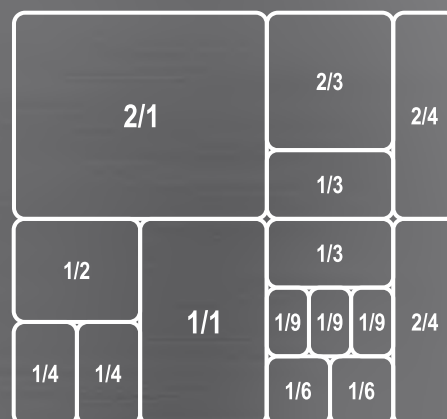



FEATURES

- Filters water to prevent limescale build-up, prolonging equipment life and improving performance
- The Filtration system consists of the following:
Flow Meter - One-off purchase (*not sold separately*)
Filter Head - One-off purchase (*not sold separately*)
Filter Cartridge - to be replaced as indicated by the flow meter

XLARGE FOR 10/11/16/20 PAN OVENS

SPECIFICATIONS

DIMENSIONS	136ø x 471mm high
FLOW RATE	3.7 LPM
PRESSURE	29 to 116 psi
TEMP. RANGE	4 to 30°C

ORDER CODE WFS0000-XL

LARGE FOR 4/6/7 PAN OVENS

SPECIFICATIONS

DIMENSIONS	136ø x 360mm high
FLOW RATE	4 LPM
PRESSURE	29 to 116 psi
TEMP. RANGE	4 to 30°C

ORDER CODE WFS0000-L

REPLACEMENT FILTER CARTRIDGES



XLARGE

SPECIFICATIONS

DIMENSIONS	136ø x 471mm high
FLOW RATE	3.7 LPM
PRESSURE	29 to 116 psi
TEMP. RANGE	4 to 30°C

ORDER CODE WFS0000-XL-RC

LARGE

SPECIFICATIONS

DIMENSIONS	136ø x 360mm high
FLOW RATE	4 LPM
PRESSURE	29 to 116 psi
TEMP. RANGE	4 to 30°C

ORDER CODE WFS0000-L-RC

Benefits of a Water Softening System in Commercial Kitchens

Prevents Limescale Build-Up

Hard water deposits scale inside equipment like combi ovens, dishwashers, steamers, and coffee machines. Softened water prevents this, reducing blockages, corrosion, and breakdowns.

Extends Equipment Lifespan

With less mineral damage, equipment such as boilers, heating elements, and spray jets last longer, saving on costly replacements.

Improves Energy Efficiency

Limescale acts as insulation on heating elements, forcing equipment to use more energy to heat water. Soft water keeps them clean, lowering utility bills.

Reduces Maintenance & Downtime

Less descaling, fewer service calls, and reduced risk of equipment failures mean kitchens can operate smoothly with minimal interruptions.

Protects Food & Beverage Quality

Scale-free combi ovens and steamers ensure consistent cooking, while softened water in coffee/tea machines improves taste and presentation.

In short, a water softening system protects your investment, improves efficiency, enhances food quality, and reduces operational costs - making it essential for any commercial kitchen running water-dependent equipment.

[illegible]

NOTES



STACKABLE DESIGN



UV RESISTANT



WEATHER PROOF



TENSAI
FURNITURE

CERTIFICATED BY:
CATAS[®]


CHAIRS



TENSAI
FURNITURE

FEATURES

- **Material:** Made from polypropylene reinforced with fiberglass, which gives it structural rigidity and durability.
- **Design & Construction:** Features an "infinite" stacking design, meaning multiple chairs can be stacked compactly for storage or transport.
- **Lightweight Yet Durable:** With a weight of around 3.5 - 4 kg, it's easy to move but still sturdy due to the fiberglass reinforcement.
- **Cost and Environmental Efficiency:** Lightweight for shipping and recyclable, making it a more sustainable and economical option for large-scale use.



CERTIFICATED BY:

CATAS®



BLACK

BRICK

OLIVE GREEN

ARMCHAIR BARS

SPECIFICATIONS

DIMENSIONS 570 x 560 x 820mm high
WEIGHT 4kg
MAX WEIGHT 150kg

ORDER CODE F-T-AC-B-BL
ORDER CODE F-T-AC-B-BR
ORDER CODE F-T-AC-B-OG



BLACK

BRICK

OLIVE GREEN

WHITE

ARMCHAIR MOSKS

SPECIFICATIONS

DIMENSIONS 570 x 560 x 820mm high
WEIGHT 4kg
MAX WEIGHT 150kg

ORDER CODE F-T-AC-M-BL
ORDER CODE F-T-AC-M-BR
ORDER CODE F-T-AC-M-OG
ORDER CODE F-T-AC-M-WH



BLACK

BRICK

OLIVE GREEN

CHAIR BARS

SPECIFICATIONS

DIMENSIONS 460 x 560 x 820mm high
WEIGHT 3,5kg
MAX WEIGHT 150kg

ORDER CODE F-T-C-B-BL
ORDER CODE F-T-C-B-BR
ORDER CODE F-T-C-B-OG



BLACK

BRICK

OLIVE GREEN

WHITE

CHAIR MOSKS

SPECIFICATIONS

DIMENSIONS 460 x 560 x 820mm high
WEIGHT 3,5kg
MAX WEIGHT 150kg

ORDER CODE F-T-C-M-BL
ORDER CODE F-T-C-M-BR
ORDER CODE F-T-C-M-OG
ORDER CODE F-T-C-M-WH

INDEX

A

ANKARSRUM Kitchen assistants	14-15
ARISCO	
• Cooking ranges	70-73
• Tilting pans	74
Armchairs	235
AVATHERM Food pan carriers	219

B

Back bar coolers	187-191
Bain maries	157
Baking tray trolleys	222
Baking trays	228
Bar coolers	191
Basins	146
Basket trolleys	138
Belgian waffle bakers	36
Beverage coolers	187-193
Bin dollies	226
Blast chillers	170
Blenders	6-7; 123
Boiling tables	65
BOLT High-speed ovens	79
Bottle coolers	187-193
Bowl cutters	5
Brat pans	74
BRAVIDA	
• Coffee brewers	121-122
• Hot chocolate machines	122
• Hot water urns	120
Bubble waffle bakers	38
Bucket and tote trolleys	226
Bucket and wringer	225
Burger baker	40
Burger patty presses	13

C

Cake Decorating Machines	21
Cake mixers	14-16
Cereal dispensers	160
Chafing dish heating elements	153
Chafing dish stands	152-153
Chafing dishes	152-156
• Econo series	155
• Electric	156
• Induction series	152-153
• PC cover series	156
• Window series	155
Chairs	235
Charcoal ovens	112-113
Chef bases	69; 176
Chicken holding cabinets	56
Chicken passes	55
Chip cutters	9
Chip dumps	54
Chrome shelving	227
Cleaning trolleys	225-226
Coffee brewers	121-122
Cold meat slicers	10
Combi steamers	82-89; 91
• Electric	82-85; 87; 89; 91
• Gas	86; 88
Cone bakers	39
Contact grills	43
Continuous sealers	30
Convection ovens	90; 92-93; 98-100
Conveyor toasters	42
Cooking ranges	64; 70-73
• Electric	72-73
• Gas	64; 70-71
COOKRITE	
• Boiling tables	65
• Cooking ranges	64
• Flat top griddles	67
• Fryers	48
• Pasta cookers	52
• Radiant grillers	66
• Salamanders	57
• Stands	68
Comdog baker	40
Crepe makers	39

D

Deck ovens	108-111
Dehydrators	22
Delux coffee urns	158
Dishwasher baskets	136
Dishwashers	134-135
• Front loading	134
• Glass washers	134
• Hoodtype	135
Display cabinets - floor standing	205-209
Display cases - countertop	210-211
Double chamber vacuum sealers	28
Dough divider & rounders	20
Dough mixers	17-18
Dough proofers	101
Dough rollers	19
Dough sheeters	20

E

EKA	
• Combi steamers	82-89; 91
• Convection ovens	90; 92-93; 98-100
Electric chafing dishes	156

F

Flat top griddles	58; 67
• Electric	58
• Gas	67
Food Choppers	5
Food Dehydrators	22
Food display warmers	55
Food pan carriers	219
Food serving carts	218
Frappe mixers	124
Front loading dishwashers	134
Frozen drinks dispensers	126-127
Fry cutters	9
Fryers	46-51
• Countertop	46
• Floor standing (Electric)	47
• Floor standing (Gas)	48-49
• Pressure	49-51

G

GALILEO	
• Display cabinets - floor standing	205-209
• Display cases - countertop	210-211
• Horizontal display cabinets	205-209
• Refrigerated glass display cases	203-204
• Upright display cases	203-204
Gelato machines	128
Glass rinsers	144
Glass top freezers	184
Glass washers	134
GN Inserts	229-230
Granita machines	127

H

Hamburger presses	13
Hand wash basins	146
Hand-press impulse sealers	31
Heart shape waffle bakers	38
Heat lamps	159
Heat sealing machines	31
Heating elements for chafing dishes	153
Hibachi grills	115
High-speed ovens	79
Holding cabinets	56
Hoodtype dishwashers	135
Horizontal continuous sealers	30
Horizontal display cabinets	205-209
• Refrigerated	205-209
• Heated	206-208
• Neutral	206; 208-209

Horizontal glass top freezers	184
Hose reels	145
Hot beverage dispensers	122
Hot chocolate machines	122
Hot passes	55
Hot water urns	120; 158

I

Ice cream machines	128-129
• Gelato	128
• Soft serve	129
Ice cream scoop freezers	185
Ice crushers	124
Ice machines	166-168
• Modular	166
• Self-contained	167-168
IGLOO	
• Display cabinets - floor standing	205-209
• Horizontal display cabinets	205-209
• Multi-deck fridges	199
Immersion Blenders	7
Impulse sealers	31
Induction chafing dishes	152-153
Induction chafing dishes	152-153
Induction cookers	62
Induction warmers	154
INOXSERV	
• Cereal dispensers	160
• Chafing dish heating elements	153
• Chafing dish stands	152-153
• Chafing dishes	152-156
• Delux coffee urns	158
• Electric chafing dishes	156
• Juice dispensers	161
• Soup kettles	155; 157
• Soup warmers	153
Inserts	229-230
Island freezers	184

J

Janitor trolleys	225
JONY	
• Frappe mixers	124
• Ice crushers	124
• Milkshake machines	124
Juice dispensers	125; 161

K

Kamado grills	115
Kitchen assistants	14-15
Kitchen taps/faucets	141-143
Knee operated basins	146

L

Laundry trolleys	225
Lolly waffle bakers	38

M

Manual lift toasters	42
Meat & cheese coolers	195
Meat agers	197
Meat Mincers	11
Meat slicers	10
Microwave ovens	76-77
Milkshake machines	124
Mincers	11
Mixers	14-18
Multi-deck fridges	198-199

N

Neutral Display cabinets	206; 208-209
--------------------------------	--------------

O

Oil filter carts	51
Open cooler merchandisers	198-199
Ovens	66-94
• Charcoal ovens	112-113
• Convection ovens	90; 92-93; 98-100
• Combi steam ovens	82-89; 91
• Deck ovens	107-111
• Pizza ovens	104; 106-107
Oven grids	228

P

Packing stations	54
Pancake makers	39
Pans GN	229-230
Parilla grills	113
Pasta cookers	52
Pastry sheeters	20
PATTY Granita machines	127
Patty presses	13
PHOENIX	
• Hibachi grills	115
• Kamado grills	115
• Yakitori grills	115
Pie warmers	212
Pitcher rinsers	144
Pizza accessories	105
Pizza cutters	105
Pizza dough rollers	19
Pizza ingredient fridges	182-183
Pizza ovens	104; 106-107
Pizza spade	105
Pizza worktop fridges	177-178
Planetary mixers	14-16
Platform trolleys	224

POLARCAB BLACK

• Back bar coolers	187-191
• Bar coolers	191
• Beverage coolers	187-193
• Upright bottle coolers	191-193
• Upright display freezers	186
• Upright display fridges	186

POLARCAB

• Back bar coolers	187-191
• Beverage coolers	187-193
• Blast chillers	170
• Chef bases	69; 176
• Gelato machines	128
• Glass top freezers	184
• Ice cream scoop freezers	185
• Ice machines	166-168
• Island freezers	184
• Juice dispensers	125
• Meat agers	197
• Multi-deck fridges	198-199
• Open cooler merchandisers	198-199
• Pizza ingredient fridges	182-183
• Pizza worktop fridges	177-178
• Saladette fridges	178-179
• Slush machines	126-127
• Soft serve machines	129
• Stainless steel worktop fridges	180-181
• Sushi display fridges	183
• Upright bottle coolers	191-193
• Upright storage freezers	171-173
• Upright storage fridges	171-173

POLARCAB VINO

• Meat & cheese coolers	195
• Wine coolers	193-196
Polony slicers	10
Popcorn machines	41
Potato chippers	9
Potato peelers	8
Pre-rinse sprays	140-141
Pressure fryers	49-51

PRISMAFOOD

• Pizza / Deck ovens	107
• Pizza dough rollers	19
• Spiral dough mixers	18

Q

INDEX

R

Rack trolleys	222-223
Radiant grillers	66
Rapid cooking ovens	79
Refrigerated glass display cases	203-204
Refuse bins	226
Rice cookers	59
ROASTER	
• Charcoal ovens	112-113
• Parilla grills	113
Round waffle bakers	37
Round waffle bakers	37

S

Saladette fridges	178-179
Salamanders	57
Sandwich toasters	43
Sausage fillers	12
Scales	23
Sealers	28-31
Serving carts	218
Shelving	227
Shock freezers	170
Single chamber vacuum sealers	28-29
Slicers	10
Slush machines	126-127

SMARTBLEND

• Blenders	6; 123
• Immersion Blenders	7
• Smoothie makers	6; 123

SMARTCHEF

• Bain maries	157
• Baking tray trolleys	222
• Baking trays	228
• Basket trolleys	138
• Bin dollies	226
• Bowl cutters	5
• Bucket and tote trolleys	226
• Bucket and wringer	225
• Cake Decorating Machines	21
• Chicken holding cabinets	56
• Chicken passes	55
• Chip dumps	54
• Chrome shelving	227
• Cone bakers	39
• Contact grills	43
• Convection ovens	98-100
• Conveyor toasters	42
• Corn dog baker	40
• Crepe makers	39
• Deck ovens	108-111
• Dehydrators	22
• Dishwasher baskets	136
• Dough divider & rounders	20
• Dough proofers	101
• Dough sheeters	20
• Flat top griddles	58
• Fry cutters	9
• Fryers	46-47; 49-51
• GN Inserts	229-230
• Hand wash basins	146
• Heat lamps	159
• Janitor trolleys	225
• Laundry trolleys	225
• Manual lift toasters	42
• Meat Miners	11
• Meat slicers	10
• Oil filter carts	51
• Oven grids	228
• Packing stations	54
• Patty presses	13
• Pie warmers	212
• Pizza accessories	105
• Pizza dough rollers	19
• Pizza ovens	104; 106
• Planetary mixers	14-16
• Platform trolleys	224
• Popcorn machines	41
• Potato peelers	8
• Pressure fryers	49-51
• Rack trolleys	222-223
• Refuse bins	226
• Rice cookers	59

SMARTCHEF (CONTINUED)

• Salamanders	57
• Sandwich toasters	43
• Sausage fillers	12
• Snackwich baker	40
• Soup kettles	157
• Sous-vide cookers	59
• Spiral dough mixers	17-18
• Spiral potato cutters	9
• Tea trolleys	220-221
• Tomato slicers	9
• UFO burger baker	40
• Vegetable preparation machines	4
• Vertical toasters	42
• Waffle bakers	36-38

SMARTCHEF-i

• Induction cookers	62
• Induction warmers	154

SMARTVAC

• Continuous sealers	30
• Impulse sealers	31
• Vacuum pack sealers	28-29

SMARTWAVE Microwave ovens

SMARTWAY Scales	23
Smoothie makers	6; 123
Snackwich baker	40
Soft serve machines	129
Soup kettles	155; 157
Soup warmers	153
Sous-vide cookers	59
Spiral dough mixers	17-18
Spiral potato cutters	9
Square waffle bakers	37
Stainless steel worktop fridges	180-181
Stick Blenders	7
Sushi display fridges	183

SWASH

• Front loading dishwashers	134
• Glass washers	134
• Hoodtype dishwashers	135

T

T&S

• Glass rinsers	144
• Hose reels	145
• Pre-rinse sprays	140-141
• Taps/faucets	141-143
Tea trolleys	220-221
• Plastic	221
• Stainless Steel	220

TENSAI Chairs

Tilting pans	74-75
Toasters	42-43
• Conveyor	42
• Manual lift	42
• Sandwich	43
• Vertical	42
Tomato slicers	9

TRAYPORT Food serving carts

.....	218
-------	-----

U

UFO burger baker	40
Upright bottle coolers	191-193
Upright display cases	203-204
Upright display freezers	186
Upright display fridges	186
Upright storage freezers	171-173
Upright storage fridges	171-173
Urns	120; 158

V

Vacuum pack sealers	28-29
Vegetable preparation machines	4
Vertical continuous sealers	30
Vertical toasters	42

W

Waffle bakers	36-38
• Belgian	36
• Bubble	38
• Heart shape	38
• Lolly	38
• Round	37
• Square	37
Water boilers	120
Water filters	231
Water softening system	231
Wine coolers	193-196

X

Y

Yakitori grills	115
-----------------------	-----

Z



POLARCARB

SLUSH MONSTER



Serve a
PREMIUM EXPERIENCE

DISCLAIMER

We have made every effort to ensure that the information contained in this catalogue at the time of publishing is true and accurate. However, we can not guarantee that this information is accurate at all times.

Images used are only for illustration purposes and may vary from the actual product.

We reserve the right to make any changes considered necessary, at any time and without warning, to improve its products. As a result we accept no responsibility or liability that may arise through the reliance of the information contained herein.

The reproduction, even partial, of images, text, etc of this catalogue for commercial purpose is strictly prohibited, without specific authorisation.





POLARCA®

Bravida

inoxserv

SmartChef

BakeMark

SmartVac

prismafood
solutions

PHENIX

SmartWave

Galileo
by POLARCA®

JOHNY®

SmartBlend

CookRite

IGLOO
MORE THAN COOLING

SmartWay

arisco®

eka®

T&S

Swash