



Decorative FR Blackout

WOOL II

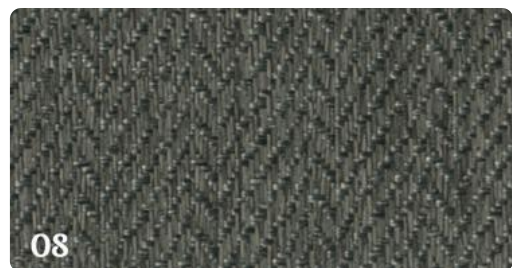

Herringbone

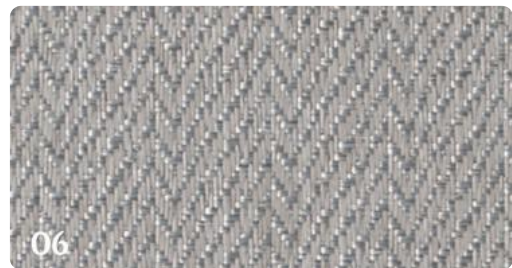



Weft Direction

WOOL II (Col 10)



Weft Direction

HERRINGBONE (Col 7)

If you are unsure which orientation the weave structure runs,
please refer to your supplier for clarification.

FR Blackout Standards

EN13773c1, IMO, B1, BS5867pt2b, NFPA 701

Tests secured at the time of publication

Other certificates may be available

FR Blackout Specifications

140cm (55") & 285cm (110")

100% Polyester

290gms/sqm (8.55oz/sqyrd)

FR Blackout Care Instructions

30°C / 85°F Gentle Quick Wash, Cool Iron,

No Dry Clean, No Bleach, No Spin,

No Tumble Dry, Line Dry/Drip Dry

