CENTAUR uPVC CABLE MANAGEMENT

PRODUCT CATALOGUE



uPVC Cable Management

Aluminium Cable Management

Fixings & Accessories

Installation Materials Division

...the name behind the brands



uPVC Cable Management

Manufacturing in Britain for over 40 years, Centaur has become a leading name in the uPVC cable management market.

Centrally located in Redditch, England, Centaur utilise a fast and efficient distribution network.


Combining continued investment and a wealth of expertise, Centaur boast a vast selection of cable management products enabling a complete installation. A dedicated fabrication section allows bespoke offerings tailor made for individual requirements.

Striving to do our utmost for the environment, Centaur aim to minimise the output of CO_2 emissions through the recycling of non-biodegradable raw materials.



Content

Meridian uPVC Trunking.....2
President uPVC Trunking.....8
President Aluminium Trunking.....14
President Bench Trunking.....18
President Power Poles & Posts.....22
Campus Range.....24
Kensington Trunking.....30
Maxi Trunking.....34
Mini Trunking.....36
Red Range.....40
Conduit.....42
Surface & Socket Boxes.....50
Dry Lining Boxes.....52
Bespoke Products.....54
Technical Information.....58
Index.....64

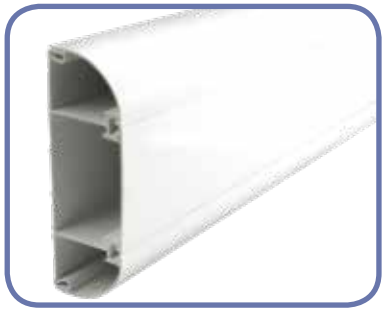



Meridian Features & Benefits

Three Compartment Trunking

Design Features:

- Cat 6 & Cat 7 compliant.
- External angle, flat tee and flat angle come with data sweep to maintain necessary bend radius and cable segregation.
- Flat tee and flat angle overlap trunking to prevent the need for additional joint couplers.
- Clip-on accessories provide a fast and efficient installation.
- Manufactured from high impact uPVC compound.
- High concentration of titanium dioxide blended into the uPVC compound for maintaining longer lasting colour stability.
- Contrasting grey centre lid available for Part M compliance.
- Available in anti-microbial uPVC.
- Can be supplied in bespoke colours upon request.
- Optional screening available up on request.
- Available in light oak and mahogany wood effect finishes.
- Internal angle comes with internal plate to maintain trunking integrity.



Meridian Features & Benefits




Meridian Features & Benefits

ADAPTOR

Mini Trunking Adaptor
(16 x 25mm)

ADJUSTABLE BENDS

Adjustable internal & external bends for wall inaccuracies

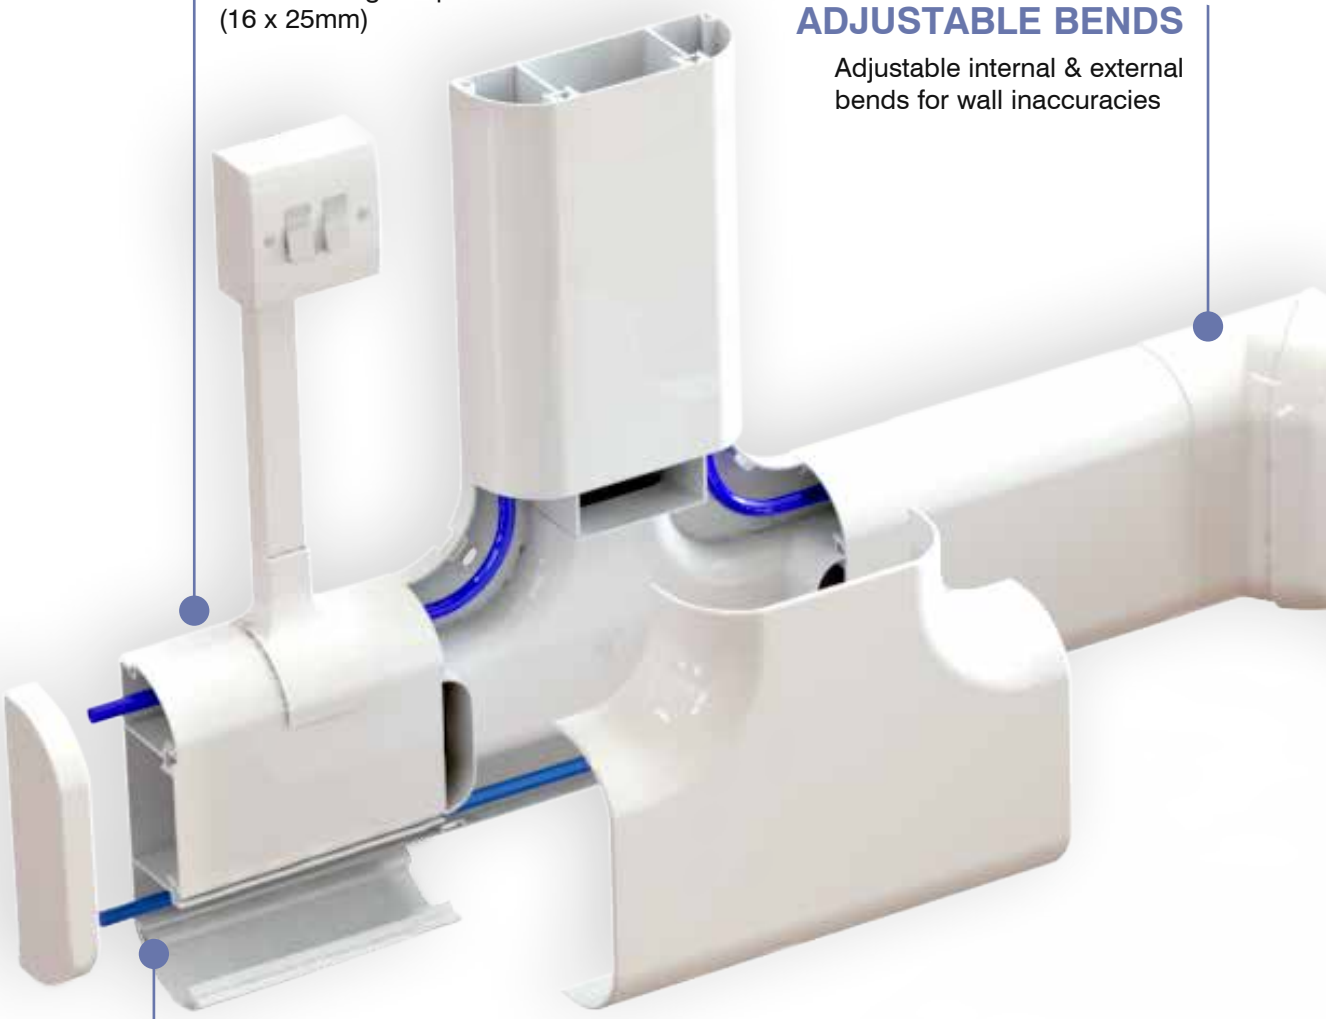

HINGED LID

Hinged lid that acts as a cable retainer to ease installation

ADDITIONAL FEATURES

- Supplied with protective film and optional fixing kits
- Generous size for greater cable capacity 173 x 60mm
- Pre-pierced fixing holes for easy installation
- PART M compliance available
- A range of colours and wood finish options
- Anti-microbial option available

Meridian Features & Benefits



PRE-PIERCED

Pre-pierced fixing holes for easy installation

CABLE SWEEP

External data cable sweep for corner protection and segregation

COMPLIANCE

Cat 6 & 7 compliant bend radii

BOXES & PLATES

Outlet boxes or plates suited to wiring accessory installation


uPVC Three Compartment Trunking



ACD 3

Three Compartment Dado Trunking

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant trunking c/w lids	ACD 3	2 x 3m





ACC 3

Coupler

Description	Cat. No.	Pack Quantity
Radius dado coupler	ACC 3	2



AECC 3

End Cap

Description	Cat. No.	Pack Quantity
Radius dado end cap	AECC 3	2



AIC 3

Adjustable Internal Angle

Description	Cat. No.	Pack Quantity
Radius dado adjustable internal angle c/w internal plate (between 83° & 95°)	AIC 3	1



AEC 3

Adjustable External Angle

Description	Cat. No.	Pack Quantity
Radius dado adjustable external angle c/w data cable sweep (between 40° & 95°)	AEC 3	1




AFA 3

Flat Angle

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant radius dado flat angle	AFA 3	1

uPVC Three Compartment Accessories

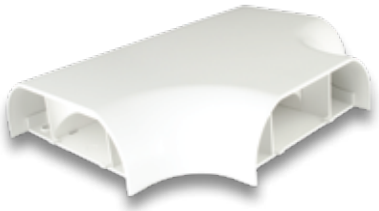

AFT 3

Flat Tee


Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant radius dado flat tee c/w with segregator	AFT 3	1



ASB 2

Outlet Boxes

Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm	ASB 1	10
Outlet box, 1 gang, 32mm, 4 pillar	ASB 1V	10
Outlet box, 2 gang, 32mm	ASB 2	10
Outlet box, 3 gang, 32mm	ASB 3	5
Outlet box, 1 gang, 40mm	ASBC6 1	10
Outlet box, 2 gang, 40mm	ASBC6 2	10



ASP 1

Outlet Plates

Description	Cat. No.	Pack Quantity
Outlet plate, 1 gang	ASP 1	15
Outlet plate, 2 gang	ASP 2	15



ACL 1

Separate Profiles

Description	Cat. No.	Pack Quantity
Base unit	AB 3	2 x 3m
Radius lid	ACH 3	4 x 3m
Centre lid	ACL 1	4 x 3m
Part M compliant centre lid - grey	ACL 1G	4 x 3m



ECR 110W

Extension Collars

Description	Cat. No.	Pack Quantity
1 Gang, round corners, 10mm	ECR 110W	10
1 Gang, square corners, 10mm	ECS 110W	10
2 Gang, round corners, 10mm	ECR 210W	10
2 Gang, square corners, 10mm	ECS 210W	10



AMC 2/3

Spares

Description	Cat. No.	Pack Quantity
Mini Trunking Adaptor (16 x 25mm)	AMC 2/3	2
Contrast plate - blue	APM 1BL	20
Contrast plate - grey	APM 1G	20
External corner data cable sweep	ACGE 3	6
Locking device c/w cap	ALD 3	50

President Features & Benefits

- An innovative design and aesthetically pleasing solution for cable management in hospitals, offices, schools, colleges, laboratories, hotels and public buildings. Offering substantial cable capacity and design appeal for today's modern buildings.
- The President uPVC cable management system allows a fast, easy and cost-effective solution.
- Variation of chamfered, square or skirting profiles, in high impact resistant uPVC.

President

Multi Compartment Trunking

Design Features:

- Clean line design for maximum aesthetic appeal.
- Large capacity multi-compartment design.
- Chamfered, square or skirting profiles.
- Square dado trunking available with Cat 6 & 7 fittings.
- Centaur white as standard. RAL/BS colours to order.
- Wood effect available in light oak and mahogany.
- Choice of 32mm or 40mm deep outlet boxes.

1. Double-skinned walls for added strength, stability and segregation.
2. A unique, positive locking device with caps for the moulded fittings provide fast installation and a neat appearance.
3. Pre-pierced base for ease of fixing.
4. Blue film to maintain finish and protect against scratches, dust and paint.



President Features & Benefits

- Centaur President trunking is an all British design and manufactured in accordance with the requirements of BS 4678, Part 4 (1982) and allows the installer to comply with BS 7671 (wiring regulations).



uPVC Multi Compartment Trunking




ASD 1

Three Compartment Square Dado Trunking

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant trunking c/w lids	ASD 1	2 x 3m

When used with Cat 6 & 7 compliant accessories.






ACD 2

Three Compartment Chamfered Dado Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	ACD 2	2 x 3m






ASKT 3

Three Compartment Skirting Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	ASKT 3	2 x 3m






ACD 4

Three Compartment Semi Chamfered Dado Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	ACD 4	2 x 3m






ACD 5

Four Compartment Semi Chamfered Dado Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	ACD 5	1 x 3m



uPVC Multi Compartment Accessories



ACS 1

Coupler

Description	Cat. No.	Pack Quantity
ASD 1 coupler	ACS 1	2
ACD 2 coupler	ACC 2	2
ASKT 3 coupler	ACSK 3	2
ACD 4 coupler	ACC 4	2
ACD 5 coupler	ACC 5	2



AECC 2

End Cap

Description	Cat. No.	Pack Quantity
ASD 1 end cap	AECS 1	2
ACD 2 end cap	AECC 2	2
ASKT 3 right-hand end cap	AECSK-3RH	2
ASKT 3 left-hand end cap	AECSK-3LH	2
ACD 4 end cap	AECC 4	2
ACD 5 end cap	AECC 5	2



AISC6 1

Internal Angle

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant ASD 1 internal angle	AISC6 1	1
ASD 1 internal angle	AIS 1	1
ASD 1 45° internal angle (fabricated)	AIS 1/45	1
ACD 2 internal angle	AIC 2	1
ACD 2 45° internal angle (fabricated)	AIC 2/45	1
ASKT 3 internal angle	AISK 3	1
ASKT 3 45° internal angle (fabricated)	AISK 3/45	1
ACD 4 internal angle	AIC 4	1
ACD 4 45° internal angle (fabricated)	AIC 4/45	1
ACD 5 internal angle	AIC 5	1




AEC 4

External Angle

Description	Cat. No.	Pack Quantity
ASD 1 external angle	AES 1	1
ASD 1 45° external angle (fabricated)	AES 1/45	1
ACD 2 external angle	AEC 2	1
ACD 2 45° external angle (fabricated)	AEC 2/45	1
ASKT 3 external angle	AESK 3	1
ASKT 3 45° external angle (fabricated)	AESK 3/45	1
ACD 4 external angle	AEC 4	1
ACD 4 45° external angle (fabricated)	AEC 4/45	1
ACD 5 external angle	AEC 5	1


uPVC Multi Compartment Accessories



AFAU 3

Flat Angle

Description	Cat. No.	Pack Quantity
ASD 1 flat angle	AFA 1	1
ACD 2 flat angle	AFA 2	1
ASKT 3 upward flat angle	AFAU 3	1
ASKT 3 downward flat angle	AFAD 3	1
ACD 4 flat angle	AFA 4	1
ACD 5 flat angle	AFA 5	1



AFT 1

Flat Tee


Description	Cat. No.	Pack Quantity
ASD 1 flat tee	AFT 1	1
ACD 2 flat tee	AFT 2	1
ASKT 3 upward flat tee	AFTU 3	1
ASKT 3 downward flat tee	AFTD 3	1
ACD 4 flat tee	AFT 4	1
ACD 5 flat tee	AFT 5	1



ASB 2

Outlet Box

Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm	ASB 1	10
Outlet box, 1 gang, 32mm, 4 pillar	ASB 1V	10
Outlet box, 2 gang, 32mm	ASB 2	10
Outlet box, 3 gang, 32mm	ASB 3	5
Outlet box, 1 gang, 40mm	ASBC6 1	10
Outlet box, 2 gang, 40mm	ASBC6 2	10



ASP 1

Outlet Plate

Description	Cat. No.	Pack Quantity
Outlet plate, 1 gang	ASP 1	15
Outlet plate, 2 gang	ASP 2	15

uPVC Multi Compartment Accessories



ACH 4

Separate Profiles

Description	Cat. No.	Pack Quantity
Base unit	AB 1	2 x 3m
Square lid	ASQ 1	4 x 3m
Chamfered lid	ACH 1	4 x 3m
Centre lid	ACL 1	4 x 3m
Part M compliant centre lid - grey	ACL 1G	4 x 3m
Base unit (ACD 4)	AB 4	2 x 3m
Semi chamfered lid	ACH 4	4 x 3m



AMC 2

Mini Trunking Entry

Description	Cat. No.	Pack Quantity
CMT 2 square lid	AMS 2	2
CMT 5 square lid	AMS 5	2
CMT 2 chamfered lid	AMC 2	2
CMT 5 chamfered lid	AMC 5	2
CMT 2 semi chamfered lid	AMC 2/4	2



ECR 110W

Extension Collar

Description	Cat. No.	Pack Quantity
1 Gang, round corners, 10mm	ECR 110W	10
1 Gang, square corners, 10mm	ECS 110W	10
2 Gang, round corners, 10mm	ECR 210W	10
2 Gang, square corners, 10mm	ECS 210W	10



ASI/4

Screening Insert

Description	Cat. No.	Pack Quantity
Metal screen insert (60mm)	ASI	10 x 3m
Metal screen insert (50mm)	ASI/4	10 x 3m



ALD 1

Spares

Description	Cat. No.	Pack Quantity
Contrast plate - blue	APM 1BL	20
Contrast plate - grey	APM 1G	20
20gm Bottle, super fast adhesive	SA 3	1
Locking device c/w cap	ALD 1	5
50mm Corner guard	ACGE 50	6
60mm Corner guard	ACGE 60	6

Aluminium Three Compartment Trunking

- Selected accessories available moulded or fabricated.
- All President aluminium trunking and fabricated accessories are powder coated traffic white (RAL 9016) & moulded accessories sprayed traffic white.




BSD 1W

Three Compartment Square Dado Trunking

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant trunking c/w lids	BSD 1W	1 x 2m

When used with Cat 6 & 7 compliant accessories.






BCD 2W

Three Compartment Chamfered Dado Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	BCD 2W	1 x 2m






BSKT 3W

Three Compartment Skirting Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lids	BSKT 3W	1 x 2m



Aluminium Three Compartment Accessories



BCSK 3W

Coupler

Description	Cat. No.	Pack Quantity
BSD 1W coupler (uPVC)	BCS 1W	2
BCD 2W coupler (uPVC)	BCC 2W	2
BSKT 3W coupler (uPVC)	BCSK 3W	2



BECS 1W

End Cap

Description	Cat. No.	Pack Quantity
BSD 1W end cap (uPVC)	BECS 1W	2
BCD 2W end cap (uPVC)	BECC 2W	2
BSKT 3W right-hand end cap (uPVC)	BECSK-3RHW	2
BSKT 3W left-hand end cap (uPVC)	BECSK-3LHW	2



BISC6 1W

Internal Angle

Description	Cat. No.	Pack Quantity
Cat 6 & 7 compliant BSD 1W internal angle (uPVC)	BISC6 1W	1
BSD 1W internal angle (uPVC)	BIS 1W	1
BSD 1W 45° internal angle (fabricated)	BIS 1/45W	1
BCD 2W internal angle (uPVC)	BIC 2W	1
BCD 2W 45° internal angle (fabricated)	BIC 2/45W	1
BSKT 3W internal angle (uPVC)	BISK 3W	1
BSKT 3W 45° internal angle (fabricated)	BISK 3/45W	1




BEC 2W

External Angle

Description	Cat. No.	Pack Quantity
BSD 1W external angle (uPVC)	BES 1W	1
BSD 1W 45° external angle (fabricated)	BES 1/45W	1
BCD 2W external angle (uPVC)	BEC 2W	1
BCD 2W 45° external angle (fabricated)	BEC 2/45W	1
BSKT 3W external angle (uPVC)	BESK 3W	1
BSKT 3W 45° external angle (fabricated)	BESK 3/45W	1

Aluminium Three Compartment Accessories



BFA 1W

Flat Angle

Description	Cat. No.	Pack Quantity
BSD 1W flat angle	BFA 1W	1
BCD 2W flat angle	BFA 2W	1
BSKT 3W upward flat angle	BFAU 3W	1
BSKT 3W downward flat angle	BFAD 3W	1



BFT 2W

Flat Tee


Description	Cat. No.	Pack Quantity
BSD 1W flat tee	BFT 1W	1
BCD 2W flat tee	BFT 2W	1
BSKT 3W upward flat tee	BFTU 3W	1
BSKT 3W downward flat tee	BFTD 3W	1



ASB 2

Outlet Boxes


Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm	ASB 1	10
Outlet box, 1 gang, 32mm, 4 pillar	ASB 1V	10
Outlet box, 2 gang, 32mm	ASB 2	10
Outlet box, 3 gang, 32mm	ASB 3	5
Outlet box, 1 gang, 40mm	ASBC6 1	10
Outlet box, 2 gang, 40mm	ASBC6 2	10



ASP 1

Outlet Plates

Description	Cat. No.	Pack Quantity
Outlet plate, 1 gang	ASP 1	15
Outlet plate, 2 gang	ASP 2	15



BSQ 1W

Separate Profiles

Description	Cat. No.	Pack Quantity
Base unit	BB 1	2 x 2m
Square lid	BSQ 1W	4 x 2m
Chamfered lid	BCH 1W	4 x 2m
Centre lid	BCL 1W	4 x 2m



ALD 1

Spares

Description	Cat. No.	Pack Quantity
Locking device with cap	ALD 1	100
Earth strap	BBS 1	10
Earth lead	BBS 2	10



Product Application

Healthcare Sector


Gas & Air Outlets

Gas & air outlets and nurse call points can be a challenge to install after a project has been completed.

Centaur can produce vertical or horizontal bedhead panels in any ward and laboratory areas and make them a breeze to install from their bespoke fabrication department. This comes with a complete Cat 6 cable management system to any general office areas.

uPVC & Aluminium Bench Units

- Available plain, populated or pre-wired, President bench units offer a sleek and sophisticated look to a variety of applications, such as; laboratories, classrooms, offices etc.





ABU 1

uPVC Bench Units

Description	Cat. No.	Pack Quantity
1 Gang	ABU 1	1
2 Gang	ABU 2	1
3 Gang	ABU 3	1
1 + 2 Gang	ABU 1/2	1
2 + 2 Gang	ABU 2/2	1
1 + 1 + 2 Gang	ABU 1/1/2	1



ABUD 1/2

uPVC Dual Bench Units

Description	Cat. No.	Pack Quantity
1 Gang x 2	ABUD 1	1
2 Gang x 2	ABUD 2	1
1 + 2 Gang x 2	ABUD 1/2	1



DBU 2

Aluminium Bench Units

Description	Cat. No.	Pack Quantity
1 Gang	DBU 1	1
2 Gang	DBU 2	1
3 Gang	DBU 3	1
1 + 2 Gang	DBU 1/2	1
2 + 2 Gang	DBU 2/2	1
1 + 1 + 2 Gang	DBU 1/1/2	1




DBUD 1

Aluminium Dual Bench Units

Description	Cat. No.	Pack Quantity
1 Gang x 2	DBUD 1	1
2 Gang x 2	DBUD 2	1
1 + 2 Gang x 2	DBUD 1/2	1

uPVC Bench Trunking

- Available in aluminium and uPVC with easy to install clip-in dividers.
- Two or three completely segregated compartments for power and data cables.






ABT 1

uPVC Bench Trunking

Description	Cat. No.	Pack Quantity
Trunking c/w lid	ABT 1	2 x 3m
40mm Clip-in divider	DIV 40	10 x 3m



ABC

Coupler

Description	Cat. No.	Pack Quantity
Coupler	ABC	2




ABEC 1*

End Cap

Description	Cat. No.	Pack Quantity
End cap	ABEC 1*	2
Dual end cap	ABEC 2**	2
Right-hand end cap	ABEC 1RH	2
Left-hand end cap	ABEC 1LH	2

* - For use where a work surface and wall meet.
** - For use with back to back bench trunking.



ABI 1

Internal & External Angles


Description	Cat. No.	Pack Quantity
Internal angle (fabricated)	ABI 1	1
External angle (fabricated)	ABE 1	1



ASB 2

Outlet Boxes

Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm	ASB 1	10
Outlet box, 2 gang, 32mm	ASB 2	10
Outlet box, 3 gang, 32mm	ASB 3	5




ASP 1

Outlet Plates

Description	Cat. No.	Pack Quantity
Outlet plate, 1 gang	ASP 1	15
Outlet plate, 2 gang	ASP 2	15

Aluminium Bench Trunking

- Selected accessories available moulded or fabricated.
- All President aluminium bench trunking and fabricated accessories are powder coated traffic white (RAL 9016) & moulded accessories sprayed traffic white.






DBT 1/2M

Aluminium Bench Trunking

Description	Cat. No.	Pack Quantity
Aluminium trunking c/w lid	**DBT 1/2M**	2 x 2m
Aluminium trunking c/w lid	**DBT 1/3M**	1 x 3m
Aluminium base c/w uPVC lid	**DBT 2/2M**	2 x 2m
Aluminium base c/w uPVC lid	**DBT 2/3M**	1 x 3m
uPVC 40mm clip-in divider	**DIV 40**	10 x 3m



ABC TW

Coupler

Description	Cat. No.	Pack Quantity
Coupler (uPVC)	**ABC TW**	2




ABEC 1TW

End Cap

Description	Cat. No.	Pack Quantity
End cap (uPVC)	**ABEC 1TW***	2
Dual end cap (uPVC)	**ABEC 2TW****	2
Right-hand end cap (uPVC)	**ABEC 1RH TW**	2
Left-hand end cap (uPVC)	**ABEC 1LH TW**	2

* - For use where a work surface and wall meet.
** - For use with back to back bench trunking.



DBI 1

Internal & External Angles

Description	Cat. No.	Pack Quantity
Internal angle (fabricated)	**DBI 1**	1
Internal angle c/w uPVC lid (fabricated)	**DBI 2**	1
External angle (fabricated)	**DBE 1**	1
External angle c/w uPVC lid (fabricated)	**DBE 2**	1


Aluminium Bench Trunking Accessories



ASB 2

Outlet Boxes

Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm	ASB 1	10
Outlet box, 2 gang, 32mm	ASB 2	10
Outlet box, 3 gang, 32mm	ASB 3	5



ASP 1

Outlet Plates


Description	Cat. No.	Pack Quantity
Outlet plate, 1 gang	ASP 1	15
Outlet plate, 2 gang	ASP 2	15



BBS 2

Spares

Description	Cat. No.	Pack Quantity
Earth strap	BBS 1	10
Earth lead	BBS 2	10

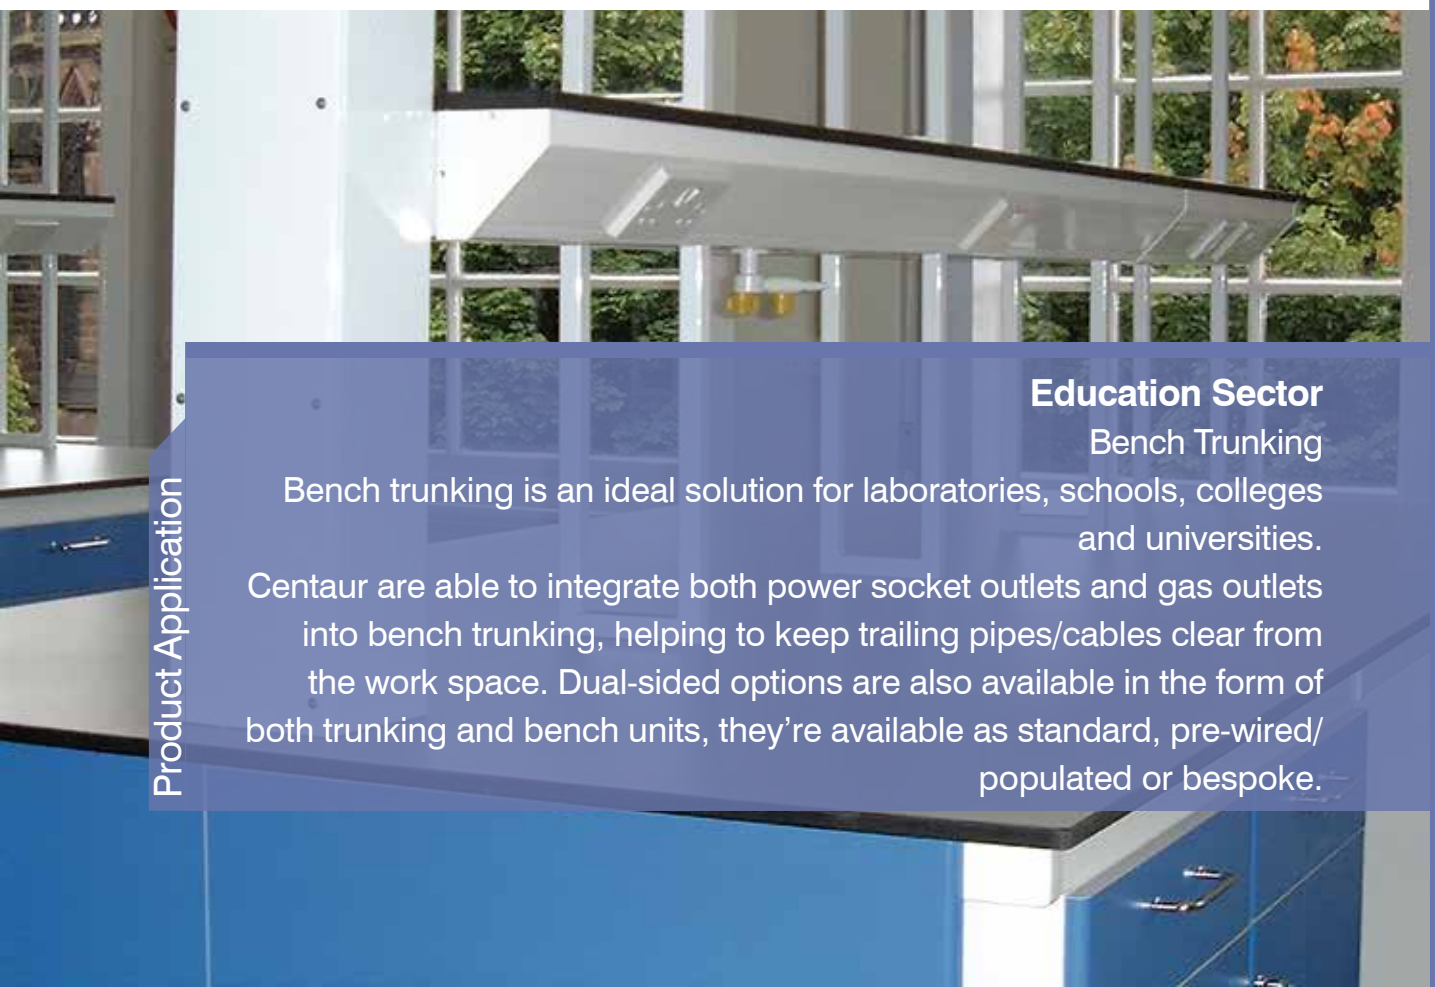

Product Application

Education Sector


Bench Trunking

Bench trunking is an ideal solution for laboratories, schools, colleges and universities.

Centaur are able to integrate both power socket outlets and gas outlets into bench trunking, helping to keep trailing pipes/cables clear from the work space. Dual-sided options are also available in the form of both trunking and bench units, they're available as standard, pre-wired/ populated or bespoke.

uPVC Power Pole & Post Systems

- Double-sided for a larger distribution, President uPVC power poles & posts are ideal for supplying commercial applications, large power, data and multimedia demand through one location.





Power Pole & Post

Description	Cat. No.	Pack Quantity
Power pole 3.6m length	AP 1	1
Power pole 3m length	AP 2	1
Power post 680mm length	AP 680	1

Each Power Pole Pack Comprises

Description	
Pole body*	1 x 3.6m
Side lids*	2 x 3.6m
Centre lids*	2 x 3.6m
Fixing bracket	1
Base foot (metal)	1
Base moulding	1

* - 3m lengths for AP 2.



AP 680
Accessories supplied separately.

Each Power Post Pack Comprises

Description	
Post body	1 x 680mm
Side lids	2 x 680mm
Centre lids	2 x 680mm
Base foot (metal)	1
Base moulding	1
Top cap	1



ASB 1V


Accessories

Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm, 4 pillars	ASB 1V	10
Top cover. For suspended & solid ceilings	APF 1	1
Tee used for suspended and solid ceilings, and floors. Compatible with President trunking ACD 4	APT 1	1
Top slide for slab fixing (standard)	ATS 1	1
Top slide 1m extension for slab fixing	ATS 1500	1

For coloured lid options or non standard heights contact Centaur sales office.

Aluminium Power Pole Systems

- Single-sided power pole offering distribution in applications where it may be subject to mechanical stress.
- Aluminium power poles are powder coated traffic white (RAL 9016) & selected moulded accessories sprayed traffic white.





AP 3W

Single Sided Power Pole

Description	Cat. No.	Pack Quantity
Single sided power pole 3m length	**AP 3W**	1

Each Power Pole Pack Comprises

Description	
Pole body	1 x 3m
Pole lid	1 x 3m
1 Gang outlet box	6
Top cover	1
Fixing bracket	1
Base foot (metal)	1
Base moulding	1



CSPB 1W

Outlet box

Description	Cat. No.	Pack Quantity
1 Gang outlet box, 32mm, 4 pillars	**CSPB 1W**	10



CSP 1W

Outlet Plate

Description	Cat. No.	Pack Quantity
1 Gang outlet plate, 4 pillars	**CSP 1W**	10

Campus Features & Benefits

- A cost effective trunking system in uPVC or aluminium for use in schools, college halls of residence, hospitals, offices, government and local authority buildings or wherever an economical cable management system is required.

Campus

Multi Compartment Trunking

Design Features

- uPVC Campus available in 3 sizes:
100mm x 30mm
100mm x 50mm (Aluminium option available)
200mm x 50mm
- Clip-on divider for 50mm deep trunking.
- Self-adhesive divider for 30mm deep trunking.
- Easy to install with a range of moulded accessories providing clean, uncluttered lines.
- 1 & 2 gang outlet boxes and plates.
- Manufactured to comply with BS4678: Part 4 Heavy Duty Classification.
- Standard colour white

1. Outlet boxes have square knock out in base to allow for deeper accessories.
2. Radiused internal angle for data cables.
3. Two module MCB/RCD housing with DIN rail fitted option available.
4. Clip-on one piece fittings for quick and easy installation.
5. External corner guards for data cable protection.
6. Moulded fittings are designed to fit close to architectural features, such as architrave or skirting.




Campus Features & Benefits

- The Centaur Campus dado trunking systems are an easy to install method of cable management, having clean, uncluttered lines for aesthetic appeal and the flexibility to fit additional accessories and outlets when required.



uPVC Dado Trunking & Accessories

- Practical in its design, Campus dado trunking offers a cost effective solution to large cable demands.
- The option of clip-on and fabricated accessories allows both a neat and efficient installation.
- Cat 6 & 7 options available.





CMXT 42W

Trunking

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lids	**CMXT 41W**	100	30	2 x 3m
Trunking c/w lids	**CMXT 42W**	100	50	2 x 3m
Trunking c/w lids	**DMXT 42W**	200	50	2 x 3m



DIV 42W

Divider

Description	Cat. No.	Pack Quantity
30mm Self-adhesive divider	**DIV 41W**	10 x 3m
50mm Clip-in divider	**DIV 42W**	10 x 3m



CXC 42W

Coupler

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
External coupler	**CXC 41W**	100	30	2
External coupler	**CXC 42W**	100	50	2
External coupler	**DXC 42W**	200	50	2
Internal coupler	**CIC 41W**	100	30	1
Internal coupler	**CIC 42W**	100	50	1



CES 42W

End Cap

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
End cap	**CES 41W**	100	30	15
End cap	**CES 42W**	100	50	15
End cap	**DES 42W**	200	50	15



CIAM 42W

Internal Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Internal angle	**CIAM 41W**	100	30	1
Cat 6 & 7 compliant internal angle	**CIAM 42W**	100	50	1
Cat 6 & 7 compliant internal angle	**DIAM 42W**	200	50	1

uPVC Dado Accessories



CXAM 42W

External Angle


Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
External angle	**CXAM 41W**	100	30	1
External angle	**CXAM 42W**	100	50	1
External angle	**DXAM 42W**	200	50	1



CFAM 42W

Flat Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat angle	**CFAM 41W**	100	30	1
Flat angle	**CFAM 42W**	100	50	1
Flat anglew	**DFAM 42W**	200	50	1



CFTM 42W

Flat Tee


Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat tee	**CFTM 41W**	100	30	1
Flat tee	**CFTM 42W**	100	50	1
Flat tee	**DFTM 42W**	200	50	1



CRT 42W

Cable Retainer

Description	Cat. No.	Pack Quantity
Cable retainer	**CRT 42W**	6



CSPB 1W


Spares


Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm, 4 pillars	**CSPB 1W***	10
Outlet box, 2 gang, 32mm	**CSPB 2W***	10
Outlet plate, 1 gang	**CSP 1W**	15
Outlet plate, 2 gang	**CSP 2W**	15
15mm Outlet box spacer	**CS 42W**	6
External corner guard	**CG 42**	10

* - Suitable for Campus Dado Trunking profiles CMXT 42W & DMXT 42W.

Aluminium Dado Trunking & Accessories

- Selected accessories available moulded or fabricated.
- All Campus aluminium trunking & fabricated accessories are powder coated traffic white (RAL 9016) & moulded accessories sprayed traffic white.
- Cat 6 & 7 options available.






BMXT 42W

Trunking

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lids	**BMXT 42W**	100	50	2 x 3m
50mm Clip-in divider	**DIV 42/S**	-	-	10 x 3m



BXC 42W

Coupler

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Coupler (uPVC)	**BXC 42W**	100	50	2



BES 42W

End Cap

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
End cap (uPVC)	**BES 42W**	100	50	15



BIAM 42W

Internal Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Cat 6 & 7 compliant internal angle (uPVC)	**BIAM 42W**	100	50	1



BXAM 42W

External Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
External angle (uPVC)	**BXAM 42W**	100	50	1



BFAM 42W

Flat Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat angle (uPVC)	**BFAM 42W**	100	50	1
Flat angle (fabricated)	**BFAT 42W**	100	50	1


Aluminium Dado Accessories



BFTM 42W

Flat Tee

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat tee (uPVC)	BFTM 42W	100	50	1
Flat tee (fabricated)	BFTT 42W	100	50	1



CSPB 1W

Outlet Boxes & Plates


Description	Cat. No.	Pack Quantity
Outlet box, 1 gang, 32mm, 4 pillars	CSPB 1W	10
Outlet box, 2 gang, 32mm	CSPB 2W	10
Outlet plate, 1 gang	CSP 1W	15
Outlet plate, 2 gang	CSP 2W	15
15mm Outlet box spacer	CS 42W	6



CRT 42W

Spares

Description	Cat. No.	Pack Quantity
100 x 50mm Cable retainer	CRT 42W	6
Earth strap	BBS 1	10
Earth lead	BBS 2	10
External corner guard	CG 42	10

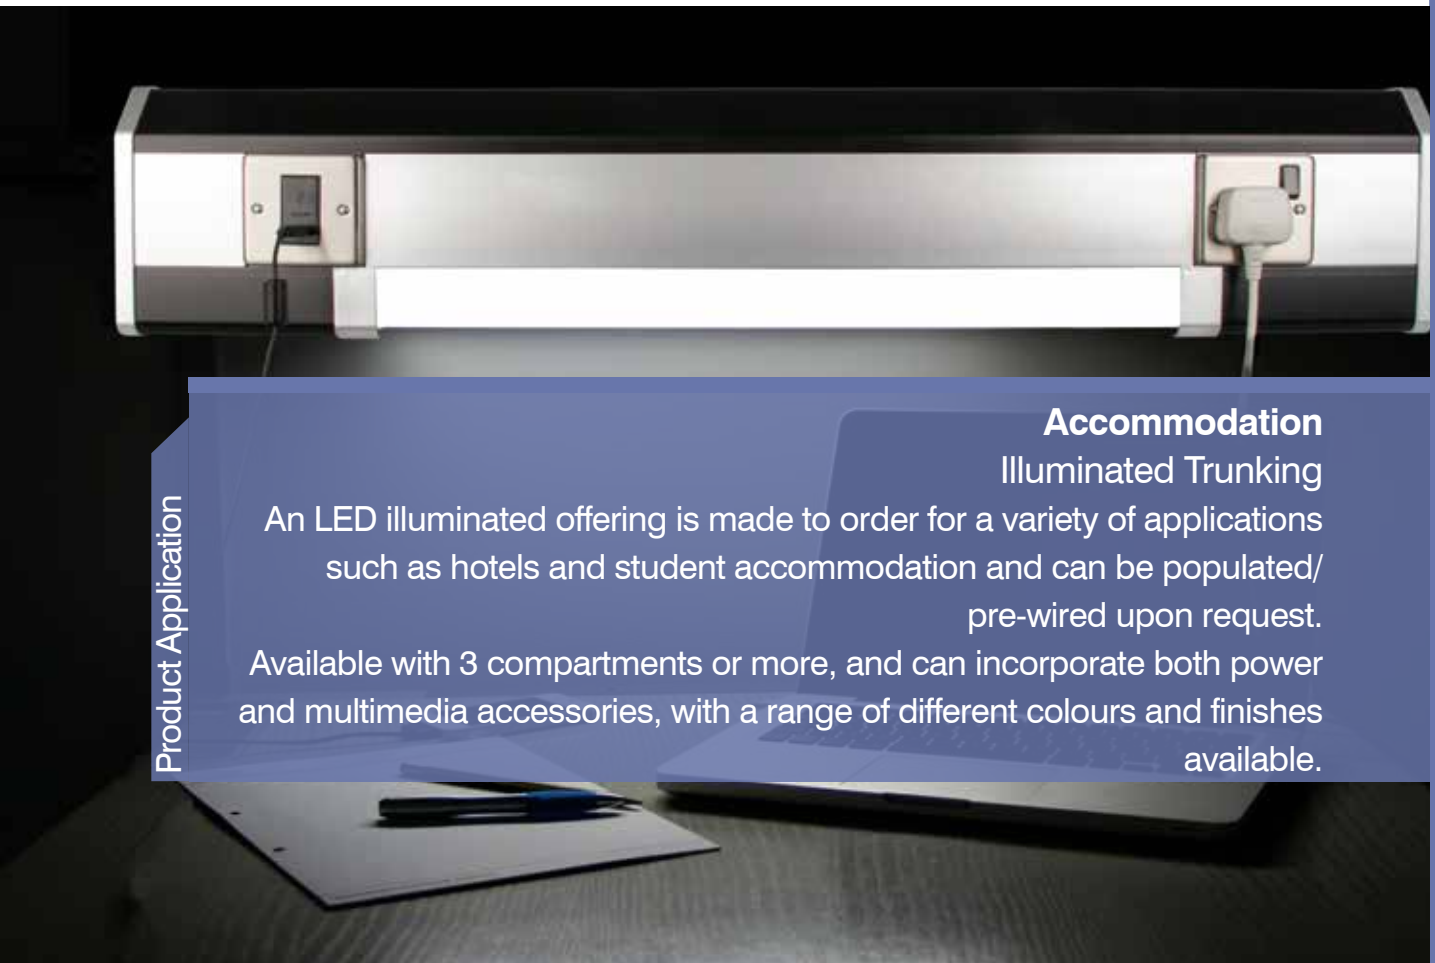

Product Application

Accommodation

Illuminated Trunking

An LED illuminated offering is made to order for a variety of applications such as hotels and student accommodation and can be populated/ pre-wired upon request.

Available with 3 compartments or more, and can incorporate both power and multimedia accessories, with a range of different colours and finishes available.

Kensington Features & Benefits

- Unobtrusive skirting, architrave/small dado cable management system.
- Ideal for installation in hotels, sheltered housing, nursing homes, and portable buildings where inconspicuous cabling is required to blend into the existing surroundings.
- The Centaur Kensington uPVC range comprises of one or two compartments.

Kensington

Multi Compartment Trunking

Design Features:

- Smooth lines for cleaning.
- Architrave profile can be run as a small dado system.
- Ideal for solid floor buildings.
- Outlet boxes for electrical accessories.

1. Single or twin compartments for cable segregation (removable divider).
2. Fittings overlap for more cutting tolerance, facilitating ease of installation.
3. Door frame kit available for ease of ordering and reduction of waste.




Kensington Features & Benefits

- A door kit is available with pre-cut lengths of architrave and accessories to help with ease of ordering, keeping installation time and wastage to a minimum.



Skirting Trunking

- The Kensington skirting range offers a practical solution to cable management in domestic and commercial environments as the lids are easily separated from the base, allowing cables to be removed and added.





CKD

Skirting Trunking

Description	Cat. No.	Pack Quantity
2 Compartment	CKD	15m
1 Compartment	CKD 1	15m



CKC

Coupler

Description	Cat. No.	Pack Quantity
Coupler	CKC	10



CKE-RH

End Cap

Description	Cat. No.	Pack Quantity
Right-hand end cap	CKE-RH	5
Left-hand end cap	CKE-LH	5



CKI

Internal & External Angle

Description	Cat. No.	Pack Quantity
Internal angle	CKI	10
External angle	CKX	10



CKA-RH

Skirting To Architrave Adaptor

Description	Cat. No.	Pack Quantity
Right-hand adaptor	CKA-RH	2
Left-hand adaptor	CKA-LH	2




CKS 1

Spares

Description	Cat. No.	Pack Quantity
CMT 2 adaptor	CKMT 2	2
Cable retainer	CKR	10
Outlet box, 1 gang	CKS 1	5
Outlet box, 2 gang	CKS 2	5

Architrave Trunking

- The Kensington architrave range provides an efficient method to cabling around door ways, eliminating the need to install under floor cable management.
- This range can also be adapted to use as a dado trunking.





CDA

Architrave Trunking

Description	Cat. No.	Pack Quantity
2 Compartment	CDA	15m
1 Compartment	CDA 1	15m



CDC

Coupler

Description	Cat. No.	Pack Quantity
Coupler	CDC	10



CDE

End Cap

Description	Cat. No.	Pack Quantity
End cap	CDE	5



CDI

Internal & External Angle

Description	Cat. No.	Pack Quantity
Internal angle	CDI	10
External angle	CDX	10



CDFA

Flat Angle & Flat Tee

Description	Cat. No.	Pack Quantity
Flat angle	CDFA	2
Flat tee	CDFT	2




CDS 1

Spares

Description	Cat. No.	Pack Quantity
CMT 2 adaptor	CDMT 2	2
Cable retainer	CDR	10
Outlet box, 1 gang	CDS 1	5
Outlet box, 2 gang	CDS 2	5

Maxi Trunking & Accessories

- Boasting a unique anti-tamper locking lid, Centaur Maxi Trunking provides a clean line to the exterior appearance.
- Dividers available separately allowing the option for multiple compartments.





CMXT 22W

Trunking

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lid	**CMXT 22W**	50	50	4 x 3m
Trunking c/w lid	**CMXT 32W**	75	50	4 x 3m
Trunking c/w lid	**CMXT 33W**	75	75	4 x 3m
Trunking c/w lid	**CMXT 44W**	100	100	2 x 3m

Additional colours available on request.



DIV 22W

Dividers

Description	Cat. No.	Pack Quantity
Self-adhesive divider	**DIV 22W**	10 x 3m
Self-adhesive divider	**DIV 33W**	10 x 3m
Self-adhesive divider	**DIV 44W**	10 x 3m



CIC 22W

Internal Coupler

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Internal coupler	**CIC 22W**	50	50	1
Internal coupler	**CIC 32W**	75	50	1
Internal coupler	**CIC 33W**	75	75	1
Internal coupler	**CIC 44W**	100	100	1




CES 22W

End Cap

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
End cap	**CES 22W**	50	50	30
End cap	**CES 32W**	75	50	20
End cap	**CES 33W**	75	75	15
End cap	**CES 44W**	100	100	15

Maxi Trunking

- Standard colour white, RAL/BS colours available on request are subject to order quantity.
- Specially fabricated fittings can be made to order.



CIAM 22W

Internal Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Internal angle (moulded)	**CIAM 22W**	50	50	2
Internal angle (fabricated)	**CIAT 22W**	50	50	1
Internal angle (fabricated)	**CIAT 32W**	75	50	1
Internal angle (fabricated)	**CIAT 33W**	75	75	1
Internal angle (fabricated)	**CIAT 44W**	100	100	1



CXAM 22W

External Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
External angle (moulded)	**CXAM 22W**	50	50	2
External angle (fabricated)	**CXAT 22W**	50	50	1
External angle (fabricated)	**CXAT 32W**	75	50	1
External angle (fabricated)	**CXAT 33W**	75	75	1
External angle (fabricated)	**CXAT 44W**	100	100	1



CFAM 22W

Flat Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat angle (moulded)	**CFAM 22W**	50	50	2
Flat angle (fabricated)	**CFAT 22W**	50	50	1
Flat angle (fabricated)	**CFAT 32W**	75	50	1
Flat angle (fabricated)	**CFAT 33W**	75	75	1
Flat angle (fabricated)	**CFAT 44W**	100	100	1




CFTM 22W

Flat Tee

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat tee (moulded)	**CFTM 22W**	50	50	2
Flat tee (fabricated)	**CFTT 22W**	50	50	1
Flat tee (fabricated)	**CFTT 32W**	75	50	1
Flat tee (fabricated)	**CFTT 33W**	75	75	1
Flat tee (fabricated)	**CFTT 44W**	100	100	1

Mini Trunking

- Adding extra strength to the integral cross section, the specially designed tamper proof lid eliminates accidental removal.
- Self-adhesive dividers in selected size enables cable segregation.





CMT 1W

Trunking

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lid	**CMT 0W**	16	10	40 x 3m
Trunking c/w lid	**CMT 1W**	16	16	20 x 3m
Trunking c/w lid	**CMT 2W**	25	16	20 x 3m
Trunking c/w lid	**CMT 3W**	38	16	15 x 3m
Trunking twin compartment c/w lid	**CMT 3W T/C**	38	16	15 x 3m
Trunking c/w lid	**CMT 4W**	38	25	15 x 3m
Trunking c/w lid	**CMT 5W**	50	25	12 x 3m
Trunking twin compartment c/w lid	**CMT 5W T/C**	50	25	12 x 3m

Additional colours available on request.



CMT 1SA

Self-adhesive Trunking

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lid (self-adhesive)	**CMT 0SA**	16	10	40 x 3m
Trunking c/w lid (self-adhesive)	**CMT 1SA**	16	16	20 x 3m
Trunking c/w lid (self-adhesive)	**CMT 2SA**	25	16	20 x 3m
Trunking c/w lid (self-adhesive)	**CMT 3SA**	38	16	15 x 3m
Trunking c/w lid (self-adhesive)	**CMT 4SA**	38	25	15 x 3m
Trunking c/w lid (self-adhesive)	**CMT 5SA**	50	25	12 x 3m

Additional colours available on request.



DIV 2W

Self-adhesive Divider

Description	Cat. No.	Pack Quantity
Self-adhesive divider	**DIV 2W**	10 x 3m
Self-adhesive divider	**DIV 3W**	10 x 3m
Self-adhesive divider	**DIV 4W**	10 x 3m
Self-adhesive divider	**DIV 5W**	10 x 3m
Divider (metal)	**DIV 5 METAL**	10 x 3m

Mini Trunking Accessories



MEC 1W

End Cap


Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
End cap	MEC 0W	16	10	100
End cap	MEC 1W	16	16	100
End cap	MEC 2W	25	16	100
End cap	MEC 3W	38	16	40
End cap	MEC 4W	38	25	30
End cap	MEC 5W	50	25	20



MC 1W

Coupler

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Coupler	MC 0W	16	10	60
Coupler	MC 1W	16	16	60
Coupler	MC 2W	25	16	40
Coupler	MC 3W	38	16	30
Coupler	MC 4W	38	25	25
Coupler	MC 5W	50	25	10




MIB 1W

Internal Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Internal angle	MIB 0W	16	10	50
Internal angle	MIB 1W	16	16	50
Internal angle	MIB 2W	25	16	40
Internal angle	MIB 3W	38	16	40
Internal angle	MIB 4W	38	25	25
Internal angle	MIB 5W	50	25	2


Mini Trunking Accessories



MEB 1W

External Angle


Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
External angle	**MEB 0W**	16	10	50
External angle	**MEB 1W**	16	16	50
External angle	**MEB 2W**	25	16	40
External angle	**MEB 3W**	38	16	40
External angle	**MEB 4W**	38	25	25
External angle	**MEB 5W**	50	25	2



MFB 1W

Flat Angle

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Flat angle	**MFB 0W**	16	10	60
Flat angle	**MFB 1W**	16	16	60
Flat angle	**MFB 2W**	25	16	40
Flat angle	**MFB 3W**	38	16	40
Flat angle	**MFB 4W**	38	25	25
Flat angle	**MFB 5W**	50	25	2



MT 1-1W

Equal Tee

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Equal tee	**MT 0-0W**	16	10	50
Equal tee	**MT 1-1W**	16	16	50
Equal tee	**MT 2-2W**	25	16	30
Equal tee	**MT 3-3W**	38	16	25
Equal tee	**MT 4-4W**	38	25	20
Equal tee	**MT 5-5W**	50	25	2



MCR 2W

Ceiling Rose Adaptor


Description	Cat. No.	Pack Quantity
Ceiling rose adaptor CMT 2/CMT 1	**MCR 2W**	30



MA 1W

Surface Box Adaptor

Description	Cat. No.	Pack Quantity
To fit CMT 1 (centre)	**MA 1W**	50
To fit CMT 2 (centre)	**MA 2W**	50

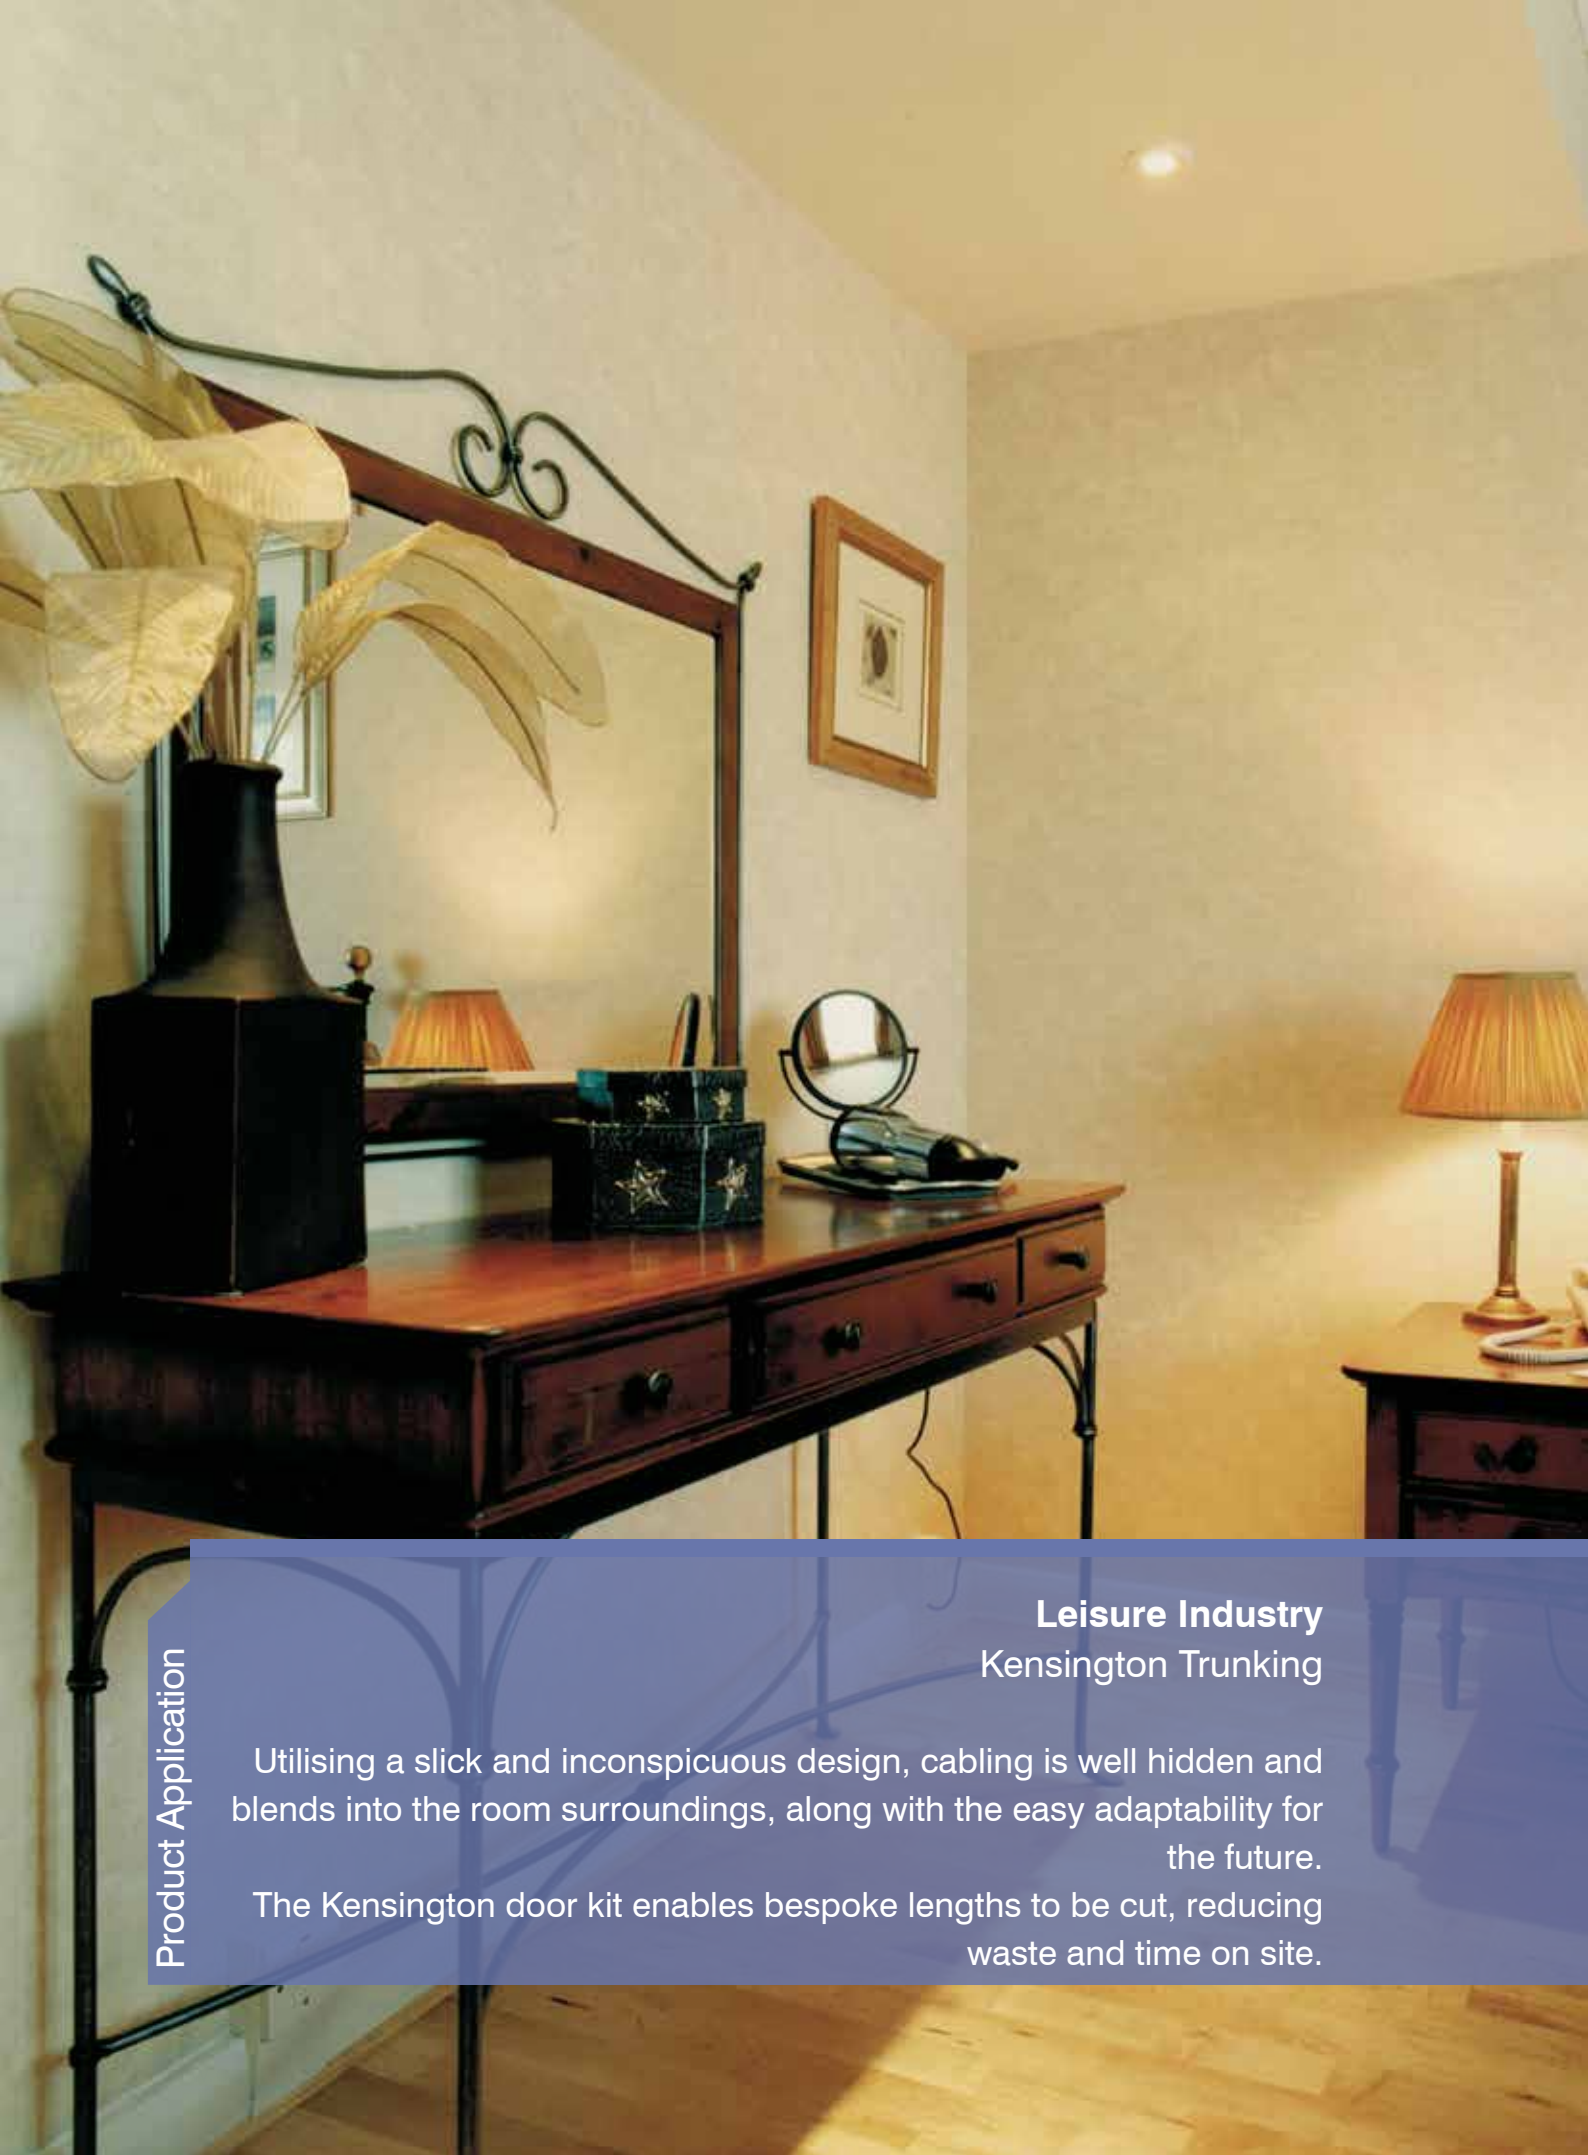

Product Application

Leisure Industry
Kensington Trunking

Utilising a slick and inconspicuous design, cabling is well hidden and blends into the room surroundings, along with the easy adaptability for the future.

The Kensington door kit enables bespoke lengths to be cut, reducing waste and time on site.

Red 202 Mini Trunking

- The Red 202 Mini Trunking range is ideal for use on installations such as computer and power supply switches, emergency stops, panic alarms, smoke detectors and sounders. Red 202 surface boxes have mini trunking opening ready prepared and are complete with earth terminals. Red 202 provides immediate identification of critical safety and alarm circuits.



CMT 2R

Trunking


Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Trunking c/w lid	**CMT 2R**	16	25	60 x 3m



MEC 2R

End Cap

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
End cap	**MEC 2R**	16	25	100



MC 2R

Coupler

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Coupler	**MC 2R**	16	25	40



MFB 2R

Bends & Tee

Description	Cat. No.	H (mm)	W (mm)	Pack Quantity
Internal bend	**MIB 2R**	16	25	40
External bend	**MEB 2R**	16	25	40
Flat bend	**MFB 2R**	16	25	40
Equal tee	**MT 2-2R**	16	25	40



SB 201R

Terminal Boxes & Lid

Description	Cat. No.	D (mm)	Pack Quantity
Square terminal box (1 outlet)	**SB 201R**	44	10
Square terminal box (2 outlet)	**SB 202R**	44	10
Square lid, 1 gang	**FL 1R**	-	20
Square lid, 2 gang	**FL 2R**	-	10



CDLBR 5W

Circular Dry Lining Box

Description	Cat. No.	D (mm)	Pack Quantity
Double back entry, depth 36mm, aperture 63.5mm, board thickness 2mm - 20mm, fixing centres 50.8mm	**CDLBR 5W**	36mm	10

Red 200 Terminal & Outlet Boxes

- The Red 200 range is designed as a combination of boxes plus 252 glands ready fitted for ease of installation, using conventional or fire performance cables. Red 200 provides immediate identification of critical fire safety and alarm circuits.



CB 2R



CB 7R

Terminal & Outlet Boxes

Description	Cat. No.	Pack Quantity
20mm Back outlet box	**CB 1R**	10
20mm Terminal box	**CB 2R**	10
20mm Through outlet box	**CB 3R**	10
20mm Angle box	**CB 4R**	10
20mm T box	**CB 5R**	10
20mm 4 Way box	**CB 6R**	10
20mm U box	**CB 7R**	10
20mm Y box	**CB 8R**	10
20mm H box	**CB 9R**	10
Circular lid	**CCL 1R**	100
Steel cheesehead screw	**M4 x 12mm**	100

All terminal boxes are complete with glands and earth terminal
All Red 200 products are also available in white.



Product Application

Group Study Areas

Centaur's sturdy and aesthetic power poles are widely specified throughout a variety of applications. The six compartment system provides generous cabling capacity for power, data and voice accessories from a central location. The ability to connect to ACD 4 President trunking enables multiple power poles to be connected via a tee accessory, which is especially useful when installing onto solid ceilings or solid flooring. If cabling from floor to ceiling or vice versa, the power pole flange enables a smooth and sleek look to entering suspended ceilings.

High Impact Conduit

- Manufactured in accordance to: BS 4607 Part 5; BSEN 50086-2-1 (1996); BSEN 61386-21 (2004) formerly BS 6099.
- Tested regularly to high quality standards, the Centaur super high impact conduit provides an easy and secure method of cable management.
- Heavy gauge and light gauge options are available to suit a variety of applications.



HG 20W

Super High Impact Conduit, Heavy Gauge

Size	Nom. Wall Thickness	Cat. No.	Pack Quantity
20mm	1.8mm	**HG 20***	30 x 3m
25mm	1.9mm	**HG 25***	30 x 3m
32mm	2.5mm	**HG 32**	10 x 3m
38mm	2.5mm	**HG 38**	10 x 3m
50mm	3.2mm	**HG 50**	10 x 3m

* - Selected conduit & accessories also available in red.



LG 20W

Super High Impact Conduit, Light Gauge

Size	Nom. Wall Thickness	Cat. No.	Pack Quantity
20mm	1.2mm	**LG 20**	30 x 3m
25mm	1.5mm	**LG 25**	30 x 3m
32mm	1.5mm	**LG 32**	10 x 3m
38mm	1.5mm	**LG 38**	10 x 3m
50mm	1.8mm	**LG 50**	10 x 3m



OCO 1500W

High Impact Oval Conduit

Size	Nom. Wall Thickness	Cat. No.	Pack Quantity
13mm	0.8mm	**OCO 500W**	50 x 3m
16mm	0.8mm	**OCO 625W**	50 x 3m
20mm	0.8mm	**OCO 750W**	50 x 3m
25mm	1.0mm	**OCO 1000W**	50 x 3m
32mm	1.0mm	**OCO 1250W**	20 x 3m
38mm	1.3mm	**OCO 1500W**	20 x 3m

Manufactured to comply with BS 4607 Part 5.



CH 150W

High Impact Channels

Size	Nom. Wall Thickness	Cat. No.	Pack Quantity
13mm	7.4mm	**CH 050W**	50 x 2m
25mm	8.0mm	**CH 100W**	50 x 2m
38mm	8.5mm	**CH 150W**	50 x 2m

Conduit & accessories available as standard black or white.

Flexible Conduit & Fixings Accessories



CFP-25W-10M-CP*

Flexible Conduit

Description	Cat. No.	Pack Quantity
20mm Flexible conduit	CFP 2*	50m
25mm Flexible conduit	CFP 3*	50m
20mm Ø, 10m Flexible conduit c/w 10 x glands. White (uPVC)	CFP-20W-10M-CP*	-
25mm Ø, 10m Flexible conduit c/w 10 x glands. White (uPVC)	CFP-25W-10M-CP*	-
20mm Ø, 10m Flexible conduit c/w 10 x glands. Black (polypropylene)	CFP-20B-10M-CP	-
25mm Ø, 10m Flexible conduit c/w 10 x glands. Black (polypropylene)	CFP-25B-10M-CP	-

* - Flame retardant. Available in black & white.



CAF 2W

Flexible Conduit Adaptor

Description	Cat. No.	Pack Quantity
20mm Flexible conduit adaptor	CAF 2	50
25mm Flexible conduit adaptor	CAF 3	50



CEC 20W

Expansion Coupler

Description	Cat. No.	Pack Quantity
20mm Expansion coupler	CEC 20	50
25mm Expansion coupler	CEC 25	25

Expansion couplers should be installed when a run exceeds 6m or on lengths adjacent to two fixed points.



CSC 50W

Conduit Coupler

Description	Cat. No.	Pack Quantity
20mm Round conduit coupler	CSC 20	100
25mm Round conduit coupler	CSC 25	50
32mm Round conduit coupler	CSC 32	25
38mm Round conduit coupler	CSC 38	15
50mm Round conduit coupler	CSC 50	10



CMA 38W

Male Adaptor

Description	Cat. No.	Pack Quantity
20mm Male adaptor	CMA 20	100
25mm Male adaptor	CMA 25	70
32mm Male adaptor	CMA 32	25
38mm Male adaptor	CMA 38	25
50mm Male adaptor	CMA 50	10

Conduit & accessories available as standard black or white.

Conduit Fixing Accessories



CLR 20W



CFA 50W



CMB 32W



93W



SBS 32W



SS 32W
Screws not included.

Screwed Lockring

Description	Cat. No.	Pack Quantity
20mm Screwed lockring	CLR 20	100
25mm Screwed lockring	CLR 25	100
32mm Screwed lockring	CLR 32	50
38mm Screwed lockring	CLR 38	25
50mm Screwed lockring	CLR 50	25

Female Adaptor

Description	Cat. No.	Pack Quantity
20mm Female adaptor	CFA 20	100
25mm Female adaptor	CFA 25	50
32mm Female adaptor	CFA 32	25
38mm Female adaptor	CFA 38	25
50mm Female adaptor	CFA 50	10

Screwed Male Bush

Description	Cat. No.	Pack Quantity
20mm Screwed male bush	CMB 20	100
25mm Screwed male bush	CMB 25	100
32mm Screwed male bush	CMB 32	50
38mm Screwed male bush	CMB 38	25
50mm Screwed male bush	CMB 50	25

Screwed Locknut

Description	Cat. No.	Pack Quantity
20mm Screwed locknut	93	100
25mm Screwed locknut	94	100

Spacer Bar Saddle

Description	Cat. No.	Pack Quantity
20mm Spacer bar saddle	SBS 20	100
25mm Spacer bar saddle	SBS 25	100
32mm Spacer bar saddle	SBS 32	50
38mm Spacer bar saddle	SBS 38	25
50mm Spacer bar saddle	SBS 50	25

Strap Saddle

Description	Cat. No.	Pack Quantity
20mm Strap saddle	SS 20	100
25mm Strap saddle	SS 25	100
32mm Strap saddle	SS 32	100
38mm Strap saddle	SS 38	25
50mm Strap saddle	SS 50	25

Conduit & accessories available as standard black or white.

Conduit Fixing Accessories



SCS 20W

Round Conduit Clip

Description	Cat. No.	Pack Quantity
20mm Round conduit clip	SCS 20	100
25mm Round conduit clip	SCS 25	100



COC 4W

Oval Conduit Clip

Description	Cat. No.	Pack Quantity
13mm Oval conduit clip	COC 1W	100
16mm Oval conduit clip	COC 2W	100
20mm Oval conduit clip	COC 3W	100
25mm Oval conduit clip	COC 4W	100



CIE 20W

Inspection Elbow, Bend & Tee

Description	Cat. No.	Pack Quantity
20mm Inspection elbow	CIE 20	50
20mm Inspection bend	CIB 20	30
25mm Inspection bend	CIB 25	20
20mm Inspection tee	CIT 20	40
25mm Inspection tee	CIT 25	20



CSB 20W

Slip Bend

Description	Cat. No.	Pack Quantity
20mm Slip bend	CSB 20	25
25mm Slip bend	CSB 25	20



CHB 25W

Heavy Gauge Bend

Description	Cat. No.	Pack Quantity
20mm Heavy gauge bend c/w couplers	CHB 20	25
25mm Heavy gauge bend c/w couplers	CHB 25	15
32mm Heavy gauge bend c/w couplers	CHB 32	2
38mm Heavy gauge bend c/w couplers	CHB 38	2
50mm Heavy gauge bend c/w couplers	CHB 50	2



CR 2W

Reducer & Adaptor

Description	Cat. No.	Pack Quantity
25-20mm Reducer	CR 2	100
20mm Oval to round conduit adaptor	COR 20	100

Conduit & accessories available as standard black or white.

Conduit Boxes

- Lid fixing centres approx. 50.8mm.
- M4 brass inserts in pillars.
- Moulded recess for earth terminals (Ref ET 1).
- Boxes without lugs are suitable for loads up to 3kg centrally, at 60° maximum.
- Boxes with external lugs, riveted to M4 brass inserts in pillars are suitable for suspending loads up to 10kg centrally, at 60° maximum.
- External lugs can be used for screw fixing to the structure or keyed into concrete slab.



20 CRB 12W

Plain Box

Description	Cat. No.	Pack Quantity
Plain box	**20 CRB 1**	30
20mm Plain box with back outlet	**20 CRB 12**	30
25mm Plain box with back outlet	**25 CRB 12**	20



20 CRB 2W

Terminal Box

Description	Cat. No.	Pack Quantity
20mm Terminal box	**20 CRB 2**	30
25mm Terminal box	**25 CRB 2**	20



20 CRB 3W

Through Box

Description	Cat. No.	Pack Quantity
20mm Through box	**20 CRB 3**	30
25mm Through box	**25 CRB 3**	20



20 CRB 4W

Angle Box

Description	Cat. No.	Pack Quantity
20mm Angle box	**20 CRB 4**	30
25mm Angle box	**25 CRB 4**	20



20 CRB 5W

Tee Box

Description	Cat. No.	Pack Quantity
20mm Tee box	**20 CRB 5**	20
25mm Tee box	**25 CRB 5**	20



20 CRB 6W

4 Way Box

Description	Cat. No.	Pack Quantity
20mm 4 Way box	**20 CRB 6**	20
25mm 4 Way box	**25 CRB 6**	10

Conduit & accessories available as standard black or white.

Conduit Boxes



20 CRB 13W

Loop In Box

Description	Cat. No.	Pack Quantity
20mm With 4 x 20mm knockouts	**20 CRB 13**	30



20 CRB 14W

Y & U Box

Description	Cat. No.	Pack Quantity
20mm Y box	**20 CRB 14**	20
20mm U box	**20 CRB 15**	20



CCL 1W

Lids & Earth Electrode Box

Description	Cat. No.	Pack Quantity
Circular lid	**CCL 1**	100
Overlapping lid, 85mm dia.	**CCL 0**	100
20mm Earth electrode box, black	**CEB 1B**	1



CXR 20W

Extension Ring

Description	Cat. No.	Pack Quantity
12.5mm	**CXR 12**	50
20mm	**CXR 20**	50
25mm	**CXR 25**	50
38mm	**CXR 38**	20
50mm	**CXR 50**	10



CRG 1

Conduit Box Gasket Seal

Description	Cat. No.	Pack Quantity
Rubber gasket seal	**CRG 1**	100




CAB 1W

Adaptable Box

Description	Cat. No.	Pack Quantity
75 x 75 x 50mm Adaptable box	**CAB 1**	5

Conduit & accessories available as standard black or white.

Conduit Boxes & Accessories



32 SRB 2W

Terminal & Through Box

Description	Cat. No.	Pack Quantity
32mm Terminal box	32 SRB 2	5
32mm Through box	32 SRB 3	5



32 SRB 4W

Angle Box

Description	Cat. No.	Pack Quantity
32mm Angle box	32 SRB 4	5



CBB 20W

Bell Mouth Bush

Description	Cat. No.	Pack Quantity
20mm Bell mouth bush	CBB 20	100
25mm Bell mouth bush	CBB 25	100



CPS 20W

Screwed Conduit Plug

Description	Cat. No.	Pack Quantity
20mm Screwed conduit plug	CPS 20	100
25mm Screwed conduit plug	CPS 25	100

Available in black & white, please state colour when ordering.



CHS 20

Heavy Gauge Conduit Bending Spring

Description	Cat. No.	Pack Quantity
20mm Heavy gauge bending spring (green tips)	CHS 20	1
25mm Heavy gauge bending spring (green tips)	CHS 25	1



CLS 20

Light Gauge Conduit Bending Spring

Description	Cat. No.	Pack Quantity
20mm Light gauge bending spring (red tips)	CLS 20	1
25mm Light gauge bending spring (red tips)	CLS 25	1

Conduit & accessories available as standard black or white.

Conduit Accessories



251W

Nylon Compression Gland

Description	Cat. No.	Pack Quantity
20mm Small for 7.0-10.5 dia. cables	**251**	100
20mm Large for 8.0-13.0 dia. cables	**252**	100
20mm Large plain end for 8.0-13.0 dia. cables	**252 P**	100
25mm For 12.0-18.0 dia. cables	**254**	100

Compression glands available in white, black & red.



SA 2

Adhesive

Description	Cat. No.	Pack Quantity
250ml Waterproof adhesive, permanent	**SA 2**	1

Waterproof adhesive (Permanent) 250ml tin vinyl solvent cement for making watertight joints between uPVC conduit and fittings.



CDT 30

Nylon Draw Tape

Description	Cat. No.	Pack Quantity
10m Nylon draw tape	**CDT 10**	1
20m Nylon draw tape	**CDT 20**	1
30m Nylon draw tape	**CDT 30**	1



BLUE 5/6

Sleeving Hanks

Description	Cat. No.	Pack Quantity
2mm i/d 3mm o/d - Blue	**BLUE 2/3**	100m
2mm i/d 3mm o/d - Brown	**BROWN 2/3**	100m
2mm i/d 3mm o/d - Green / yellow	**GYE 2/3**	100m

Add suffix: 3/4 (3mm i/d 4mm o/d). 4/5 (4mm i/d 5mm o/d). 5/6 (5mm i/d 6mm o/d)



BROWN REEL 3/4

Single Sleeving Reels

Description	Cat. No.	Pack Quantity
2mm i/d 3mm o/d - Blue	**BLUE REEL 2/3**	100m
2mm i/d 3mm o/d - Brown	**BROWN REEL 2/3**	100m
2mm i/d 3mm o/d - Green / yellow	**GYE REEL 2/3**	100m

Add suffix: 3/4 (3mm i/d 4mm o/d). 4/5 (4mm i/d 5mm o/d).



Multi 2/3

Multi Sleeving Reels

Description	Cat. No.	Pack Quantity
2mm i/d 3mm o/d	**Multi 2/3**	60m G/Y, 20m Blue & Brown
3mm i/d 4mm o/d	**Multi 3/4**	60m G/Y, 20m Blue & Brown
4mm i/d 5mm o/d	**Multi 4/5**	40m G/Y, 10m Blue & Brown

Surface & Socket Boxes



CSU/8/1AL

Flush Fitting Socket Box

Description	Cat. No.	Pack Quantity
1 Gang, 35mm deep. 8 x 20mm round knockouts	CSU/8/1AL	20
2 Gang, 35mm deep. 12 x 20mm round knockouts	CSU/8/2AL	10

Supplied with 1 fixed lug & 1 adjustable lug.



SBR/3W

1 Gang Surface Box - Conduit Knockout

Description	Cat. No.	Pack Quantity
32mm Deep, square corners	SBR/3W	20
32mm Deep, rounded corners	SBR/7W	20
44mm Deep, square corners	SBR/9W	10



SBP 1W

1 Gang Surface Box - Plain Sides

Description	Cat. No.	Pack Quantity
25mm Deep, square corners	SBP 1W	20
32mm Deep, square corners	SBP 3W	20
25mm Deep, rounded corners	SBP 5W	20
32mm Deep, rounded corners	SBP 7W	20
44mm Deep, square corners	SBP 9W	10



SB 3W

1 Gang Surface Box - Mini Trunking Cutouts

Description	Cat. No.	Pack Quantity
25mm Deep, square corners	SB 1W	20
32mm Deep, square corners	SB 3W	20
25mm Deep, rounded corners	SB 5W	20
32mm Deep, rounded corners	SB 7W	20



SB 3/20W

1 Gang Surface Box - Multi Entry

Description	Cat. No.	Pack Quantity
32mm Deep, square corners	SB 3/20W	20
32mm Deep, rounded corners	SB 7/20W	20

Surface & Socket Boxes



SBR/4W

2 Gang Surface Box - Conduit Knockout

Description	Cat. No.	Pack Quantity
32mm Deep, square corners	SBR/4W	10
32mm Deep, rounded corners	SBR/8W	10
44mm Deep, square corners	SBR/10W	5



SBP 2W

2 Gang Surface Box - Plain Sides

Description	Cat. No.	Pack Quantity
25mm Deep, square corners	SBP 2W	10
32mm Deep, square corners	SBP 4W	10
25mm Deep, rounded corners	SBP 6W	10
32mm Deep, rounded corners	SBP 8W	10
44mm Deep, square corners	SBP 10W	5



SB 4W

2 Gang Surface Box - Mini Trunking Cutouts

Description	Cat. No.	Pack Quantity
25mm Deep, square corners	SB 2W	10
32mm Deep, square corners	SB 4W	10
25mm Deep, rounded corners	SB 6W	10
32mm Deep, rounded corners	SB 8W	10



SB 4/20W

2 Gang Surface Box - Multi Entry

Description	Cat. No.	Pack Quantity
32mm Deep, square corners	SB 4/20W	10
32mm Deep, rounded corners	SB 8/20W	10

Surface boxes manufactured to comply with BS 4662.

FasterFix Dry Lining Boxes



CDLB1-35

1 Gang Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 35mm, aperture 73mm x 73mm, board thickness 6mm - 16mm	CDLB1-35	10



CDLB1-47

1 Gang Deep Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 47mm, aperture 74mm x 73mm, board thickness 10mm - 26mm	CDLB1-47	10



CDLB2-35

2 Gang Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 35mm, aperture 73mm x 133mm, board thickness 6mm - 16mm	CDLB2-35	5



CDLB2-47

2 Gang Deep Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 47mm, aperture 73mm x 134mm, board thickness 10mm - 26mm	CDLB2-47	5



CDLB 1+1W

Dual 1 + 1 Gang Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 35mm, board thickness 6mm - 16mm	CDLB 1+1W	10



CDLB 1+2W

Dual 1 + 2 Gang Dry Lining Box - Spring Action Lugs

Description	Cat. No.	Pack Quantity
Depth 35mm, board thickness 6mm - 16mm	CDLB 1+2W	6

Dry Lining Boxes



CDLB 1W

1 Gang Dry Lining Box


Description	Cat. No.	Pack Quantity
Depth 35mm, aperture 73mm x 73mm, board thickness 2mm - 19mm	CDLB 1W	10



CDLB 3W

1 Gang Deep Dry Lining Box

Description	Cat. No.	Pack Quantity
Depth 46mm, aperture 73mm x 73mm, board thickness 2mm - 30mm	CDLB 3W	10



CDLB 2W

2 Gang Dry Lining Box

Description	Cat. No.	Pack Quantity
Depth 35mm, aperture 73mm x 133mm, board thickness 2mm - 19mm	CDLB 2W	5



CDLB 4W

2 Gang Deep Dry Lining Box

Description	Cat. No.	Pack Quantity
Depth 46mm, aperture 73mm x 133mm, board thickness 2mm - 30mm	CDLB 4W	5



CDLBR 5W

Circular Dry Lining Box

Description	Cat. No.	Pack Quantity
Double back entry, depth 36mm, aperture 63.5mm, board thickness 2mm - 20mm, fixing centres 50.8mm	CDLBR 5W	10

Bespoke Products Features & Benefits

Bespoke Products

Make the Product Fit the Job

Design Features:

- Using their specialised and experienced fabrication department, Centaur are able to provide bespoke cable management solutions to a variety of applications within all sectors of the industry.
- Considerations such as compliance with current legiastion and project budgets are taken into account at an early design stage. Based upon their technical experience, Centaur can assist projects from design through to installation with continuous innovation.

1. Quick and efficient lead times to suit customer requirements.
2. Precision made products to suit exact specifications.
3. Guidance led support direct from the manufacturer.



Bespoke Products Features & Benefits



Bespoke Products

Multi-Compartment Trunking & Accessories

Multi-compartment trunking can be provided for installations that require vast amount of cables. Using Centaur's innovative base extension (ABX 1), customers can be supplied with a large number of extra centre compartments to suit cabling requirements. Working in coordination with this product, Centaur's flexibility enables them to fabricate accessories to maintain an aesthetically appealing system.





Anti-Microbial Trunking & Accessories

A popular choice for specification in hospitals, Centaur offers a complete range of anti-microbial trunking and accessories. A silver based additive added into the uPVC compound enables the prevention of bacteria spreading further if the surfaces are kept free of dirt and grime.

Colours/Finishes

From corporate colours to Part M compliancy, Centaur offers a vast array of colours and finishes to a wide range of products. A choice of extruded/moulded or paint sprayed colours/finishes can facilitate quick lead times on specialised products. Wood effect trunking is also an option to match existing fixtures with buildings, Centaur offer both a light oak and mahogany finish along with sprayed colour coordinated accessories.









Illuminated Trunking

Available plain, populated or pre-wired, the Centaur illuminated trunking is a great product for quiet studying, such as university halls of residence. With the option of cool or warm white LED fitting, illuminated trunking is ideal for a range of ambience. Units are tailor made to the customer's requirements from lengths to colour to wiring accessories.

Pendants

Fabricated as a bespoke solution to eliminate tripping hazards and keep sockets out of arms reach from vulnerable people such as hospitals patients or students, pendants are available in a variety of lengths with a selection of wiring accessory configurations to install. Pendants are manufactured from a powder coated solid aluminium body, with a four compartment surrounding for added accessory space and a fixing plate included.





Pre-Wired & Populated

Working in coordination with another of the Installation Materials Division operations, Centaur are able to offer trunking both pre-wired and populated with matching accessories. Pre-wired units vary from cut lengths of trunking to power posts to bench units and can be wired to tails or for a plug and play system.

Bespoke Products

Bedhead Units

With vertical or horizontal bedhead units available, Centaur offer a wide variety of accessories made for hospital applications. Penlon or Gem 10 medical gas plates can be fitted into the centre compartment of the Meridian or President ranges to enable fixing of gas, air and vacuum outlets. These outlets along with nurse call points can be fabricated into the trunking if provided with them.





Fabricated Angles

Specialist angles can be fabricated to adapt to pre-existing objects in buildings e.g. odd shaped pillars or existing trunking. Odd angles can also be created to provide a more pleasing to the eye finish in difficult installations. A variety of different compartment options are also available e.g. an angle that comes down from a four compartment trunking down to a three compartment trunking.

Carousels

Boasting four sides and a massive twelve compartments, the Centaur carousel systems is ideal for supplying several areas with power, data and voice from a central location. Available in light uPVC, sturdy aluminium or aluminium base with a uPVC lid, carousels are a very popular source within commercial applications.





Pods






For use on the large (192mm) President chamfered compartments only, the Centaur pod accessory allows for the easy creation of a local extension (above or below the trunking run) where wiring accessories are required. Special accessories can be fabricated to order.

Pipe Encasement

Supplying 10mm and 15mm pipe clips and offering a tidy pipe trunking outlet, Centaur pipe encasement is a practical yet visibly appealing method of housing pipe work. Centaur pipe clips are capable of holding pipes that operate up to a working temperature of 80°C and the pipes should not come into contact with the trunking walls. Clips are recommended to be installed at approximately one metre intervals along the trunking length.









Endless Possibilities

From RCD/MCB housing to transparent trunking, Centaur offers a vast array of bespoke products beyond this page. To help transform ideas into products, please contact the Centaur sales office.

Technical Information

President uPVC Trunking Chemical Resistance

The uPVC material used in the manufacture of President trunking systems is resistant to most organic chemicals, solutions of organic acids, alkalis and salts. It may possibly be softened by some organic materials such as ketones and aromatic compounds. If in doubt please contact Centaur sales office.

Strength

High impact resistance. The material is formulated to comply with the –5°C clause of BS 4678 Part 4 (1982), cable trunking standard.


Fire Resistance

The materials used in Centaur President trunking system are non-flame propagating and comply with the requirements of BS 476 Part 7 and BS 4678 Part 4.

President systems are designed to accommodate local thermal expansion and contraction. The coefficient of linear expansion: 7.0 x 10 –5°C operating temperatures –5°C to 60°C.

President Aluminium Trunking Physical Constraints Of Pure Aluminium

Specific Gravity	2.70
Coeff. of expansion	24.0 x 10-6/°C
Thermal conductivity at 100°C	0.523/calsec/cm2/°C
Young's modulus of elasticity (E)	60.6 GPa
Torsion modulus	24 GPa
Poisson's ratio	0.34
Melting point	659.8°C




Meridian Cable Capacity ACD 3

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full	Capacity C @ 45% Full
Full Term CSA 100% Fill (mm²)			1711	i-4442; ii-1758; iii-1356; iv-3202; v-3325	1711
PVC power stranded	1.5	8.6	i-89	i-232; ii-92; iii-71; iv-167; v-174	i-89
PVC power stranded	2.5	12.6	i-61	i-158; ii-63; iii-48; iv-113; v-118	i-61
PVC power stranded	4.0	16.6	i-46	i-120; ii-48; iii-37; iv-86; v-90	i-46
PVC power stranded	6.0	21.2	i-36	i-94; ii-37; iii-29; iv-67; v-70	i-36
Cat. 6 UTP	6.5* dia.	42.2	i-18	i-47; ii-18; iii-14; iv-33; v-35	i-18
Cat. 6 STP	7.0* dia.	49.0	i-15	i-40; ii-16; iii-12; iv-28; v-30	i-15
Cat. 7	8.0* dia.	64.0	i-12	1-31; ii-12; iii-9; iv-22; v-23	i-12

* - Typical values for guideline purposes only. i - denotes no outlet box fitted in compartment. ii - denotes 32mm deep outlet box fitted in compartment. iii - denotes 40mm deep outlet box fitted in compartment. iv - denotes 60mm radius corner guard fitted in compartment for internal/external angles. v - denotes 60mm radius corner guard protection fitted in compartment for flat angles.


Technical Information

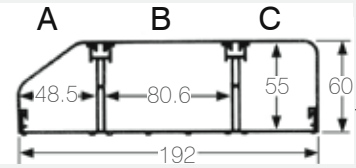

President Cable Capacity ASKT 3/BSKT 3W

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full	Capacity C @ 45% Full
PVC power stranded	1.5	8.6	i-101	i-225; ii-90; iii-71; iv-163; v-170	i-128
PVC power stranded	2.5	12.6	i-69	i-153; ii-61; iii-48; iv-111; v-115	i-87
PVC power stranded	4.0	16.6	i-52	i-116; ii-47; iii-36; iv-84; v-87	i-66
PVC power stranded	6.0	21.2	i-41	i-91; ii-36; iii-28; iv-66; v-68	i-52
Cat. 6 UTP	6.5* dia.	42.2	i-21	i-46; ii-18; iii-14; iv-33; v-35	i-26
Cat. 6 STP	7.0* dia.	49.0	i-18	i-39; ii-16; iii-12; iv-28; v-30	i-22
Cat. 7	8.0* dia.	64.0	i-13	i-29; ii-11; iii-8; iv-20; v-21	i-16

* - Typical values for guideline purposes only. i - denotes no outlet box fitted in compartment. ii - denotes 32mm deep outlet box fitted in compartment. iii - denotes 40mm deep outlet box fitted in compartment. iv - denotes 60mm radius corner guard fitted in compartment for internal/external angles. v - denotes 60mm radius corner guard protection fitted in compartment for flat angles.
For ASD 1/BSD 1W, use the cable capacity section C twice and section B.
For ACD 2/BCD 2W, use the cable capacity section A twice and section B.





Bench Trunking Cable Capacity ABT 1/DBT 1

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full	Capacity C @ 45% Full
PVC power stranded	1.5	8.6	i-64	i-288; ii-168 iii-150	i-64
PVC power stranded	2.5	12.6	i-44	i-197; ii-115 iii-102	i-44
PVC power stranded	4.0	16.6	i-33	i-150; ii-87 iii-78	i-33
PVC power stranded	6.0	21.2	i-26	i-117; ii-68 iii-61	i-26
Cat. 6 UTP	6.5* dia.	42.2	i-13	i-56; ii-32 iii-28	i-13
Cat. 6 STP	7.0* dia.	49.0	i-11	i-50; ii-28 iii-25	i-11
Cat. 7	8.0* dia.	64.0	i-8	i-38; ii-21 iii-19	i-8

*- Typical values for guideline purposes only. i - denotes no outlet box fitted in compartment. ii - denotes 32mm deep outlet box fitted in compartment. iii - denotes 40mm deep outlet box fitted in compartment

Cable Capacities






Power Pole/Post/President AP 1/AP 2/AP 680 & ACD 4

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full	Capacity C @ 45% Full
PVC power stranded	1.5	8.6	i-39	i-183; ii-53; iii-33; iv-121; v-141	i-39
PVC power stranded	2.5	12.6	i-27	i-125; ii-36; iii-22; iv-83; v-96	i-27
PVC power stranded	4.0	16.6	i-20	i-95; ii-27; iii-17; iv-63; v-73	i-20
PVC power stranded	6.0	21.2	i-16	i-74; ii-21; iii-12; iv-49; v-57	i-16
Cat. 6 UTP	6.5* dia.	42.2	i-8	i-37; ii-11; iii-6; iv-25; v-29	i-8
Cat. 6 STP	7.0* dia.	49.0	i-7	i-32; ii-9; iii-5; iv-21; v-25	i-7
Cat. 7	8.0* dia.	64.0	i-5	i-24; ii-6; iii-4; iv-15; v-18	i-5


* - Typical values for guideline purposes only. i - denotes no outlet box fitted in compartment. ii - denotes 32mm deep outlet box fitted in compartment. ACD 4 only - iii - denotes 40mm deep outlet box fitted in compartment. iv - denotes 50mm radius corner guard fitted in compartment for internal/external angles. v - denotes 50mm radius corner guard protection fitted in compartment for flat angles.



* - Typical values for guideline purposes only. i - denotes no outlet box fitted in compartment. ii - denotes 32mm deep outlet box fitted in compartment. iii - denotes 40mm deep outlet box fitted in compartment.

Carousel Post AP 5680/6680/7680

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full	Capacity C @ 45% Full
PVC power stranded	1.5	8.6	i-64	i-288; ii-168 iii-150	i-64
PVC power stranded	2.5	12.6	i-44	i-197; ii-115 iii-102	i-44
PVC power stranded	4.0	16.6	i-33	i-150; ii-87 iii-78	i-33
PVC power stranded	6.0	21.2	i-26	i-117; ii-68 iii-61	i-26
Cat. 6 UTP	6.5* dia.	42.2	i-13	i-56; ii-32 iii-28	i-13
Cat. 6 STP	7.0* dia.	49.0	i-11	i-50; ii-28 iii-25	i-11
Cat. 7	8.0* dia.	64.0	i-8	i-38; ii-21 iii-19	i-8

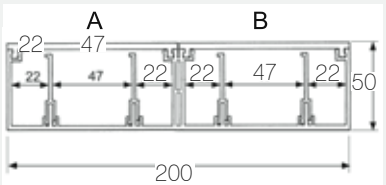


* - Typical values for guideline purposes only. i - denotes no outlet box or dividers fitted in compartment. ii - denotes 32mm deep outlet box and no dividers fitted in compartment. iii - denotes 50mm corner guard fitted for external angle only.

Campus DMXT 42W

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full
PVC power stranded	1.5	8.6	i-217; ii-64; iii-137	i-217; ii-64; iii-137
PVC power stranded	2.5	12.6	i-150; ii-44; iii-95	i-150; ii-44; iii-95
PVC power stranded	4.0	16.6	i-113; ii-33; iii-71	i-113; ii-33; iii-71
PVC power stranded	6.0	21.2	i-88; ii-26; iii-55	i-88; ii-26; iii-55
Cat. 6 UTP	6.5* dia.	42.2	i-45; ii-13; iii-28	i-45; ii-13; iii-28
Cat. 6 STP	7.0* dia.	49.0	i-39; ii-11; iii-24	i-39; ii-11; iii-24
Cat. 7	8.0* dia.	64.0	i-29; ii-8; iii-18	i-29; ii-8; iii-18


Cable Capacities



* - Typical values for guideline purposes only. i - denotes no outlet box or dividers fitted in compartment. ii - denotes 32mm deep outlet box and no dividers fitted in compartment. CMXT 42W/BMXT 42W only - iii - denotes 50mm corner guard fitted for external angle only.

Campus CMXT 42W & BMXT 42W & AP 3 Power Pole

Conductor	Size mm²	Cable Factor	Capacity A @ 45%	Capacity B @ 45%	Capacity C @ 45%
PVC power stranded	1.5	8.6	i-48; ii-15 iii-33	i-110; ii-31 iii-71	i-48; ii-15 iii-33
PVC power stranded	2.5	12.6	i-33; ii-10 iii-23	i-75; ii-21 iii-49	i-33; ii-10 iii-23
PVC power stranded	4.0	16.6	i-25; ii-8 iii-17	i-57; ii-16 iii-37	i-25; ii-8 iii-17
PVC power stranded	6.0	21.2	i-19; ii-6 iii-13	i-45; ii-12 iii-29	i-19; ii-6 iii-13
Cat. 6 UTP	6.5* dia.	42.2	i-10; ii-3 iii-7	i-22; ii-6 iii-14	i-10; ii-3 iii-7
Cat. 6 STP	7.0* dia.	49.0	i-8; ii-2 iii-6	i-19; ii-5 iii-12	i-8; ii-2 iii-6
Cat. 7	8.0* dia.	64.0	i-6; ii-2; iii-4	i-14; ii-4; iii-6	i-6; ii-2; iii-4




* - Typical values for guideline purposes only

i - denotes no outlet box or dividers fitted in compartment.

Campus CMXT 41

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full
PVC power stranded	1.5	8.6	i-115
PVC power stranded	2.5	12.6	i-77
PVC power stranded	4.0	16.6	i-59
PVC power stranded	6.0	21.2	i-46
Cat. 6 UTP	6.5* dia.	42.2	i-23
Cat. 6 STP	7.0* dia.	49.0	i-19
Cat. 7	8.0* dia.	64.0	i-15

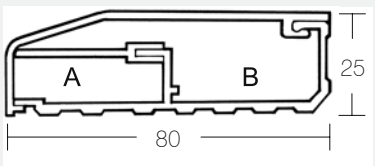


* - Typical values for guideline purposes only

i - denotes no outlet box or dividers fitted in compartment

Skirting Trunking CKD

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full
PVC power stranded	1.5	8.6	i-23	i-56
PVC power stranded	2.5	12.6	i-16	i-38
PVC power stranded	4.0	16.6	i-12	i-29
PVC power stranded	6.0	21.2	i-9	i-23
Cat. 6 UTP	6.5* dia.	42.2	i-5	i-11
Cat. 6 STP	7.0* dia.	49.0	i-4	i-10
Cat. 7	8.0* dia.	64.0	i-3	i-7

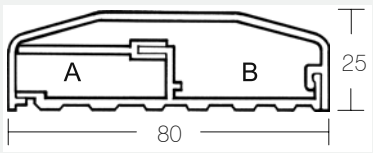

* - Typical values for guideline purposes only

i - denotes no outlet box or dividers fitted in compartment

Architrave Trunking CDA

Conductor	Size mm²	Cable Factor	Capacity A @ 45% Full	Capacity B @ 45% Full
PVC power stranded	1.5	8.6	i-23	i-49
PVC power stranded	2.5	12.6	i-16	i-33
PVC power stranded	4.0	16.6	i-12	i-25
PVC power stranded	6.0	21.2	i-9	i-20
Cat. 6 UTP	6.5* dia.	42.2	i-5	i-9
Cat. 6 STP	7.0* dia.	49.0	i-4	i-8
Cat. 7	8.0* dia.	64.0	i-3	i-6

Cable Capacities

Choice of trunking is normally controlled by the quantity of cable to be carried. In accordance with the requirements of IEE. wiring regulations, the space factor of trunking occupied should not exceed 45% of the cross sectional area of the section.

Mini Trunking Selection & Capacity

Cat. No.	Size	Nominal Cross Section Area Based On 45% Capacity
CMT 0	16mm x 10mm	42mm^2
CMT 1	16mm x 16mm	66mm^2
CMT 2	25mm x 16mm	120mm^2
CMT 3	38mm x 16mm	185mm^2
CMT 4	38mm x 25mm	325mm^2
CMT 5	50mm x 25mm	410mm^2

Choice of trunking is normally controlled by the quantity of cable to be carried. In accordance with the requirements of IEE wiring regulations, the space factor of trunking occupied should not exceed 45% of the cross sectional area of the section.

Maxi Trunking Selection & Capacity

Cat. No.	Size	Nominal Cross Section Area Based On 45% Capacity
CMXT 22	50mm x 50mm	930mm^2
CMXT 32	75mm x 50mm	1415mm^2
CMXT 33	75mm x 75mm	2200mm^2
CMXT 41	100mm x 30mm	1020mm^2
CMXT 42	100mm x 50mm	1895mm^2
CMXT 44	100mm x 100mm	4030mm^2

For each cable to be used, obtain the cable factors from the table above, add all factors together and compare to the capacities given.
Any trunking with a space factor equal to or larger than that of the cable factors will satisfactorily accommodate the desired cables.

PVC Insulated Single-Core Cable In Trunking

Type Of Conductor	Conductor Cross-Sectional Area (mm^2)	Factor
Solid	1.5	7.1
	2.5	10.2
Stranded	1.5	8.1
	2.5	11.4
	4	15.2
	6	22.9
	10	36.3

Centaur conduit is light in weight (16% of weight of steel conduit), is clean and easy to handle, does not require the use of on site special equipment such as vice bender or thread cutting gear, is non-conductive, will not corrode or stain plaster.

Centaur conduit, oval conduit and high impact channelling should be installed using the special Centaur accessories.

Oval conduit and high impact channel are usually used for short runs in domestic situations, for external fixing or where the deep chasing required for round conduit is not possible. uPVC conduit has a rate of expansion greater than that of steel; it is therefore important to make sure that surface work allows for sliding joint into boxes or couplers, this will permit movement along the conduit run and avoid distortion. The distance between saddles or clips should not exceed 4' 0' (1.20m). If possible the boxes should be fixed first and a line used to establish correct alignment, which will ease the threading of cable through the conduit. Cutting can be performed with any fine-toothed saw. Bending or forming of conduit of 25mm Dia. or less can be achieved cold, provided the appropriate bending spring is employed internally in the location of the bend. Greater diameters may need local application of gentle heat. Cable is threaded by using the Centaur draw tape. Centaur plastic conduit cement provides a waterproof joint which is easily made by painting the female internal surface of any joint before sliding the male section in with a twisting action to spread the cement evenly.

Cable Capacities

Conduit Cable Capacity

Conductor	Conductor cross sectional area mm²	Factor
Solid	1	22
	1.5	27
	2.5	39
Stranded	1.5	31
	2.5	43
	4	58
	6	88
	10	146

Table 12A. Cable factors short straight runs

Conduit dia. mm	Factor
16	290
20	460
25	800
32	1400

Table 12B. Conduit factors short straight runs

Conductor	Conductor cross sectional area mm²	Factor
Solid or stranded	1	16
	1.5	22
	2.5	30
	4	43
	6	58
	10	105

Table 12C. Cable factors for long straight or runs incorporating bends

Single-core PVC insulated cables in straight runs of conduit exceeding 3m in length or in runs of any length incorporating bends or sets. The information in the tables is intended only for guidance.

Calculation system based on Appendix 12 IEE Wiring Regulations.
1. Use table 12A or 12C to determine the factor for each cable being used.
2. Add the appropriate cable factors and compare with the conduit factor from table 12B or 12D.
3. The required conduit size is the one having a factor equal to or greater than the sum of the cable factors.

Conduit Cable Capacity

Length Of Run (m)	Conduit Diameter (mm)																			
	16	20	25	32	16	20	25	32	16	20	25	32	16	20	25	32	16	20	25	32
	Straight				One Bend				Two Bends				Three Bends				Four Bends			
1	Covered By Tables 12A and 12B				188	303	543	947	177	286	514	900	158	256	463	818	130	213	288	692
1.5					182	294	528	923	167	270	487	857	143	233	422	750	111	182	333	600
2					177	286	514	900	158	256	463	818	130	213	388	692	97	159	292	529
2.5					171	278	500	878	150	244	442	783	120	196	358	643	86	141	260	474
3					167	270	487	857	143	233	422	750	111	182	333	600				
3.5	179	290	521	911	162	263	475	837	136	222	404	720	103	169	311	563				
4	177	286	514	900	158	256	463	818	130	213	388	692	97	159	292	529				
4.5	174	282	507	889	154	250	452	800	125	204	373	667	91	149	275	500				
5	171	278	500	878	150	244	442	873	120	196	358	643	86	141	260	474				
6	167	270	487	857	143	233	422	750	111	182	333	600								
7	162	263	475	837	136	222	404	720	103	169	311	563								
8	158	256	463	818	130	213	388	692	97	159	292	529								
9	154	250	452	800	125	204	373	667	91	149	275	500								
10	150	244	442	783	120	196	358	643	86	141	260	474								

Table 12D Conduit factors for runs incorporating bends.

Index

20 CRB 1 46
20 CRB 2 46
20 CRB 3 46
20 CRB 4 46
20 CRB 5 46
20 CRB 6 46
20 CRB 12 46
20 CRB 13 47
20 CRB 14 47
20 CRB 15 47
25 CRB 2 46
25 CRB 3 46
25 CRB 4 46
25 CRB 5 46
25 CRB 6 46
25 CRB 12 46
32 SRB 2 48
32 SRB 3 48
32 SRB 4 48
93 44
94 44
251 49
252 49
252 P 49
254 49

A

AB 1 13
AB 3 7
AB 4 13
ABC 19
ABC TW 20
ABE 1 19
ABEC 1 19
ABEC 1LH 19
ABEC 1LH TW 20
ABEC 1RH 19
ABEC 1RH TW 20
ABEC 1 TW 20
ABEC 2 19
ABEC 2 TW 20
ABI 1 19
ABT 1 19
ABU 1 18
ABU 1/1/2 18
ABU 1/2 18
ABU 2 18
ABU 2/2 18
ABU 3 18
ABUD 1 18
ABUD 1/2 18
ABUD 2 18
ACC 2 11
ACC 3 6
ACC 4 11
ACC 5 11
ACD 2 10
ACD 3 6
ACD 4 10
ACD 5 10
ACGE 3 7
ACGE 50 13
ACGE 60 13
ACH 1 13
ACH 3 7
ACH 4 13
ACL 1 ..... 7, 13
ACL 1G 7, 13
ACS 1 11
ACSK 3 11
AEC 2 11
AEC 2/45 11
AEC 3 6
AEC 4 11
AEC 4/45 11
AEC 5 11
AECC 2 11
AECC 3 6
AECC 4 11
AECC 5 11
AECS 1 11
AECSK-3LH 11
AECSK-3RH 11
AES 1 11
AES 1/45 11
AESK 3 11
AESK 3/45 11
AFA 1 12
AFA 2 12
AFA 3 6
AFA 4 12
AFA 5 12
AFAD 3 12
AFAU 3 12
AFT 1 12
AFT 2 12
AFT 3 7
AFT 4 12
AFT 5 12
AFTD 3 12
AFTU 3 12
AIC 2 11
AIC 2/45 11
AIC 3 6
AIC 4 11
AIC 4/45 11
AIC 5 11
AIS 1 11
AIS 1/45 11
AISC6 1 11
AISK 3 11
AISK 3/45 11
ALD 1 ..... 13, 16
ALD 3 7
AMC 2 13
AMC 2/4 13
AMC 5 13
AMS 2 13
AMS 5 13
AP 1 22
AP 2 22
AP 3W 23
AP 680 22
APF 1 22
APM 1BL 7, 13
APM 1G 7, 13
APT 1 22
ASB 1 ..... 7, 12, 16, 19, 21
ASB 1V 7, 12, 16, 22
ASB 2 ..... 7, 12, 16, 19, 21
ASB 3 ..... 7, 12, 16, 19, 21
ASBC6 1 ..... 7, 12, 16
ASBC6 2 ..... 7, 12, 16
ASD 1 10
ASI 13
ASI/4 13
ASKT 3 10
ASP 1 ..... 7, 12, 16, 19, 21
ASP 2 ..... 7, 12, 16, 19, 21
ASQ 1 13
ATS 1 22
ATS 1500 22

B

BB 1 16
BBS 1 ..... 16, 21, 29
BBS 2 ..... 16, 21, 29
BCC 2W 15
BCD 2W 14
BCH 1W 16
BCL 1W 16
BCS 1W 15
BCSK 3W 15
BEC 2/45W 15
BEC 2W 15
BECC 2W 15
BECS 1W 15
BECSK-3LHW 15
BECSK-3RHW 15
BES 1/45W 15
BES 1W 15
BES 42W 28
BESK 3/45W 15
BESK 3W 15
BFA 1W 16
BFA 2W 16
BFAD 3W 16
BFAM 42W 28
BFAT 42W 28
BFAU 3W 16
BFT 1W 16
BFT 2W 16
BFTD 3W 16
BFTM 42W 29
BFTT 42W 29

Index

BFTU 3W 16
BIAM 42W 28
BIC 2/45W 15
BIC 2W 15
BIS 1/45W 15
BIS 1W 15
BISK 3/45W 15
BISK 3W 15
BLUE 2/3 49
BLUE 3/4 49
BLUE 4/5 49
BLUE 5/6 49
BLUE REEL 2/3 49
BLUE REEL 3/4 49
BLUE REEL 4/5 49
BMXT 42W 28
BROWN 2/3 49
BROWN 3/4 49
BROWN 4/5 49
BROWN 5/6 49
BROWN REEL 2/3 49
BROWN REEL 3/4 49
BROWN REEL 4/5 49
BSD 1W 14
BSKT 3W 14
BSQ 1W 16
BXAM 42W 28
BXC 42W 28

C

CAB 1 47
CAF 2 43
CAF 3 43
CB 1R 41
CB 2R 41
CB 3R 41
CB 4R 41
CB 5R 41
CB 6R 41
CB 7R 41
CB 8R 41
CB 9R 41
CBB 20 48
CBB 25 48
CCL 0 47
CCL 1 47
CCL 1R 41
CDA 33
CDA 1 33
CDC 33
CDE 33
CDFA 33
CDFT 33
CDI 33
CDLB 1+1W 52
CDLB 1+2W 52
CDLB1-35 52
CDLB1-47 52
CDLB 1W 53
CDLB2-35 52
CDLB2-47 52
CDLB 2W 53
CDLB 3W 53
CDLB 4W 53
CDLBR 5 40
CDLBR 5W 53
CDMT 2 33
CDR 33
CDS 1 33
CDS 2 33
CDT 10 49
CDT 20 49
CDT 30 49
CDX 33
CEB 1B 47
CEC 20 43
CEC 25 43
CES 22W 34
CES 32W 34
CES 33W 34
CES 41W 26
CES 42W 26
CES 44W 34
CFA 20 44
CFA 25 44
CFA 32 44
CFA 38 44
CFA 50 44
CFAM 22W 35
CFAM 41W 27
CFAM 42W 27
CFAT 22W 35
CFAT 32W 35
CFAT 33W 35
CFAT 44W 35
CFP 2 43
CFP 3 43
CFP-20B-10M-CP 43
CFP-20W-10M-CP 43
CFP-25B-10M-CP 43
CFP-25W-10M-CP 43
CFTM 22W 35
CFTM 41W 27
CFTM 42W 27
CFTT 22W 35
CFTT 32W 35
CFTT 33W 35
CFTT 44W 35
CG 42 ..... 27, 29
CH 050W 42
CH 100W 42
CH 150W 42
CHB 20 45
CHB 25 45
CHB 32 45
CHB 38 45
CHB 50 45
CHS 20 48
CHS 25 48
CIAM 22W 35
CIAM 41W 26
CIAM 42W 26
CIAT 22W 35
CIAT 32W 35
CIAT 33W 35
CIAT 44W 35
CIB 20 45
CIB 25 45
CIC 22W 34
CIC 32W 34
CIC 33W 34
CIC 41W 26
CIC 42W 26
CIC 44W 34
CIE 20 45
CIT 20 45
CIT 25 45
CKA-LH 32
CKA-RH 32
CKC 32
CKD 32
CKD 1 32
CKE-LH 32
CKE-RH 32
CKI 32
CKMT 2 32
CKR 32
CKS 1 32
CKS 2 32
CKX 32
CLR 20 44
CLR 25 44
CLR 32 44
CLR 38 44
CLR 50 44
CLS 20 48
CLS 25 48
CMA 20 43
CMA 25 43
CMA 32 43
CMA 38 43
CMA 50 43
CMB 20 44
CMB 25 44
CMB 32 44
CMB 38 44
CMB 50 44
CMT 0SA 36
CMT 0W 36, 40, 41
CMT 1SA 36
CMT 1W 36
CMT 2R 40
CMT 2SA 36
CMT 2W 36
CMT 3SA 36
CMT 3W 36

Index

CMT 3W T/C 36
CMT 4SA 36
CMT 4W 36
CMT 5SA 36
CMT 5W 36
CMT 5W T/C 36
CMXT 22W 34
CMXT 32W 34
CMXT 33W 34
CMXT 41W 26
CMXT 42W 26
CMXT 44W 34
COC 1W 45
COC 2W 45
COC 3W 45
COC 4W 45
COR 20 45
CPS 20 48
CPS 25 48
CR 2 45
CRG 1 47
CRT 42W 27, 29
CS 42W 27, 29
CSB 20 45
CSB 25 45
CSC 20 43
CSC 25 43
CSC 32 43
CSC 38 43
CSC 50 43
CSP 1W 23, 27, 29
CSP 2W 27, 29
CSPB 1W 23, 29
CSPB 1W 27
CSPB 2W 29
CSPB 2W 27
CSU/8/1AL 50
CSU/8/2AL 50
CXAM 22W 35
CXAM 41W 27
CXAM 42W 27
CXAT 22W 35
CXAT 32W 35
CXAT 33W 35
CXAT 44W 35
CXC 41W 26
CXC 42W 26
CXR 12 47
CXR 20 47
CXR 25 47
CXR 38 47
CXR 50 47

D

DBE 1 20
DBE 2 20
DBI 1 20
DBI 2 20
DBT 1/2M 20
DBT 1/3M 20
DBT 2/2M 20
DBT 2/3M 20
DBU 1 18
DBU 1/1/2 18
DBU 1/2 18
DBU 2 18
DBU 2/2 18
DBU 3 18
DBUD 1 18
DBUD 1/2 18
DBUD 2 18
DES 42W 26
DFAM 42W 27
DFTM 42W 27
DIAM 42W 26
DIV 2W 36
DIV 3W 36
DIV 4W 36
DIV 5 METAL 36
DIV 5W 36
DIV 22W 34
DIV 33W 34
DIV 40 20
DIV 41W 26
DIV 42/S 28
DIV 42W 26
DIV 44W 34
DMXT 42W 26
DXAM 42W 27
DXC 42W 26

E

ECR 110W 7, 13
ECR 210W 7, 13
ECS 110W 7, 13
ECS 210W 7, 13

F

FL 1R 40
FL 2R 40

G

GYE 2/3 49
GYE 3/4 49
GYE 4/5 49
GYE 5/6 49
GYE REEL 2/3 49
GYE REEL 3/4 49
GYE REEL 4/5 49

H

HG 20 42
HG 25 42
HG 32 42
HG 38 42
HG 50 42

L

LG 20 42
LG 25 42
LG 32 42
LG 38 42
LG 50 42

M

M4 x 12mm 41
MA 1W 38
MA 2W 38
MC 0W 37
MC 1W 37
MC 2R 40
MC 2W 37
MC 3W 37
MC 4W 37
MC 5W 37
MCR 2W 38
MEB 0W 38
MEB 1W 38
MEB 2R 40
MEB 2W 38
MEB 3W 38
MEB 4W 38
MEB 5W 38
MEC 0W 37
MEC 1W 37
MEC 2R 40
MEC 2W 37
MEC 3W 37
MEC 4W 37
MEC 5W 37
MFB 0W 38
MFB 1W 38
MFB 2R 40
MFB 2W 38
MFB 3W 38
MFB 4W 38
MFB 5W 38
MIB 0W 37
MIB 1W 37
MIB 2R 40
MIB 2W 37
MIB 3W 37
MIB 4W 37
MIB 5W 37
MT 0-0W 38
MT 1-1W 38
MT 2-2R 40
MT 2-2W 38
MT 3-3W 38
MT 4-4W 38

Index

MT 5-5W 38
Multi 2/3 49
Multi 3/4 49
Multi 4/5 49

O

OCO 500W 42
OCO 625W 42
OCO 750W 42
OCO 1000W 42
OCO 1250W 42
OCO 1500W 42

S

SA 2 49
SA 3 13
SB 1W 50
SB 2W 51
SB 3/20W 50
SB 3W 50
SB 4/20W 51
SB 4W 51
SB 5W 50
SB 6W 51
SB 7/20W 50
SB 7W 50
SB 8/20W 51
SB 8W 51
SB 201R 40
SB 202R 40
SBP 1W 50
SBP 2W 51
SBP 3W 50
SBP 4W 51
SBP 5W 50
SBP 6W 51
SBP 7W 50
SBP 8W 51
SBP 9W 50
SBP 10W 51
SBR/3W 50
SBR/4W 51
SBR/7W 50
SBR/8W 51
SBR/9W 50
SBR/10W 51
SBS 20 44
SBS 25 44
SBS 32 44
SBS 38 44
SBS 50 44
SCS 20 45
SCS 25 45
SS 20 44
SS 25 44
SS 32 44
SS 38 44
SS 50 44

Notes



VISIT OUR WEBSITE

WWW.**CENTAURMFG**.COM

CENTAUR®

ACCESS TO ALL OUR PRODUCTS.
CATALOGUE & DATA SHEET DOWNLOADS.
FOLLOW US ON SOCIAL MEDIA.

Centaur

01527 528 049
sales@centaurmfg.com
www.centaurmfg.com

Pipers Road,
Park Farm Ind. Est.
Redditch
Worcestershire
B98 0HU

Centaur Manufacturing
@centaurmfg
Centaur Manufacturing UK

The content of this catalogue is for information only.
The manufacturer reserves the right to alter design or specification without prior notice.

Colours are reproduced as accurately as photographic and printing processes allow and may not exactly match the actual products.

Issue 2.3