

The logo consists of two overlapping blue rectangular blocks with rounded corners. The top block contains the word "GLOBESTOCK" in white, bold, sans-serif capital letters. The bottom block, which overlaps the right side of the top one, contains the word "SAFETY" in blue, bold, sans-serif capital letters on a white background.

GLOBESTOCK
SAFETY

***SOLUTIONS FOR CONFINED SPACE,
FALL PROTECTION & LOAD ARREST***

SAVER

FALL ARRESTER / SRL-R 3-Way



FEATURES

- Recovery winch with anti-run brake
- Shock absorbing brake mechanism
- Approx. 3 m (10 ft) per minute retrieval
- Stopping distance 0.6 to 1m (2 to 3.3 ft)
- Snaphook karabiner with fall indicator
- Synthetic rope option



SAVER
fitted to a
SENTRY
Tripod

INFORMATION

The highly-acclaimed SAVER is a retractable type fall arrester with an integrated emergency rescue mechanism (SRL-R 3-way).

May be used in conjunction with appropriate, certified anchorages and harnesses in confined space / fall protection applications. Our TF heat-treated aluminium castings are ultra robust and durable, capable of withstanding the harshest conditions and rough treatment.


The rope is secured with a secondary backup feature to ensure full protection even at the rope termination.

A top shackle is not included with the SAVER.

Product Code	Conformity	Max. Working Load	Min. Working Load	Lifeline Length	Lifeline / Snap Hook Material
GSE414G	EN 360: 2023 / EN 1496:2017 Class A / ANSI/ASSP Z359.14-2021 / CSA Z259.2.2-17 / AS-NZS 1891.3-2020	141 kg / 310 lbs	60 kg / 132 lbs	14 m / 46 ft	Zinc plated steel
GSE410SSK				10 m / 32 ft	Stainless steel
GSE414P				14 m / 46 ft	Synthetic lifeline, zinc plated steel snap hook
GSE430G				30 m / 98 ft	Zinc plated steel
GSE425SSK				25 m / 82 ft	Stainless steel
GSE430P				30 m / 98 ft	Synthetic lifeline, zinc plated steel snap hook

DIMENSIONS

GSE414G / GSE410SSK / GSE414P
Measurements (mm)

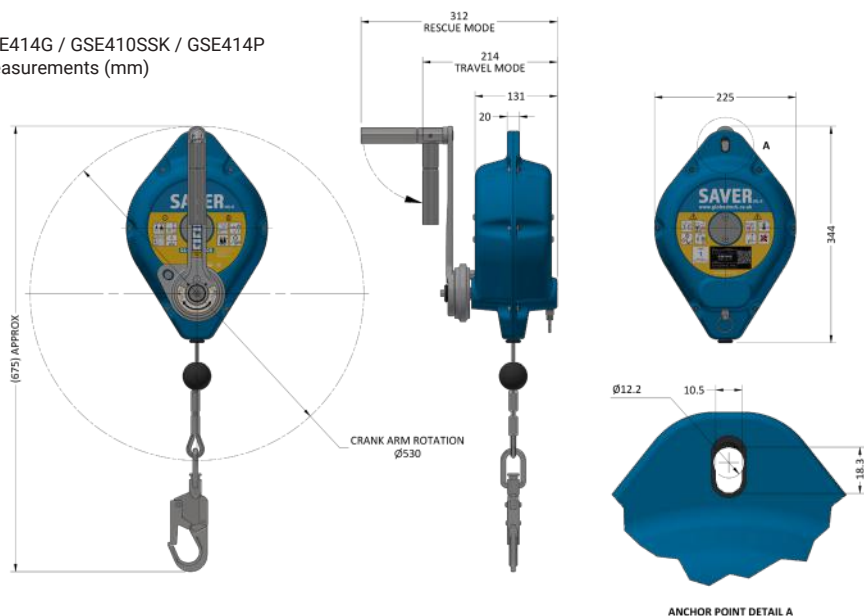

ACCESSORIES



Arrester brackets enable a SAVER or STOP fall arrester (SRL) to be securely fitted to a SENTRY Tripod.

GSE230AB14 (for 10-14 m / 32-46 ft)
GSE230AB34 (for 25-30 m / 82-98 ft)



Holdall Bag
GSE-H/ALL

SENTRY

CONFINED SPACE ACCESS TRIPOD



FEATURES

- Robust & lightweight
- Simple folding design
- Three pulley head
- Two person



INFORMATION

The SENTRY Tripod is an EN 795 (B) + TS16415 anchorage device that is durable and lightweight. It provides a secure and stable anchorage for confined space access.


May be used as an anchor by more than one person simultaneously, providing the max. working load is not exceeded.

Available in two different sizes:


Compact (GSE230C) / **Standard** (GSE230S)

Product Code	Max. Working Load	Weight (Approx)	Conformities
GSE230C	200 kg / 440 lbs (personnel) 250 kg / 551 lbs (materials)	18 kg / 40 lbs	EN795:2012 type B CEN/TS 16415:2013 Directive 2006/42/EC ISO 12100:2010 ANSI/ASSP Z359.18-2017 Type A CSA Z259.15-22 Class A AS/NZS 5532:2013 OSHA 1910.140 OSHA 1926.502
GSE230S		21 kg / 46 lbs	

DIMENSIONS



SIZE / CODE	A	B	C
COMPACT (GSE230C)	270	1217	180
STANDARD (GSE230S)	270	1527	180



SIZE / CODE	A	B	C	D
COMPACT (GSE230C) *	1131	963	841	1112
COMPACT (GSE230C) **	1747	1579	1315	1585
STANDARD (GSE230S) *	1421	1253	1064	1334
STANDARD (GSE230S) **	2307	2172	1744	2015


* at lowest setting

** at tallest setting

ACCESSORIES

Tripod Bag GSETB230

- Document window
- Wheels
- Internal straps
- Water resistant fabric and zip
- 1000D Cordura



STOP

FALL ARRESTER / SRL 2-Way



FEATURES

- Shock absorbing brake
- Stopping distance 0.6 to 1m (2 to 3.3 ft)
- Snaphook karabiner with fall indicator
- Steel or synthetic lifeline options
- Built to last
- Includes top karabiner



INFORMATION

The STOP is a durable fall arrest block (SRL 2-way) with a steel or synthetic cable. Engineered to remain in service for longer.

The SAVER & STOP fall arresters are available with a steel or synthetic lifeline.

The new synthetic models follow the same construction and function of the popular SAVER/STOP fall arrester range, but are fitted with a high performance HMPE fibre lifeline. Using synthetic ropes for fall arrest systems can offer several benefits compared to traditional materials like steel cables.


Product Code	Conformity	Max. Working Load	Min. Working Load	Lifeline Length	Lifeline / Snap Hook Material
GSE510SSK	EN 360: 2023 CSA Z259.2.2-17 (R2022) ANSI/ASSP Z359.14-2021	141 kg / 310 lb	60 kg / 132 lb	10 m / 32 ft	Stainless steel
GSE514G				14 m / 46 ft	Zinc plated steel
GSE514P					Synthetic lifeline, zinc plated steel snap hook
GSE525SSK				25 m / 82 ft	Stainless steel
GE530G				30 m / 98 ft	Zinc plated steel
GSE530P					Synthetic lifeline, zinc plated steel snap hook

DIMENSIONS

All measurements in mm



KARABINER DETAIL B



ANCHOR POINT DETAIL A

ACCESSORIES



Holdall bag
GSE-H/ALL

ARMOR

FALL ARREST HARNESSES



Wear ARMOR for superior fall protection and comfort.

Available in four sizes from XS to XXL.

FEATURES



- **Quick-connect buckles with visual lock indicators** – for fast, secure fitting, offering a premium experience even on the standard model
- **Max. working load: 140 kg (310 lbs)** – robust and reliable under pressure
- **Conforms to multiple global standards** – exceeding individual requirements across diverse markets
- **Front (sternal) & rear (dorsal) attachment points** – for versatile anchorage options
- **Available in four sizes (XS-XXL)** – find a perfect fit for most body types
- **Contrast stitching** – makes visual inspections quicker and easier
- **Oversized dorsal D-rings** – easier to clip-on, even with gloves
- **AA-grade 45mm webbing** – comfortable handling and superior durability
- **Sealed web ends** – neat, easy to locate, fray-proof
- **Elastic keepers** – keep excess webbing secure and out of the way
- **Webbing retainers on all adjustment buckles** – buckles stay exactly where you set them with no creeping
- **Multiple adjustment points** – ensure comfort and safety for all-day wear
- **Fall indicators** – for quick visual checks
- **Quick-access label pouch** – protects critical info without sacrificing accessibility
- **Personalisable label panel** – deters users from marking the webbing
- **Lanyard park loops** – free up your hands when you need them



FAH1

Quick-connect fall arrest harness. Reliable and practical for everyday use.

*ANSI Z359.11-2021, CSA Z259.10-18 (R2023),
EN 361:2002*



FAH2 'ARMOR PRO'

Premium fall arrest harness. Padded straps and anodised aluminium hardware.

*ANSI Z359.11-2021, CSA Z259.10-18 (R2023),
EN 361:2002*

Combining durability, comfort, and multi-compliance, the ARMOR range sets a new standard in fall protection.


SYNTHETIC ROPE OPTION

The SAVER & STOP fall arresters are available with a steel or synthetic lifeline.

The new synthetic models follow the same construction and function of the popular SAVER/STOP fall arrester range, but are fitted with a high performance HMPE fibre lifeline. Using synthetic ropes for fall arrest systems can offer several benefits compared to traditional materials like steel cables:




- **Lightweight:** Synthetic ropes are significantly lighter than steel cables, making them easier to handle and transport.
- **Energy Absorption:** Synthetic ropes have some inherent elasticity, which means they will absorb energy in the event of a fall.
- **Corrosion Resistance:** Unlike steel cables, synthetic ropes are not susceptible to rust or corrosion.
- **Improved Handling:** Synthetic ropes are generally easier to handle than steel cables. They are less prone to causing hand injuries due to fraying or sharp edges.
- **Maintenance:** Synthetic lifelines are less likely to split, deform or kink in the way metal lifelines sometimes do.
- **Reduce Electrocution Risk:** This new product variant was specifically requested by several customers who work with electrical networks.

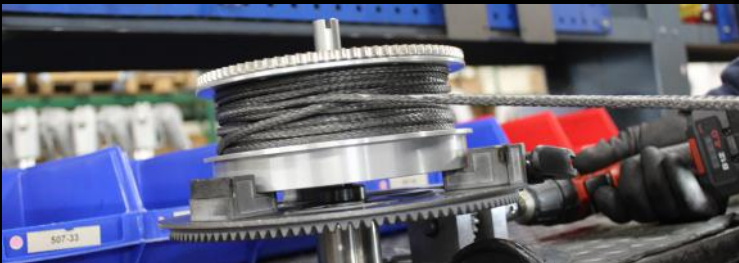

High grade synthetic rope being fitted to a SAVER rope drum

stockssafety.com

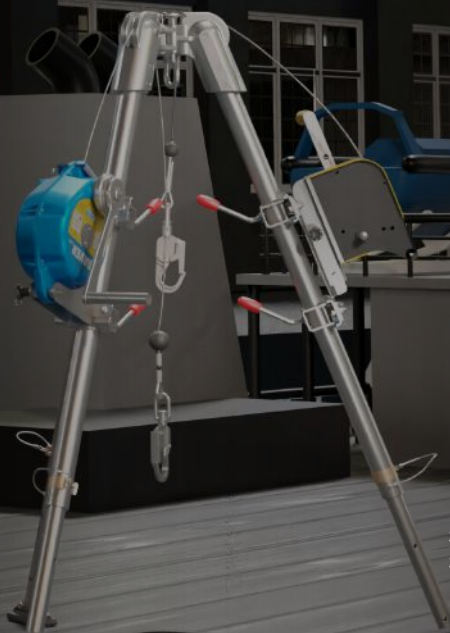

SENTRY Tripod with
SAVER SRL-R fitted



GUARD LOAD ARREST



LOAD ARRESTORS

FEATURES

- **MWL from 150-1,500 kg (330-3300 lbs)**
- **Rope lengths up to 25 m (82 ft)**
- **Shock absorption minimises damage**
- **Fall indicator lens for easy monitoring**
- **Galvanized or stainless steel rope options**
- **Rope automatically extends / retracts**



GUARD300-25
GUARD500



GUARD800
GUARD1000
GUARD1500



GUARD150
GUARD300-10

INFORMATION

Guard load arrestors are heavy-duty fall arrest blocks for protecting equipment that is suspended at height.

Load arrestors provide a secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or fixed anchorage. If the primary support fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting people below.

Guard load arrestors have a high-strength retractable rope that extracts and retracts, following the movement of the load. This means Guards can be fitted to equipment that needs to be moved (dynamic loads), as well as to non-moving (static) loads.

Product Code	Maximum Working Load		Minimum Working Load		Rope Length		Wire Rope Material	Minimum Anchor Strength		Maximum Running Speed	
	kg	lbs	kg	lbs	m	ft		kN	lbf	m s ⁻¹	ft s ⁻¹
GUARD150-14G	150	330	10	22	14	46	Galvanised Steel	7.4	1,663	1	3.280
GUARD150-14S	150	330	10	22	14	46	Stainless Steel	7.4	1,663	1	3.280
GUARD300-10G	300	660	50	110	10	33	Galvanised Steel	14.1	3,169	0.7	2.297
GUARD300-10S	300	660	50	110	10	33	Stainless Steel	14.1	3,169	0.7	2.297
GUARD300-25G	300	660	50	110	25	82	Galvanised Steel	14.1	3,169	0.7	2.297
GUARD300-25S	300	660	50	110	25	82	Stainless Steel	14.1	3,169	0.7	2.297
GUARD500-10S	500	1,100	100	220	10	33	Stainless Steel	20.6	4,631	0.7	2.297
GUARD500-24S	500	1,100	100	220	24	79	Stainless Steel	20.6	4,631	0.7	2.297
GUARD500-10G	500	1,100	100	220	10	33	Galvanised Steel	20.6	4,631	0.7	2.297
GUARD500-24G	500	1,100	100	220	24	79	Galvanised Steel	20.6	4,631	0.7	2.297
GUARD800-10S	800	1,760	150	330	10	33	Stainless Steel	45.1	10,123	0.6	1.969
GUARD1000-10G	1000	2,200	150	330	10	33	Galvanised Steel	45.1	10,123	0.6	1.969
GUARD1500-10G	1500	3,300	200	440	10	33	Galvanised Steel	63.3	14,230	0.6	1.969

INSTALLATION EXAMPLES



Single Hoist



Multiple hoists



Pulley

**Protect loads from 330 lbs
to 3,300 lbs**



**Fall indicator for easy
monitoring**



**Rope lengths
up to 82 ft**



**Galvanized or
stainless steel
rope options**



Sept. 2026

Globestock Ltd. reserve the right to change specifications without prior notice.

All information herein is copyright protected by Globestock Ltd. 2026.

The Globestock name is a registered trademark of Globestock Ltd.

The GUARD LOAD ARREST logo is a registered trademark of Globestock Ltd.