

DOUBLE THROW LATCH DEADLOCK



Universal Handing

Adjustable Deadlock

Keyed Both Sides

Suitable for metal gate frames.
Featuring a robust double throw deadbolt which moves 24mm for extra security.
Versatile design allows to easily swap for left or right handed gates, simple remove lock from outer case, lift latch retraining spring then remove the latch and reinstall as required.

INCLUDED IN THE BOX

- Keep plate
- Eurocylinder
- Countersunk screws
- A set of keys (3)



Product code	Description
GLD30	To fit 30mm (1-1/8") gate frame width, mild steel case
GLD40	To fit 40mm (1-5/8") gate frame width, mild steel case
GLD50	To fit 50mm (2") gate frame width, mild steel case
GLD60	To fit 60mm (2-3/8") gate frame width, mild steel case

GLDS30	To fit 30mm (1-1/8") gate frame width, stainless steel case
GLDS40	To fit 40mm (1-5/8") gate frame width, stainless steel case

WHAT DOES DEADLOCK MEAN?

Lock Type	What happens when the gate closes?	What do I need to do next to lock the gate?	Best for:
Latch Deadlock	Latches shut automatically, but doesn't lock	Use the key if you want to lock the gate	Best for convenience, when you want the gate to catch and open conveniently with the handle, then choose when to fully lock it.

TECHNICAL SPECIFICATIONS

Lock type	Keyed gate lock
Handing	Universal
Latchbolt throw	24mm (1")
Lock case width	94mm (3-3/4")
Fixing method	Weld-in
Fixings included	Yes
Compatible Keeps	BSKG
Compatible Handles	Alloy handle (AH), Profiled handle (PH) & Traditional handle (TDH) <i>*Handles sold separately*</i>

HELP & SUPPORT



UK: +44 1243 558580

US: +1 214 872 9687




www.gatemasterlocks.com



support@gatemasterlocks.com

1. Weld the outer lockcase into the gate and galvanise or paint as part of the gate.
2. Fit the lock into the lockcase and secure using 4 countersunk screws and the eurocylinder.
3. Drill clearance hole in keep or outer frame to receive the latchbolt. Slot this hole vertically to allow for gate sag.
4. Ensure latchbolt moves freely without binding on the gate or frame.

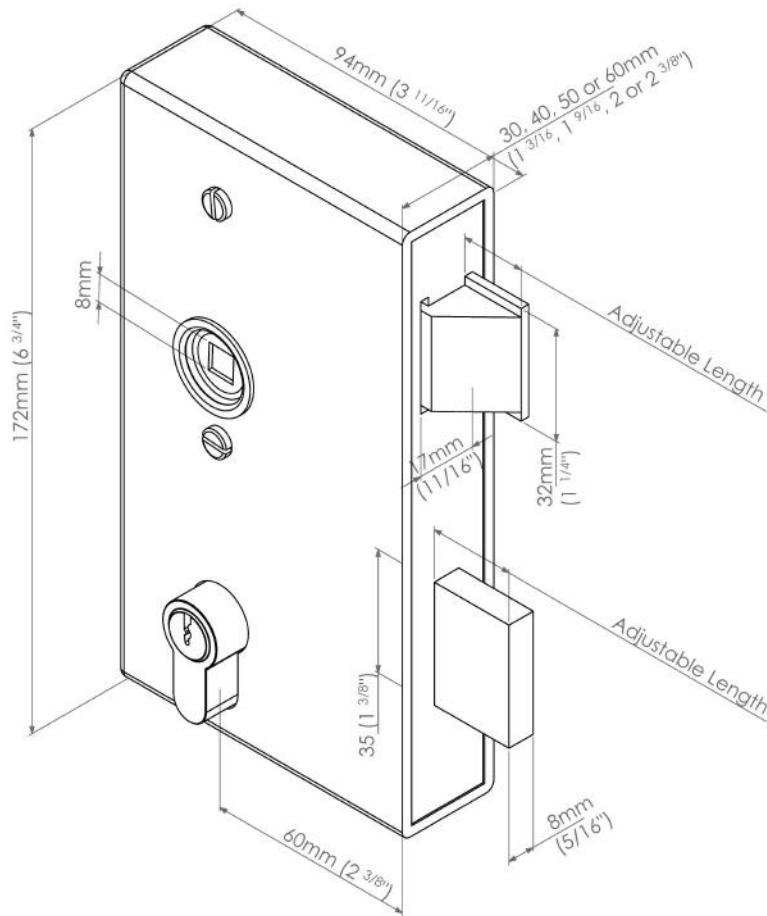

MAINTENANCE

Annually:

Remove the lock from the lockcase and lightly oil all moving parts.

To help improve gate security and overall performance, The SelectPro can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.

Handles

Alloy Gate Handle (AH)



Profiled Gate Handle (PH)



Traditional Gate Handle (TDH)



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.



Hydraulic Gate Closer (APS)

- Provides safe, reliable gate closing using a proven hydraulic mechanism, ideal for schools, playgrounds, and other applications where adjustable closing speed is essential.
- Designed to support gates up to 150kg.
- Available with either a standard top hinge or an integrated 90° stop, offering a durable, unobtrusive, and maintenance-free solution.
- Requires no power.