

MOTOR SPECIFICATIONS

Motor Design	NEMA design B, squirrel cage induction, air filled
Motor Type	Enclosed submersible, IP 68
Maximum submergence	65 feet (20m)
Insulation Class	Class F, rated at 155° C
Motor Protection	Bi-metallic Thermal Switch
Bi-Metallic Temp Trip	120° C ± 5° C
Service Factor	1.15
Max. Liquid Temperature	104°F (40°C)
Voltage Tolerance	± 10% from nominal



MOTOR DATA, 60Hz

Model	Phase	Output Power BHP	Volts	Full Load Amps	Locked Rotor Amps	NEMA Code Letter	Power Factor 100% Load	Motor Efficiency 100% Load	Pole/Speed (rpm)
SL1000	3	10	460	14	88	H	.88	.85	2/3450
			575	11	71	H	.88	.85	2/3450

MATERIALS OF CONSTRUCTION

Upper Motor Lid	356-T6 Aluminum
Motor Housing	356-T6 Aluminum
Oil Chamber	AISI 304 Stainless Steel
Strainer	AISI 304 Stainless Steel
Volute	ASTM A-48, Class 35B
External Hardware	AISI 304 Stainless Steel
O-Rings	NBR
Motor Shaft	AISI 416 Stainless Steel
Upper Bearing	Deep groove ball bearing, double sealed
Lower Bearing	Double row angular contact ball bearing, double shielded
Shaft Seal	SiC/SiC
Impeller	AISI 316 Stainless Steel

DIMENSIONS, WEIGHT, AND MISC.

Pump weight (without cable)	152 lbs (69kg)
Discharge size	3 inch NPT male vertical
Strainer Opening	18.90mm

CABLE SPECIFICATIONS




MODEL	PHASE/VOLTAGE	POWER CABLE	LENGTH	OUTER JACKET
SL1000	3Ø-460V	Drill Cord SOOW 10/5, 12/4	50' Standard	CPE, Heavy Duty
	3Ø-575V	Drill Cord SOOW 10/5, 12/4	50' Standard	CPE, Heavy Duty

SOLD BY



AQUOSIS
FLUID SOLUTIONS

info@aquosis.com
1.877.907.7852

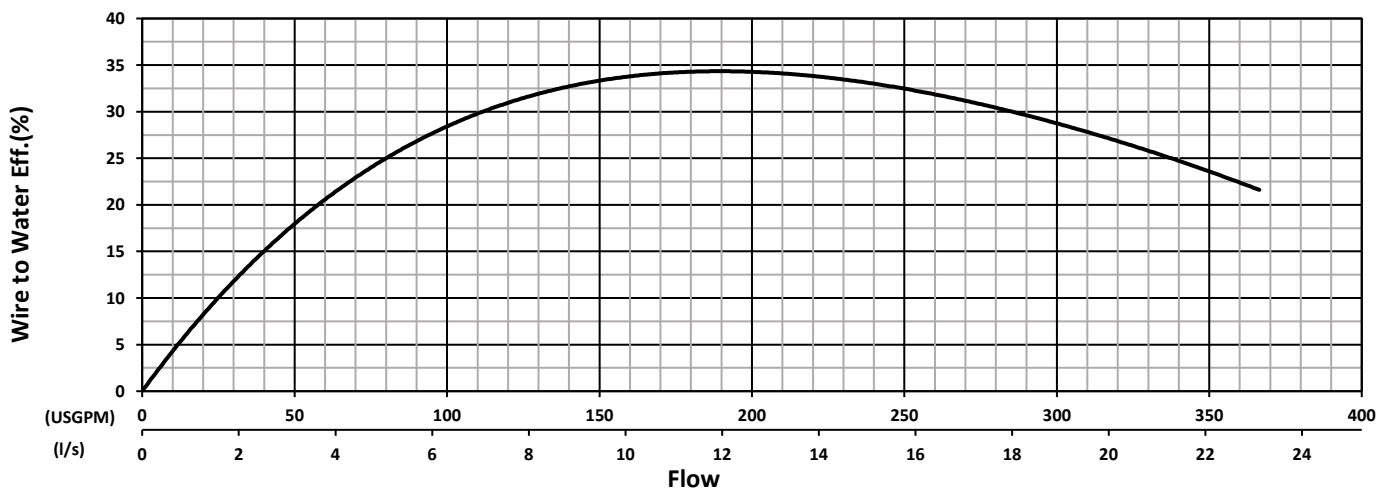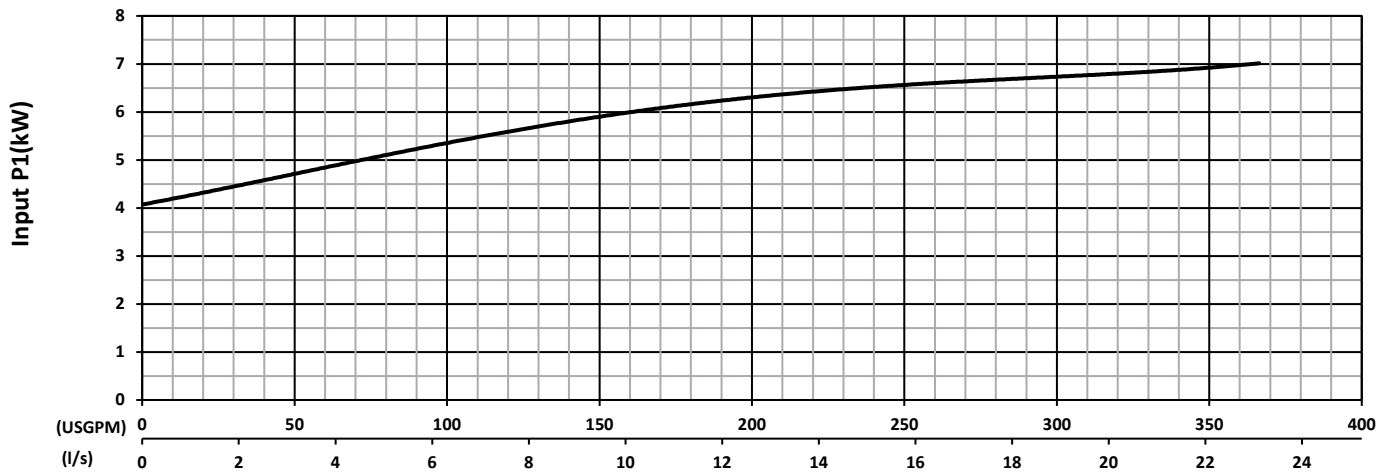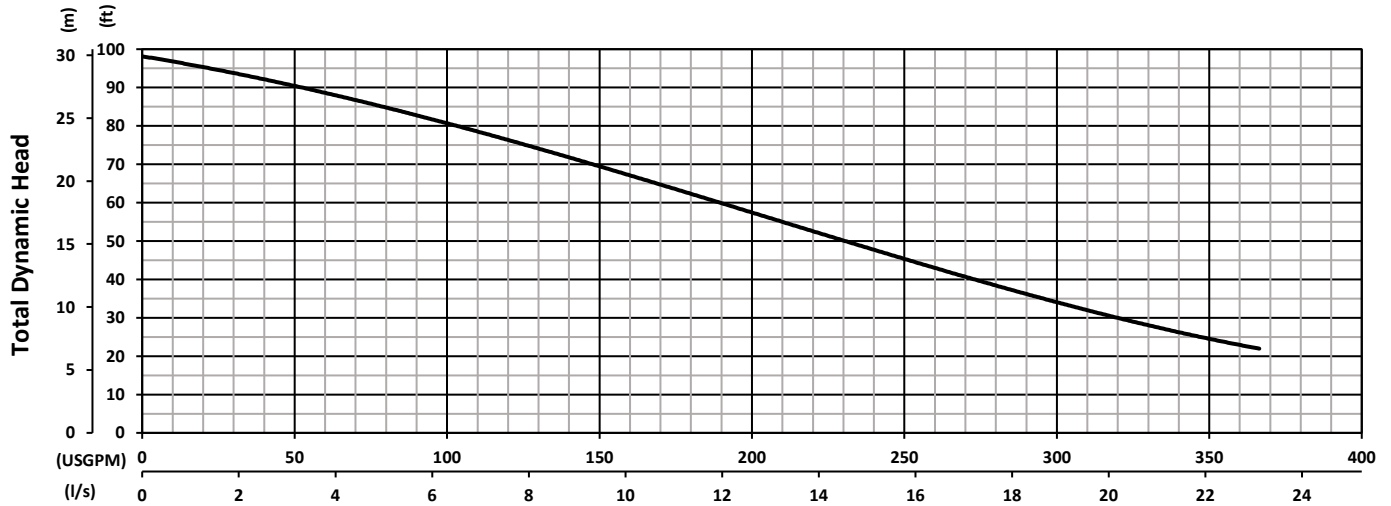

Test Standard : HI 11.6 Gr 3B
Tested with water at 20°C

Pump Performance Test - Dual Units

Frequency 60 Hz
Pump Speed 3450 RPM
Impeller Ø155mm

Specifications subject to change without notice

Industrial Flow Solutions Operating, LLC • 104 John W Murphy Drive, New Haven, CT 06513, USA

SOLD BY



info@aquosis.com
1.877.907.7852