

SUPERLOCK 2.0 KEYED DEADLOCK



- 5-Year Warranty
- Universal handing
- Adjustable latchbolt

Suitable for metal gate frames. For wooden gates, our surface-mounted option is available.

INCLUDED IN THE BOX

- 2.5mm hex key + 3mm hex key
- 2 x M8 fixing bolts
- Face plate
- Latchbolt
- Strike plate (2 x self-drilling fasteners)
- A set of keys (3)



Dependable and straightforward keyed security in an easy-to-fit bolt-on deadlock. Designed for ultimate reliability, its single 20mm locking action ensures robust protection, while the slim depth allows it to fit seamlessly into most gate designs.





Product code	Description
BD1030	To fit 10-30mm (½" to 1 ¼") gate frames
BD4060	To fit 40-60mm (1 ½" to 2 ¼") gate frames
Available in:	Black RAL9005 Moss Green RAL6005

WHAT DOES DEADLOCK MEAN?

Lock Type	What happens when the gate closes?	What do I need to do next to lock the gate?	Best for:
Deadlock	Nothing latches or locks when the gate closes	Use the key to lock the gate	Best when the gate should only lock when deliberately keyed.


TECHNICAL SPECIFICATIONS

Lock type	Keyed gate lock
Handing	Universal
Latchbolt throw	20mm (3/4")
Lock case width	70mm (2 3/4")
Fixing method	3-hole drilling. Bolt-on
Fixings included	Yes
Warranty	5 years
Compatible Keeps	BSK, BSKS, BSKG

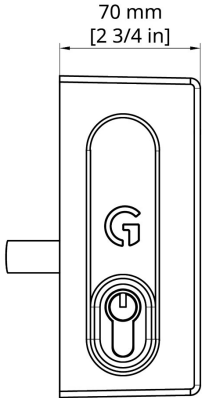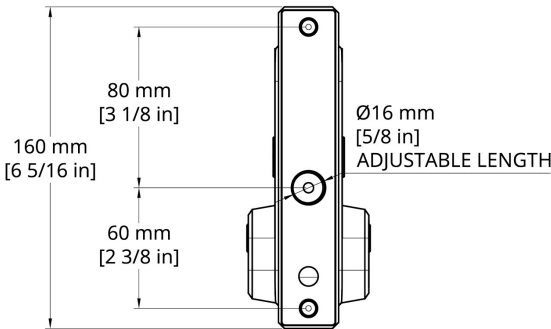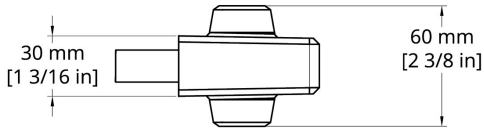


1. Drill 2 x 9mm (3/8") holes at 140mm (5 1/2") centres for fixing bolts provided.
2. Drill a 18mm (3/4") clearance hole for the latchbolt at 60mm (2 3/8") centres up from the bottom fixing hole.
3. Hold the lock against the back of the box section and screw on the latchbolt through the larger hole. Fixing the lock in place using the stainless steel bolt support plate and the countersunk screws provided. Ensure the latchbolt moves freely.
4. Lock the latchbolt with the hex key supplied by inserting the hex key into the end of the latchbolt.
5. Fix strike plate by either welding or screw fixing onto the gate post.


Step 1 & 2:



Step 3:



Step 4:



MAINTENANCE

Every 6 months:

Lubricate the latchbolt with light oil.

Annually:

Dismantle the lock and spray mechanism with light oil.

HELP & SUPPORT

Need further assistance? Our customer support team can help with order queries, product identification, spare parts, warranty information and general after-care.



UK: +44 1243 558580 US: +1 214 872 9687



www.gatemasterlocks.com



support@gatemasterlocks.com

To help improve gate security and overall performance, The Superlock 2.0 can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.



Superlock Secure Keep (BSK)

- Designed to enhance gate security by preventing access to the latchbolt.
- Slim, low-profile design provides a sleek, modern appearance that improves the overall look of the gate.
- Versatile, simple, and easy to install, suitable for a wide range of gate and fencing applications.



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.



Hydraulic Gate Closer (APS)

- Provides safe, reliable gate closing using a proven hydraulic mechanism, ideal for schools, playgrounds, and other applications where adjustable closing speed is essential.
- Designed to support gates up to 150kg.
- Available with either a standard top hinge or an integrated 90° stop, offering a durable, unobtrusive, and maintenance-free solution.
- Requires no power.