MITSUBISHI MATERIALS

VQT6UR

Smart Miracle End Mill Series

BARREL END MILL FOR FINISH CUTTING OF TITANIUM ALLOYS





TOOL NEWS **B232A**

Barrel End Mill for Finish Cutting of Titanium Alloys

VQT6UR


Nose radius designed for both fillet milling and tangential form radius blade surface machining.



Radial Accuracy

RE1 and RE2 ±.0004 inch

Optimum Cutting Edge Design

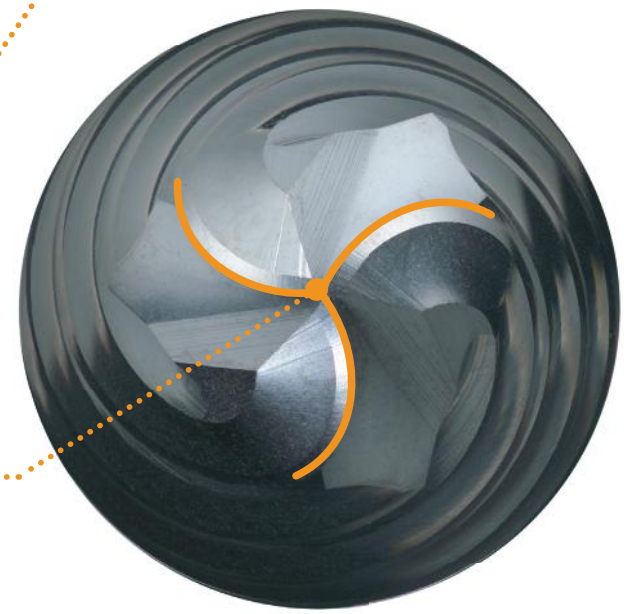

6-flute Peripheral Cutting Edge


Multi cutting edge designed for high efficiency machining.
Irregular pitch design prevents chattering.

3-flute End Cutting Edge


A wide flute for superior chip evacuation.

Ideal Shape

Compared with a ball nose end mill, the tangential form radius is larger and cusp height is minimized and more controllable. This design makes highly efficient machining with a pick feed.

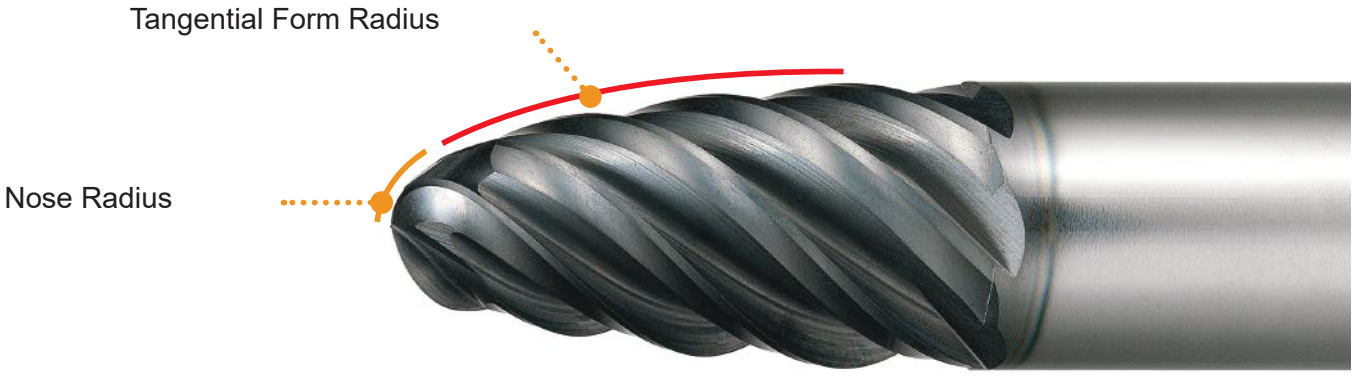


Nose and tangential form part has two distinct radii.

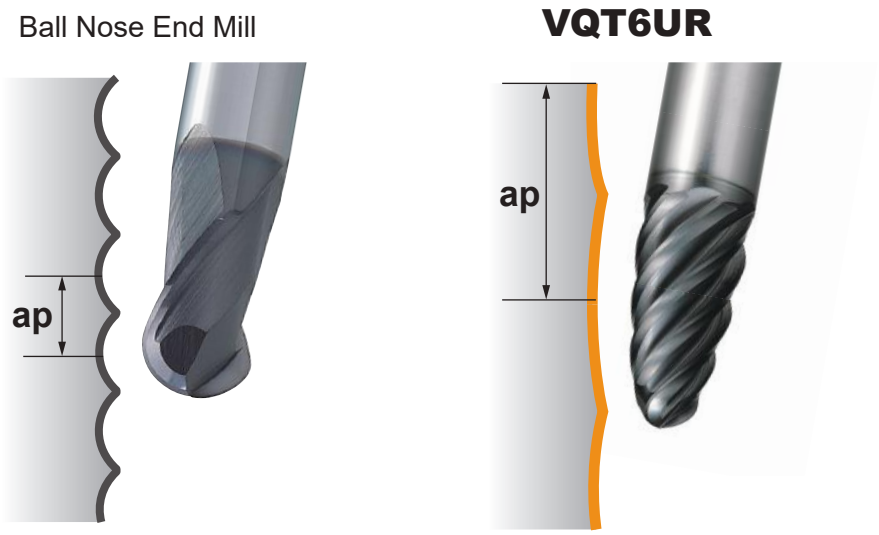

Shorter cutting distance contributes to longer tool life.

Comparison of Machining Time by CAM Simulation

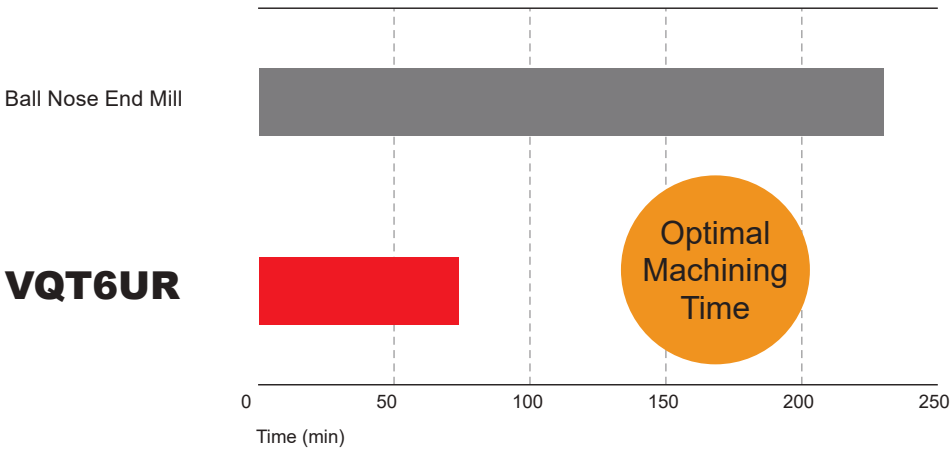

Tools for Simulation
Ball Nose End Mill : R.197
ø.394 inch
VQT6URR020R085S10 : R.079xR3.346
ø.394 inch


Barrel End Mill for Finish Cutting of Titanium Alloys

VQT6UR

Barrel, Medium cut length, 6 flute

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel,Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
○				○	◎		○



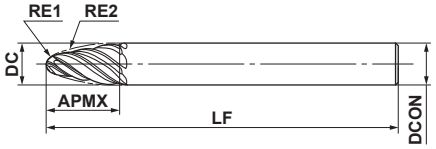

Type1

R	RE1≤4	RE2≤100			
	±0.01	±0.01			
h6	DCON≤10	DCON=12			
	0 - 0.009	0 - 0.011			

- Nose and tangential form part has two distinct radii.
- Irregular pitch design prevents chattering.

(mm)

Order Number	DC	RE1	RE2	APMX	LF	DCON	No.F *	Stock	Type
VQT6URR020R075S08	8	2	75	21	90	8	6	●	1
VQT6URR020R085S10	10	2	85	26	100	10	6	●	1
VQT6URR030R075S10	10	3	75	22	100	10	6	●	1
VQT6URR040R100S12	12	4	100	25	110	12	6	●	1

Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.
When measuring the tool length, an internal contact/non-electric type or laser tool setter is recommended.

* Number of Flutes

DC = Cutting Dia.
RE1 = Nose Radius
RE2 = Tangential Form Radius
APMX = Depth of Cut Max.
LF = Functional Length
DCON = Connection Diameter

● : **USA Stock**


Recommended Cutting Conditions

Effective Angle

Please refer to the table below for the use of the nose radius (RE1) and tangential form radius (RE2).

(inch)

Order Number	Nose Radius		Tangential Form Radius	
	RE1	Effective Angle	**RE2**	Effective Angle
VQT6URR020R075S08	.079 (2mm)	76.6°	2.953 (75mm)	13.4°
VQT6URR020R085S10	.079 (2mm)	74.5°	3.346 (85mm)	15.5°
VQT6URR030R075S10	.118 (3mm)	76.4°	2.953 (75mm)	13.6°
VQT6URR040R100S12	.157 (4mm)	78.3°	3.937 (100mm)	11.7°




Side Milling with the Use of the Tangential Form Radius (RE2)

(inch)

Workpiece Material				Mild Steels (≤180HB) Carbon Steels, Alloy Steels (180—280HB)				Austenitic Stainless Steels (≤200HB) Titanium Alloys				Aluminum Alloys (Si<5%)			
DC		**RE2**		Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**	Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**	Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**
mm	inch	mm	inch												
8	**.315**	**75**	**2.953**	8000	94.5	.031	.002–.012	3200	30.3	.031	.002–.012	16000	189.0	.031	.002–.012
10	**.394**	**85**	**3.346**	6400	74.8	.033	.002–.012	2500	23.6	.033	.002–.012	13000	153.5	.033	.002–.012
10	**.394**	**75**	**2.953**	6400	74.8	.031	.002–.012	2500	23.6	.031	.002–.012	13000	153.5	.031	.002–.012
12	**.472**	**100**	**3.937**	5300	63.0	.035	.002–.012	2100	19.7	.035	.002–.012	11000	129.9	.035	.002–.012

Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.
When measuring the tool length, an internal contact/non-electric type or laser tool setter is recommended.
Note 2) Recommended for finish cutting only.
Note 3) The tool contact part differs between the nose radius and tangential form radius depending on machining geometries and tilt angles. Select suitable cutting conditions according to tool contact parts.

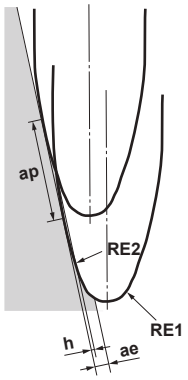

Depth of Cut Calculation Table Based on Tangential Form Radius (RE2) and Cusp Height (h)

(inch)

Order Number	**RE2**	Cusp Height **h**	.000004	.000012	.000020	.000031	.000039	.000118	.000197	.000315
VQT6URR020R075S08	2.953 (75mm)	Depth of Cut **ae**	.0096	.0167	.0216	.0273	.0305	.0528	.0682	.0863
VQT6URR030R075S10	2.953 (75mm)		.0096	.0167	.0216	.0273	.0305	.0528	.0682	.0863
VQT6URR020R085S10	3.346 (85mm)		.0103	.0178	.0230	.0291	.0325	.0562	.0726	.0918
VQT6URR040R100S12	3.937 (100mm)		.0111	.0193	.0249	.0315	.0352	.0610	.0787	.0996


Recommended Cutting Conditions

Fillet Milling with the Use of the Nose Radius (RE1)

(inch)

Workpiece Material				Mild Steels (≤180HB) Carbon Steels, Alloy Steels (180−280HB)				Austenitic Stainless Steels (≤200HB) Titanium Alloys				Aluminum Alloys (Si<5%)			
DC		RE1		Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**	Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**	Revolution (min^{-1})	Feed Rate (IPM)	Depth of Cut **ap**	Depth of Cut **ae**
mm	inch	mm	inch												
8	**.315**	**2**	**.079**	16000	94.5	.016	.039	6400	22.8	.016	.039	32000	189.0	.016	.039
10	**.394**	**2**	**.079**	16000	94.5	.016	.039	6400	22.8	.016	.039	32000	189.0	.016	.039
10	**.394**	**3**	**.118**	11000	66.9	.024	.059	4200	15.0	.024	.059	21000	126.0	.024	.059
12	**.472**	**4**	**.157**	8000	47.2	.031	.079	3200	11.4	.031	.079	16000	94.5	.031	.079

Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.
When measuring the tool length, an internal contact/non-electric type or laser tool setter is recommended.
Note 2) Recommended for finish cutting only.
Note 3) The tool contact part differs between the nose radius and tangential form radius depending on machining geometries and tilt angles. Select suitable cutting conditions according to tool contact parts.



Cutting Performance

Fillet Milling of Titanium Alloy


Achieves a quality surface finish with no chipping on the cutting edge.

VQT6UR






Conventional



Surface




Cutting Edge


<Cutting Conditions>
Workpiece Material : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : vc=260 SFM
Revolution : n=6770 min^{-1}
Feed per Tooth : fz=.001 IPT
Depth of Cut : ap=.039 inch
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axisl MC (HSK63)


Cutting Performance

Deep Wall Machining of Titanium Alloy

High efficiency machining is achieved while maintaining quality of machined surface.

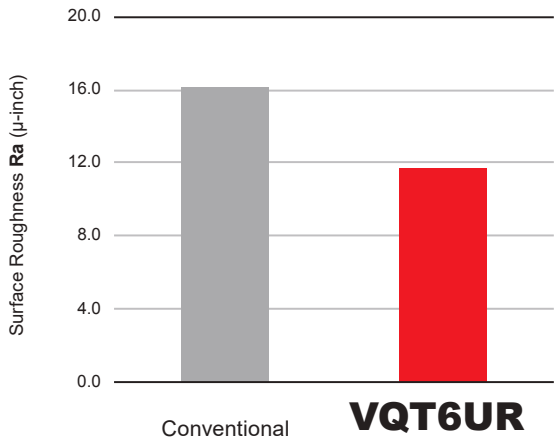


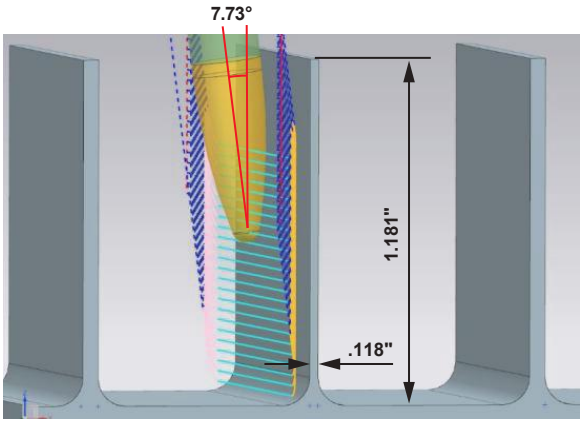


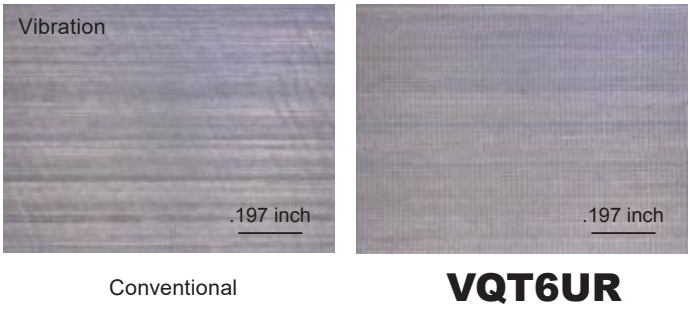

<Cutting Conditions>
Workpiece Material : Ti-6Al-4V
Tool : VQT6URR020R085S10
Revolution : n=2546min^{-1}
Feed per Tooth : fz=.001 IPT
Depth of Cut : ap=.059 inch
: ae=.012 inch
Tilt Angle : 7.73°
Cutting Mode : Side Milling
External Coolant (Emulsion)
Machine : 5-axis MC (HSK63)

Comparison of Tool Life in Titanium Alloy

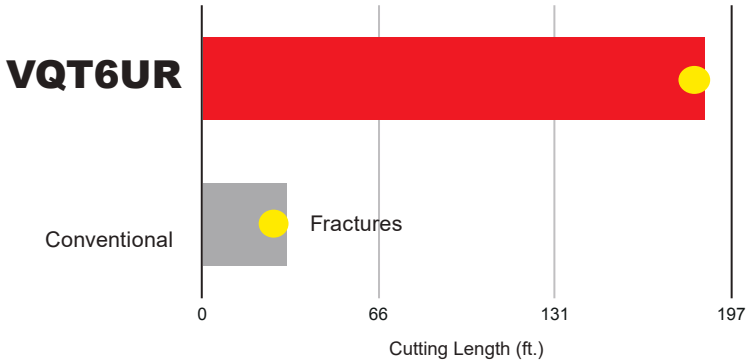


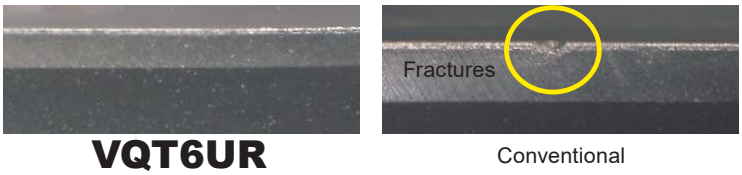


<Cutting Conditions>
Workpiece Material : Ti-6Al-4V
Tool : VQT6URR020R085S10
Revolution : n=2546min^{-1}
Feed per Tooth : fz=.001 IPT
Depth of Cut : ap=.157 inch
: ae=.012 inch
Tilt Angle : 8°
Overhang Length : 1.575 inch
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axisl MC (HSK63)

Machining Example


Blade Surface Machining




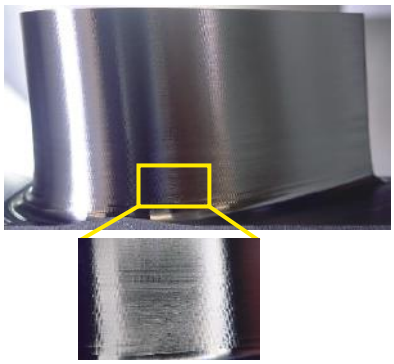

<Cutting Conditions>
Workpiece Material : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : vc=395 SFM
Feed per Rev. : vf= 36.22 IPM
Depth of Cut : ap=.056 inch
: ae=.008 inch
Tilt Angle : 10°
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axisl MC (HSK63)

Fillet Milling





<Cutting Conditions>
Workpiece Material : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : vc=260 SFM
Feed per Rev. : vf= 29.92 IPM
Depth of Cut : ap=.009 inch
: ae=.008 inch
Tilt Angle : 20°
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axisl MC (HSK63)

Memo

MTEC

MACHINING TECHNOLOGY AND EDUCATION CENTER

Welcome to our new world-class Machining Technology and Education Center (MTEC) in Mooresville, NC providing year round support and services to North America.



ABOUT MTEC

TOOLING PROPOSALS & EVALUATION

We will review your current processes or outline a new process. From this review, we will improve productivity, analyze programming methods and output a solution with programming, tooling and time savings.

MACHINING SIMULATION

Using the latest CAD/CAM software and our cutting tool experience, we will outline a new process using proper machining techniques to maximize tool life and productivity.

TECHNICAL SUPPORT

Dedicated local professionals to answer any of your order, product or technical questions.

TRAINING


We are excited to offer several levels of training with goals to reach our highest level--Craftsman Machining Technology. At MTEC NC, we will train using a combination of classroom and hands-on machine time to develop skills and real-world understanding of materials, tools and applications. In addition to multi-day courses, we will have Machining Technology skills seminars, as well as seminars from our partners to complement our apprentice level courses, our journeyman courses, and up to our craftsman level courses.

PROCESS IMPROVEMENTS

Review of the complete part processing and recommend changes of speed, feed, new tooling, reduction of passes, modifying programming and other solutions to reduce cycle time, save money and be proactive.





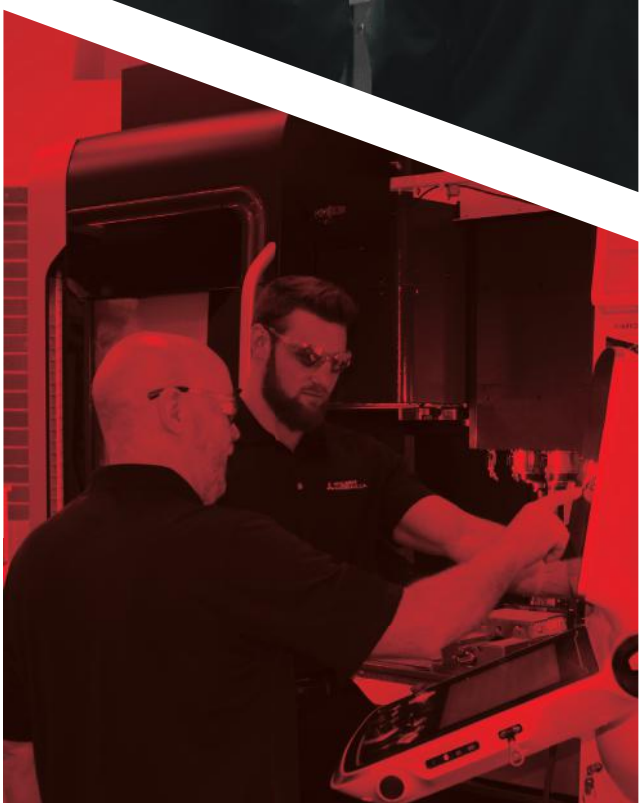

WEBINARS

Our FREE online webinar series is available anytime on-demand. Narrated by the MTEC training staff, you will receive in-depth knowledge of the topic. Simply register online at the link below for access. You will receive a certificate upon completion of each course.

mmusnewsstand.com/register

ONLINE TRAINING

Our FREE e-learning program offers 11 courses in drilling, milling, turning, threading, tool grades and workpiece materials. Once each course is completed, you will be given the opportunity to print a certificate.

- Basic Drilling
- Basic Milling
- Basic Turning
- Advanced Drilling
- Advanced End Milling
- Advanced Turning
- Basic Threading
- Advanced Face Milling
- Basic Workpiece Materials
- Tool Grades
- Advanced Workpiece Materials

TRAINING COURSES

Programs are designed for several levels of skill development – from basic understanding to advance manufacturing with digital solutions, complementing to your valued experience in CNC machining environment. Participate in machining demonstrations with Mitsubishi Materials' skilled engineers. Discover methods to reduce setup and cycle time, optimize programs and enhance your knowledge base.

Information on course schedule,
course description, and accommodations

MTECTRAINING.INFO

Follow the QR Code for a virtual facility tour

MITSUBISHI MATERIALS U.S.A.

MITSUBISHI MATERIALS U.S.A. CORPORATION

California Office
(Headquarters)

3535 Hyland Avenue, Suite 200
Costa Mesa, CA 92626
Customer Service: 800.523.0800
Technical Service: 800.486.2341

Chicago Office
(Engineering)

300 N. Martingale Road, Suite 500
Schaumburg, IL 60173
Main: 847.252.6300
Fax: 847.519.1732

MMC Metal de Mexico, S.A. DE C.V.

Av. La Cañada No.16,
Parque Industrial Bernardo
Quintana, El Marques,
Queretaro C.P. 76246 MEXICO
Main: +52.442.221.61.36
Fax: +52.442.221.61.34

North Carolina-MTEC
(Marketing & Technical Center)

105 Corporate Center Drive, Suite A
Mooresville, NC 28117
Main: 980.312.3100
Fax: 704.746.9292

Toronto Office
(Canada Branch)

600 Matheson Blvd. Unit 5 (Office)
Mississauga, ON L5R 4C1
Main: 905.814.0240
Fax: 905.814.0245

Detroit Office
(Moldino CS)

41700 Gardenbrook Road, Suite 120
Novi, MI 48375
Main: 248.308.2620
Fax: 248.308.2627

FOR YOUR SAFETY

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or driver.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

www.mmc-carbide.com/us

Tools specifications subject to change without notice.

B232A-US-2018.12