AEROTYRE®

2026



TRUCK & BUS TYRES CATALOGUE

WORLD-CLASS TYRES

DESIGNED & DEVELOPED IN EUROPE



CONTENTS

WHY AEROTYRE? 03

INTRODUCTION TO AEROTYRE 04

REGIONAL HAUL RANGE

AE01-S 06

AE01-D 07

AE01-T 08

AE01-S PLUS 09

AE01-D PLUS 10

AE01-T PLUS 11

AE01-Z PLUS 12

CONSTRUCTION RANGE

CONSTRUCTAULTRA 15

AE01-CS II 16

AE01-CD II 17

AE01-CT II 18

URBAN RANGE

ECO-PLUS 21

DISTRIBUTION AND WARRANTY 22

WHY AEROTYRE?

- Advanced technology to reduce rolling resistance.
- Resistance to wear and tear.





- Engineered with high-quality materials and robust construction ensuring, durability and longevity.
- Exceptional traction and grip on diverse road surfaces, providing drivers with confidence and control.

- Regroovability, extending lifespan and maximising value.
- Enhanced durability against punctures and cuts.



INTRODUCTION TO AEROTYRE

OUR AIMS

- Sustainability and environmental responsibility.

- Innovation in tyre technology.

- Partnerships and collaborations.

- Accessiblity and affordability.

- Carbon footprint reduction.

- Smart tyre technologies.

DESIGN

As a manufacturer, we place a high priority on designing tyres with optimal wet grip, understanding the critical importance this holds for your safety. In Europe, where rain and wet conditions are frequent, having tyres that maintain excellent traction and stability on wet roads is essential.

MANUFACTURING

We manufacture using cutting-edge technologies available in our state-of-the-art 4.0 mega factory, our product is engineered to surpass industry standards and redefine excellence.

CUSTOMER SUPPORT

Experience peace of mind with our dedicated European sales team at your service.

REGIONAL HAUL RANGE



Our regional haul tyres are designed to deliver impressive mileage performance and a comfortable ride. Capable of performing all year round, they are great value for money.

AE01-S

- ☑ Pattern design enables even wear while enhancing grip.
- ☑ Improved grip in wet and slippery conditions.
- ☑ Better stability in corners to reduce the risk of rollovers.
- ☑ Innovative compound allows for greater resistance to cuts and abrasions.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
295	80	22.5	154/149	M	18PR	15.5	246	C	A	73	3PMSF	74 dB
315	70	22.5	156/150	L	18PR	15.5	256	C	A	73	3PMSF	74 dB
315	80	22.5	156/150 (154/150)	L (M)	20PR	15.5	256	C	A	73	3PMSF	74 dB

ON ROAD

REGIONAL



AE01-D

- ☑ Enhanced braking performance with specialised compounds and tread patterns.
- ☑ Reduced stopping distances enhancing safety.
- ☑ Increased stability for increased safety for the driver and passengers.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
295	80	22.5	152/148	M	18PR	20.8	256	D	B	75	3PMSF	76 dB
315	70	22.5	154/150	L	18PR	21.8	260	D	B	75	3PMSF	76 dB
315	80	22.5	156/150 (154/150)	L (M)	20PR	21.8	262	D	B	75	3PMSF	76 dB



ON ROAD



REGIONAL



AE01-T

- ☑ Enhanced resistance to uneven wear patterns. The uniform tread wear results in an even distribution of forces across the road surface.
- ☑ Improved vehicle alignment and balance.
- ☑ Increased driver confidence and peace of mind.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
385	65	22.5	164	K	20PR	15.5	308	C	B	74	3PMSF	74 dB

ON ROAD

REGIONAL



AE01-S PLUS

- ☑ Greater resistance to punctures.
- ☑ Longer tread life for extended durability reducing the frequency of tyre replacements.
- ☑ Improved reliability.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
275	70	22.5	150/148	M	18PR	15.8	220	C	A	73	3PMSF	74 dB
295	60	22.5	150/147 (149/146)	K (L)	16PR	15.5	250	D	A	73	3PMSF	74 dB
315	60	22.5	154/150 (152/148)	L (M)	20PR	14.7	276	C	A	73	3PMSF	74 dB
385	55	22.5	160 (158)	K (L)	20PR	16.6	308	C	A	74	3PMSF	74 dB
385	65	22.5	164 (158)	K (L)	20PR	16.6	308	C	A	74	3PMSF	74 dB



ON ROAD



REGIONAL



AE01-D PLUS

- ☑ Brilliant shock absorption which helps to extend the lifespan of suspension and steering systems.
- ☑ Enhanced performance in extreme weather conditions including extreme heat, cold, rain and snow.
- ☑ Improved resistance to sidewall damage.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
205	75	17.5	124/122	M	14PR	15.7	178	D	B	74	3PMSF	76 dB
215	75	17.5	126/124	M	16PR	15.7	186	D	B	74	3PMSF	76 dB
235	75	17.5	132/130	M	16PR	16.7	206	D	B	74	3PMSF	76 dB
245	70	17.5	136/134	M	16PR	16.7	212	D	B	74	3PMSF	76 dB
265	70	19.5	140/138	M	16PR	16.7	232	D	B	74	3PMSF	76 dB
285	70	19.5	146/144 (145/143)	L (M)	16PR	16.7	240	D	B	74	3PMSF	76 dB
295	60	22.5	150/147 (149/146)	K (L)	16PR	20.8	256	E	A	75	3PMSF	76 dB
315	60	22.5	152/148	L	20PR	18.9	286	C	A	74	3PMSF	76 dB



ON ROAD



REGIONAL



AE01-T PLUS

- ☑ Enhanced fuel efficiency for cost saving.
- ☑ Better handling and responsiveness creating a smoother driving experience.
- ☑ Better mileage potential with reduced rolling resistance.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
215	75	17.5	136/134	J	18PR	13	186	D	B	74	3PMSF	74 dB
235	75	17.5	143/141 (145/145)	J (F)	18PR	13	200	D	B	74	3PMSF	74 dB
245	70	17.5	143/141 (146/146)	J (F)	18PR	13	206	D	B	74	3PMSF	74 dB
385	55	22.5	160	K	20PR	16.6	308	C	A	74	3PMSF	74 dB
425	65	22.5	165	K	20PR	17.4	326	C	A	74	3PMSF	74 dB
445	65	22.5	169	K	20PR	16.7	360	C	A	74	3PMSF	74 dB



ON ROAD



REGIONAL



AE01-Z PLUS

- ☑ Reduced noise and vibration levels to help dampen road noise.
- ☑ Improved vehicle stability when carrying heavy loads.
- ☑ Reduced wear and tear on vehicle components. Superior load-carrying capacity and stability help minimise wear and tear on other vehicle components.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
205	75	17.5	124/122	M	14PR	12.5	168	D	B	72	3PMSF	74 dB
215	75	17.5	135/133	L	16PR	13	180	D	A	72	3PMSF	74 dB
235	75	17.5	132/130	M	16PR	13	185	D	A	72	3PMSF	74 dB
245	70	17.5	136/134	M	16PR	13	200	D	A	72	3PMSF	74 dB
245	70	19.5	141/140	M	18PR	14.5	200	D	A	72	3PMSF	74 dB
265	70	19.5	140/138	M	16PR	15.1	224	D	A	72	3PMSF	74 dB
285	70	19.5	146/144 (145/143)	L (M)	16PR	14.6	234	D	A	72	3PMSF	74 dB



ON ROAD



REGIONAL



CONSTRUCTION RANGE



AEROTYRE®



Our construction series is specially designed to meet the robust requirements of construction vehicles and environments.

CONSTRUCTAULTRA

NEW

- ☑ Extra deep tread providing high resistance to cutting and chipping for an extended lifespan on severe on-and-off-road sites.
- ☑ Robust tread pattern engineered to deliver exceptional drive-axle traction across rough and uneven surfaces.
- ☑ Increased load capacity to support heavy commercial vehicles in demanding construction environments.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
295	80	22.5	154/150 (152/148)	G (K)	18PR	18.9	260	C	C	72	3PMSF	74 dB
315	80	22.5	158/156 (156/150)	G (K)	20PR	16.7	270	C	C	72	3PMSF	74 dB

ON ROAD

CONSTRUCTION

AE01-CS II

- ☑ Resistant against heat and wear and tear from prolonged use.
- ☑ Incredibly versatile available in a variety of sizes and configurations to suit multiple applications and needs in construction.
- ☑ Prioritise safety and stability to provide better traction and control in challenging conditions.
- ☑ Optimised performance to deliver more responsive steering and smoother handling.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
13	R	22.5	156/150	K	20PR	18.9	260	C	C	72	3PMSF	74 dB
315	80	22.5	156/150	K	20PR	16.7	270	C	C	72	3PMSF	74 dB

ON ROAD

CONSTRUCTION



AE01-CD II

- ☑ Durable and able to withstand rough terrains including rocky surfaces, debris and sharp objects commonly found on construction sites.
- ☑ Enhanced traction to provide superior grip in mud, gravel, sand and uneven terrain.
- ☑ High load-bearing capacity.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
13	R	22.5	156/150	K	20PR	24.1	266	D	C	75	3PMSF	76 dB
315	80	22.5	156/150	K	20PR	24.1	262	D	C	74	3PMSF	76 dB

ON ROAD

CONSTRUCTION

AE01-CT II

- ☑ All-weather performance reliable in rainy, snowy and muddy conditions.
- ☑ Pattern design reduces stone trapping and abrasions.
- ☑ Easy maintenance with replaceable tread elements.




Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
385	65	22.5	164	K	20PR	15.8	308	C	B	74	3PMSF	74 dB
445	65	22.5	169	K	20PR	17.8	360	B	B	74	3PMSF	74 dB

ON ROAD

CONSTRUCTION

URBAN RANGE

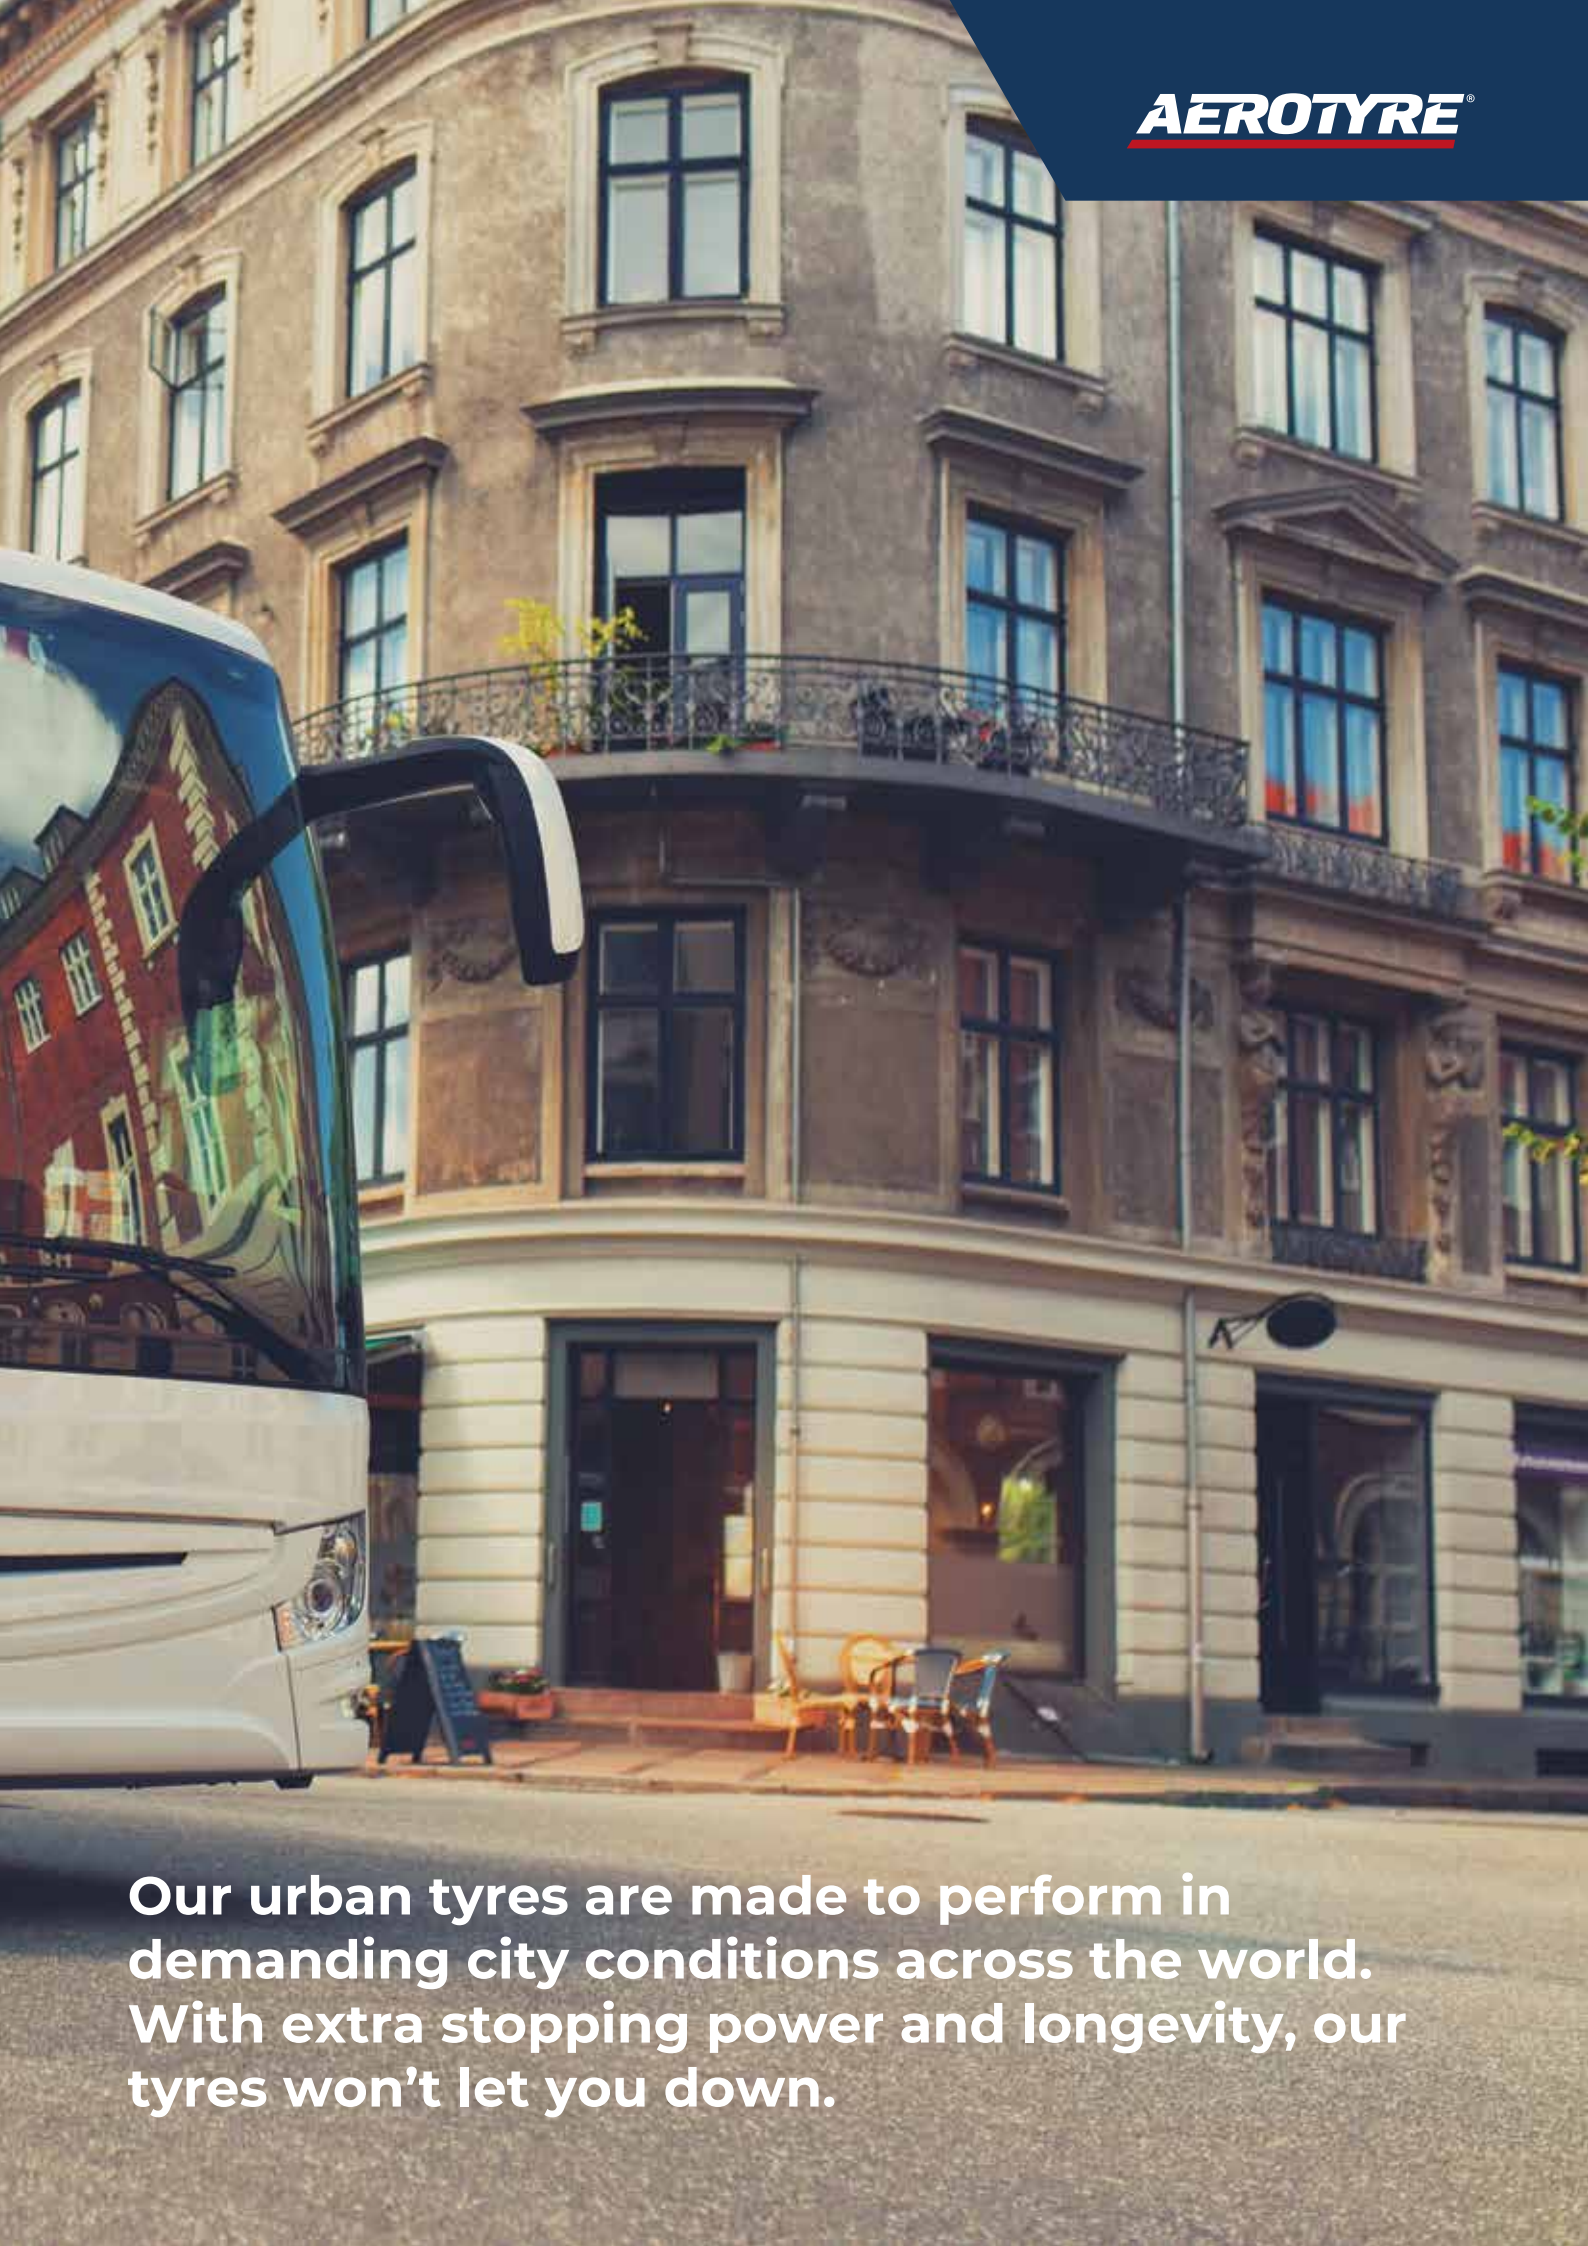


AEROTYRE®
Our urban tyres are made to perform in demanding city conditions across the world. With extra stopping power and longevity, our tyres won’t let you down.

ECO-PLUS

- ☑ No compromise on safety with advanced tread patterns and specialised rubber compounds this tyre provides exceptional traction on various road surfaces.
- ☑ Comfort for passengers to enjoy a smooth ride thanks to innovative shock-absorbing technologies.
- ☑ Built to be durable with reinforced sidewalls and rugged tread compounds to endure daily commutes.



Section Width	Aspect Ratio	Rim Size	Load Index	Speed Index	Ply Rating	Tread Depth (mm)	Tread Width (mm)				3PMSF	Noise Limit
275	70	22.5	152/149	J	18PR	18.9	240	C	B	71	3PMSF	74 dB

ON ROAD

URBAN



DISTRIBUTION AND WARRANTY

Official Global Distributor

GB Tyres (UK) LTD
Old Corus Building
Barnfield Road
Tipton
West Midlands
DY4 9DE

Telephone:

+44 (0)121 520 5215

Email:

sales@gbtyres.net

Website:

www.gbtyres.net

WARRANTY

Every effort is made by Aerotyre and GB Tyres (UK) Ltd to ensure the highest possible standards of quality, materials and workmanship are incorporated in our products.

All products carry a 7-year warranty to protect against failure on account of any manufacturing defects (defective material or faulty workmanship) during the period of warranty.

In the unlikely event, you experience a defect with an Aerotyre product, the tyre shall be subject to a thorough inspection by an authorised team member who will ascertain the cause of any defects in the product. If the tyre is found to have failed due to a manufacturing defect, the tyre will be replaced on a pro-rata basis based on the remaining tread pattern depth.

Aerotyre product warranty is limited to defects of workmanship and/or materials. The decision whether the tyres are defective or not will be decided by the appointed representative of Aerotyre and GB Tyres (UK) Ltd.

YOUR LOCAL DISTRIBUTOR

AEROTYRE®

+44 (0)121 520 5215
sales@gbtyres.net

www.aerotyre.com