

F2- Fast Sintering Furnace



Fast Cool 2.0 Technology, cools down the furnace quickly without damaging the unit


Zotion Economic dental Fast Sintering Furnace F2 consist of a double shell structure with excellent insulation. The specially designed structure ensures that the furnace can achieve fast heating and cooling procedures, providing a cleaner working environment during sintering process. It can sinter zirconia block, glass ceramics and glazing.

Technical Parameters: F2 Fast Sintering Furnace

Rated Voltage	Interflow 220 VAC + 20 %
Rated Power	2500W
Temperature Control Precision	+ 1°C
Size	420 * 320 * 600 mm
Net Weight	38.25 kg
Rated Temperature	maximum temperature 1650°C
Motor	Stepping
Max Heating Rate	100°C/minute
Sintering Chamber	100 * 200 mm, 3 layers sintering trays



Full touch screen
for easier operations

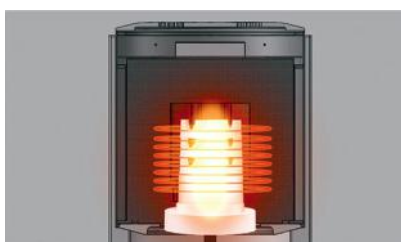

3 Sintering trays can be put
In the large sintering chamber




Maximum Heating Rate is
100°C per minute



Silicon-molybdenum
rods to generate heat



Excellent Temperature
Accuracy: **+/- 1°C**

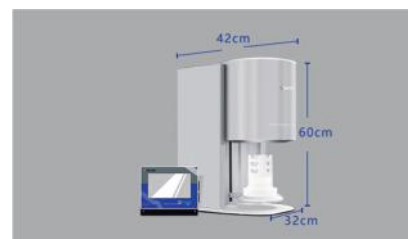

Smaller & Lighter: Zotion's
Advanced Design