



Technical Specifications

Welding Process	Input Power	Rated Output 40% Duty Cycle	Welding Amperage Range	Max. Open Circuit Voltage	Input at Rated Output, 50/60 Hz. A KVA KW			Dimensions in (mm)	Weight lb (kg)
Stick	127 VAC	130 A @ 23 V	30 A - 130 A	78 VAC	43	5.4	3.8	H: 11.3 (295) W: 6.1 (155) L: 16.9 (430)	Net: 15.4 (7.0) Ship: 23.8 (10.8)
	220 VAC	200 A @ 26 V	30 A - 200 A		48	10.9	6.7		
TIG	127 VAC	130 A @ 15 V	30 A - 130 A		32	4.2	2.8		
	220 VAC	200 A @ 18 V	30 A - 200 A		32	7.2	4.2		

Process:

- Stick (SMAW)
- TIG (GTAW)

Applications:


- Stick (SMAW) of DC in diameters of 1.6 to 4.0 mm (1/16" to 5/32") E7018, E6013 E6010, E6011 and INOX.
- Welding TIG (GTAW) Mainly for stainless steel, arc controlled start CONTACT TIG system with tungsten electrode diameters of 0.040 and 1/6".

Comes With:

- Strap to carry on the shoulder.
- Input cable.
- Set of cables for soldering (with ground clamp, electrode holder and quick connectors).
- Owner manual, maintenance guide, parts list and warranty policy.

Applications:

- Welding workshops.
- Amateur practices.
- Automotive mechanic workshops.
- School and building maintenance.

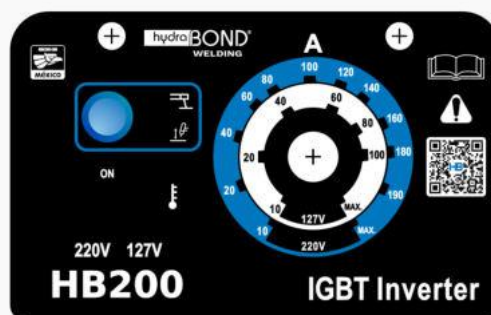

Stock No: 302-504

INFRA CODE: 3400



Technical Specifications

Advantages:

- Electronic current control that allows a precisely use of the welding current.
- INVERTER type power supply.
- Compact, lightweight and easy to carry, to load the shoulder while welding.
- Protection against overheating, which prevents damage to the equipment due to abuse of the duty cycle.
- Cooling system forced ventilation.
- Dual supply voltage 127/220 V AC +/- 10% (automatic configuration according to present voltage).
- Digital process selector.
- Power light indicator.
- Indicator light of process
- Indicator light for thermal protection.
- Indicator light of supply voltage present.

