

LINELED
2024-2025

CONTENT

Introduction	1-9
Alba Series	11-12
Lucia Series	13-14
Rayo Series	15-17
Clora Series	18-21
Sole Series	22-26
Pablo Series	27-29
Aqua Guard Series	30-31
Raggio Series	32-34
Non Visualizer	35-36
Sconce Series	37
MartinSeries	38-39
Elena Series	40-42
Parker	43-45
Ultra slim magnetic track Series	46-48
Sevelte magnetic Series	49-52
Magnetic track channe	53
Silicaflex Series	54-63
Lumin Flex Series	64-65
Stretch ceiling	66-81
Translucent ceiling	72-74
Printed ceiling	75-77
Lacquered ceiling	78-80
3-D ceiling	81-84
Led Aluminium Profile	84-131
Decorative Lights	132-149
Step & Aisles Led Lighting	150-162

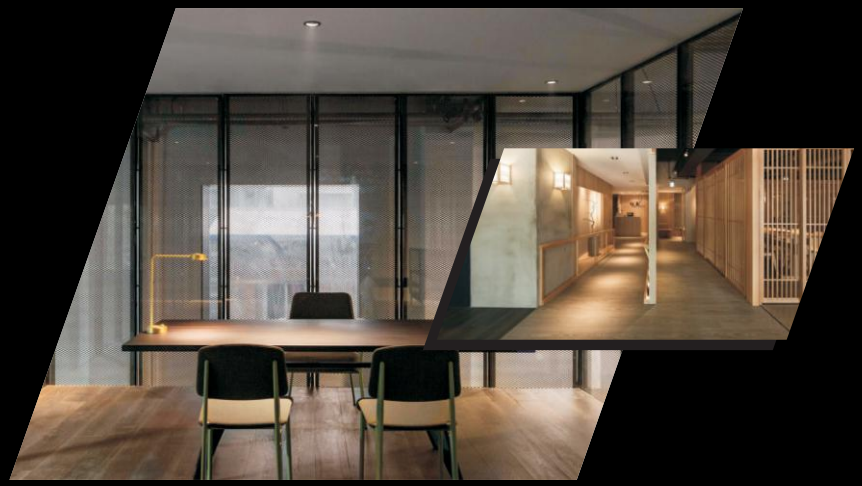


It's great to learn about Alineled, a professional lighting enterprise with a comprehensive focus on R&D, manufacturing, sales, and service. The emphasis on high-end lighting products for various commercial spaces such as hotels, villas, clubs, shops, and shopping malls is notable.The commitment to a young and energetic team that combines innovation with environmental consciousness is commendable. The idea of integrating luminaires and lighting seamlessly into the environment, making them both aesthetically pleasing and energy-efficient, reflects a forward-thinking approach. Continuous innovation in product research and development, coupled with a dedication to quality, has led to establishing long and deep collaborations with both domestic and foreign customers. This demonstrates a commitment to excellence and customer satisfaction. The company's guiding principle of "R&D is the soul, quality is the foundation, service is intention" reflects a holistic approach to business. By aiming to become a well-known brand in the field of high-end indoor commercial lighting, Alineled sets ambitious goals for itself within the lighting industry. Wishing Alineled continued success in its endeavors to make a mark in the field of high-end indoor commercial lighting, and to contribute to energy-saving and environmental protection through its innovative and quality products.

OUR VISION

To be a preferred manufacturing and solutions provider of Lighting, Energy-efficient Products in the global marketplace.

OUR MISSION

To deliver superior products and services that meet the needs and expectations of our customers, while adhering to the highest standards of quality, safety, and ethics.

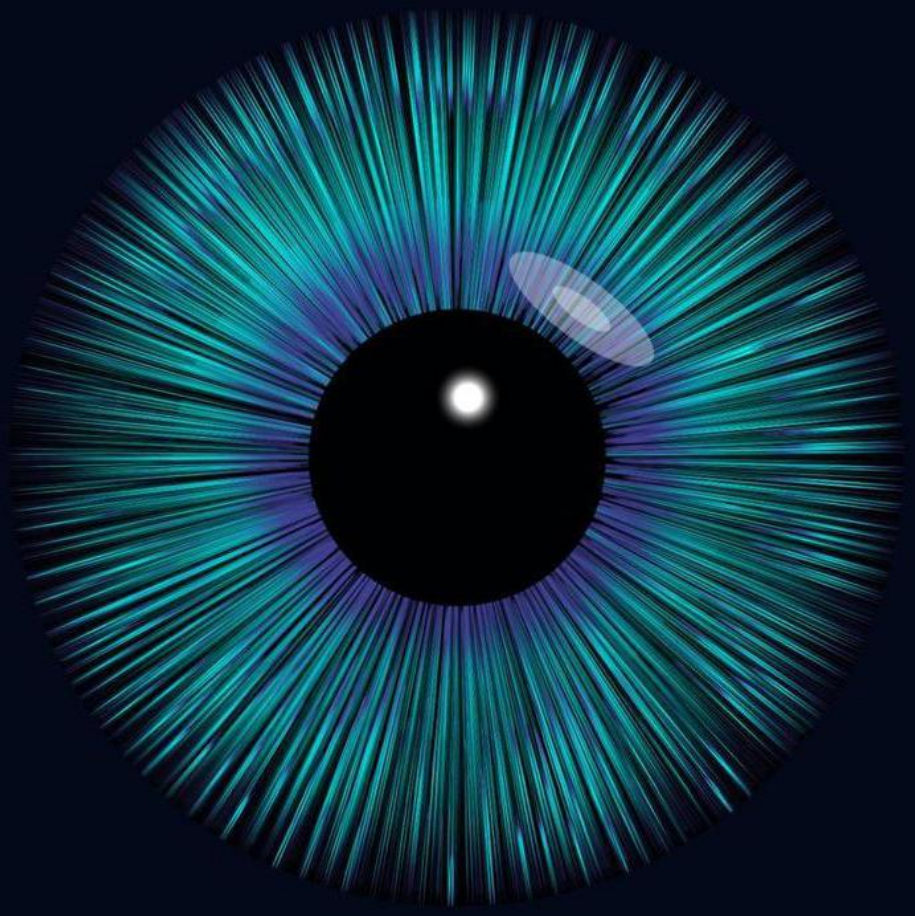

1500+SKU **1500+** Projects **5+** Countries

A spectrum leading us to the future

The brain has immense capabilities, and runs every part of you.
It perceives color, and controls the biological clock that maintains your bodily functions.
The development of TRI-R began by focusing on the spectrum of light,
Which fulfills an important role for these mechanisms.






Your eyes are sensors. Three types of photoreceptor cells on the retina detect the intensity oflight on different wavelengths, and transmit this information as signals to the brain. The brain then perceives this color and, at the same time, issues various instructions. From this perspective, the idea of what it meansfor humanity to have light is now attracting attention all around the world.TRI-R is a human-centric, LED spectrum technology that will open the way to humanity's future.

Humankind lives alongside and was created from natural light

Humankind now lives with articial light.

Go back four million years to the time of our ancestors. the light of the sun shines unending continuously illuminates the earth. in time humans encountered fire and civilization were born that harnessed the power of natural light form both fire and the sun.

Then about 80 years ago a new illumination technology appeared artificial light. The spectrum of the light however was quite differed from that of natural sunlight and the light from incandescent bulbs that had come before. Compare the spectrum of natural light which draws a smooth line to the spectrum of artificial light which peaks in particular wavelengths and is lacking in other. The effect that these differences have on people is gaining attention.

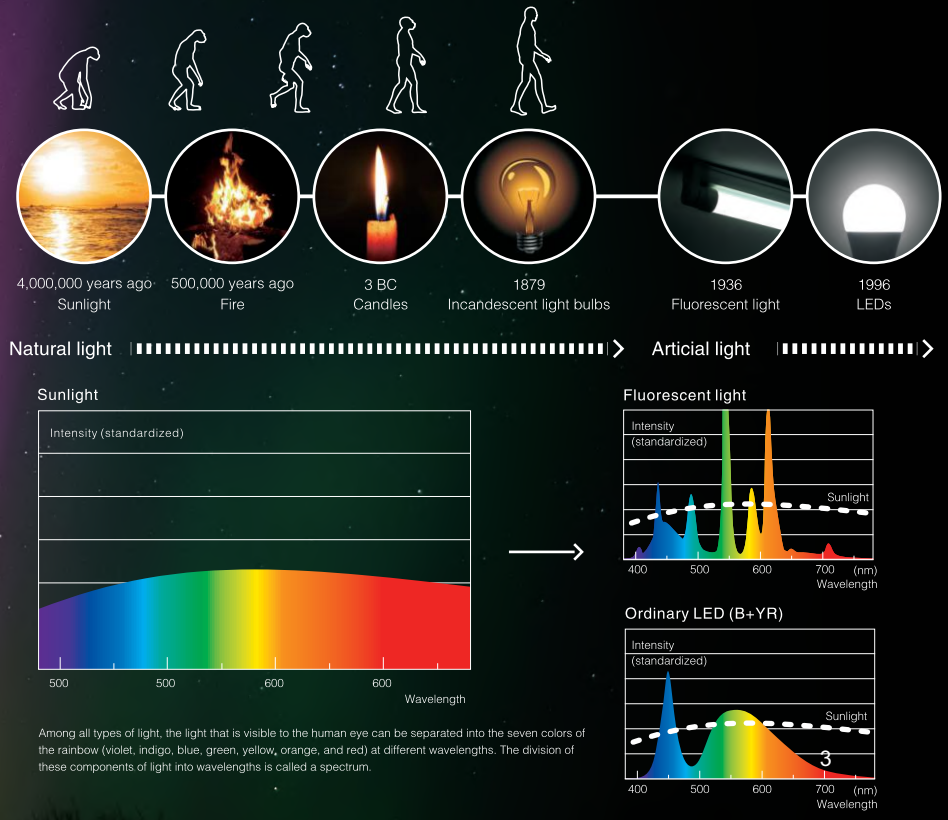




Light, the brain, the body.


Light and the biological clock

From the time we are born a biological clock is running not only in our brains but in each of the countless cell throughout our bodies. The clock naturally operates on a cycle of about 25 hours but synchronizes with our 24 hour day as the morning light causes a daily correction. This is one way that light is used not only to view objects but also to maintain our bionomical functions and is an important component to sensitivity.

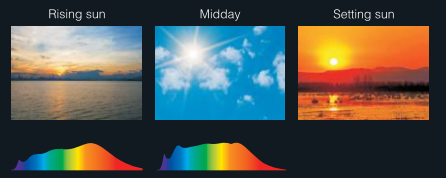


Same perceived colour does not mean same spectra

When a spectrum enters the eye our photoreceptor cells measure the respective intensity of blue, green and red light. The retina converts and transmits this data to the brain where it is perceived as colours and luminosity in order words the brain interprets the results of calculation and is not capable of recognising spectra directly. The allows the brain to recognize the same colour in different spectra such as natural light, artificial light or images on a display.

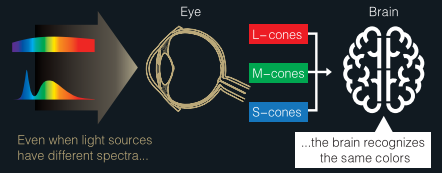

Photoreceptor cells transmit light changes throughout the day to the brain

In 2002 scientists discovered the existence of opRGCs (intrinsically photosensitive retinal ganglion cells) which transmit the intensity of Blue light a major part of morning light. We now know that these photoreceptor cells control the biological clock. This on turn suggests that spectra might affect the biological clock through ipRGCs. Research is showing us the effects on organisms of intensities in the blue portion of the spectrum that differ from those in natural light even with light that we perceive as being the same colour. This rework focuses on disruptions to the biological clock and the resulting degradations in sleep quality as well as risks involving other illnesses.

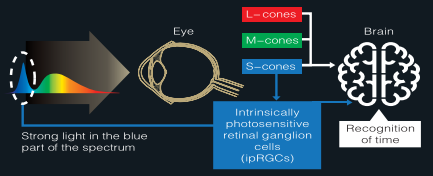





TRI-R, a next-generation LED spectrum technology

TRI-R light-emission principles


The light from an ordinary white LED is created from the combination of light emitted from a blue LED and light emitted by exciting fluorescent materials. But with TRI-R virtually all of the excitation light from a violet LED is converted into light emitted from florescent materials which in a natural and continuous spectrum that is very close to that of sunlight one that close not have excessive peaks or deficiencies at specific wavelengths.

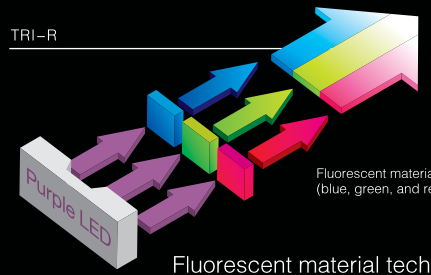

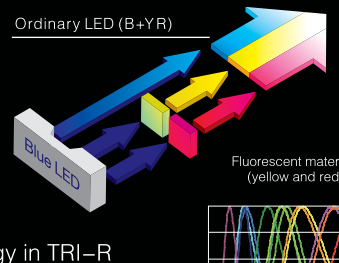


Fluorescent material technology in TRI–R

Based on our research into fluorescent materials that give rise to excited luminescence at various wavelengths and our accumulated expertise, we developed fluorescent materials that are optimized for generating white light from violet LEDs, as well as the technology needed for this blending.



Spectral comparison of 5000 K color temperature

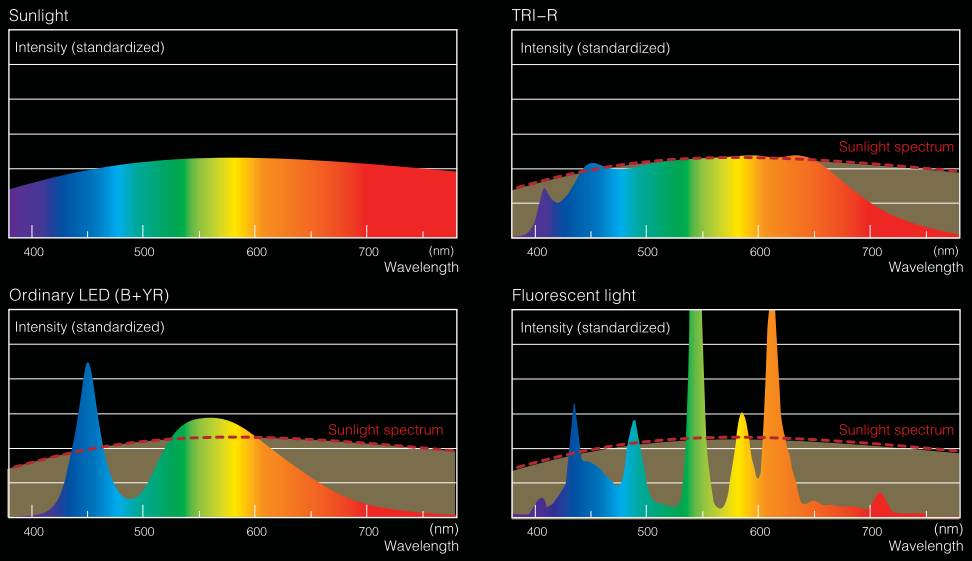

Light closest to that of the sun


Recreating the sunlight spectrum

Faithful reproduction of natural colors, contrasts, and three–dimensionality

Artists select colours and brush stokes to create depth and perspective when viewed under light and viewing paintings under th same lighting with which the artist created them is one way to properly appreciate them. TRI-R faithful illuminates painting as they would appear under sunlight in terms of colour and contrast. We must also not forget texture or three dimensionality when illuminating work of art, fashion or interior design. TRI-R delivers a natural spectrum without excessive blue light, which is easily scattered and therefor produces specular reflection from the surface of object imparting a greater sense of three dimensionality and texture.





Peter Paul Rubens's *Self–portrait* (1623) from the Royal Collection

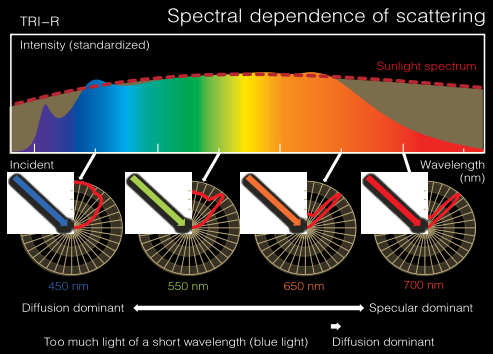

Superb color rendering and expression of texture

Sometime the colours clothing look different outside than it did in the store. This happen because the spectrum of light in the store differs from that of natural light. Colour rendering indicates the effect that a light source has on how the colour of object are perceived with 100 representing colour under natural light. TRI-R exhibits superior colour rendering properties with a value close to 100 when using not only the traditional CRI (Colour Rendering Index) standard but also the new TM-30-15 standard (The IES Method for Evaluating Light Source Colour Rendition). The Technology expresses natural colour at events such as exhibition of European art and fashion shows.

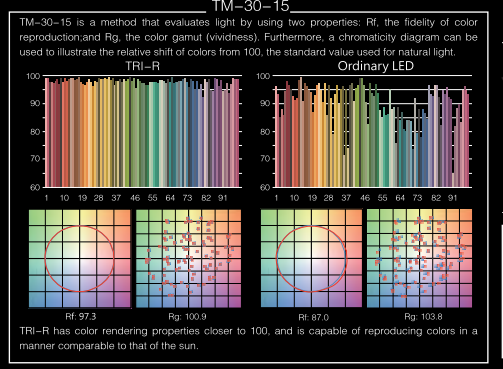

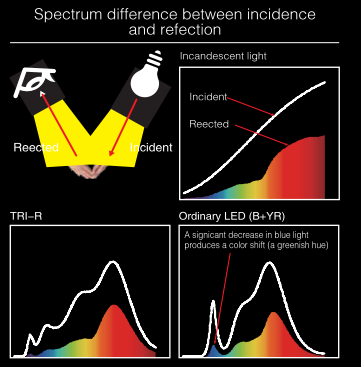

True–to–life expression

Rendering high–quality scenes with depth


TRI-R allow for superb colour rendering and expression of texture. Art galleries, showrooms, shops, hotels and restaurants of places that are capable of maximizing this potential. The light from TRI-R produces natural scenes with depth in various spaces.



With light that is exceedingly close to that of the sun, TRI–R can illuminate human vitality. The technology allows for the accurate expression of the natural colors and textures inherent to the skin.



TRI–R lighting clearly brings out colors ranging from faint to vivid. The beauty of the meticulous weaving of clothing items is depicted in every detail.

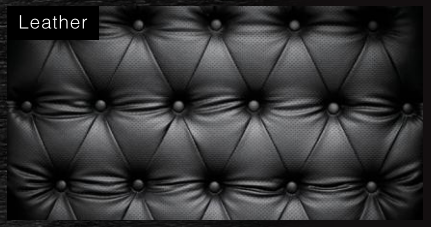


TRI–R faithfully reproduces the appearance of even monotone leather products and other items that do not have an easily perceived texture. Viewers are able to recognize the craftsmanship that has gone into such items.




Because of TRI–R' s natural and smooth, continuous spectrum, the technology is capable of accurately revealing the deep luster of objects made of gold, and the accompanying feeling of luxury.

Excellent visibility, with little glare

An ordinary LED light source transmits a strong beam of light from a blue LED which scatters greatly due to its short wavelength and high energy. This scattering occurs not only on an illuminated object but within the eye itself where it is easier to perceive shimmering and glare. because TRI-R does not contain a high intensity blue light component the technology provide light that offers excellent visibility with little glare

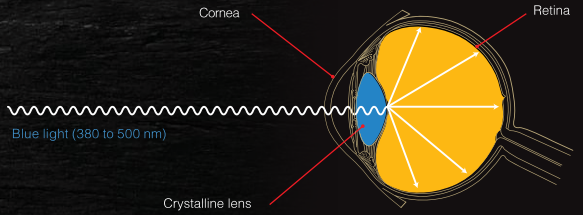

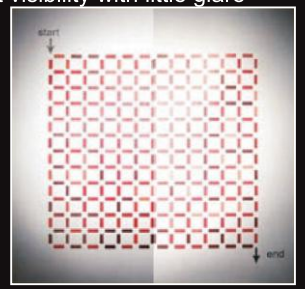

TRI–R Ordinary LED (B+YR)



URBAN REVIVO

Alba Series





Power:8W

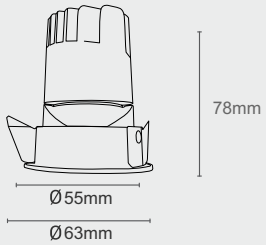


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19001
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W

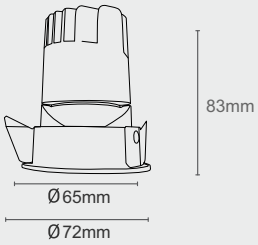


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19002
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:20W

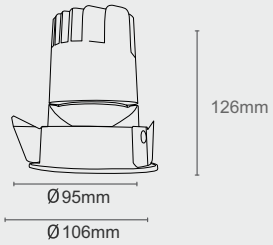


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19003
CCT: 3000K/ 4000K/ 6000K
Power : 22W
Beam angle: 36 degree
Cutout size: 95mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:30W

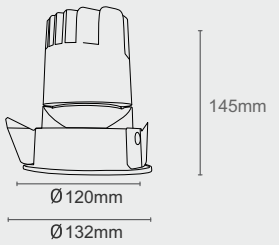

V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim


Product code: ALN19004
CCT: 3000K/ 4000K/ 6000K
Power : 30W
Beam angle: 36 degree
Cutout size: 120mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90

Lucia Series





Power:7W

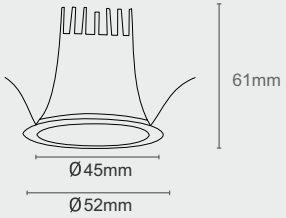


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19005
CCT: 3000K/ 4000K/ 6000K
Power : 7W
Beam angle: 38 degree
Cutout size: 45mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:10W

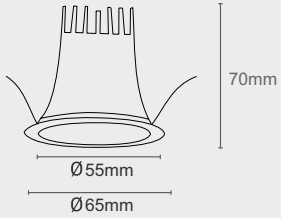


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19006
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 38 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W

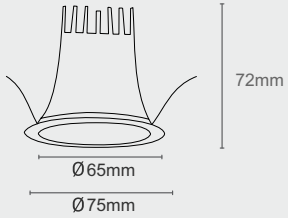

V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19007
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 38 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90










Rayo Series





Power:3W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19008
CCT: 3000K/ 4000K/ 6000K
Power : 3W
Beam angle: 30 degree
Cutout size: 25mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:6W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19009
CCT: 3000K/ 4000K/ 6000K
Power : 6W
Beam angle: 24 degree
Cutout size: 40mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:10W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19010
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 24 degree
Cutout size: 45mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN190011
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 35 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:20W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19012
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 35 degree
Cutout size: 70mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:35W



V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN190013
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 56 degree
Cutout size: 85mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Clora Series





Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19014
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19015
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19016
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 36 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19017
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19018
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19019
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 36 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19020
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:10W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19021
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W



V~AC
220-240V

Glare Cut
39°

Dimmable

IP20

Product code: ALN19022

CCT: 3000K/ 4000K/ 6000K

Power : 15W

Beam angle: 36 degree

Cutout size: 75mm

Location: Recessed

Installation: Ceiling

Ingress Protection: IP20

Dimming: Depending on power supply

CRI: 90




Sole Series





Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19023
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19024
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19025
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 36 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:22W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19026
CCT: 3000K/ 4000K/ 6000K
Power : 22W
Beam angle: 36 degree
Cutout size: 95mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19027
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19028
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19029
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 36 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:22W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19030
CCT: 3000K/ 4000K/ 6000K
Power : 22W
Beam angle: 36 degree
Cutout size: 95mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:8W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19031
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 36 degree
Cutout size: 55mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19032
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19033
CCT: 3000K/ 4000K/ 6000K
Power : 15W
Beam angle: 36 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:22W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19034
CCT: 3000K/ 4000K/ 6000K
Power : 22W
Beam angle: 36 degree
Cutout size: 95mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19035
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W

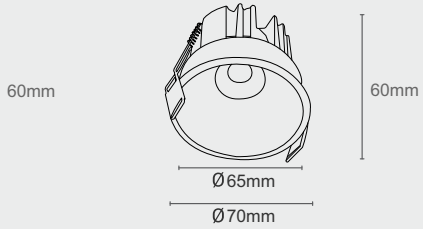

V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19036
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 65mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Pablo Series





Power:7W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19037
CCT: 3000K/ 4000K/ 6000K
Power : 7W
Beam angle: 36 degree
Cutout size: 70mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19038
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 90mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:15W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19039
CCT: 3000K/ 4000K/ 6000K
Power : 18W
Beam angle: 36 degree
Cutout size: 110mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:24W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19040
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 36 degree
Cutout size: 140mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:7W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19041
CCT: 3000K/ 4000K/ 6000K
Power : 7W
Beam angle: 36 degree
Cutout size: 70mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19042
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 36 degree
Cutout size: 90mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:18W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19043
CCT: 3000K/ 4000K/ 6000K
Power : 18W
Beam angle: 36 degree
Cutout size: 110mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:24W



V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim


Product code: ALN19043
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 36 degree
Cutout size: 140mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90

Aqua Guard





Power:16W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP65 | TW LED Dim

Product code: ALN19044
CCT: 3000K/ 4000K/ 6000K
Power : 16W
Beam angle: 24/38/60 degree
Cutout size: 82mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP65
Dimming: Depending on power supply
CRI: 90




Power:22W

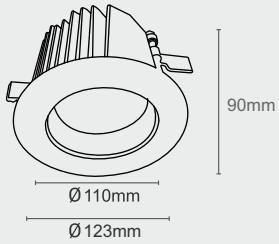

V~AC 220-240V | Glare Cut 39° | Dimmable | IP65 | TW LED Dim

Product code: ALN19045
CCT: 3000K/ 4000K/ 6000K
Power : 18W
Beam angle: 24/38/60 degree
Cutout size: 98mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP65
Dimming: Depending on power supply
CRI: 90

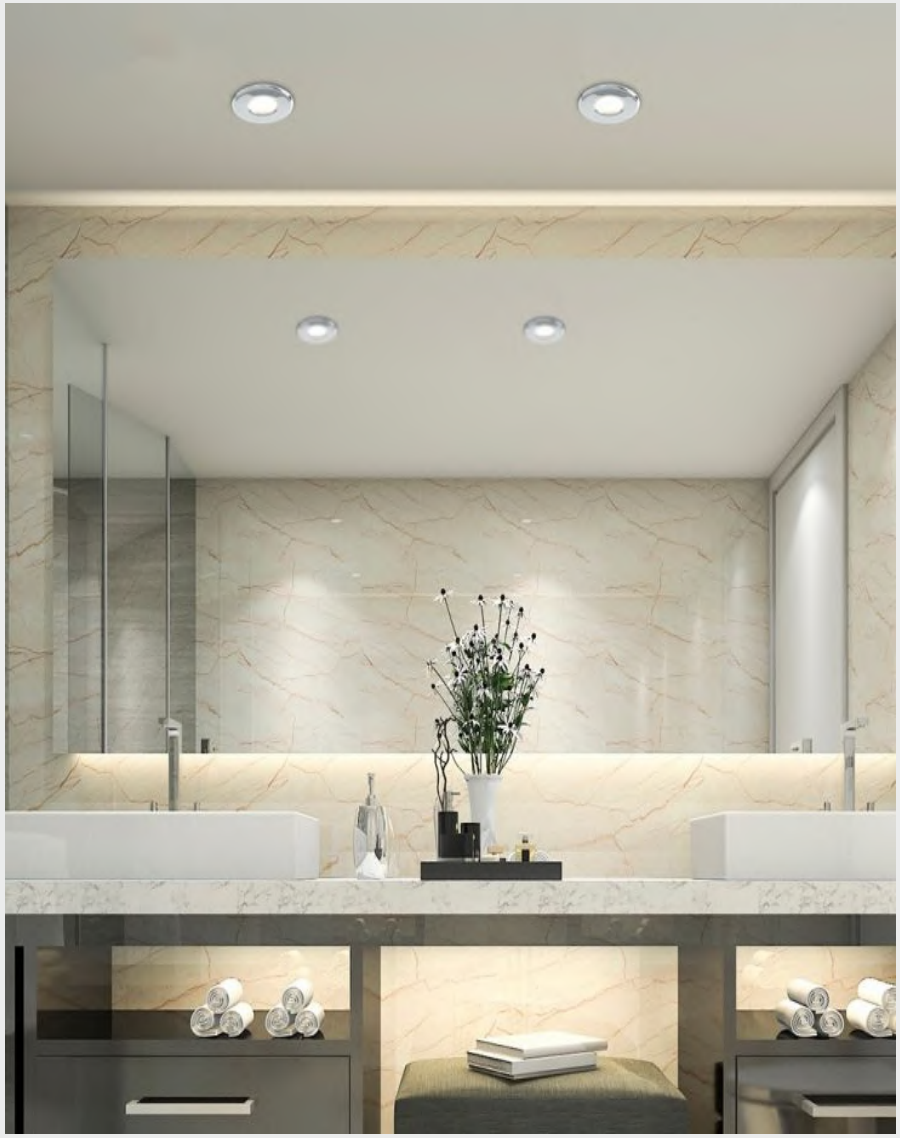


Raggio





Power:40W

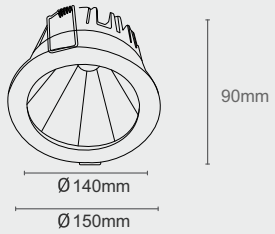


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19048
CCT: 3000K/ 4000K/ 6000K
Power : 40W
Beam angle: 24/38/60 degree
Cutout size: 140mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:24W

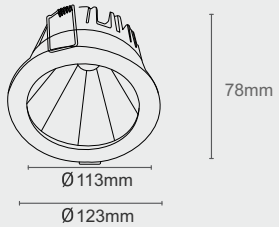


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19049
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 24/38/60 degree
Cutout size: 113mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:33W

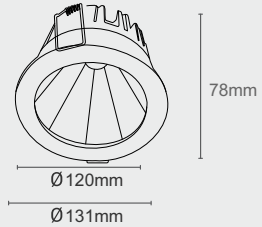


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19050
CCT: 3000K/ 4000K/ 6000K
Power : 33W
Beam angle: 24/38/60 degree
Cutout size: 120mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W

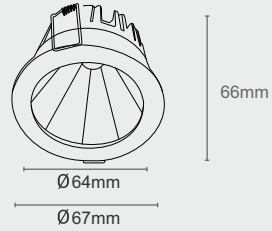


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19046
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 64mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:18W

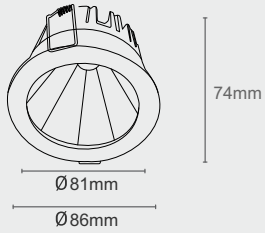



Product code: ALN19047
CCT: 3000K/ 4000K/ 6000K
Power : 18W
Beam angle: 24/38/60 degree
Cutout size: 81mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Non Visualizer





Power:7W

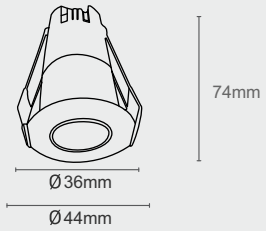




Product code: ALN19051
CCT: 3000K/ 4000K/ 6000K
Power : 7W
Beam angle: 24/38/60 degree
Cutout size: 36mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:10W

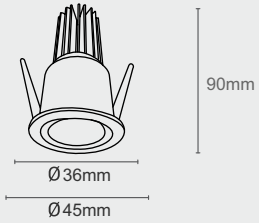




Product code: ALN19052
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 24/38/60 degree
Cutout size: 36mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:9W

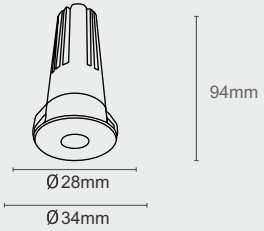




Product code: ALN19053
CCT: 3000K/ 4000K/ 6000K
Power : 9W
Beam angle: 24/38/60 degree
Cutout size: 28mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90

Sconce Series







Power:12W

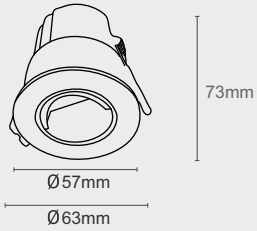



Product code: ALN19054
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 57mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90

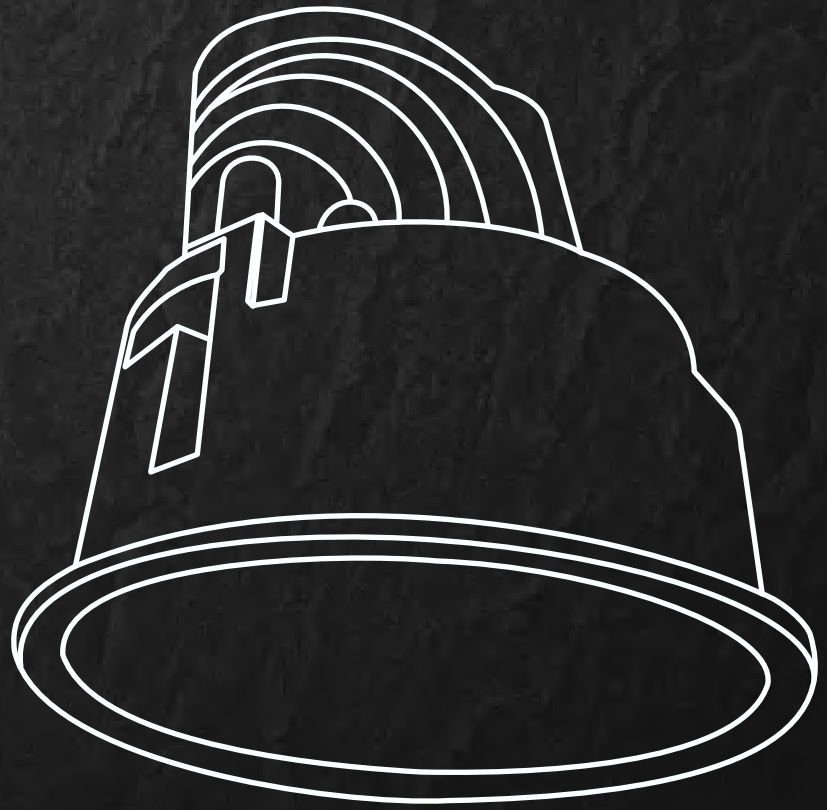


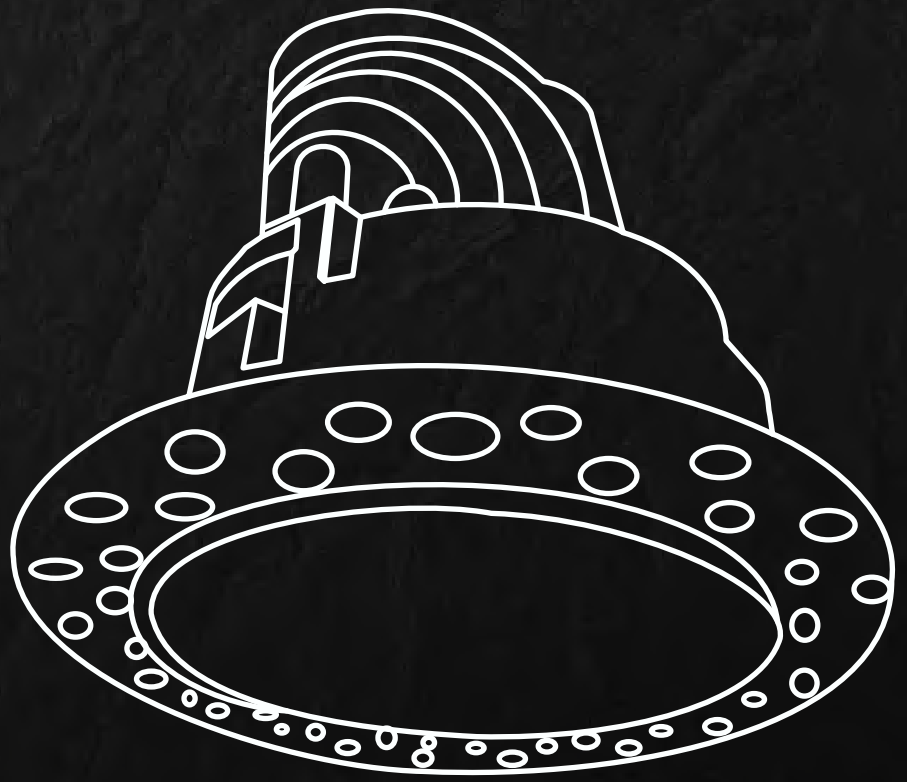

Martin



Power:12W

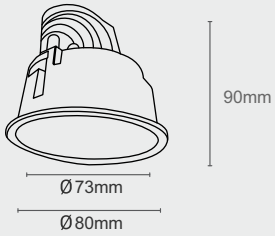


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19055
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 73mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W

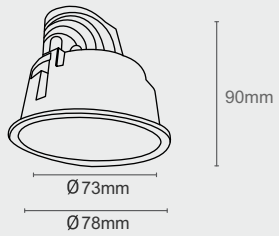


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19056
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 73mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19057
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19058
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90


Elena



Power:10W






Product code: ALN19059
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 24/38/60 degree
Cutout size: 53mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W






Product code: ALN19060
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:24W

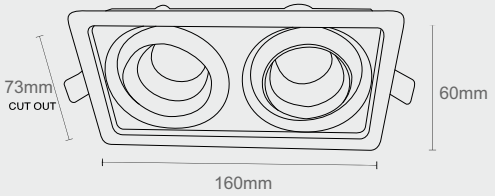




Product code: ALN19061
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 24/38/60 degree
Cutout size: 73mm X 156mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W






Product code: ALN19061
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 73mm X 73mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W





Product code: ALN19062
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Parker





Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19063
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19064
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 75mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19065
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:18W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19066
CCT: 3000K/ 4000K/ 6000K
Power : 18W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19067
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19068
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: IP20
Dimming: Depending on power supply
CRI: 90




Power:8W

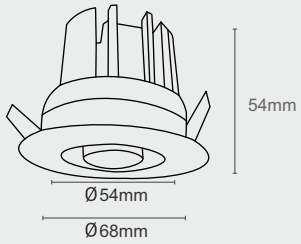


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19069
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 24 degree
Cutout size: 54mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

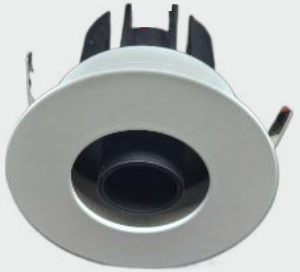

Power:8W

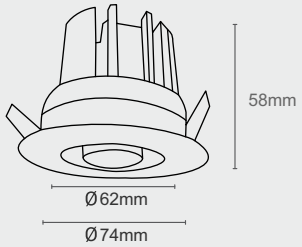

V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim


Product code: ALN19070
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 8 degree
Cutout size: 62mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Ultra Slim Magnetic track Lights





Power:12W

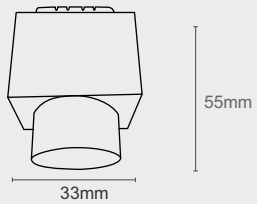


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19071
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 36mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W

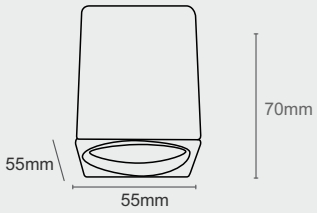


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19072
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 72mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:24W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19073
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 24/38/60 degree
Cutout size: 73mm X 156mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90




Power:12W



V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19074
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Cutout size: 73mm X 73mm
Location: Recessed
Installation: Ceiling
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

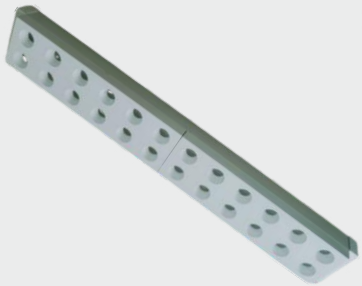

Power:10W




Power:10W





Power:10W




Power:7W





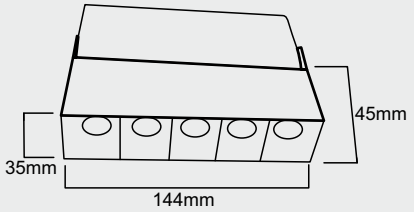












Product code: ALN19074
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 32/230/20mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Product code: ALN19075
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 120 degree
H/L/W: 12/300/32mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Product code: ALN19076
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 24/38/60 degree
H/L/W: 45/144/35mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90


Product code: ALN19077
CCT: 3000K/ 4000K/ 6000K
Power : 24W
Beam angle: 24/38/60 degree
Height: 88mm
Outer dia: 35mm
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Sevelte Magnetic tracklight

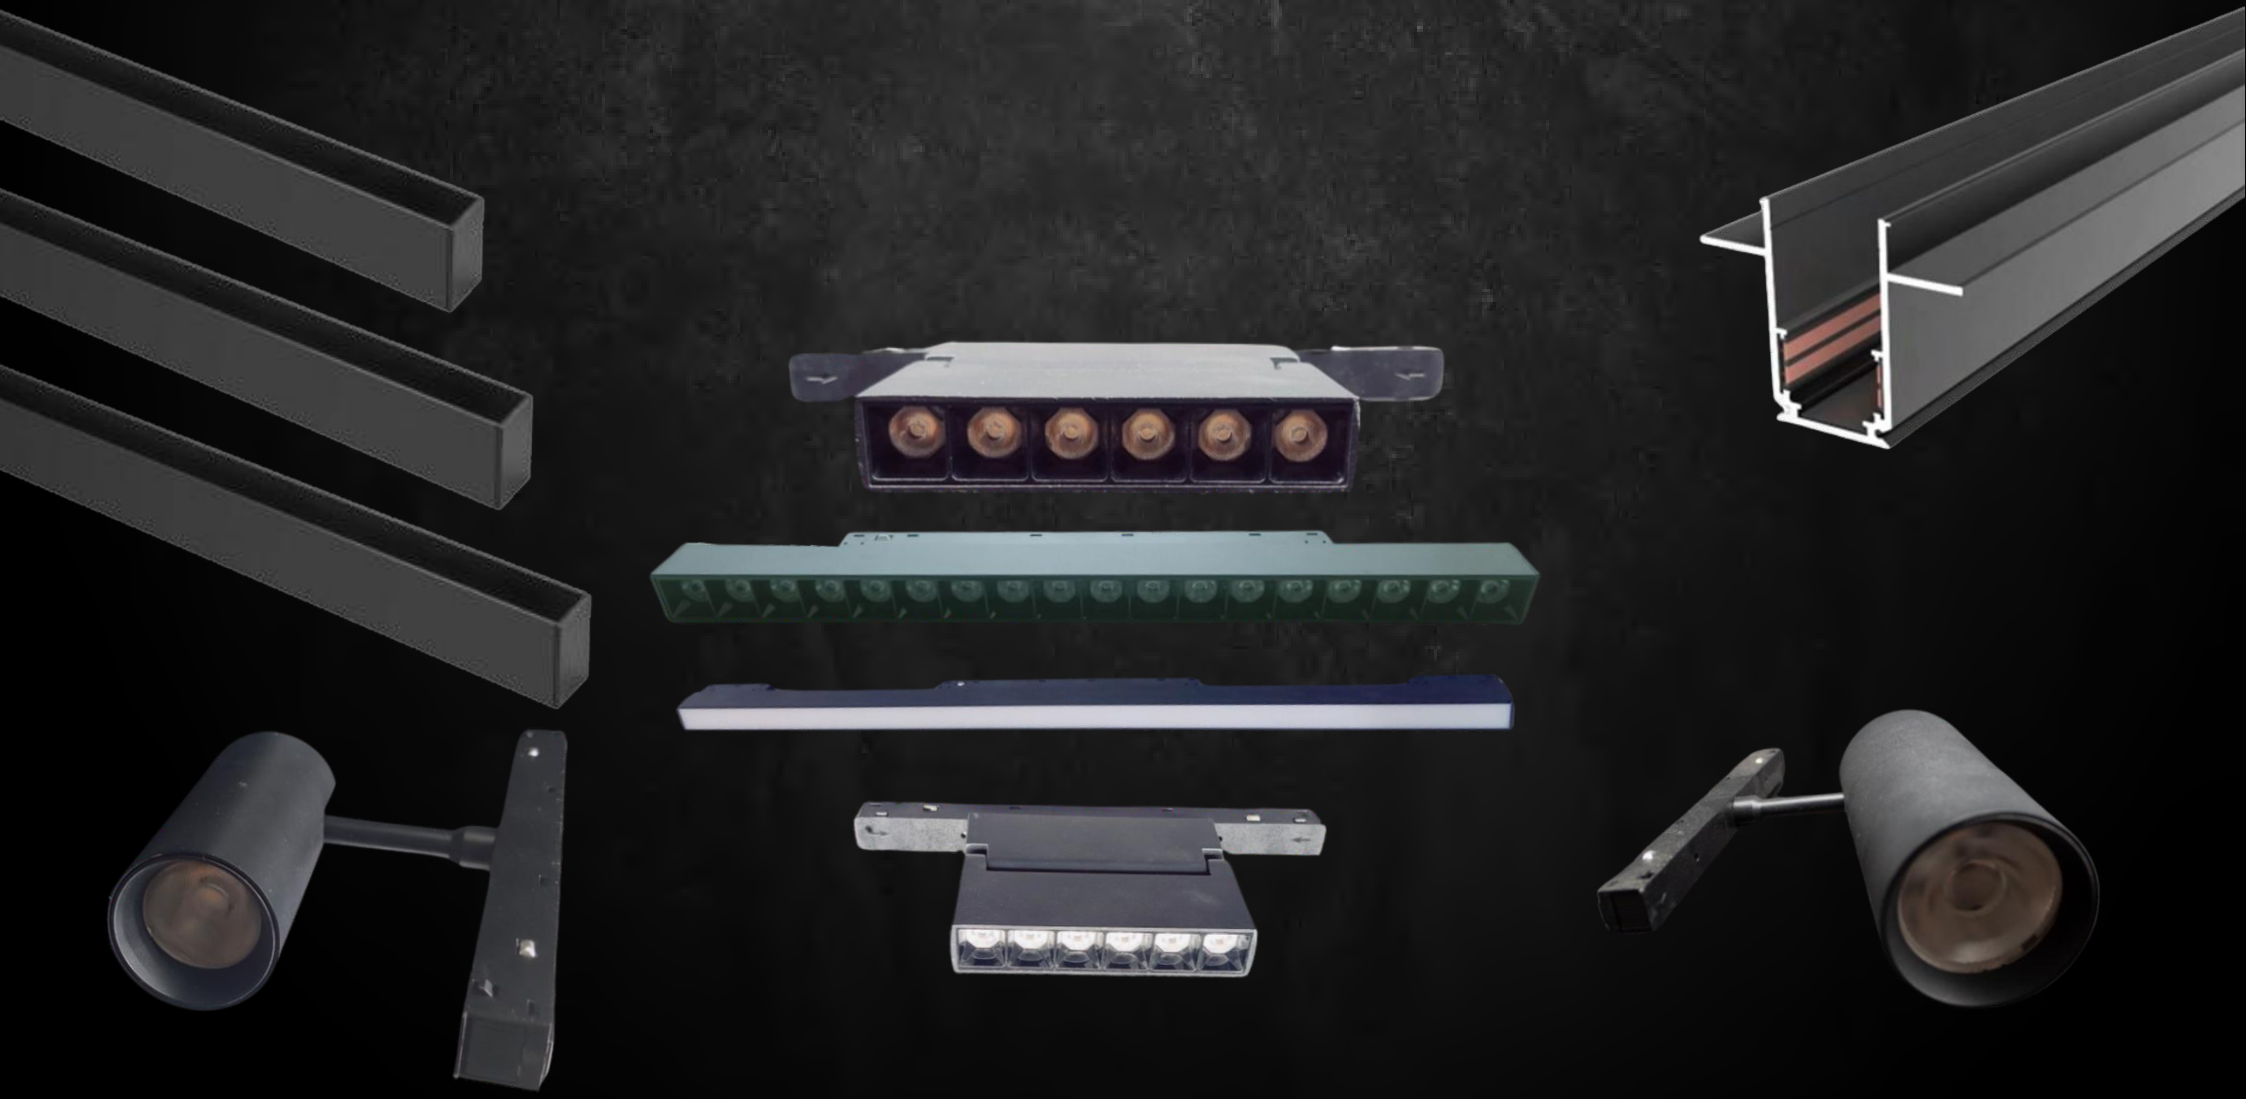




Power:6W

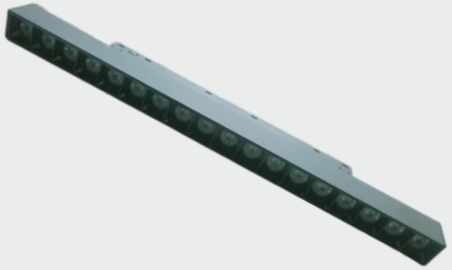


Power:18W

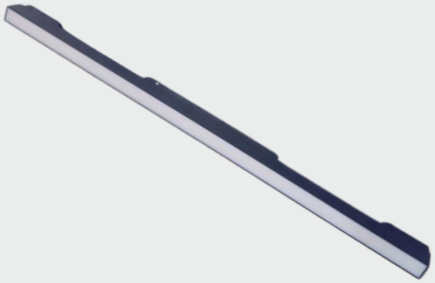



Power:20W




Power:10W

















Product code: ALN19078
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 22/114/25mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90


Product code: ALN19079
CCT: 3000K/ 4000K/ 6000K
Power : 10W
Beam angle: 24/38/60 degree
H/L/W: 22/330/25mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Product code: ALN19080
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 120 degree
H/L/W: 22/600/25mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Product code: ALN19081
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 120 degree
H/L/W: 22/300/25mm
Input Voltage: 24VDC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W

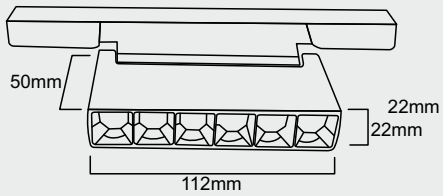


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19082
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 22/112/50mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19083
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 24/220/22mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W

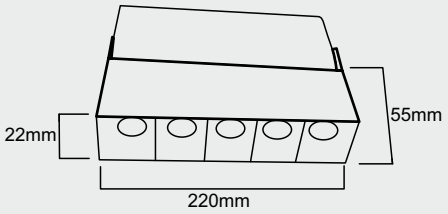


V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19084
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 55/220/22mm
Input Voltage: 24V DC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19085
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
H/L/W: 22/435/22mm
Input Voltage: 24VDC
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:20W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19086
CCT: 3000K/ 4000K/ 6000K
Power : 20W
Beam angle: 24/38/60 degree
Height: 140mm
Outer dia:65mm
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90



Power:12W




V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19087
CCT: 3000K/ 4000K/ 6000K
Power : 12W
Beam angle: 24/38/60 degree
Height: 100mm
Outer dia: 44mm
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90




Power:8W



V~AC 220-240V | Glare Cut 39° | Dimmable | IP20 | TW LED Dim

Product code: ALN19088
CCT: 3000K/ 4000K/ 6000K
Power : 8W
Beam angle: 24/38/60 degree
Height: 160mm
Outer dia: 44mm
Installation: Magnetic Track
Ingress Protection: Ip20
Dimming: Depending on power supply
CRI: 90

Magnetic Track Channel

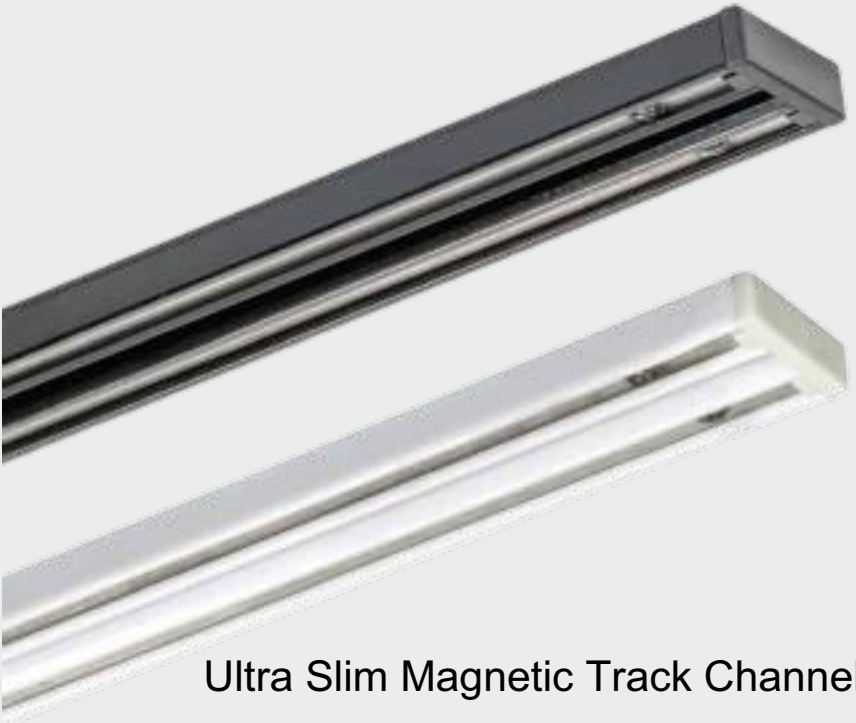

Ultra Slim Magnetic Track Channel



Recessed and surface magnetic track channel

SILICAFLEX SERIES

LINELED


LD-FR-SJS-DC24V-XXXX-120D-10*10MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>90
LM/W	49LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	8.3MM
POWER/M	8W/12W
IP RATE	IP67




ACCESSORIES

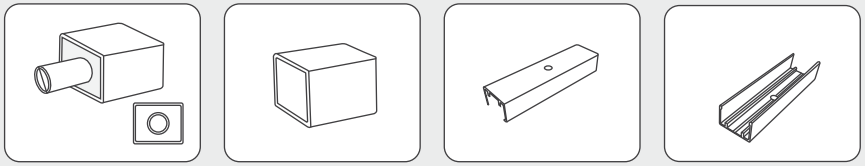

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-144D-10*10MM NEON FLEX(HOLLOW EXTRUSTION)

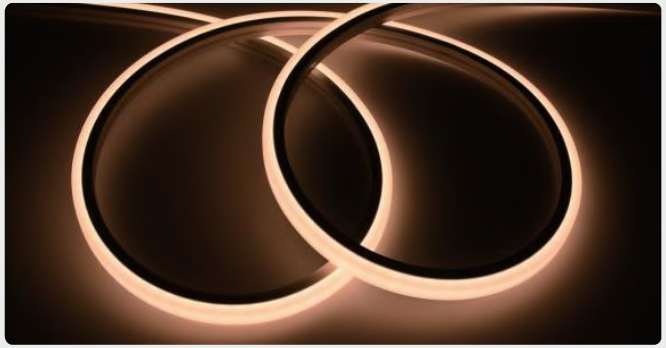


Basic Parameters	
LED TYPE	2835
LEDs/M	144
CRI	>90
LM/W	65LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	7MM
POWER/M	8W/12W
IP RATE	IP67

ACCESSORIES

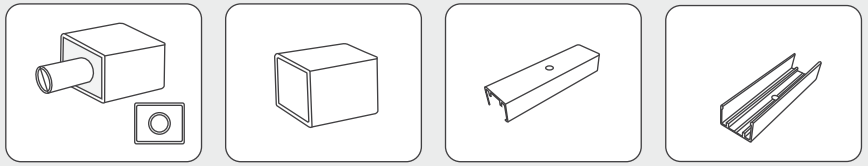

DIMENSIONAL DRAWING

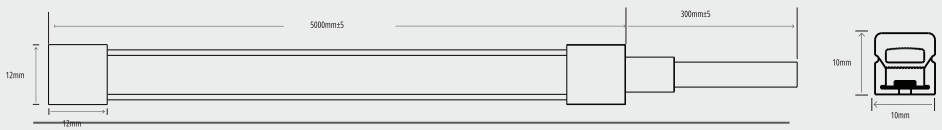


LD-FR-SJS-DC24V-XXXX-120D-12*12MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>90
LM/W	47LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	8.3MM
POWER/M	8W/12W
IP RATE	IP67


ACCESSORIES

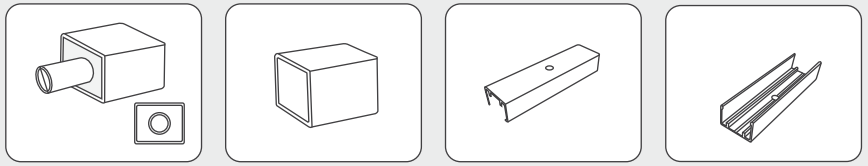

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-144D-12*12MM NEON FLEX(HOLLOW EXTRUSTION)

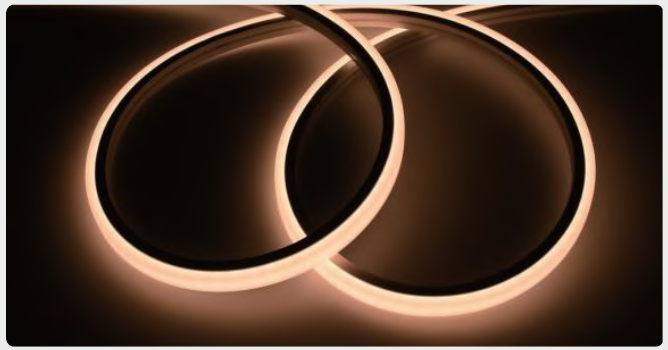


Basic Parameters	
LED TYPE	2835
LEDs/M	144
CRI	>90
LM/W	58LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	7MM
POWER/M	8W/12W
IP RATE	IP67

ACCESSORIES

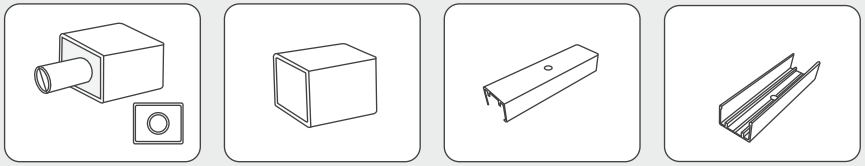

DIMENSIONAL DRAWING

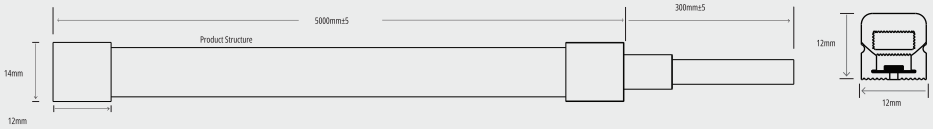


LD-FR-SJS-DC24V-XXXX-144D-12*12MM NEON FLEX(SOLID EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	144
CRI	>90
LM/W	47LM/W(4000K)
VOLTAGE	DC 24V
CCT	3000K/4000K/5000K
CUTTING	7MM
POWER/M	8W/12W
IP RATE	IP68


ACCESSORIES

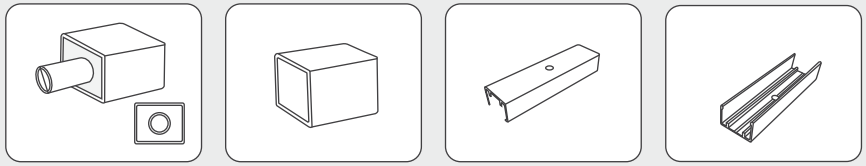

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-120D-6*12MM NEON FLEX(HOLLOW EXTRUSTION)

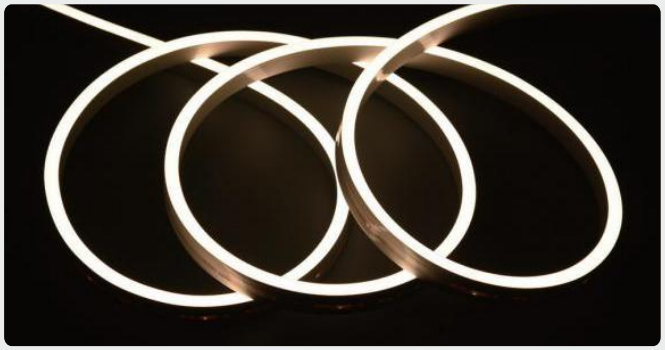


Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	28LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/
CUTTING	50MM
POWER/M	8W/12W
IP RATE	IP67


ACCESSORIES

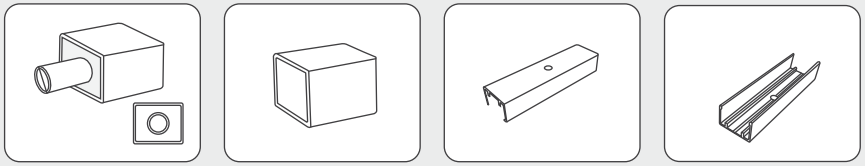

DIMENSIONAL DRAWING

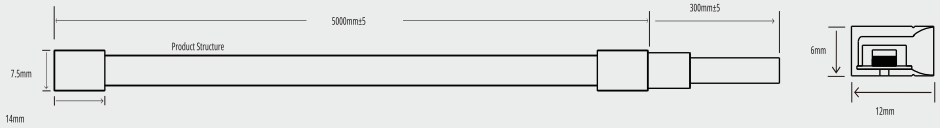


LD-FR-SJS-DC24V-XXXX-168D-16*16MM NEON FLEX(SOLID EXTRUSTION)

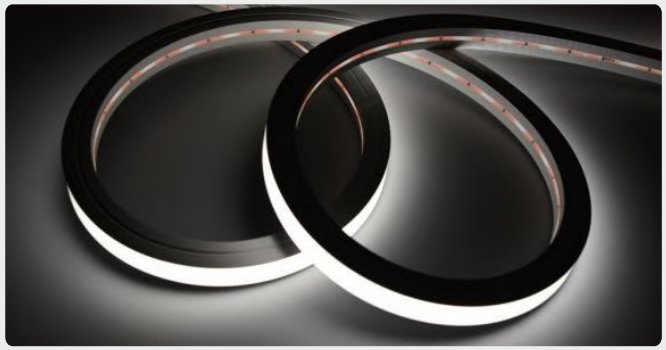


Basic Parameters	
LED TYPE	2835
LEDs/M	168
CRI	>90
LM/W	36LM/w(4000K)
VOLTAGE	DC 24V
CCT	3000K/4000K/5000K
CUTTING	6MM
POWER/M	15W
IP RATE	IP68

ACCESSORIES

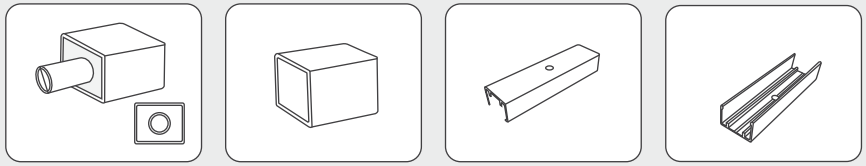

DIMENSIONAL DRAWING

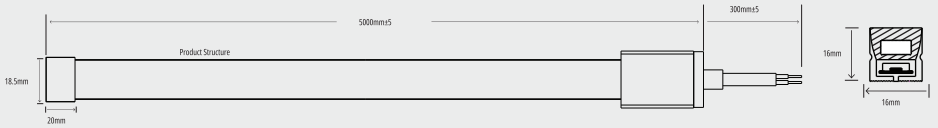


LD-FR-SJS-DC24V-XXXX-168D-16*16MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	168
CRI	>90
LM/W	38LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	6MM
POWER/M	15W
IP RATE	IP67

ACCESSORIES

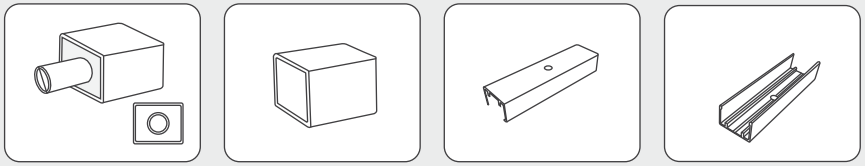

DIMENSIONAL DRAWING

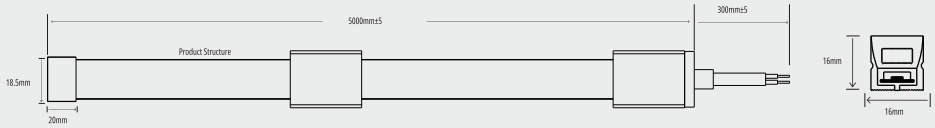


LD-FR-SJS-DC24V-XXXX-120D-16*16MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	46LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	50MM
POWER/M	12W
IP RATE	IP67

ACCESSORIES

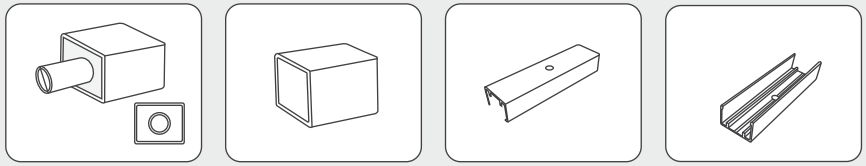

DIMENSIONAL DRAWING

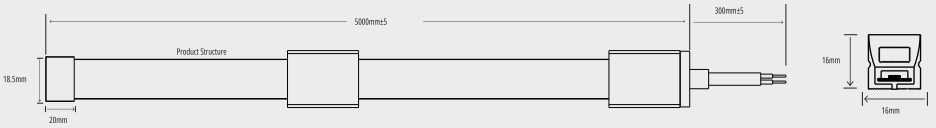


LD-FR-SJS-DC24V-XXXX-RGB-60D-16*16MM NEON FLEX (HOLLOW EXTRUSTION)



Basic Parameters	
LED TYPE	5050RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 24V
CCT	RGB Multi-colour
CUTTING	100MM
POWER/M	8W/12W
IP RATE	IP67

ACCESSORIES

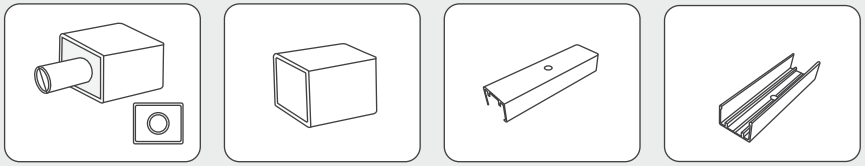

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-120D-12*20MM NEON FLEX(SOLID EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	28LM/W(4000K)
VOLTAGE	DC 24V
CCT	3000K/4000K/5000K
CUTTING	50MM
POWER/M	8W/12W
IP RATE	IP68

ACCESSORIES

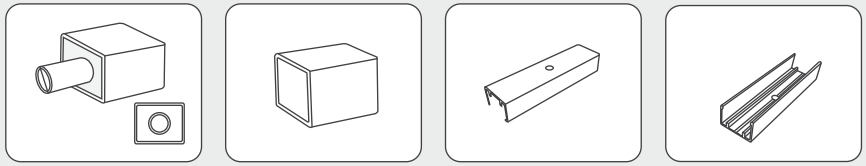

DIMENSIONAL DRAWING

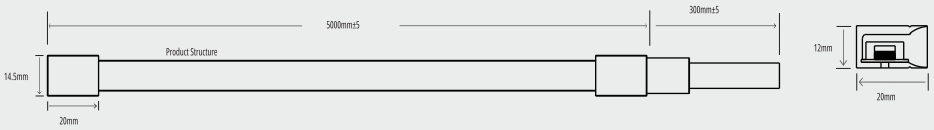


LD-FR-SJS-DC24V-XXXX-120D-12*20MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	28LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K
CUTTING	50MM
POWER/M	8W/12W
IP RATE	IP67

ACCESSORIES

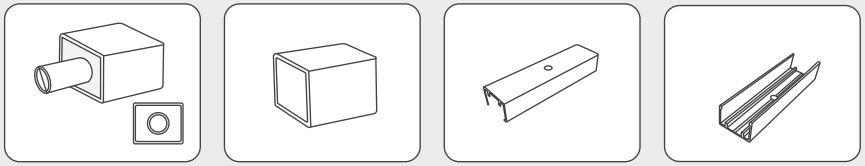

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-RGB-60D-12*20MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	5050RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 24V
CCT	RGB Multi-colour
CUTTING	100MM
POWER/M	8W/12W
IP RATE	IP67


ACCESSORIES

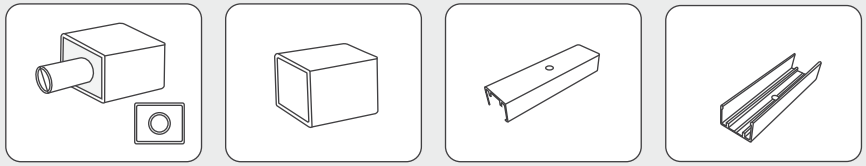

DIMENSIONAL DRAWING

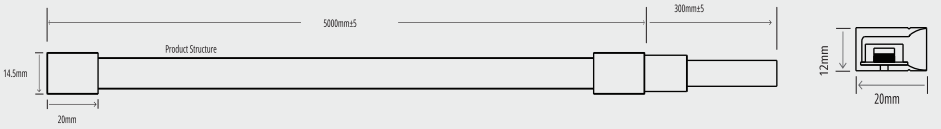


LD-FR-SJS-DC24V-XXXX-RGB-60D-12*20MM NEON FLEX(HOLLOW EXTRUSTION)

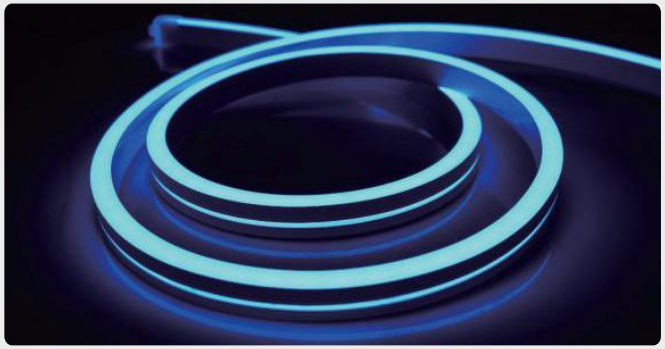


Basic Parameters	
LED TYPE	5050RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 24V
CCT	RGB Multi-colour(DMX512)
CUTTING	100MM
POWER/M	13W
IP RATE	IP67

ACCESSORIES

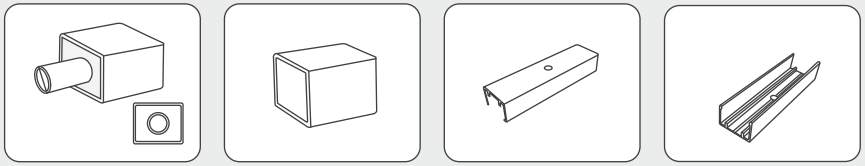

DIMENSIONAL DRAWING

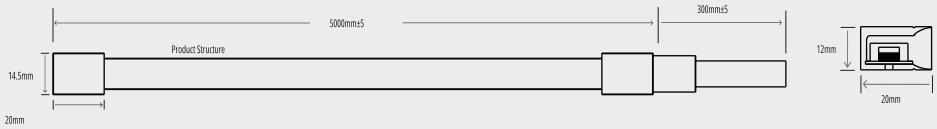


LD-FR-SJS-DC24V-XXXX-RGBW-60D-12*20MM NEON FLEX(HOLLOW EXTRUSTION)




Basic Parameters	
LED TYPE	5050RGBW
LEDs/M	60
CRI	>80
LM/W	/
VOLTAGE	DC 24V
CCT	RGBW Multi-colour(DMX512)
CUTTING	100MM
POWER/M	16W
IP RATE	IP67


ACCESSORIES

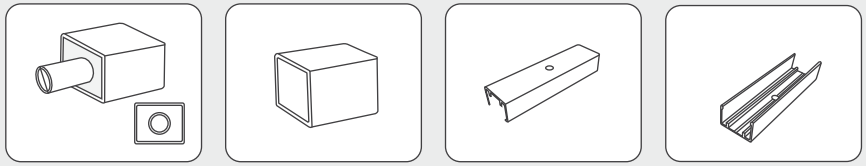

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-240D-20*14MM NEON FLEX(HOLLOW EXTRUSTION)

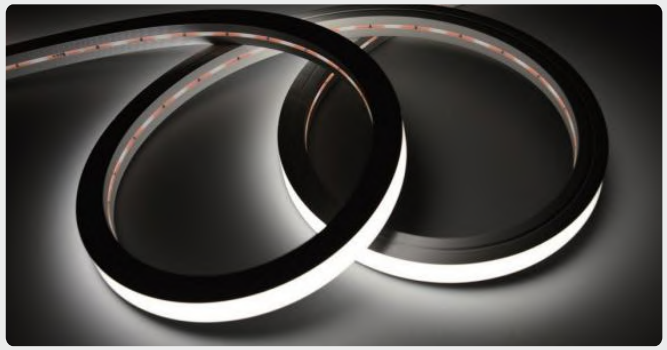


Basic Parameters	
LED TYPE	2835
LEDs/M	240
CRI	>80
LM/W	45LM/W(4500K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	50MM
POWER/M	17W
IP RATE	IP67

ACCESSORIES

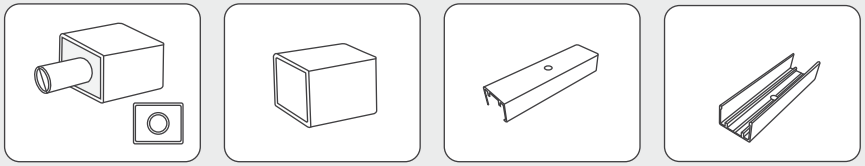

DIMENSIONAL DRAWING




LD-FR-SJS-DC24V-XXXX-120D-14*22MM NEON FLEX(SOLID EXTRUSTION)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	35LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K
CUTTING	8.3MM
POWER/M	8W/12W
IP RATE	IP68

ACCESSORIES

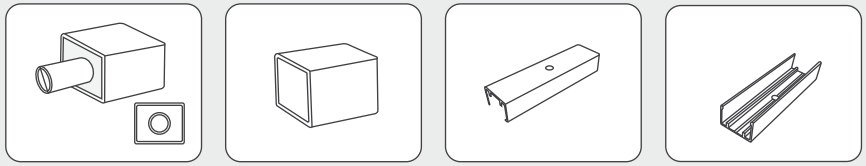


DIMENSIONAL DRAWING



LINELED

LD-FR-SJS-XXX-XXX-120D-12*12-IP67

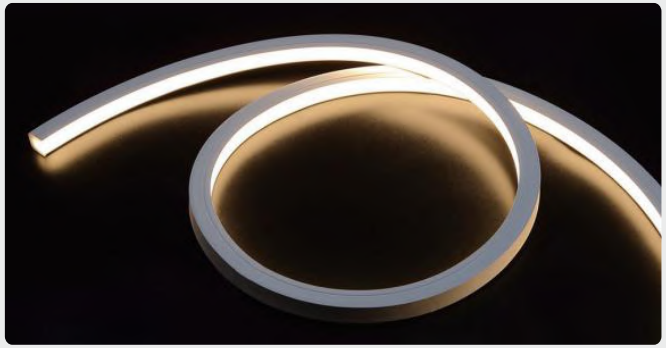


LUMIN FLEX SERIES




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>90
LM/W	47LM/W(4000K)
VOLTAGE	DC 24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	8.3MM
POWER/M	8W/12W
IP RATE	IP67


ACCESSORIES

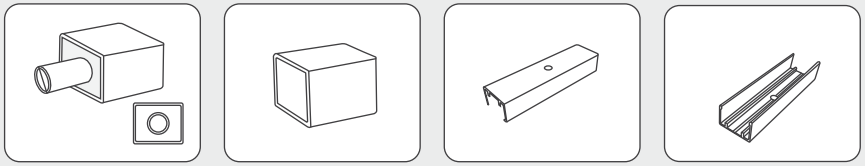

DIMENSIONAL DRAWING

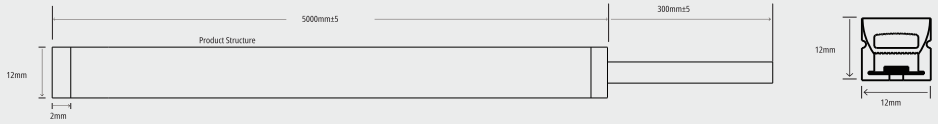

SMD2835 42LEDS/M

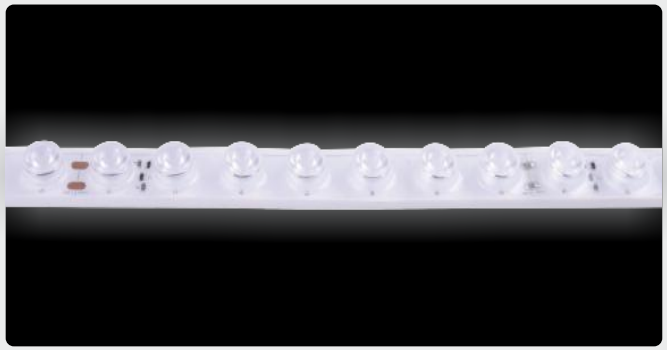

Basic Parameters

Size	5000×22.5×11.5mm
Cutting Unit	7LEDs/165mm
Input Voltage	24VDC
Input Current	0.06A/m
Typ-power	14W/m
Max.Power	15.4W
Bend Diameter	>60mm
Copper foil	2oz

SPECTROGRAM


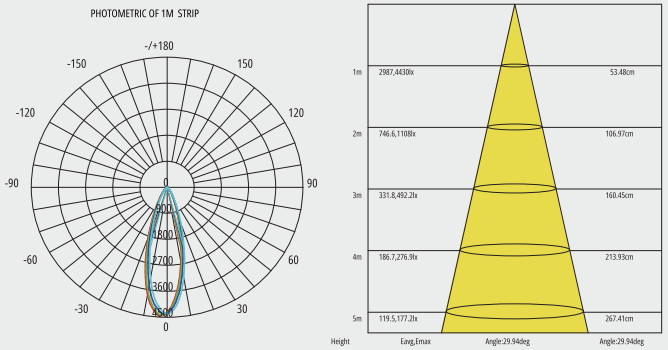


Photo-electric Parameters

CRI	CCT	LM/m	LM/W	Energy Efficiency Class
>80	2700K	1637	117	E
	3000K	1728	123	E
	4000K	1818	130	E
	5000K	1750	125	E
	6500K	1680	120	E

DIMENSIONAL DRAWING




LINELED
Introducing
new age of décor
in the world of ceilings


LINELED
“Quick turnaround time combined with Innovations for limitless possibilities.

Warranty

Long Life

Quick & Easy Installation

Easy To Clean

Maintenance Free

Waterproof & Dustproof



Fabric Technical Specifications

Finishes : Matte, Satin, Lacquer, Translucent, Printed.
Sheet Material : Calendered Special Poly Vinyl Chloride (Free of Heavy Metal)



Physical Properties

Thickness
- 0.18mm to 0.2mm (Suede 0.35mm)

Weight
- Approx. 200 gms/sq.m (Suede 350gm/sq.m)



Mechanical Properties

Breaking Strength
- Lengthwise : 185 kgs/cm2
- Widthwise : 220kgs/cm2

Elongation
- Lengthwise : 210%
- Widthwise : 305%
- Hardness : 93.5 Shore A



Light Reflection Properties

For High Gloss Ceiling
- >80%

For Matte Ceiling
- <10%



Light Transmittance Properties

For Translucent Ceiling / Wall with Backlighting
- 50% approx.



Resistance to Humidity

Relative Humidity ,65%
- 0.30 GR/H M2 mm

Relative Humidity >65%
- 0.45 GR/H M2 mm



Thermal Properties

Dimensional Stability
- -5°C to +55°C

Thermal Coefficient
- 0.16cal/m H C

Fire Safety Norms
- B1/B2 in accordance to DIN 4102 - 1



Acoustic Properties

Reverberation Time at 125/ 250/ 500/ 1000/ 2000 hertz reduced from 1.5s to 0.7s with designed perforations & insulation



Recycle Properties

- 100% Recyclable
- 1000 sq.m. of sheet weighs approximately
- 200kgs in a volume of 0.1 cu.m.

Resistive Properties

- Anti-bacterial
- Anti-fungal
- Anti-static
- Impermeable to water & steam
- Insensitive to x-rays & chemicals
- Flame retardant
- Non-flammable
- Self extinguishing
- Energy saving
- 100% recyclable

LED Technical Specifications

For LEDs Rigid Bar

Type	: Rigid Bar
Watts	: 12W/Meter
Beam Angle	: 160 degrees
Lumens	: 140 to 150 per Watt
Colour Temperature	: 3500K to 6500K
Lux Level	: 150lux to 1000 lux at 1.5m below pandora stretch ceiling
Warranty Rigid Bar	: 3 to 5 years
Warranty Smps	: 1 to 2 Years

For LEDs Module


Type	: PVC (Module with Lens)
Watts	: 1.1W/ per module
Beam Angle	: 120 - 160 degrees
Lumens	: 80 to 100 per Watt
Colour Temperature	: 3500K to 6500K
Lux Level	: 150lux to 1000lux at 1.5m below pandora stretch ceiling
Warranty Rigid Bar	: 3 to 5 years
Warranty Smps	: 1 to 2 Years



Real Ceiling



Wooden / Metal Support

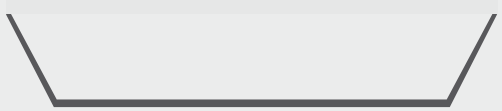

Aluminium Profile / PVC

LED Rigid Bar / LED Modules

Pandora PVC Fabric

DEPTH

4"-6" for LED's

WIDTH

Available Width Ranges Up to 5 meters and any Length.



Types of Stretch Ceiling

Translucent	Printed
Lacquered	3D Ceiling

Alineled Translucent

A Ceiling to create a soft monotonic
glow with vibrant illuminating lights.



















Alineled Printed Ceiling

Creative Printed Stretch Ceiling is your solution for enhancing creativity and achieving the layout you've always wanted.


















Customize your
Alineled Stretch Ceiling:


Your Concept → Our Design → Printing → Installation


Categories:


Abstract


Marble



Patterns


Nature


Texture


Alineled Lacquered Ceiling

Lacquered gives a very contemporary look which can go
from traditional to the ultra-modern ambience

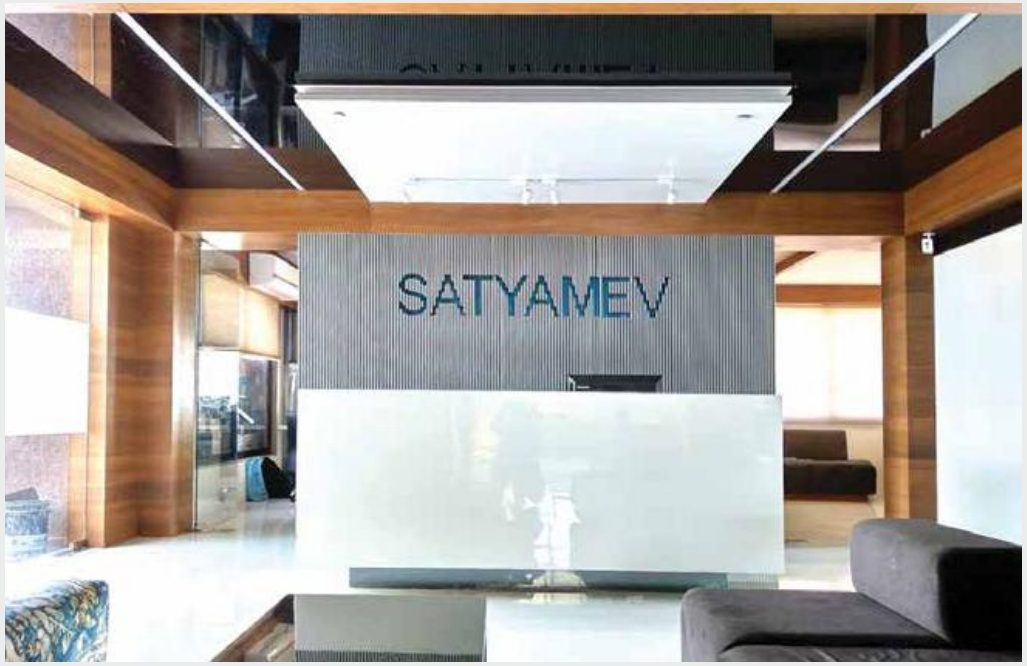





AI QUAD CAMERA

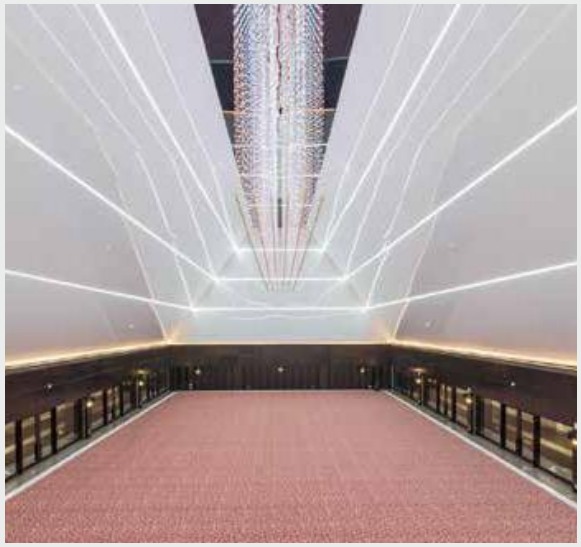





Create your world with Alineled Lacquer

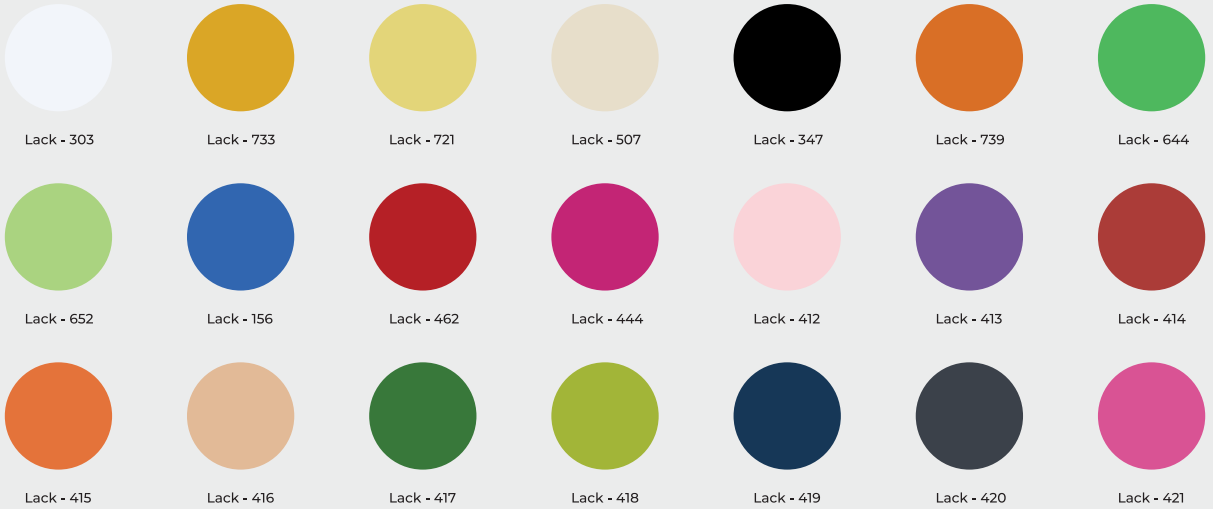

Premium High Gloss

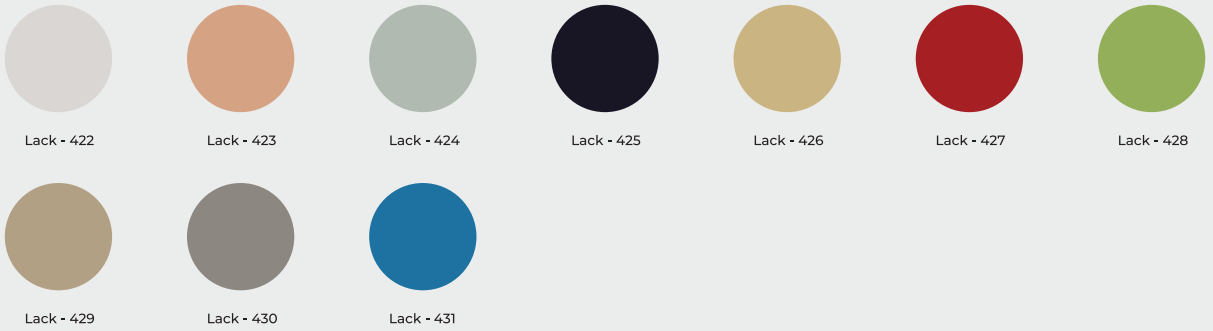

Note: Due to limitation in monitor display setting, desktop scanners, digital photography and printing technology, the colours are intended as a guide only and should not be regarded as an exact colour of the products.

Alineled 3-D Ceiling

The ceiling stretched over a frame by adding another dimension to create a three-dimensional effect, creating unique and visually appealing spaces.





















Spectacular ambience that
reflects your vision effortlessly




LED ALUMINIUM PROFILE


Aline 1606

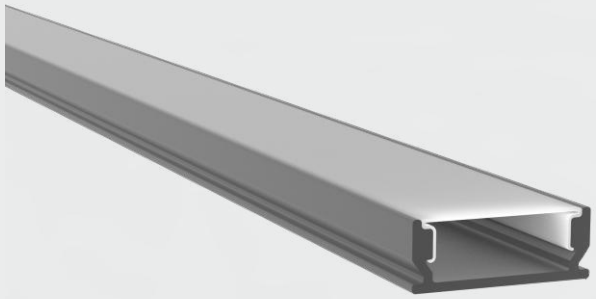

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 16mm X 6mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 Watt
PCB Size: 12mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

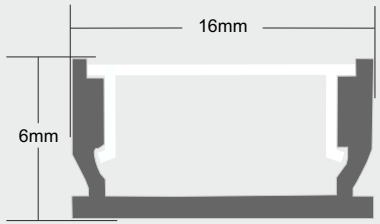


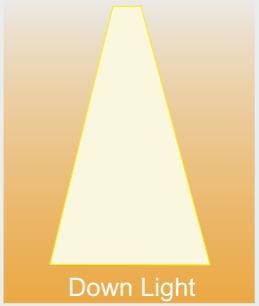







Aline 1606R

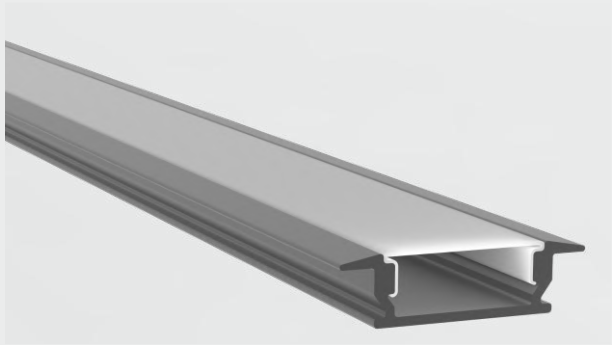

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 22mm X 6mm
Standard Length: 3000mm
Accessory: Side end cap, Mounting clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 Watt
PCB Size: 12mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

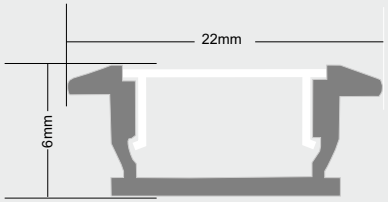


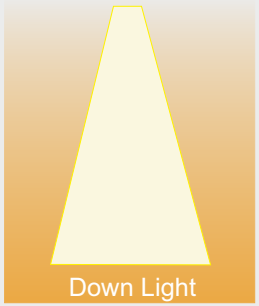







Aline 1612

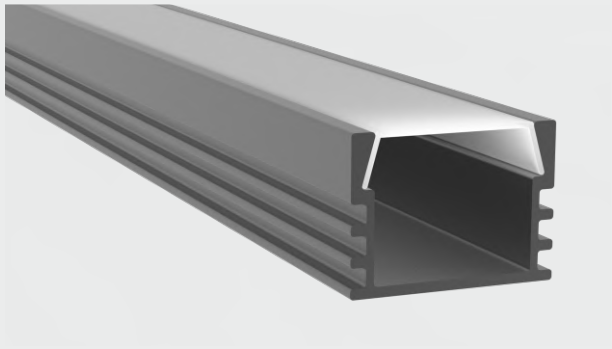


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 16mm X 12mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

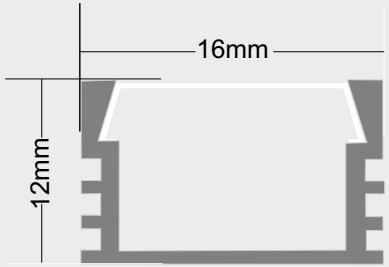






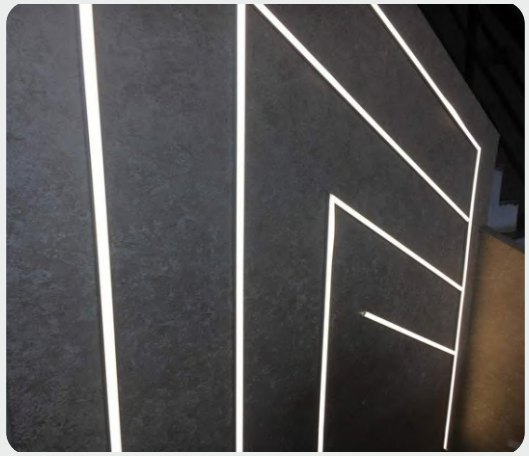



Aline 1612R

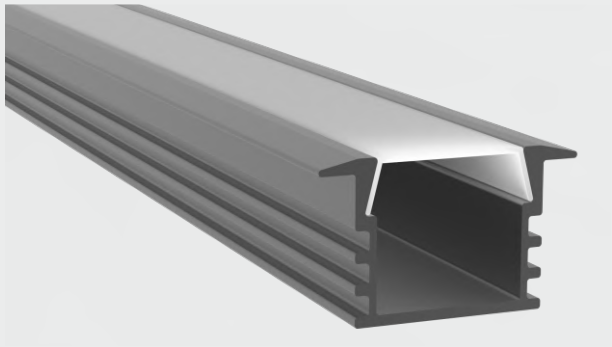


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 22mm X 12mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

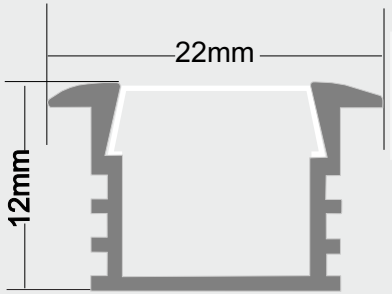




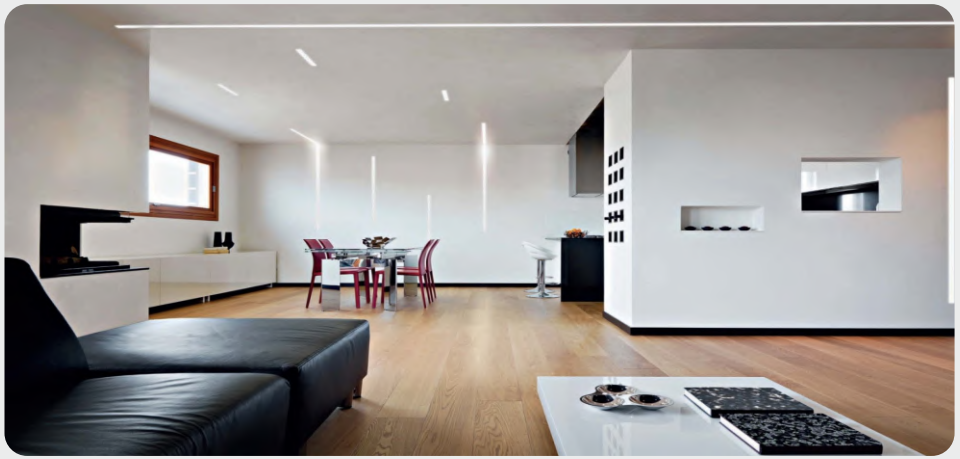





Aline 0809

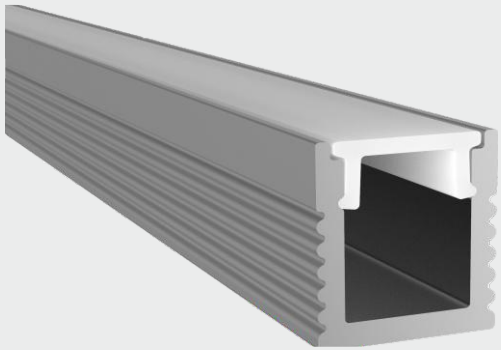

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Surface Mounted, Recessed Mounted, Furniture Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 8mm X 9mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 8 - 12Watt
PCB Size: 6mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT











Aline 0809R

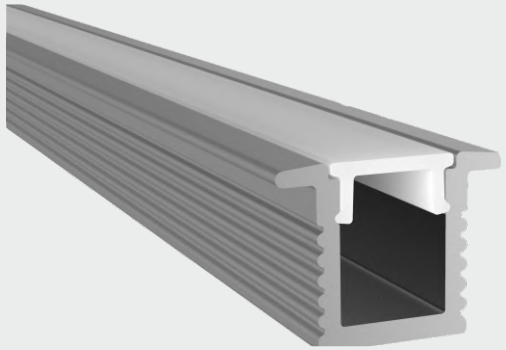


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Recessed Mounted, Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 12mm X 9mm
Standard Length: 3000mm
Accessory: two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 8 - 12Watt
PCB Size: 6mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT






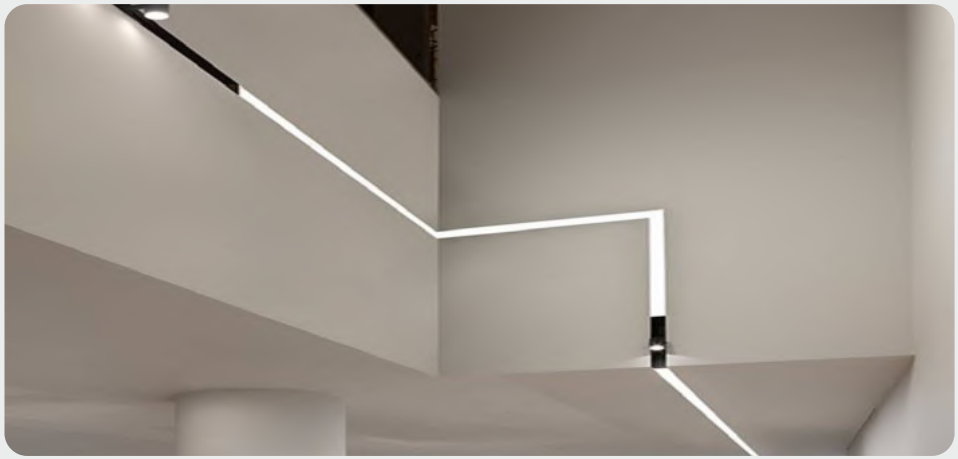





Aline 2410

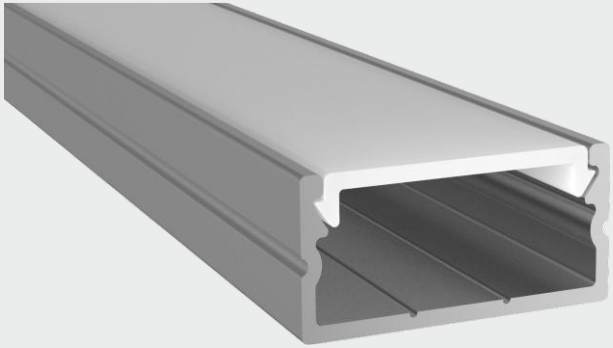

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Surface Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 24mm X 10mm
Standard Length: 3000mm
Accessory: two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 20mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT

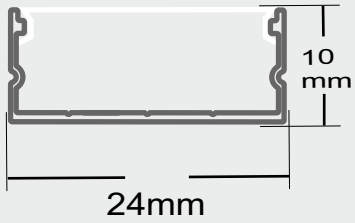










Aline 2410R

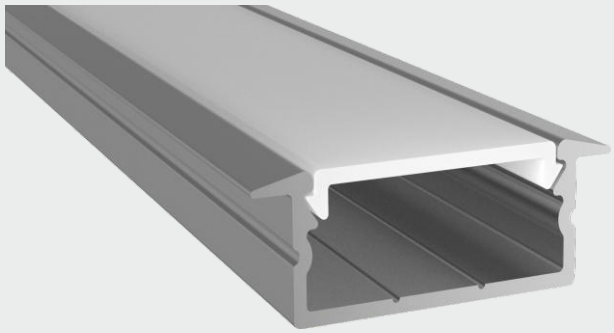

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted, Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 30mm X 10mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 20mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT

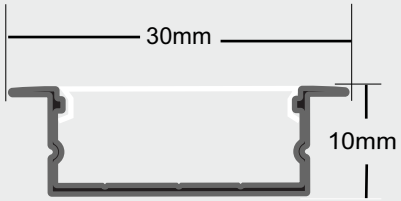










Aline 2525

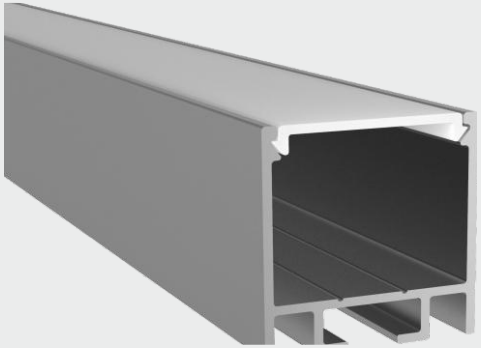


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted, Surface Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 25mm X 25mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Auminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 20mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT








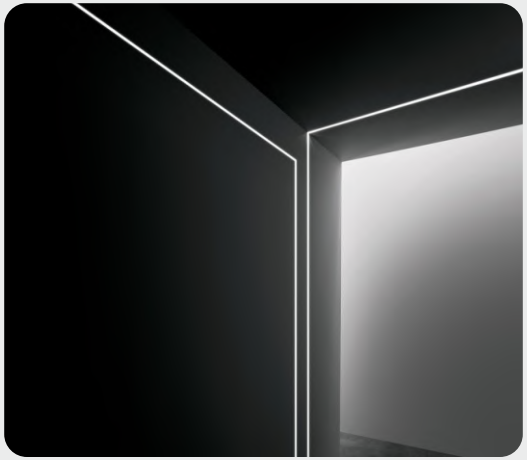



Aline 2525R

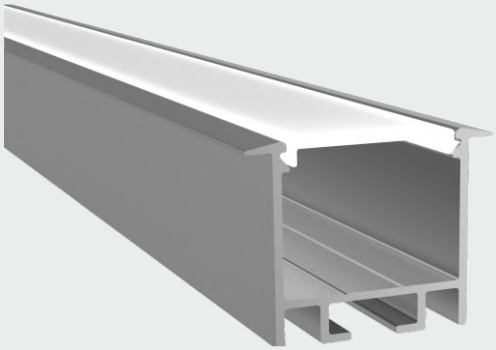

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 30mm X 25mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LEED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 20mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT











Aline 3535

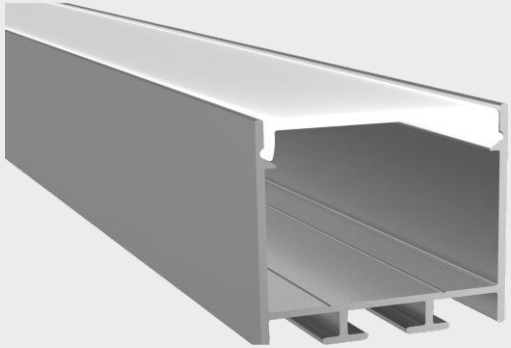

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 35mm X 35mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 30mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

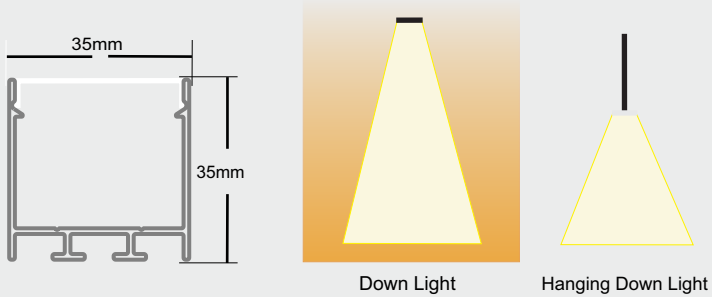






Aline 3535R

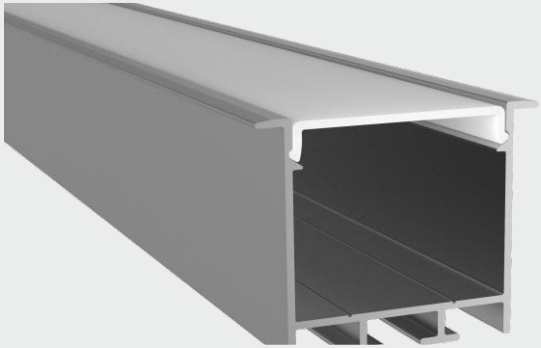

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 44mm X 35mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 30mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

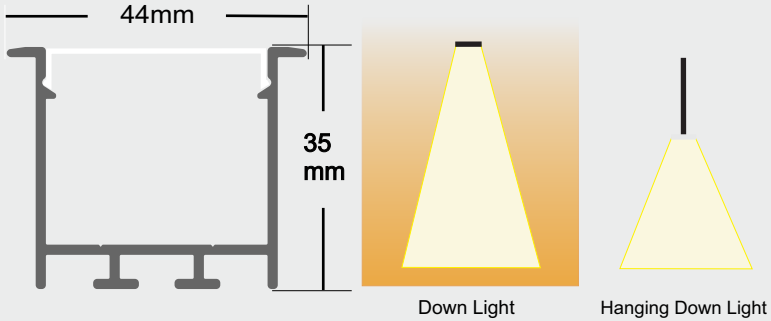







Aline 5020

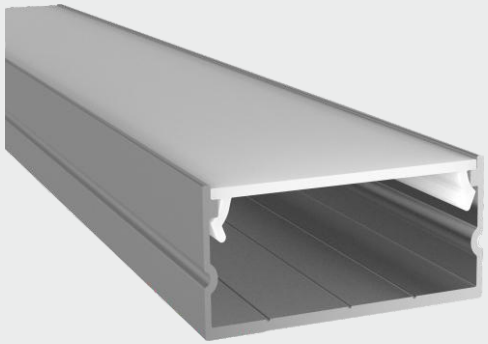

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted, Surface Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 50mm X 20mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 40Watt
PCB Size: 43mm
Input Voltage: Dc 24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

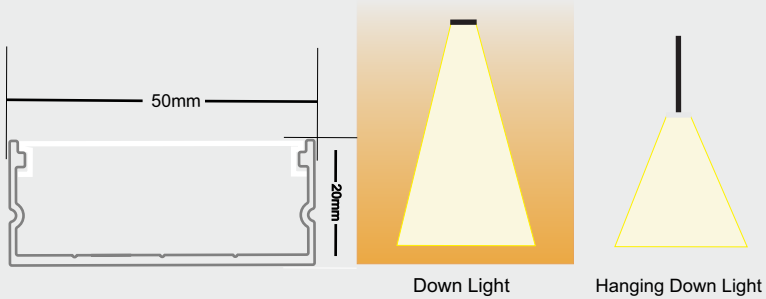

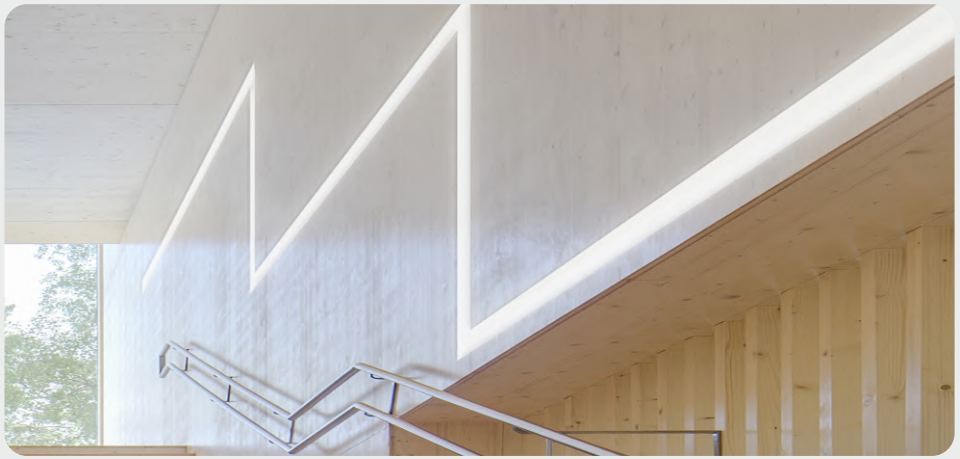





Aline 5020R

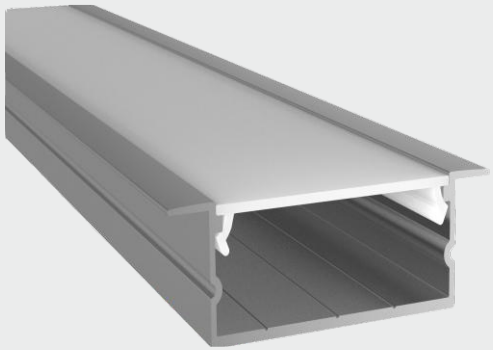

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 64mm X 20mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 45mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

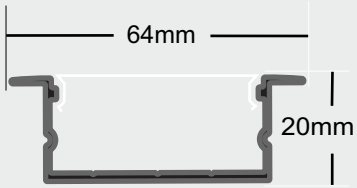




Down Light






Aline 5035R

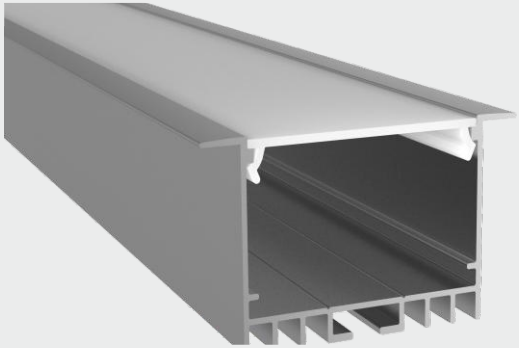

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 64mm X 35mm
Standard Length: 2425mm & 3025mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 46mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

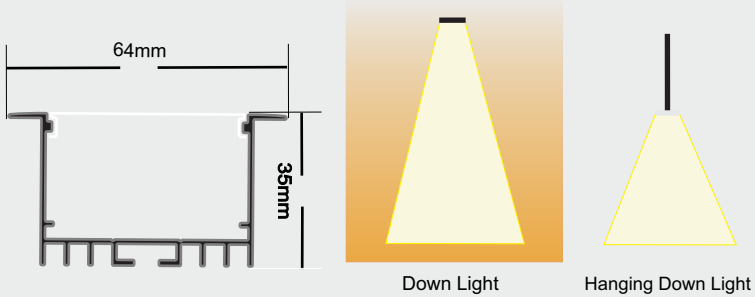






Aline 7535

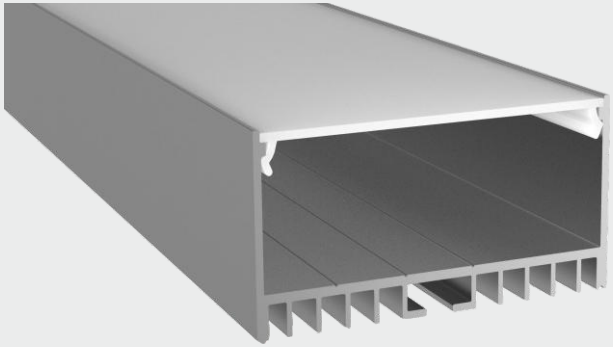

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed mounted, Surface Mounted, Wall Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 75mm X 35mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap,
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

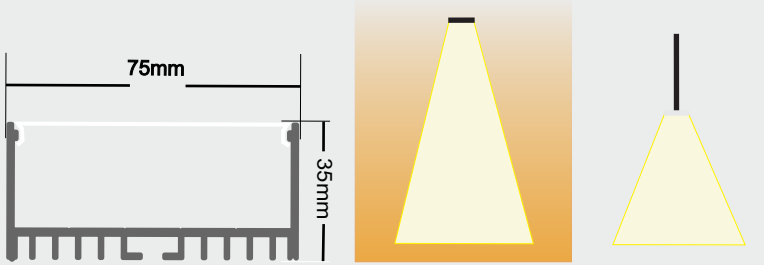






Aline 5075R

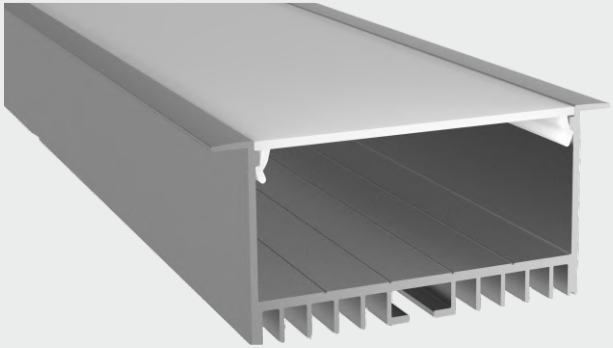

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted, Recessed Wall Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 90mm X 35mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

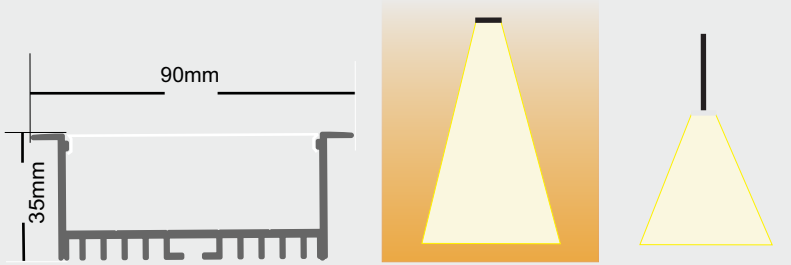






Aline 10035

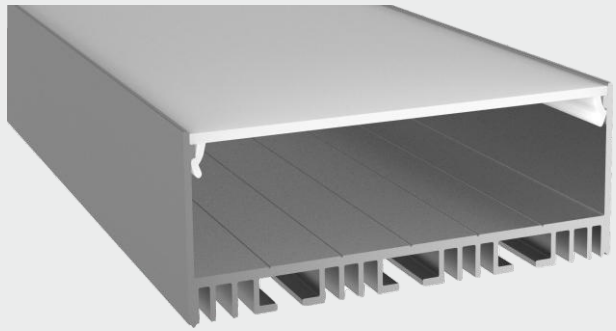

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted, Wall Mounted
Diffuser PC Diffuser Cover (Milky)
Dimension: 100mm X 35mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 60 - 72Watt
PCB Size: 90mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

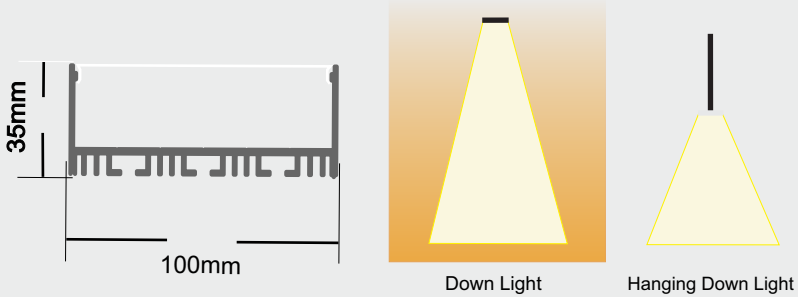







Aline 10035R

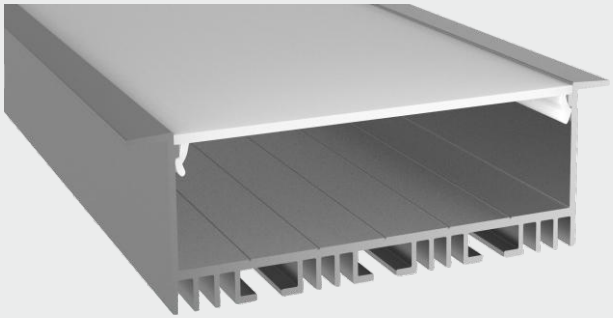


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 118mm X 35mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 60 - 72Watt
PCB Size: 90mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

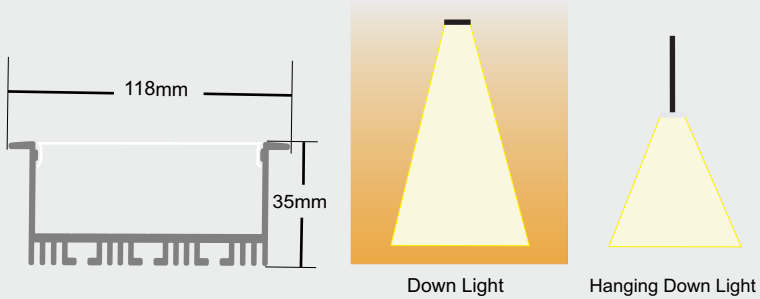

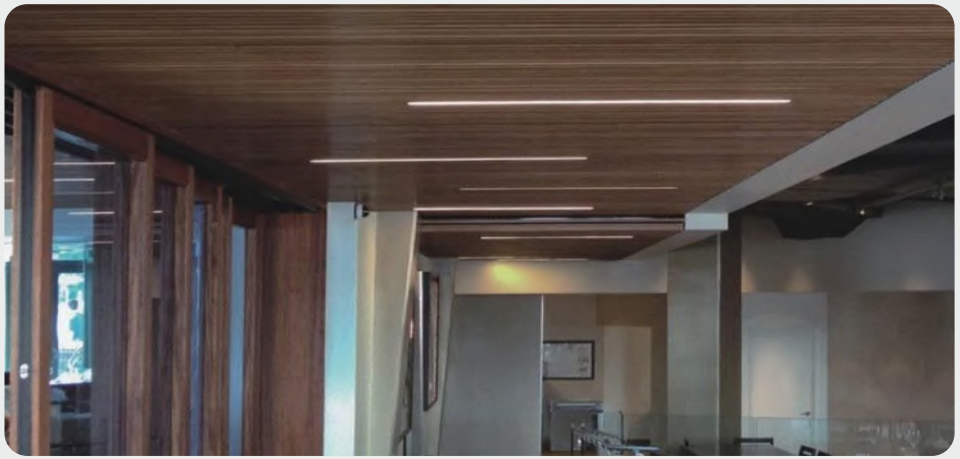

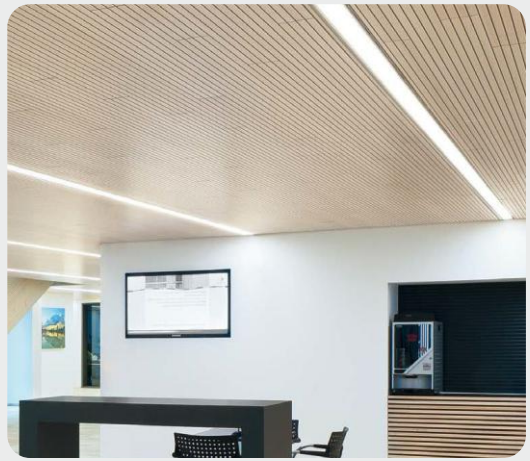



Aline 1616V

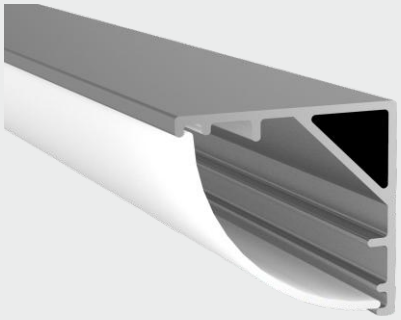

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Cove Light application
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 16mm X 16mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline 2619V

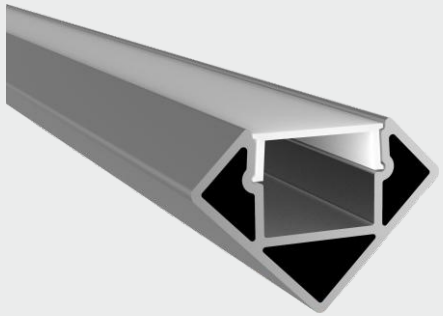

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Cove Light Application
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 26mm X 19mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT

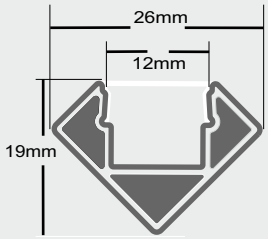


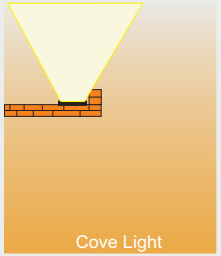






Aline 5075

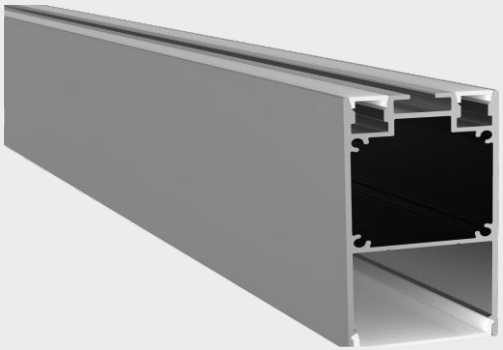


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Down Light

Installation: Up & Down Hangings, Surface Mounted
Diffuser Material: PC Diffuser Cover Up & Down (Milky)
Dimension: 50mm X 75mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap, Two clamp, Hanging Wire
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 40Watt
PCB Size: 43mm Downward, 12mm Upward
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT




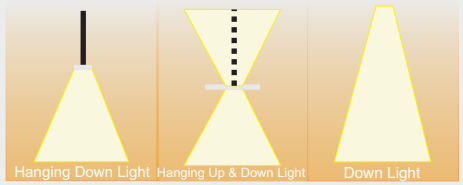







Aline 6080

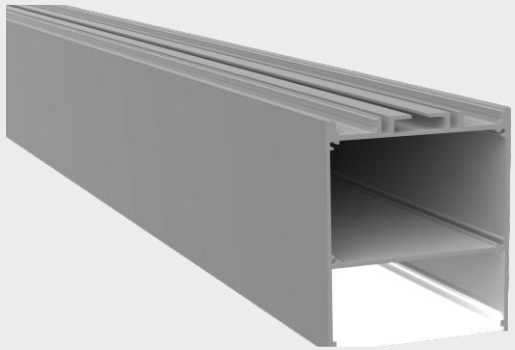


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Surface Mounted, Hanging
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 60mm X 80mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: Watt
PCB Size: mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT




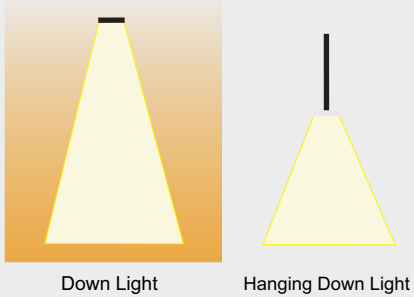



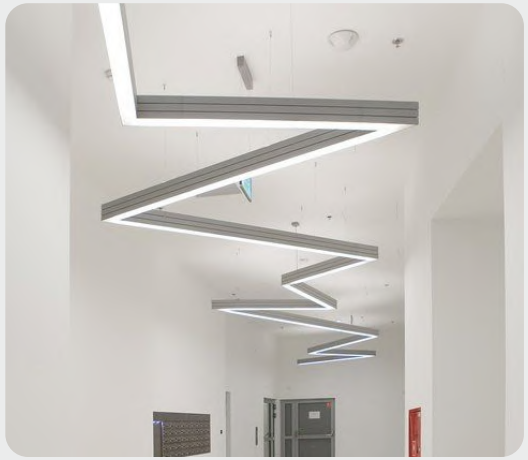


Aline 7550

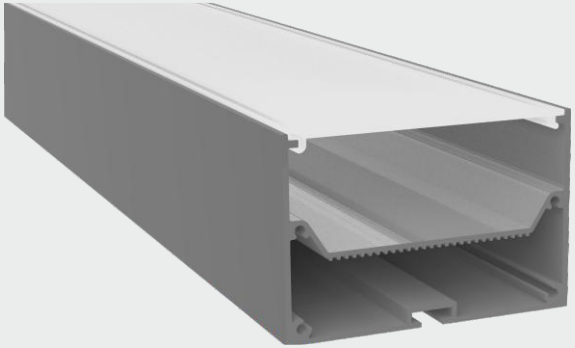

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Surface Mounted,
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 75mm X 50mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

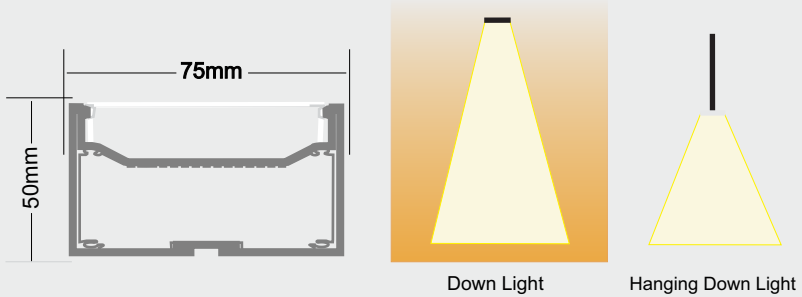







Aline 7590

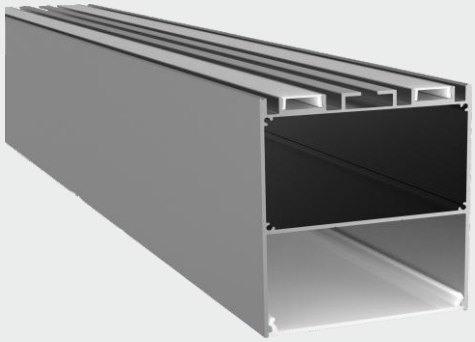


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Up & Down Hanging
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 75mm X 90mm
Standard Length: 2425mm, 3060mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT




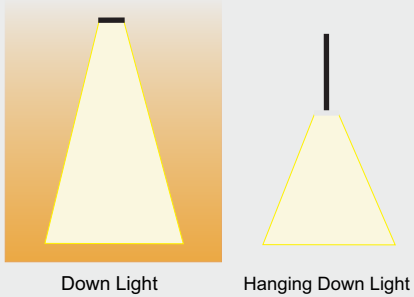



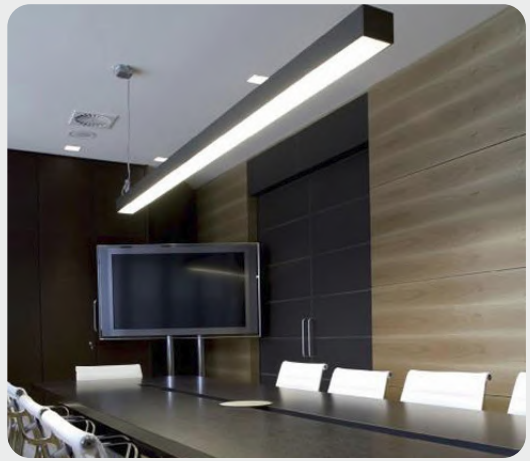



Aline 1214 POP Out

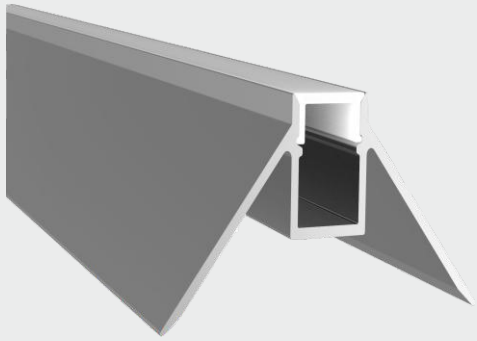


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Side Lighting
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 50mm X 22mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 8mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT








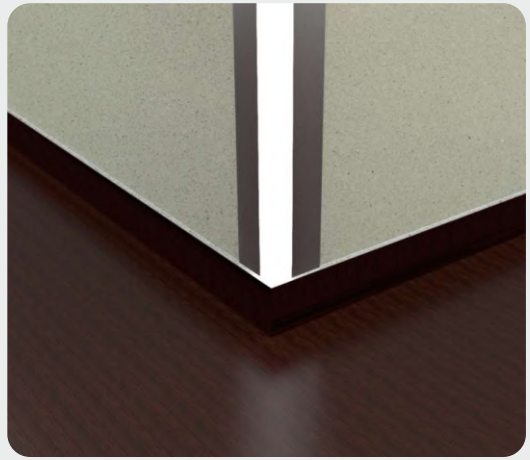



Aline 1214 POP In

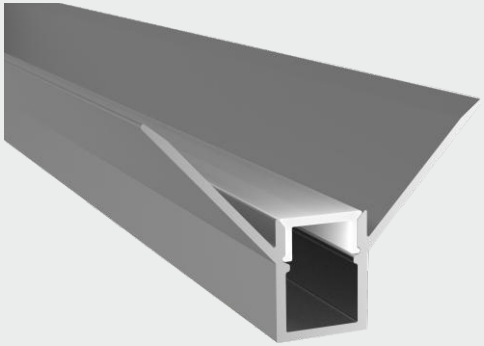


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 44mm X 26mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 8mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT




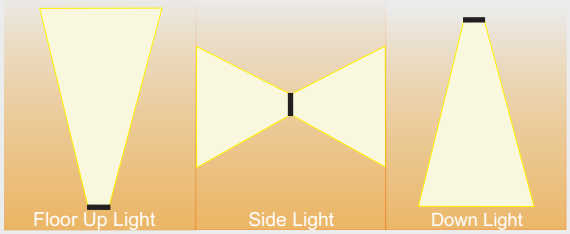



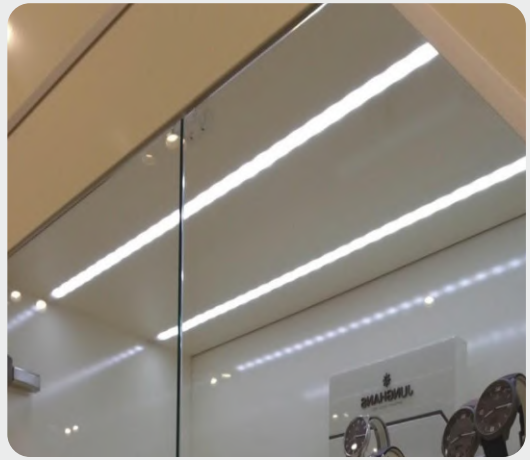



Aline 1214 POP Flat

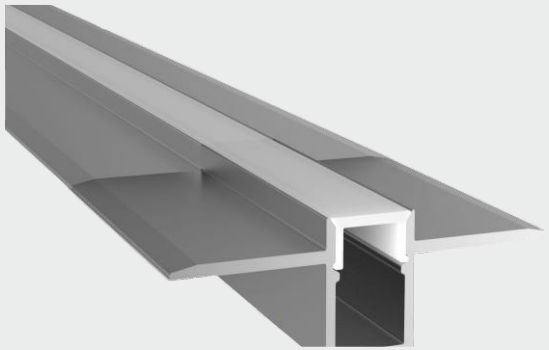

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Recessed
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 52mm X 14mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 8mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

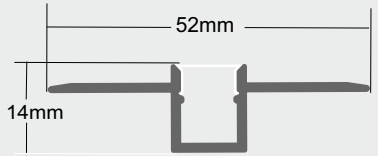


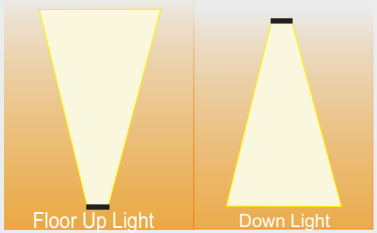







Aline 3520 POP

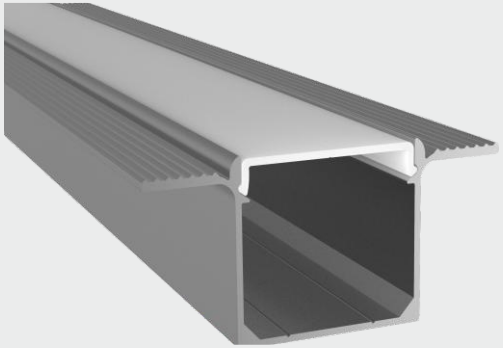

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: PoP Recessed
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 67mm X 32mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 32mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT




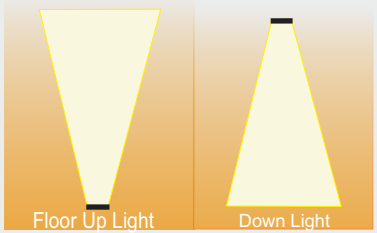







Aline 50mm POP

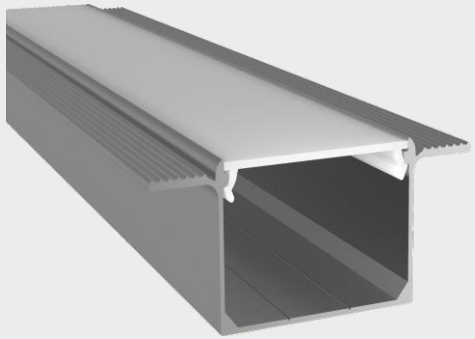

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.


Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 80mm X 30mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 45mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

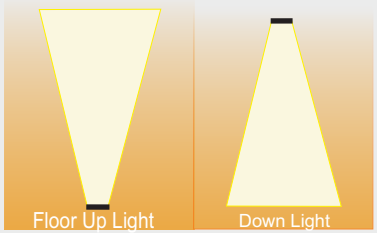

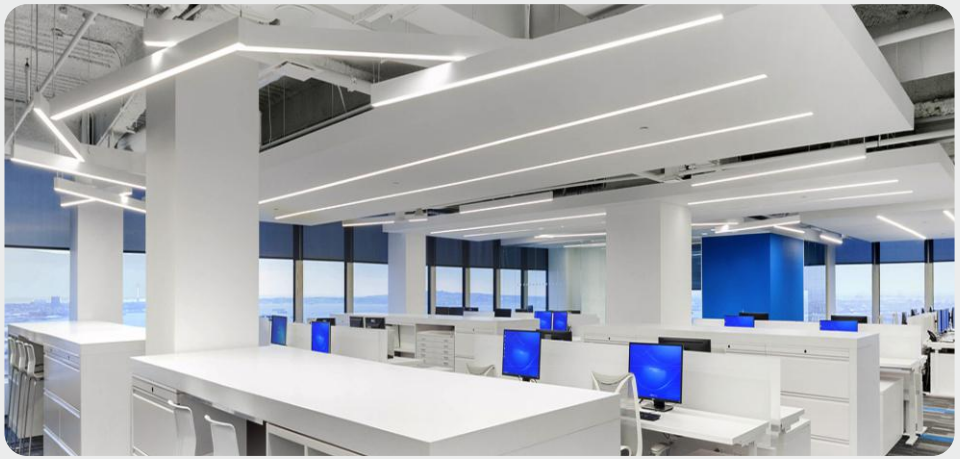





Aline 75mm POP

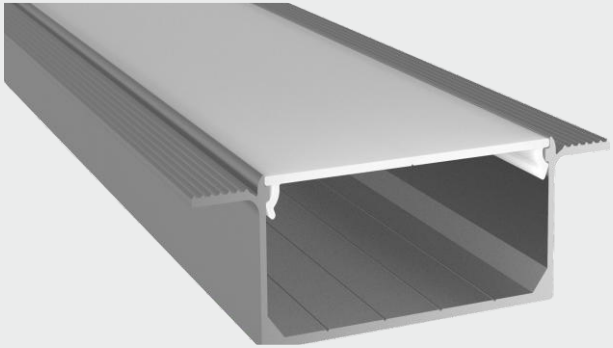


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (milky)
Dimension: 105mm X 30mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36-48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT








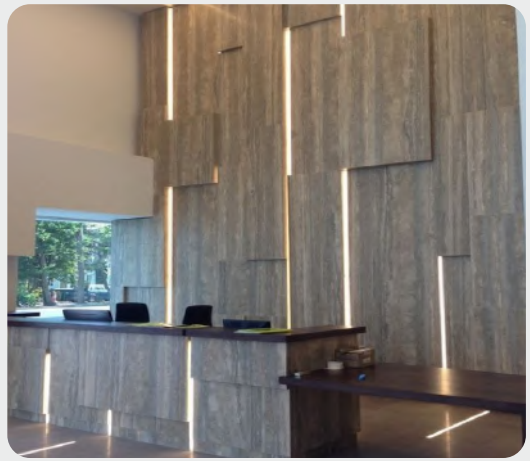



Aline 75mm POP

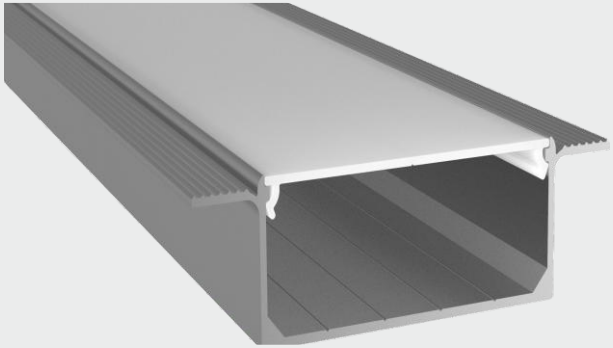


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Recessed Mounted
Diffuser Material: PC Diffuser Cover (milky)
Dimension: 105mm X 30mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36-48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT








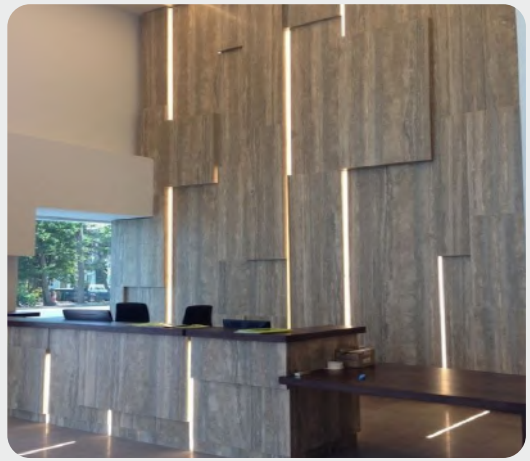



Aline 35mm Dry Wall

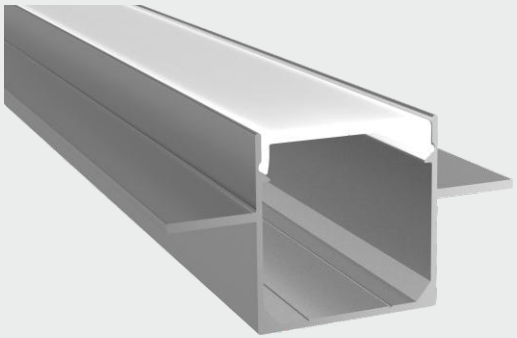


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 67mm X 35mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 32mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT






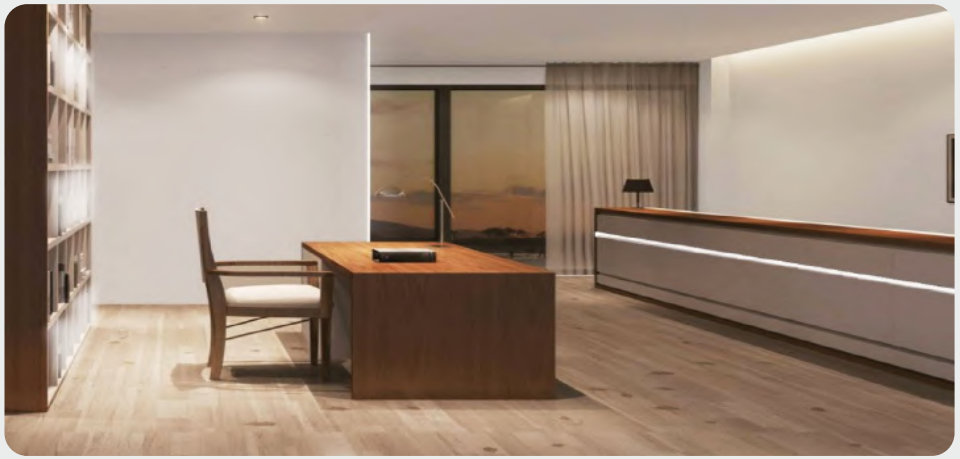





Aline 50mm Dry Wall

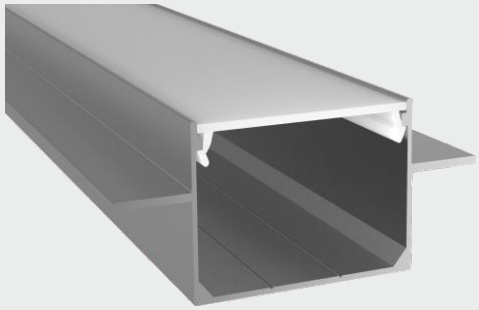

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 80mm X 30mm
Standard Length: 3000mm
Accessory: two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LEED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 46mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline 75mm Dry Wall

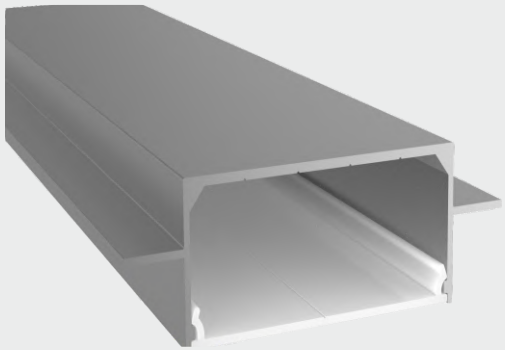

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 105mm X 30mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 36 - 48Watt
PCB Size: 70mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline Floor Wash POP

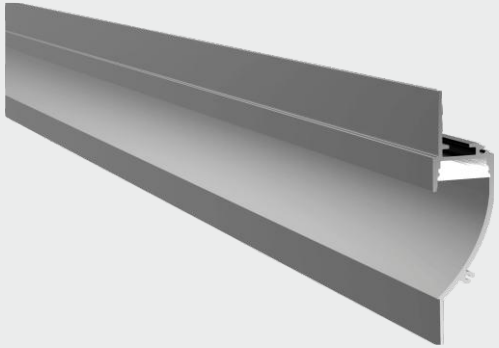

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: mm X mm
Standard Length: 3000mm
Accessory: two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LEED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline Floor Big

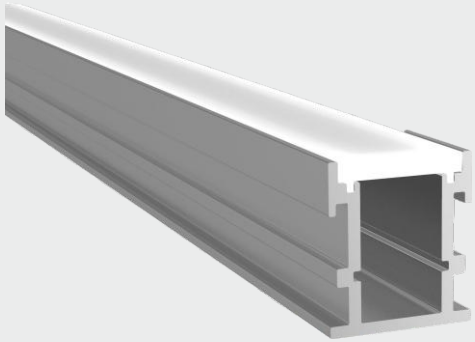



Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: mm X mm
Standard Length: 3000mm
Accessory: two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LEED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT






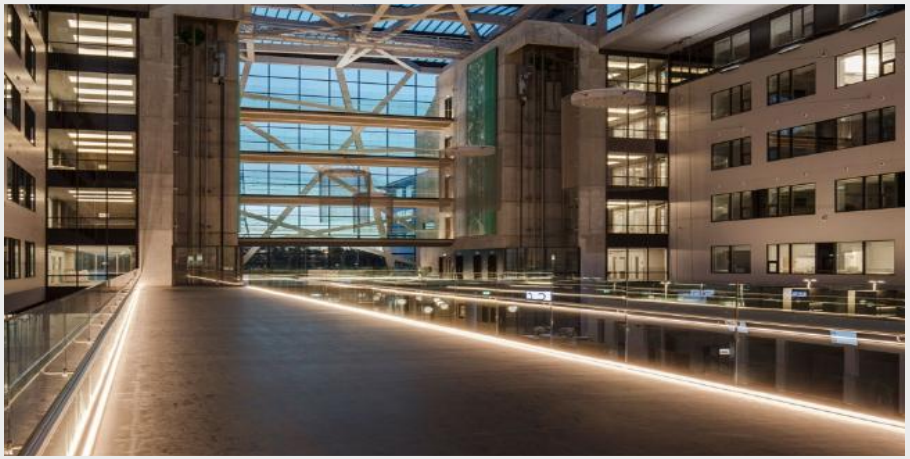

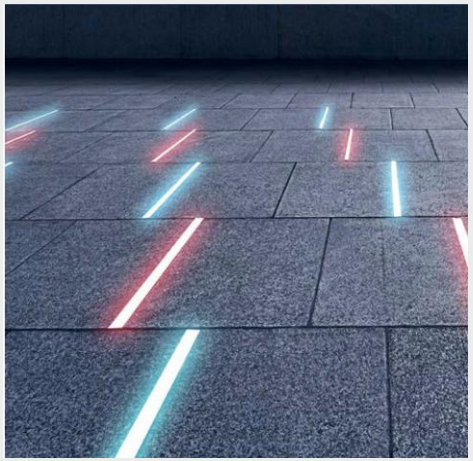


Aline Skirting 60mm

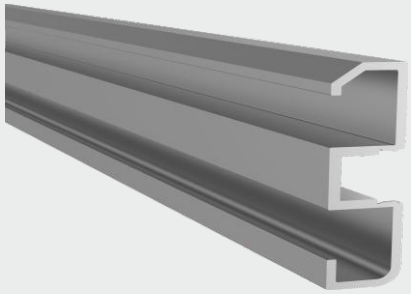


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Skirting
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 58mm X 15mm
Standard Length: 3000mm
Accessory: Two end cap
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

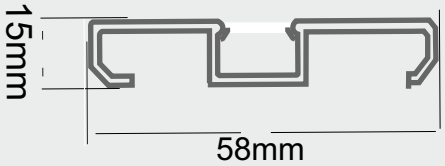




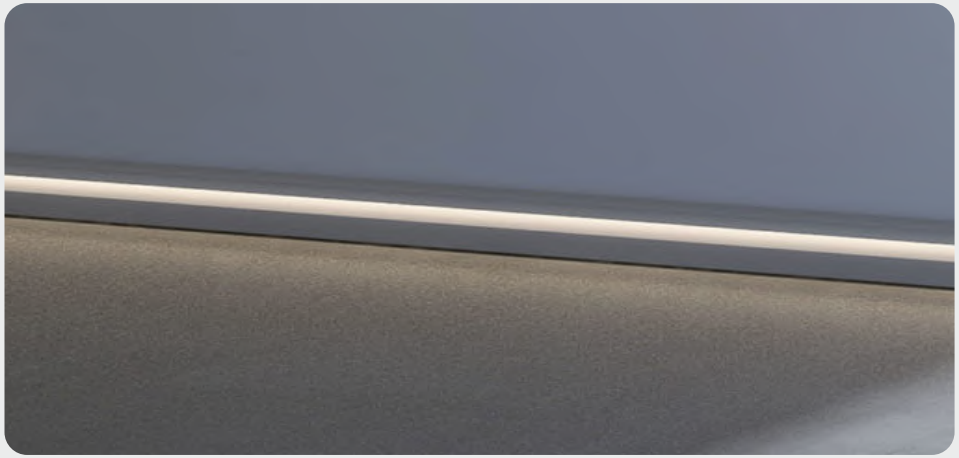





Aline Skirting Floor Wash

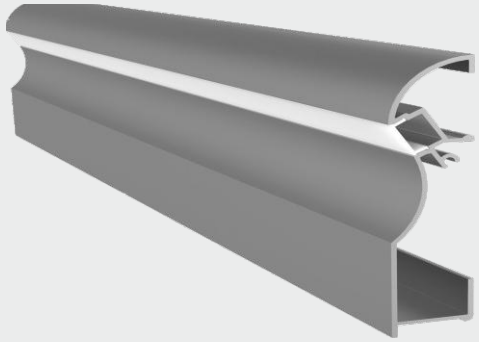


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted, Skirting
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 106mm X 24mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Pink, Purple, RGBW, CCT, RGB+CCT

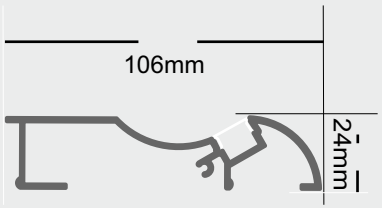




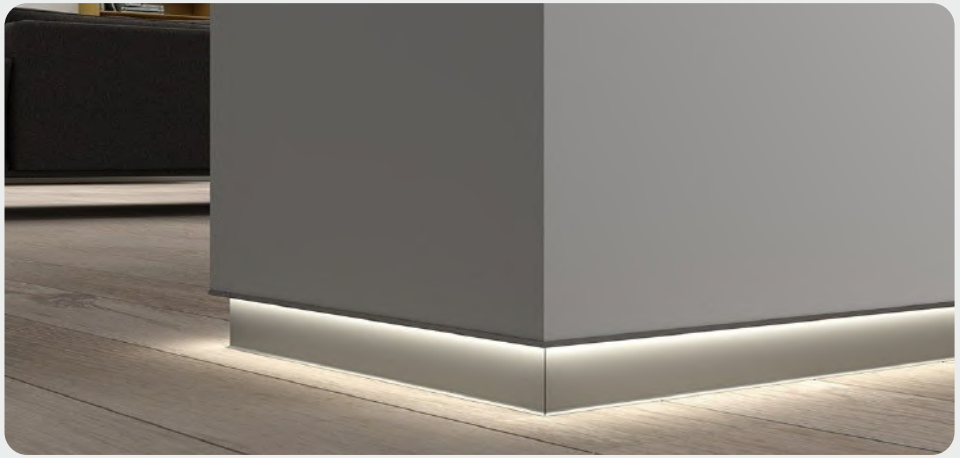





Aline Up Light

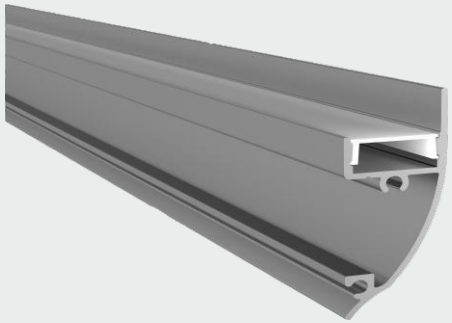



Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 43mm X 16mm
Standard Length: 3000mm
Accessory: two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT






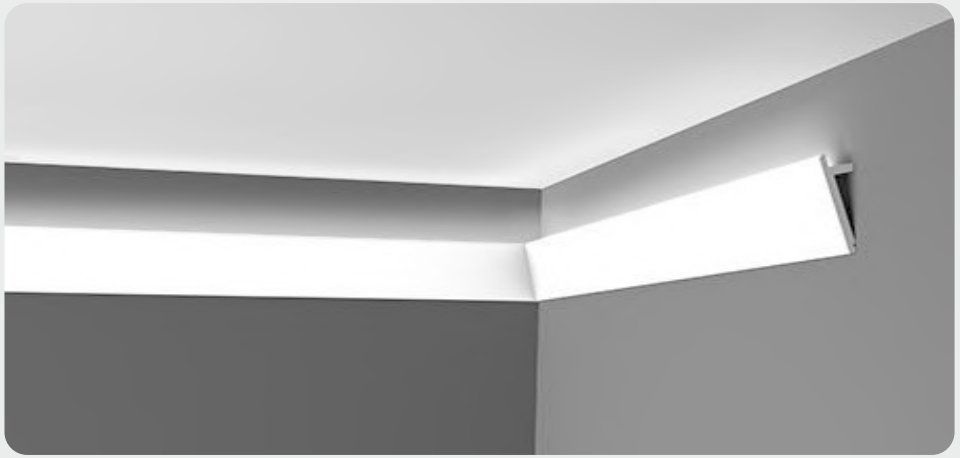

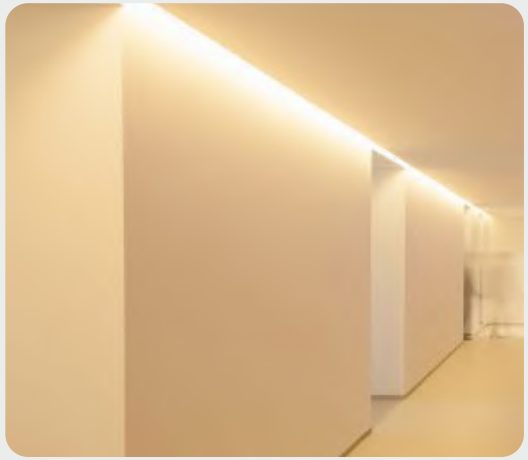



Aline 12mm Up & Down Light

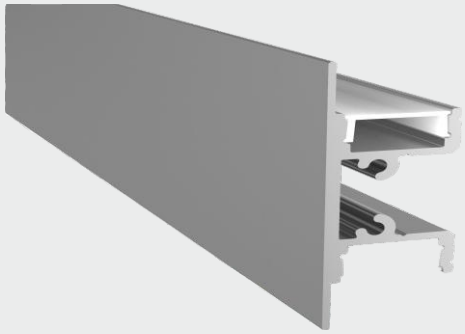


Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 48mm X 17mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12 x 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT






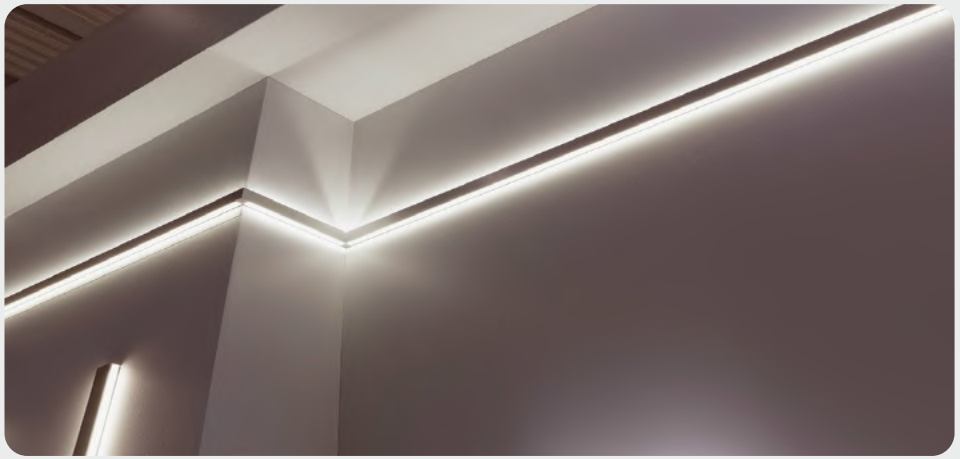





Aline 35mm Up & Down Light

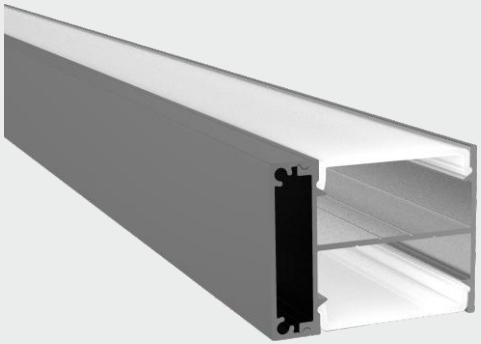

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Wall Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 39mm X 35mm
Standard Length: 3000mm
Accessory: Two end cap, Clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 32mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline Hanger

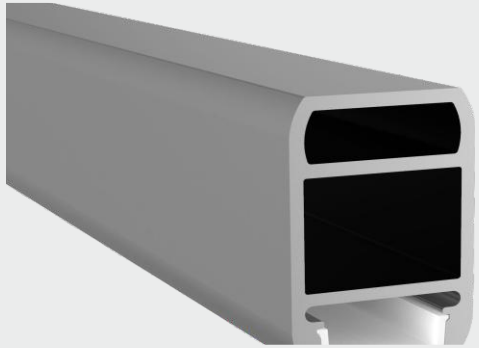

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 30mm X 19mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline Hanger

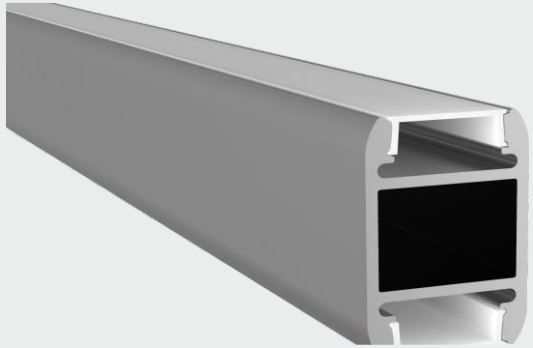

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Mounted
Diffuser Material: PC Diffuser Cover (Milky & Clear)
Dimension: 30mm X 19mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 12 - 24Watt
PCB Size: 12 x 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT












Aline Retail Glass mount

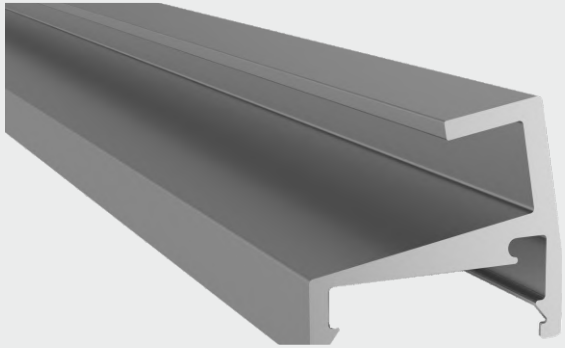

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Glass Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 25mm X 22mm
Standard Length: 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24 - 36Watt
PCB Size: 22mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT




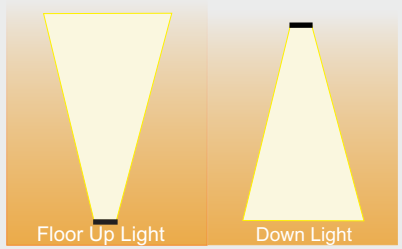







Aline Retail Profile

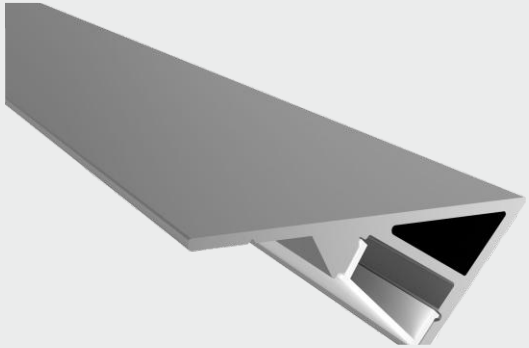

Ability to create a line. easy assembly and disassembly can be combined in to straight and broken linear runs. high luminous efficiency. Linear light design are homogeneous and dots free made up of high quality 6063 aluminum led profile help strip to dissipate heat, make led strip enjoy a longer lifetime and less brightness decline. Nice LED aluminum profile make led strip lighting more elegant. Aluminum led profile's diffuse cover can help you get different light effect. Can cut freely according to your requirement.

Installation: Furniture Recessed Mounted
Diffuser Material: PC Diffuser Cover (Milky)
Dimension: 44mm X 15mm
Standard Length: 2425mm, 3000mm
Accessory: Two end cap, Two clamp
Housing: Aluminium 6063
Color: Silver Anodized Aluminium and Customize color on request
Light Source: 2835 (120LEED/M)
Power Dissipation: 24Watt
PCB Size: 12mm
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT










Decorative Lights

Aline Square Hanging(Out Light)





Installation: Recessed Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300mm X 300mm, 450mm X 450mm
600mm X 600mm, 900mm X 900mm, 1200mm X 1200mm
Accessory: Hanging Wirs
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Square Hanging (In Side)





Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300mm X 300mm, 450mm X 450mm
600mm X 600mm, 900mm X 900mm, 1200mm X 1200mm
Accessory: Hanging Wirs
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT


Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.


Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance





Single Square hanging light

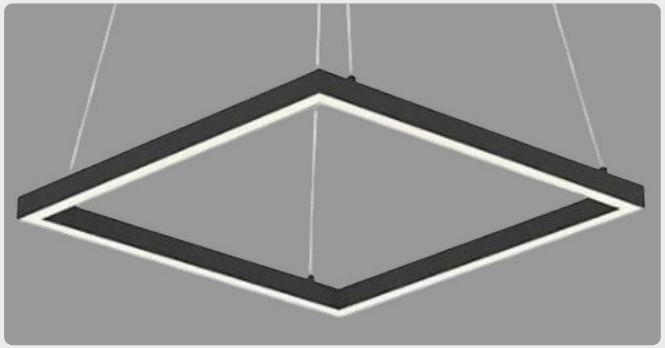

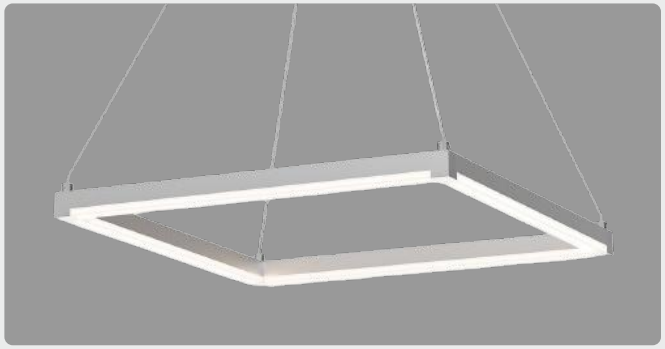

Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300mm, 450mm, 600mm, 900mm, 1200mm
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT


Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.






Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Round Hanging(Out Light)

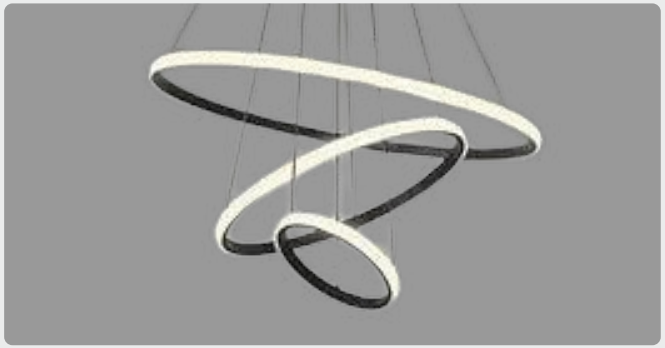

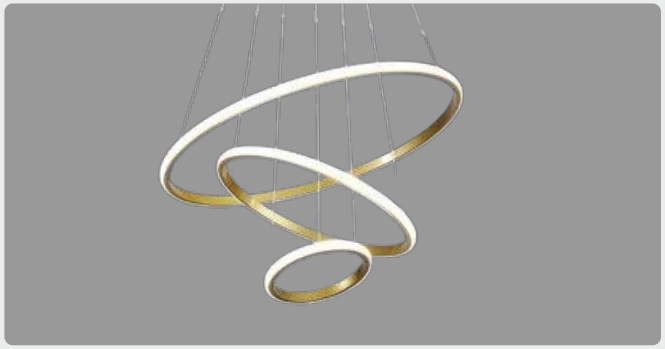

Installation: Recessed Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm, 900mm, 1200mm
Accessory: Hanging Wirs
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT


Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.


Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance





Aline Round Hanging (in Side)

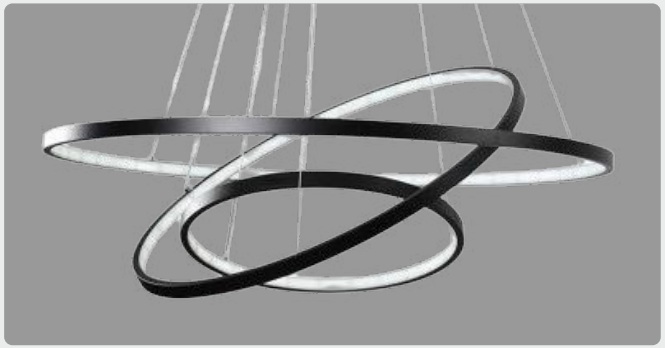

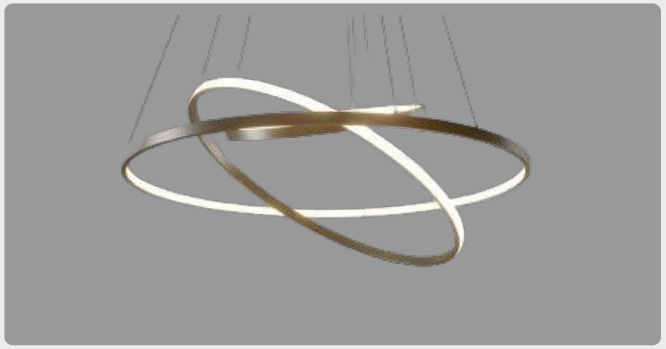

Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm, 900mm, 1200mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.






Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Round Spiral Hanging Light



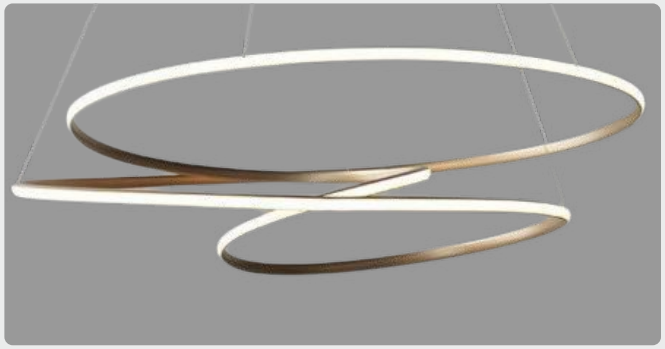

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Three-Recta-Hanging Light





Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 30” X 9” Each X 3
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home’s entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn’t what you’re looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance


Aline Three - Recta Wall Light





Installation: Wall Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 30” X 9” Each X 3
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT


Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home’s entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn’t what you’re looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

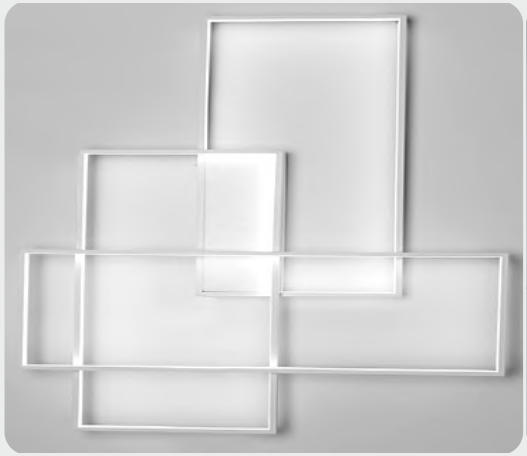




Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Triangles Hanging Light

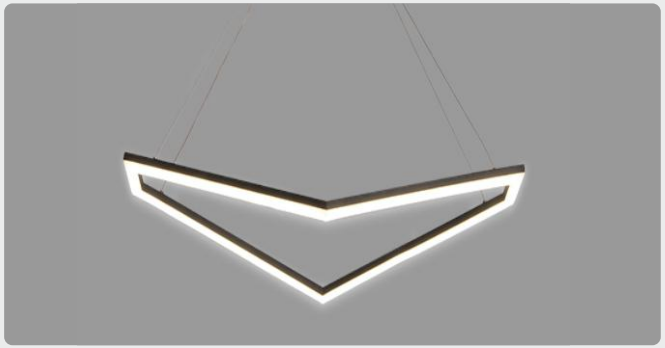

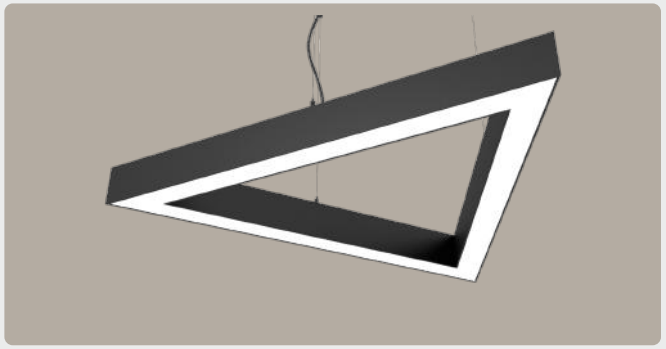

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

Installation: Suspended, Wall Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300X300X300mm, 450X450X450mm, 600X600X600mm, 750X750X750mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Linear Spring Desk Top Light





Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

Installation: Desk Top
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 150mm X 450mm
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Round Light (Down Light)





Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm, 900mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Round Light (Hollow)





Installation: Hanging
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300X50mm, 450X50mm, 600X50mm, 900X50mm 1200X50mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Square Light (Holllow)





Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

Installation: Suspended, Surface Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300X300X300mm, 450X450X450mm, 600X600X600mm
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance


Aline Hexagon Light (Down Light)





Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.

Installation: Suspended, Surface Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: 300X300X300mm, 450X450X450mm, 600X600X600mm
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

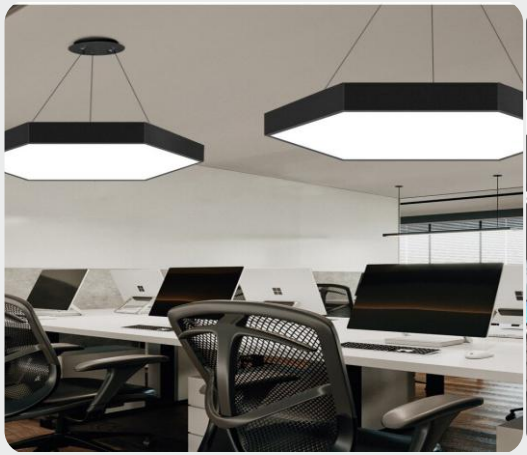



Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Hexagon (Hollow)





Installation: Suspended, Surface Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm
1200X50mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Triangle Light (Down Light)





Installation: Suspended, Surface Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300X300X300mm, 450X450X450mm
600X600X600mm
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.






Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

Aline Triangle Light (Hollow)



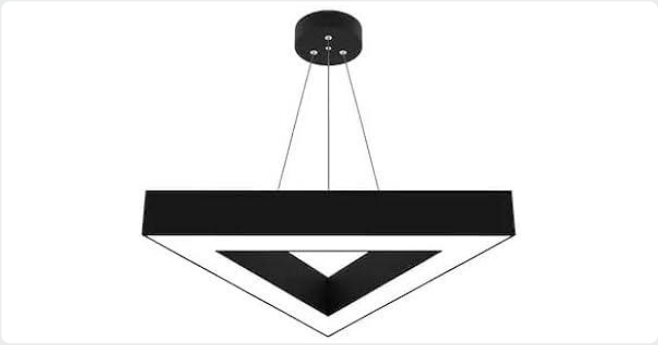


Installation: Suspended, Surface Mounted
Housing Material: Aluminum, PC Diffuser Cover
Dimension: Dia 300mm, 450mm, 600mm
1200X50mm
Accessory: Hanging Wire
Housing: Aluminum 6063
Color: Silver and Customize color on request
Light Source: 2835 (120LED/M)
Power Dissipation: 24Wat
Input Voltage: Dc12V/24V
CCT: 2400K, 3000K, 4200K, 6000K, Red, Green, Blue, Yellow, Purple, RGBW, CCT, RGB+CCT

Led Hanging Profile Lights is extremely versatile and adds a subtle elegance to a home's entryway, kitchen, or dining room. Pendants lights are available in a variety of styles and finishes as well as sizes, ranging from mini pendant lights to large pendants. Select multiple pendant light fixtures and create a unique lighting design. hang from your ceiling to light a room and generally have one central light source. Pendant lights mount on cable, wire, stem, or chain, which separate them from close to ceiling lights. Pendants are available in a wide variety of sizes, from mini pendants to large bowl pendants. If a round pendant light isn't what you're looking for, try a square pendant or cylinder pendant light to better suit your personal preference.





Features:
Particular space illumination
Bright and robust ambiance
Durability and lesser maintenance

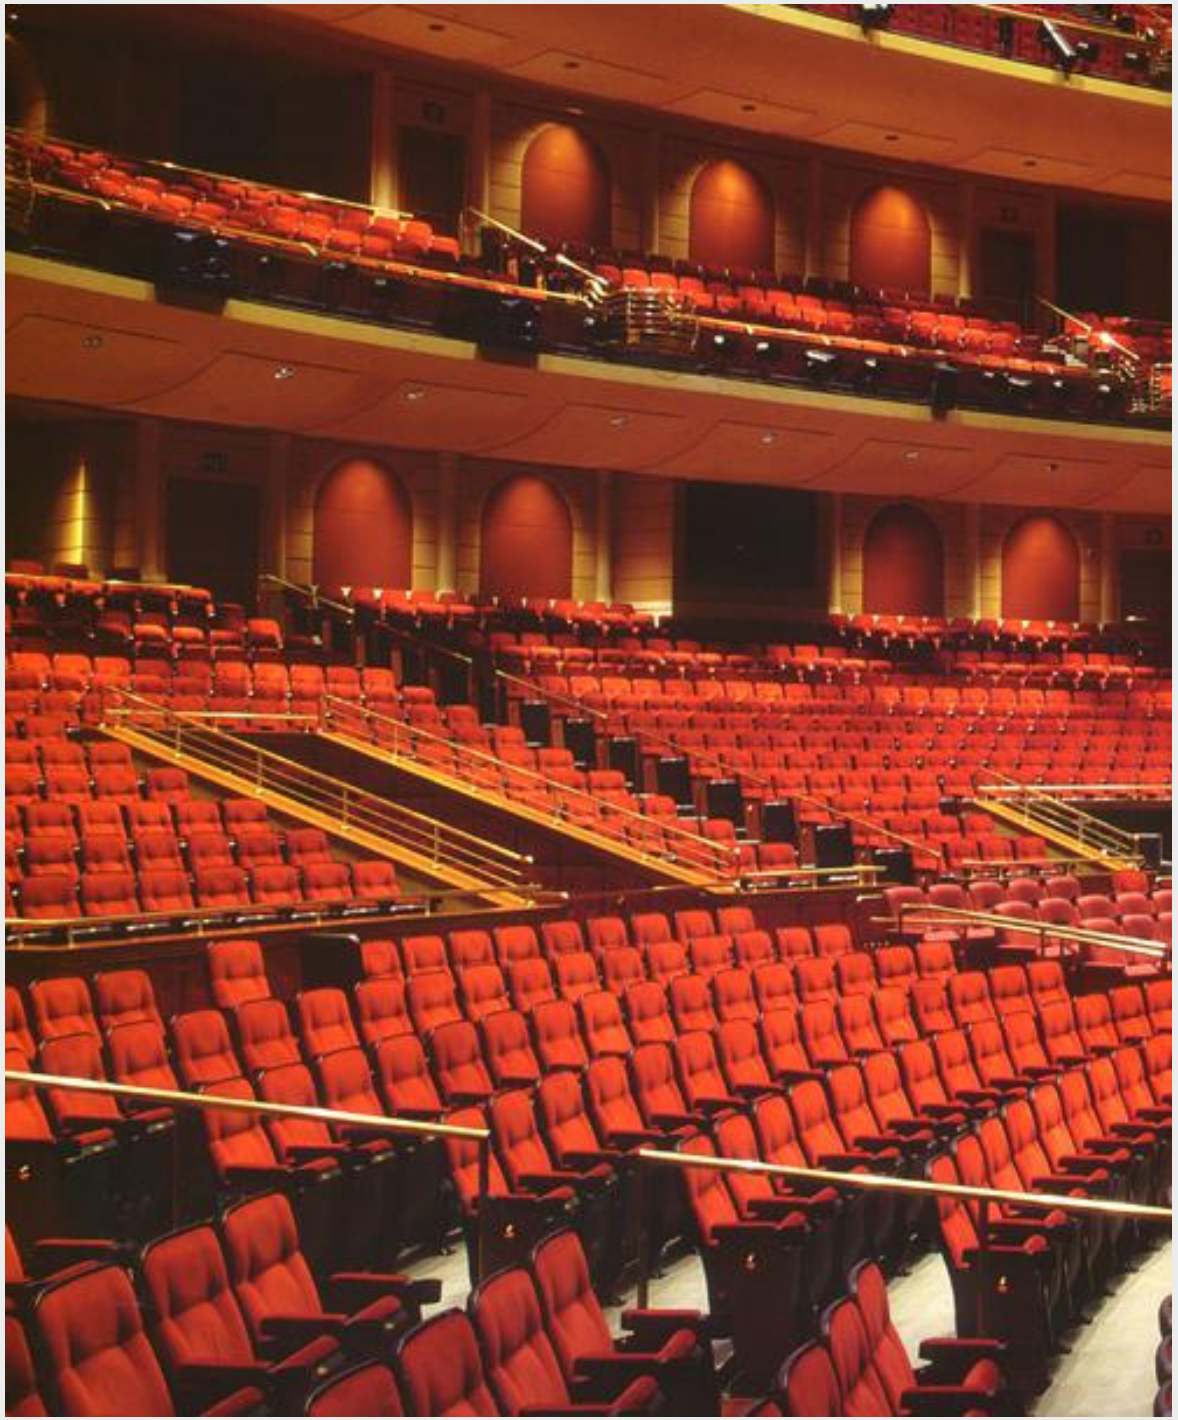


STEP & AISLES
LED LIGHTING SOLUTIONS


FIBERLED
102 STEP LIGHTING



TECHNICAL DATA		
Version	**12V**	**24V**
Consumption	0,25W	0,5W
Dimensions	72 x 22 mm	
Weight	0,89 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	1 LED	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWING

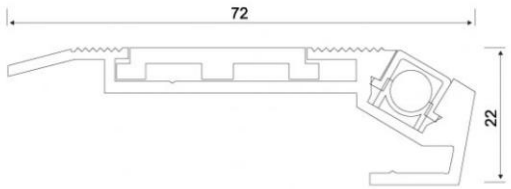

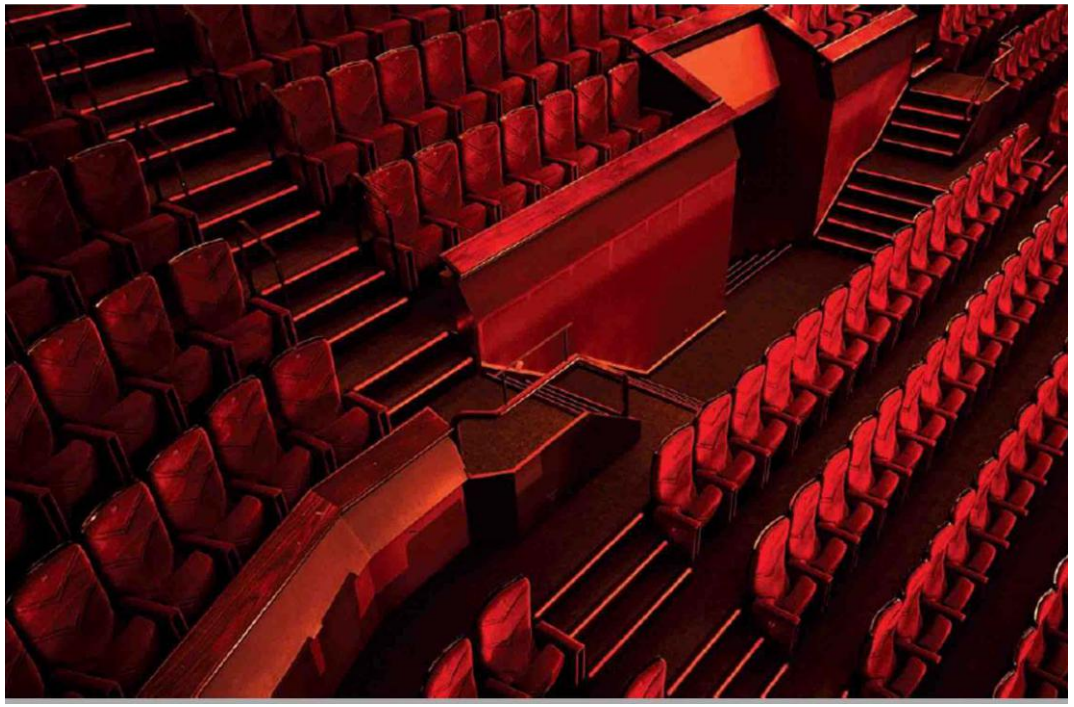


FIBERLED


201 STEP LIGHTING



TECHNICAL DATA		
Version	12V	24V
Consumption	0,25W	0,5W
Dimensions	72 x 40 mm	
Weight	1,16 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	1 LED	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

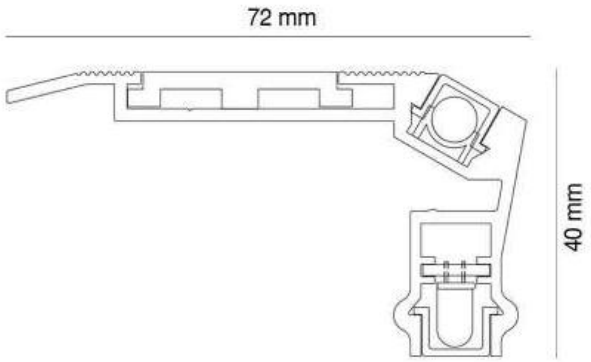

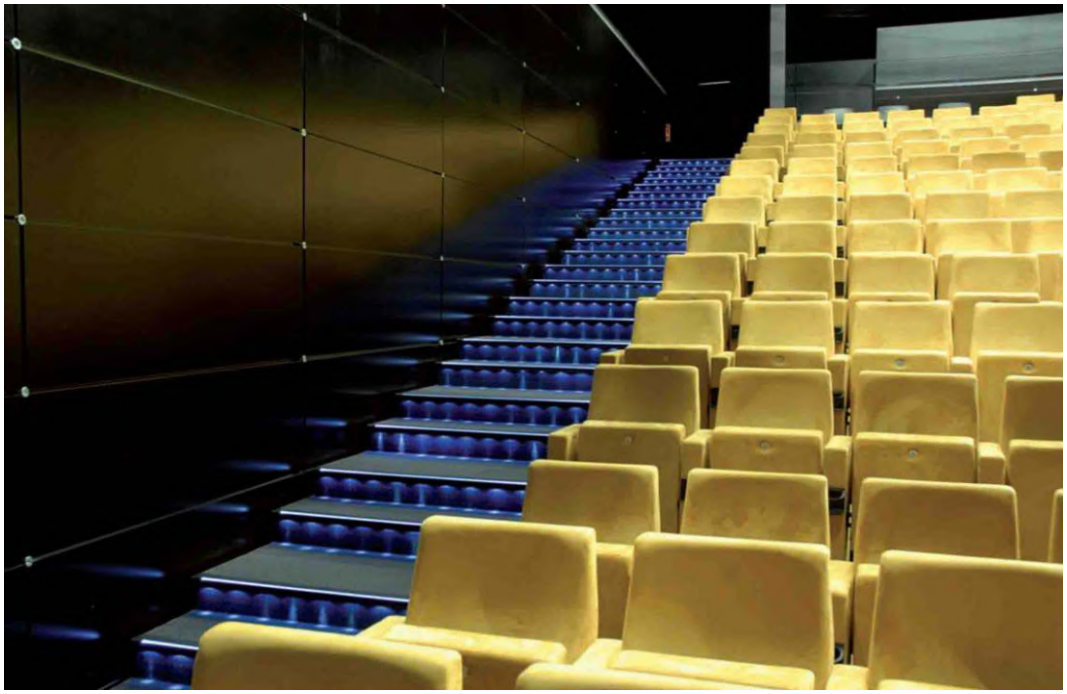



LEDLINE
102 STEP LIGHTING



TECHNICAL DATA		
Version	12V	24V
Consumption	Consult	
Dimensions	72 x 22 mm	
Weight	0,89 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	LED SMD	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

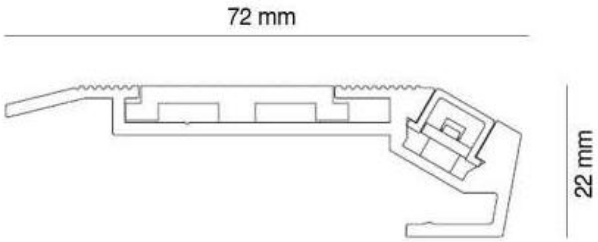

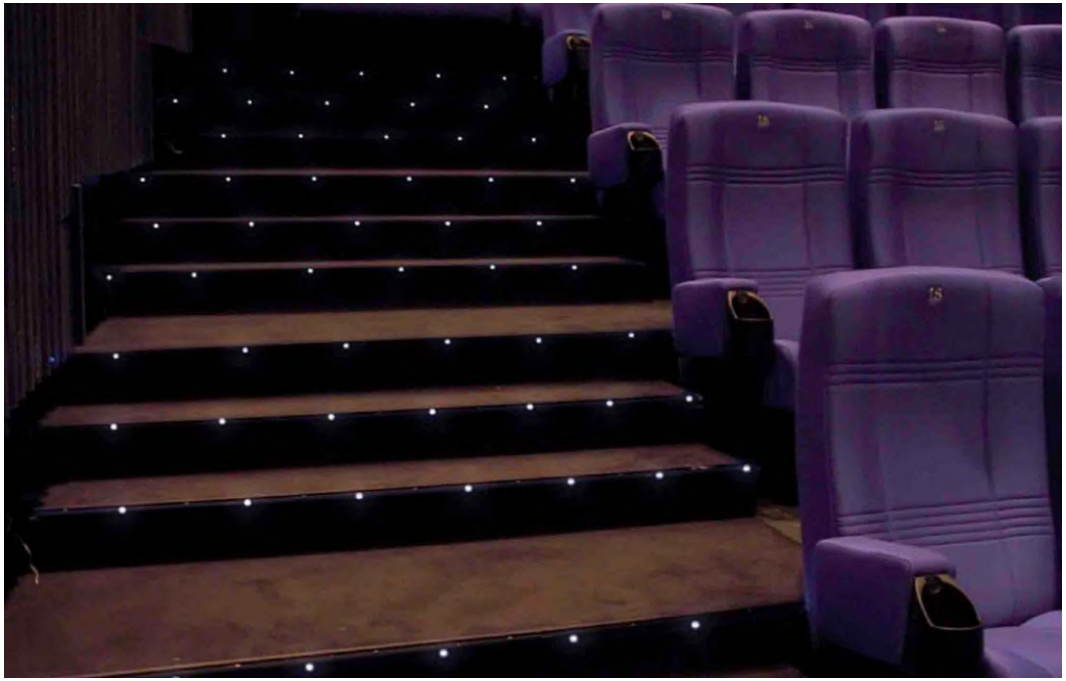



LEDLINE
104 STEP LIGHTING



TECHNICAL DATA		
Version	**12V**	**24V**
Consumption	Consult	
Dimensions	72 x 40 mm	
Weight	1,16 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	LED SMD	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

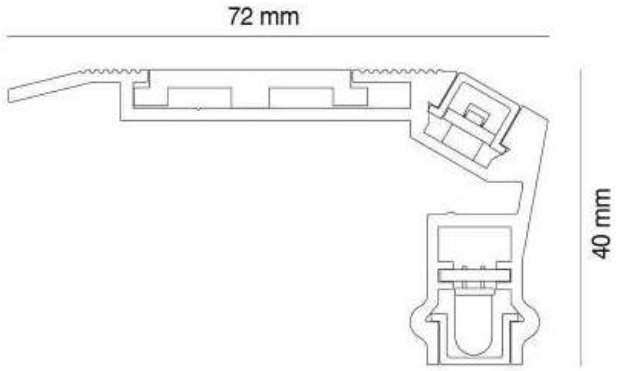

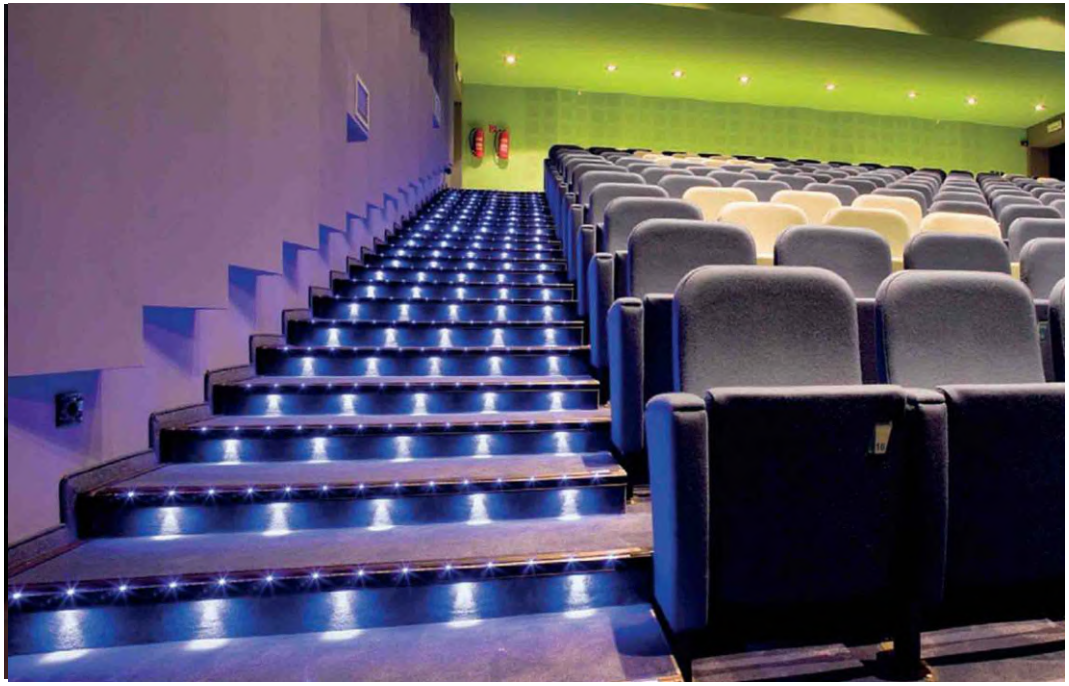


FIBERLED

102 AISLE/WALL LIGHT



TECHNICAL DATA		
Version	12V	24V
Consumption	Consult	
Dimensions	50,7 x 12,8 mm	
Weight	0,54 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	5/10/15/30 LEDs SMD	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

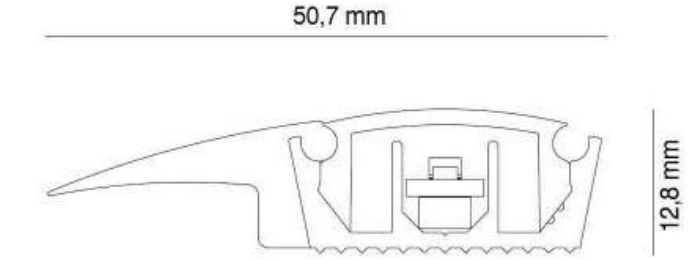




LEDLINE


301 FF AISLE LIGHTING



TECHNICAL DATA		
Version	**12V**	**24V**
Consumption	Consult	
Dimensions	75,3 x 12,8 mm	
Weight	0,54 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	5/10/15/30 LEDs SMD	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	


DRAWINGS

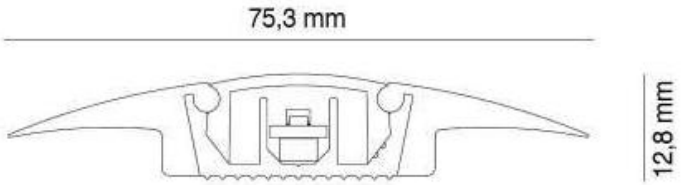

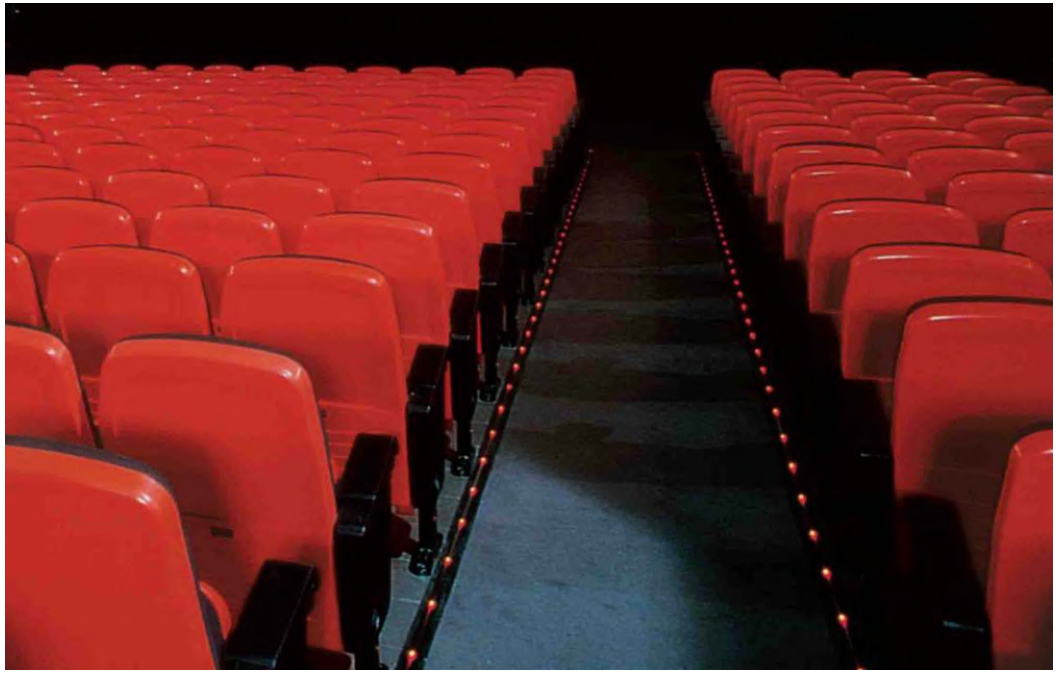


FIBERLINES


301 AISLE/WALL LIGHT

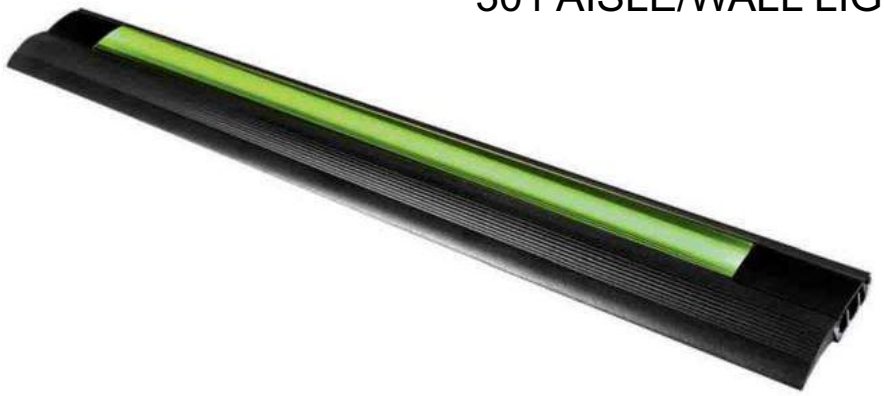

TECHNICAL DATA		
Version	**12V**	**24V**
Consumption	0,25W	0,5W
Dimensions	50,7 x 12,8 mm	
Weight	0,54 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	1 LED	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

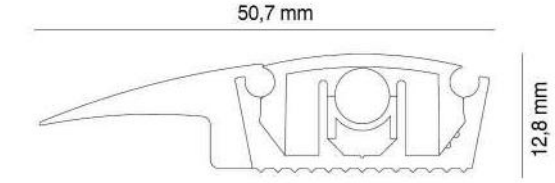

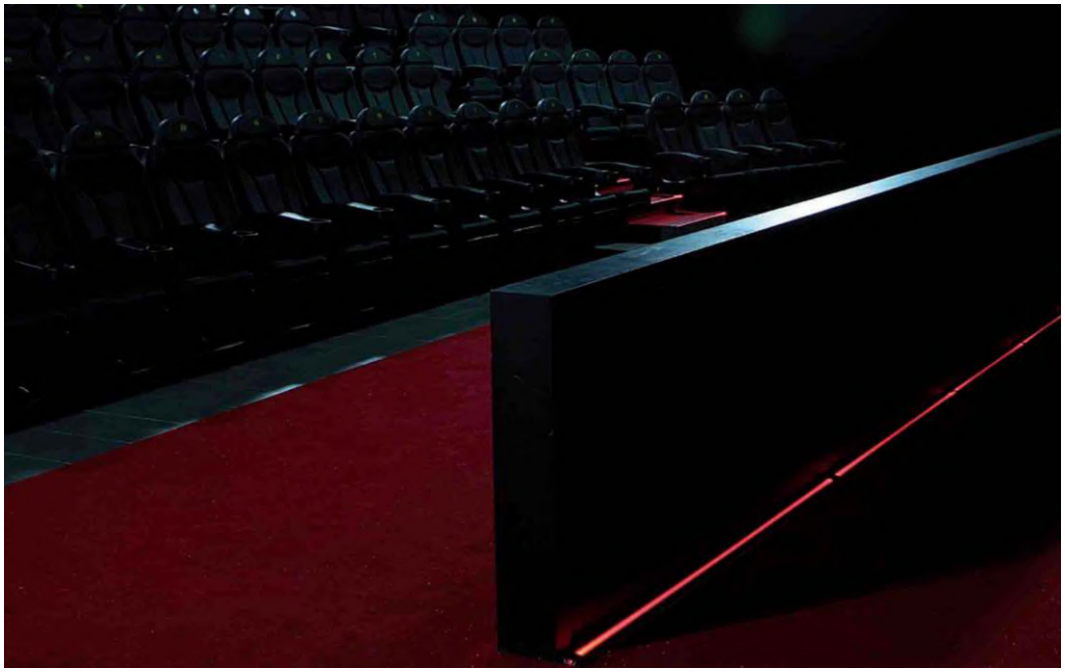


FIBERLINES


301 FF AISLE LIGHTING



TECHNICAL DATA		
Version	**12V**	**24V**
Consumption	0,25W	0,5W
Dimensions	75,3 x 12,8 mm	
Weight	0,73 kg/m	
Material	Light Alloy	
Protection class	III	
LEDs quantity	1 LED	
Aplication	Floor	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

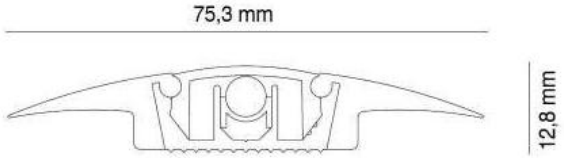

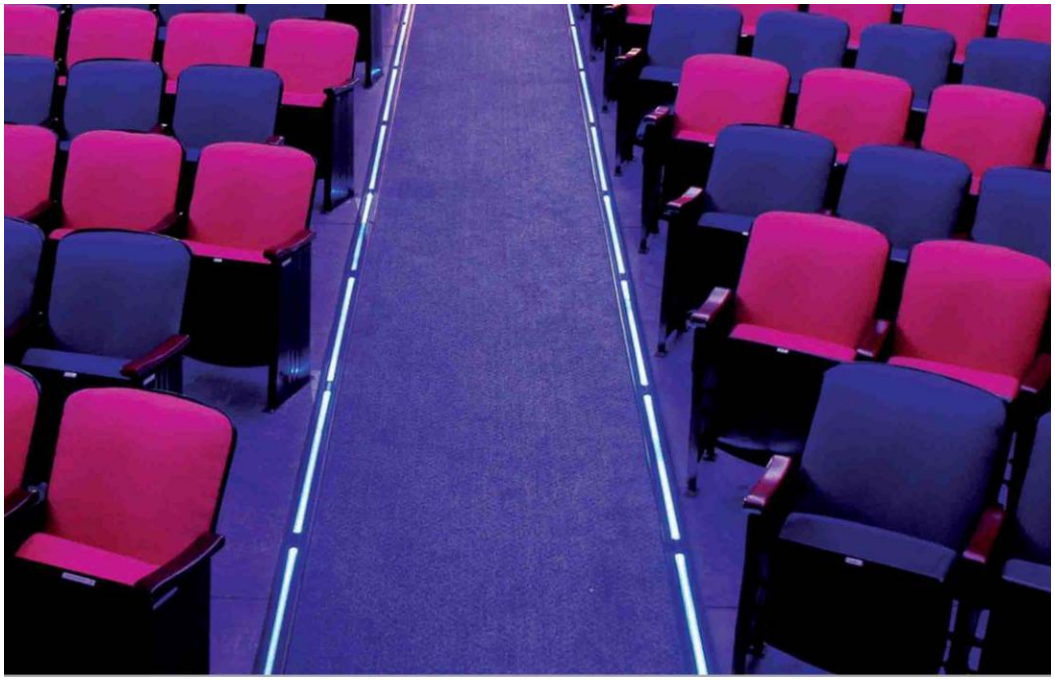


GUIDELINES
WALL LIGHTING



TECHNICAL DATA		
Version	12V	24V
Consumption	Consult	
Dimensions	27 x 18,5 mm	
Weight	0,19 kg/m	
Material	PVC	
Protection class	III	
LEDs quantity	7 / 15 LEDs/m	
Aplication	Wall	
Use	Indoor	
Accessory	Transformer (excl)	

DRAWINGS

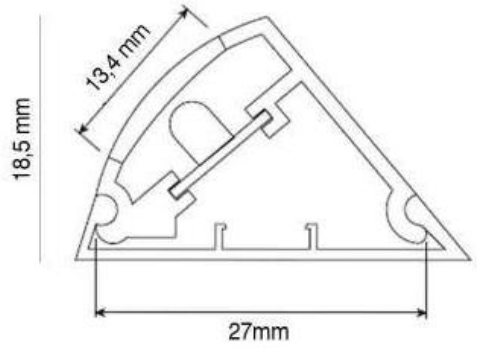




WIRE WAY
STEP LIGHT




TECHNICAL DATA	
Dimensions	57 x 13 mm
Weight	0,3 kg/m
Material	PVC
Aplication	Floor
Use	Indoor

Ref	Description	Unit
A130219/C13	Cover profile in black polymer	1 m
A130218	Semi-rigid base profile in black polymer	1 m
A130214 (D/R) A130215 (I/L)	Wire-Way wide endcap right/left E-102	1 m
A130216 (D/R) A130217 (I/L)	Wire-Way wide endcap right/left E-201	1 m

DRAWINGS

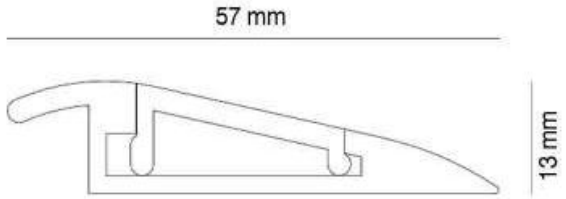

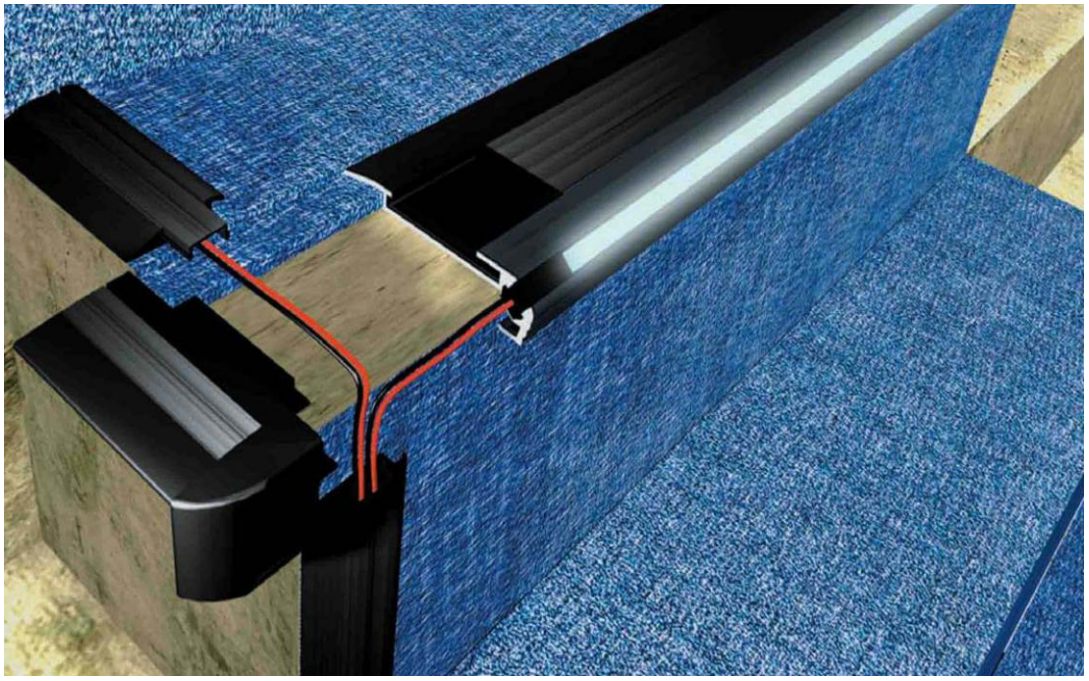

FIBERLINES

302 FW/FF


AISLE/WALL WASHER
AISLE LIGHTING




TECHNICAL DATA		
Version	302 FW	302 FF
Dimensions	50.7 x 12.8 mm	81.3 x 12.8 mm
Weight	0,88 kg/m	
Material	Light Alloy	
Aplication	Floor	

DRAWINGS

302 FW 50,7 mm



302 FF 81,3 mm



COMPLETE READY SYSTEM

Ref	Description	Unit
7031000 (FW) 7030800 (FF)	Light alloy profile black anodized non illuminated For installation and finishes between one floor and one wall (FW) or between two floors (FF)	1 m

In addition to the complete system, you must order end-plated separately

NON ILUMINATED PROFILE FOR CORRIDOR / PARTS LIST

Ref	Description	Unit
8010109/C13	Light alloy base profile black with anti-slip surface	1 m
A130022	Light alloy profile with drill-hole to support base profile	1 m
A130301/C13	Continuous diffusing black lens manufactured in pure, fire retardant polycarbonate	1m
A130110	Cylindric profile in silicone for sealing (for FW)	1 m
A130106	Elastomer profile for floor (for FF 2 m / for FW 1 m)	1+1 m
A130230/C13	End-caps	2 u 1




FIBERLED

104 STEP LIGHT



TECHNICAL DATA	
Dimensions	72 x 40 mm
Weight	1,16 kg/m
Material	Light Alloy
Aplication	Floor
Accessory	Transformer (excl)

DRAWINGS

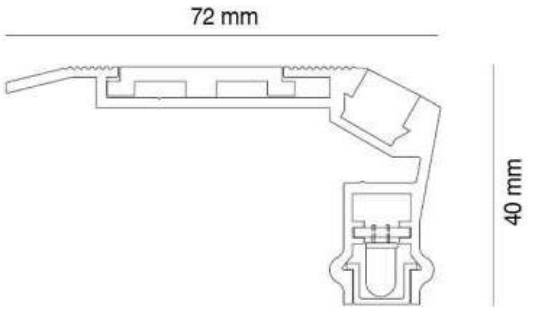





B132, Phase I, Mayapuri Industrial
Area, New Delhi-110064
Ph No: 011 404 54999
Web: www.alineled.in
Email: sales@arteluce.in