

HIKVISION®

HIKVISION MONITORS

Right for your office



Super Narrow Bezel Monitors



Multiple Interfaces



More fluid & life-like video



Wide View Angle



3 year warranty

With first **18 months** change new

HOTLINE: **1900 2810**

HIKVISION 2024

Vertical and horizontal ultra wide view

High quality Panel ensures **accurate colors and images** when viewed from 178° viewing angle




Excellent Color with Sharp Details

Full HD imaging ensures that images are naturally clear and **vivid in color**



Certified by TUV Rheinland

Global leader of technical and safety certification for low blue light

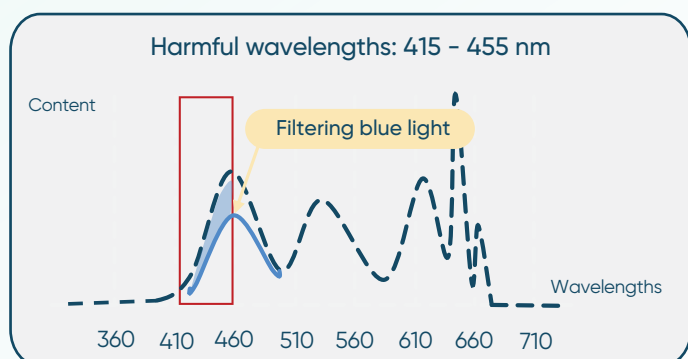


More Fluid and Life-Like Video

100Hz refresh rate improves the smoothness of the image and presents a realistic picture dynamics



Virtually-Borderless Slim Design

Comes with a **super-narrow bezel** and **stylish slim body design** which offers you a wider view

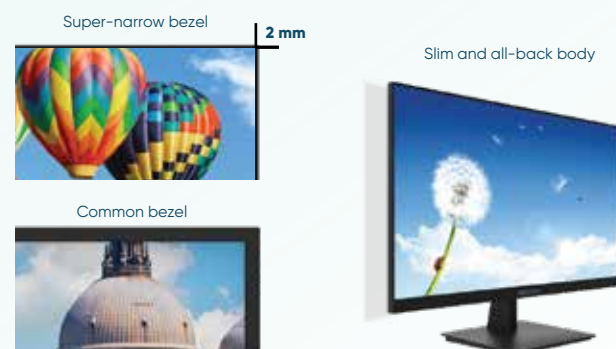

Eye-Safe and Comfortable

Filters harmful radiation and reduces damage to human eyes





DS-D5019QE-B

European standard - VA panel - 60Hz

- LED backlit technology with full HD 1366 x 768
- 19" LED backlight monitor
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiple interfaces: HDMI, VGA
- Wide viewing angle: Horizontal 90°, Vertical 65°
- 24/7 operation

2.010.000



NEW

DS-D5019S1-1P0

European standard - IPS panel - 75Hz

- LED backlit technology with full HD 1366 x 768
- 19" LED backlight monitor
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiple interfaces: HDMI, VGA
- Wide viewing angle: Horizontal 90°, Vertical 65°
- 24/7 operation

NEW



DS-D5022FN-C

European standard - VA panel - 60Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 2 channels of 8 bit/10 bit LVDS HD (1920*1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

HOT



HOT SELLING

DS-D5022FN00

European standard - VA panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Supports VESA wall mount.

2.250.000



HOT SELLING

DS-D5022FN10

European standard - VA panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Supports VESA wall mount.

2.250.000



NEW

DS-D5022F2-1V1

European standard - VA panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Supports VESA wall mount.

NEW



NEW

DS-D5022F2-2V1

European standard - VA panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Supports VESA wall mount.

NEW



NEW

DS-D5022F2-1V1S

European standard - VA panel - 75Hz

- Ultra-thin device body with 3 ultra-narrow sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

NEW



NEW

DS-D5022F2-1P1

European standard - IPS panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- IPS technology for wide, 178° ultra-wide view screen.
- 75 Hz refresh rate, more fluid and life-like video
- Excellent color with sharp details

NEW



NEW

DS-D5022F2-2P1

European standard - IPS panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- IPS technology for wide, 178° ultra-wide view screen.
- 75 Hz refresh rate, more fluid and life-like video
- Excellent color with sharp details

NEW



NEW

DS-D5022F2-1P2

European standard - IPS panel - 100Hz

- 100 Hz refresh rate, more fluid and life-like video
- IPS technology for wide, 178° ultra-wide view screen.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount

NEW



NEW

DS-D5022F2-2P2

European standard - IPS panel - 100Hz

- 100 Hz refresh rate, more fluid and life-like video
- IPS technology for wide, 178° ultra-wide view screen.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount

NEW



DS-D5022F2-1V2

European standard - VA panel - 100Hz

NEW



DS-D5022F2-1V2S

European standard - VA panel - 100Hz

NEW



DS-D5022F2-2V2

European standard - VA panel - 100Hz

NEW



DS-D5022F2-2P2A

European standard - IPS panel - 100Hz

NEW



DS-D5024F2-1V2

European standard - VA panel - 100Hz

NEW



DS-D5024F2-2V2

European standard - VA panel - 100Hz

NEW



DS-D5024F2-1V2S

European standard - VA panel - 100Hz

NEW



DS-D5024F2-1P2

European standard - IPS panel - 100Hz

NEW



DS-D5024F2-2P2

European standard - IPS panel - 100Hz

NEW



DS-D5024F2-1V1

European standard - VA panel - 75Hz

NEW



DS-D5024F2-2V1

European standard - VA panel - 75Hz

NEW



DS-D5024F2-1P1

European standard - IPS panel - 75Hz

NEW



DS-D5024F2-2P1

European standard - IPS panel - 75Hz

NEW





DS-D5024FN

European standard - VA panel - 60Hz

- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- User-friendly operation menu
- High reliable components for 7×24 working
- 1 channel HDMI 1.3 input interface
- Three image modes to adapt different environment
- Support software spread-spectrum technology to reduce EMI radiation
- VESA stand bracket

NEW



DS-D5024FN-B

European standard - VA panel - 60Hz

- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- User-friendly operation menu
- 1 channel HDMI 1.3 input interface
- Three image modes to adapt different environment
- Support software spread-spectrum technology to reduce EMI radiation
- VESA stand bracket

NEW



DS-D5024FN01

European standard - VA panel - 75Hz

- IPS technology for wide, 178° viewing angle
- Virtually-borderless slim design
- 75 Hz refresh rate, more fluid and life-like video
- Eye-safe and comfortable with TÜ V Rheinland certified, low blue light
- Excellent color with sharp details

NEW



HOT SELLING

DS-D5024FN10

European standard - VA panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

2.760.000



HOT SELLING

DS-D5024FN11

European standard - IPS panel - 75Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

2.790.000



HOT SELLING

DS-D5027FN

European standard - VA panel - 75Hz

- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- User-friendly operation menu
- High reliable components for 7×24 working
- 1 channel HDMI 1.3 input interface
- Three image modes to adapt different environment
- Support software spread-spectrum technology to reduce EMI radiation
- VESA stand bracket

3.000.000



HOT SELLING

DS-D5027FN01

European standard - IPS panel - 75Hz

- IPS technology for wide, 178° viewing angle
- Virtually-borderless slim design
- 75 Hz refresh rate, more fluid and life-like video
- Eye-safe and comfortable with TÜ V Rheinland certified, low blue light
- Excellent color with sharp details

3.100.000



NEW

DS-D5027F2-1P2

European standard - IPS panel - 100Hz

- IPS technology for wide, 178° viewing angle
- Virtually-borderless slim design
- 75 Hz refresh rate, more fluid and life-like video
- Eye-safe and comfortable with TÜ V Rheinland certified, low blue light
- Excellent color with sharp details

NEW



NEW

DS-D5027F2-2P2

European standard - IPS panel - 100Hz

- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

NEW



DS-D5032QE

- LED backlit technology with full HD 1920 x 1080
- 32" LED backlight monitor
- 16.7 million colors display images perfectly
- Multiple interfaces: HDMI, VGA, audio in
- Built-in speaker
- Wide viewing angle: Horizontal 178°, Vertical 178°
- 24/7 operation
- LED backlit technology with full HD 1920×1080
- 16.7 million color, display picture perfectly
- HDMI support up to 1080P
- Multiple inputs: HDMI, VGA
- Build-in speaker, Audio 5W*2
- Auto signal input Detection
- Smart engine for Phase/Image position/Color calibration
- Plastic casing
- Narrow front Bezel

HIGH - END



DS-D5043QE

- LED backlit technology with full HD 1920 x 1080
- 43" LED backlight monitor
- 16.7 million colors display images perfectly
- Multiple interfaces: HDMI, VGA, audio in
- Built-in speaker
- Wide viewing angle: Horizontal 178°, Vertical 178°
- 24/7 operation
- LED backlit technology with full HD 1920×1080
- 16.7 million color, display picture perfectly
- HDMI support up to 1080P
- Multiple inputs: HDMI, VGA
- Build-in speaker, Audio 5W*2
- Auto signal input Detection
- Smart engine for Phase/Image position/Color calibration
- Plastic casing

HIGH - END



DS-D5032FC-A

- LED backlit technology with full HD 1920×1080
- 32" LED backlight monitor
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiple interfaces: HDMI, VGA, DVI, BNC input, BNC output, audio in, audio out, USB
- Built-in speaker
- Wide viewing angle: Horizontal 178°, Vertical 178°
- 24/7 operation

HIGH - END



DS-D5027UC

Monitor

- Designed for video security, high reliability and stability;
- 27" Fashion appearance, very narrow frame;
- 4K resolution is 4 times 1080P can own broader view and more abundant details;
- VESA standard;
- Wide view angle: Horizontal 178°, Vertical 178°;
- High reliability and stability, 24/7 operation;
- Build-in speaker;

HIGH - END



DS-D5043UC

42.5-inch LCD Monitor

- Designed for video security, high reliability and stability.
- 42.5" LED backlight with wide display equipment.
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and finer details.
- Multiple inputs: HDMI, VGA, USB.
- Narrow front bezel.
- Wide view angle: horizontal 178°, vertical 178°.
- 24/7 operation.

HIGH - END



DS-D5050UC-C

50-inch LCD Monitor

- Designed for video security, high reliability and stability
- 50" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

HIGH - END



DS-D6055UH

Wall-mounted Digital Signage

- Plastic shell appearance, slim frame, and all-in-one design.
- Exquisite image, auto-coloring and image-enhancing engine.
- Variable materials, static and dynamic

materials, including the pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.

- Flexible program schedule, free schedules and district play of multiple materials and variable play modes: play by day, play by week, play by loop, custom play, etc.
- Centralized management, remotely control and manage one screen or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview, remotely release programs and updates local (USB) programs.
- Organization permission, 5-level organization is available for managing materials, programs, terminals, and users, and support creating custom users, allocating permission for users according to user level, and permission templates.
- Multiple security safeguards, 3-level check of materials, programs and schedules to prevent mistake release, encryption of data in storage and transmission to prevent data tampering, and with no default password, users can activate and set initial password to guarantee the password safety

HIGH - END



DS-D5055UC-C

55-inch LCD Monitor

- Designed for video security, high reliability and stability
- 55" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

HIGH - END



DS-D5065UC-C

65-inch LCD Monitor

- Designed for video security, high reliability and stability
- 65" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

HIGH - END




DS-DM1940W

LCD Monitor Base Bracket

- Solid steel structure, preventing screen bending or twisting
- Cold-rolled steel plate (SPCC)
- Quick and easy installation

HIGH - END



DS-DM4255W

LCD Monitor Base Bracket

- Solid steel structure, preventing screen bending or twisting
- Cold-rolled steel plate (SPCC)
- Quick and easy installation

HIGH - END



DS-DM4304B

LCD Monitor Base Bracket

- Solid steel structure, preventing screen bending or twisting
- Cold-rolled steel plate (SPCC)
- Quick and easy installation

HIGH - END

HIKVISION®

HIKVISION VIETNAM

HA NOI OFFICE:

38th Floor, Keangnam Hanoi Landmark Tower, Me Tri Ward, Nam Tu Liem District, Ha Noi Capital.

HO CHI MINH OFFICE:

L12A-07, L12a Floor, Vincom Center, 72 Le Thanh Ton, Ben Nghe Ward, District 1, Ho Chi Minh City.

Hotline: 1900 2810

Email: hotro@hikvision.com