

GENERAL CATALOGUE

2026



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.

pentaesp.com

A TEAM OF PASSIONATE EXPERTS

We build solutions for your safety and performance.

We design, manufacture and market safety and maintenance equipment for power grid and electrical network professionals.



+750
employees

+140
countries
using
our products

170M€
in 2025
+20% growth vs. 2024

16
manufacturing
plants
worldwide
(incl. 12 in France)

15,000
products
references


/ Empowering & protection electricians throughout the electricity journey


PRODUCTION

TRANSMISSION

SUBSTATION

INDUSTRY

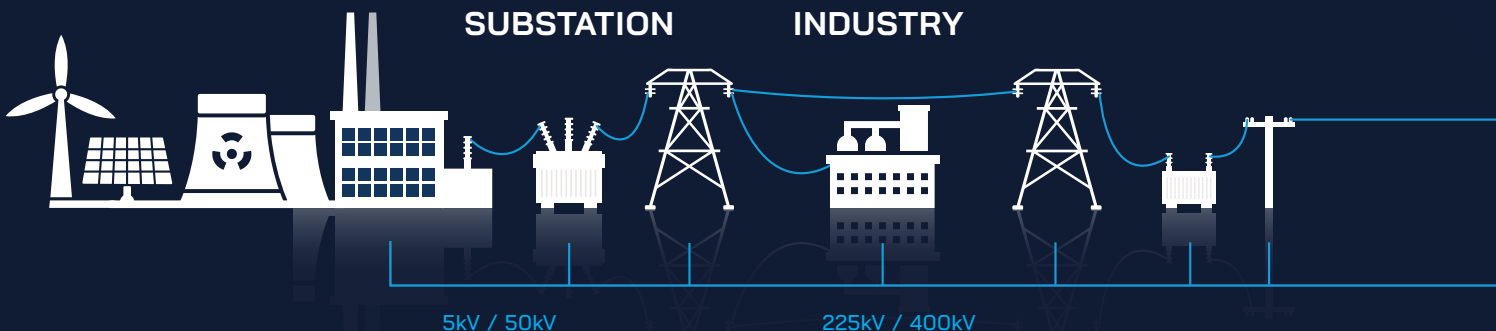

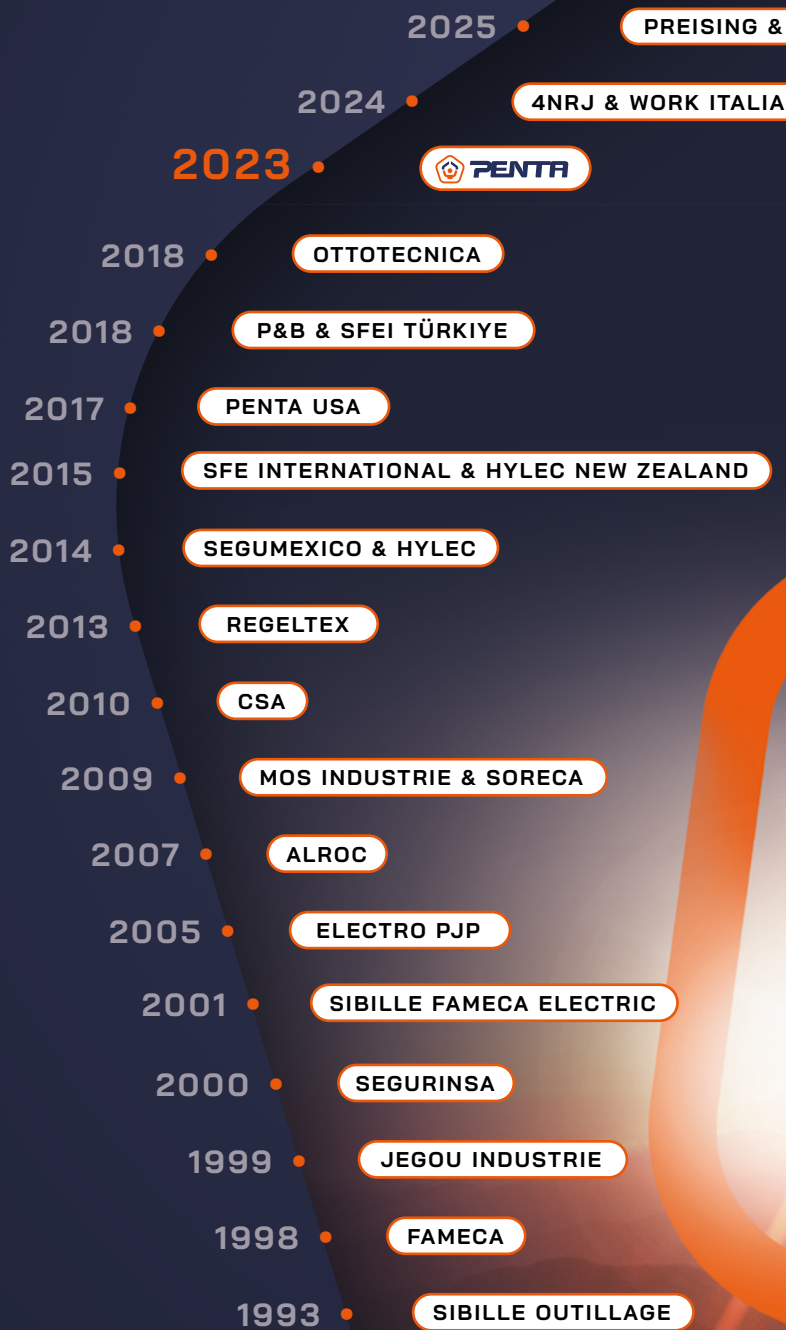

OUR HISTORY

Founded in 1993, PENTA Electrical Safety Products leverage 90 years of industrial heritage to create a unique, customer-focus brand.




DISTRIBUTION

ELECTRIC TRACTION

TERCIARY

ELECTRIC MOBILITY

CIVIL SECURITY

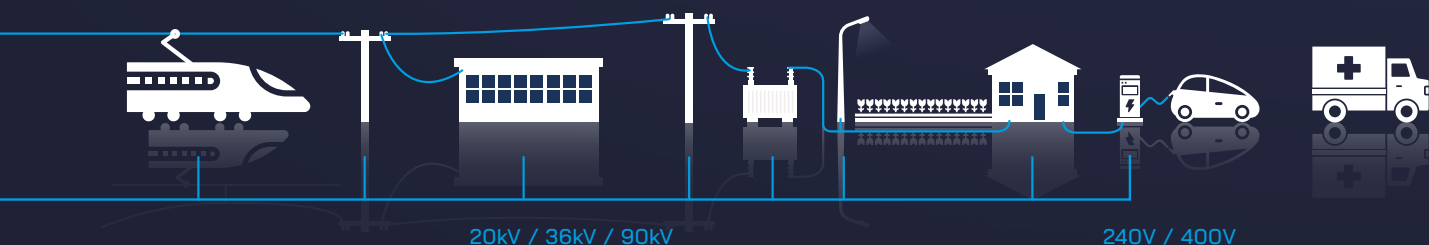

CABLE & CONNECTIONS

From
prototype...



15% new products
each year



65 patent applications



5% of turnover
injected in R&D

... to
production

/ Our manufacturing expertise




PULTRUSION




**INJECTION
MOULDING**



FOUNDRY
(ALUMINIUM,
BRASS, BRONZE)



**HARDWARE/
SOFTWARE**




**POLYMER
PROCESSING**
(LATEX)



MACHINING




PVC DIPPING



**LEATHER
& FABRIC**

From
our french factories...

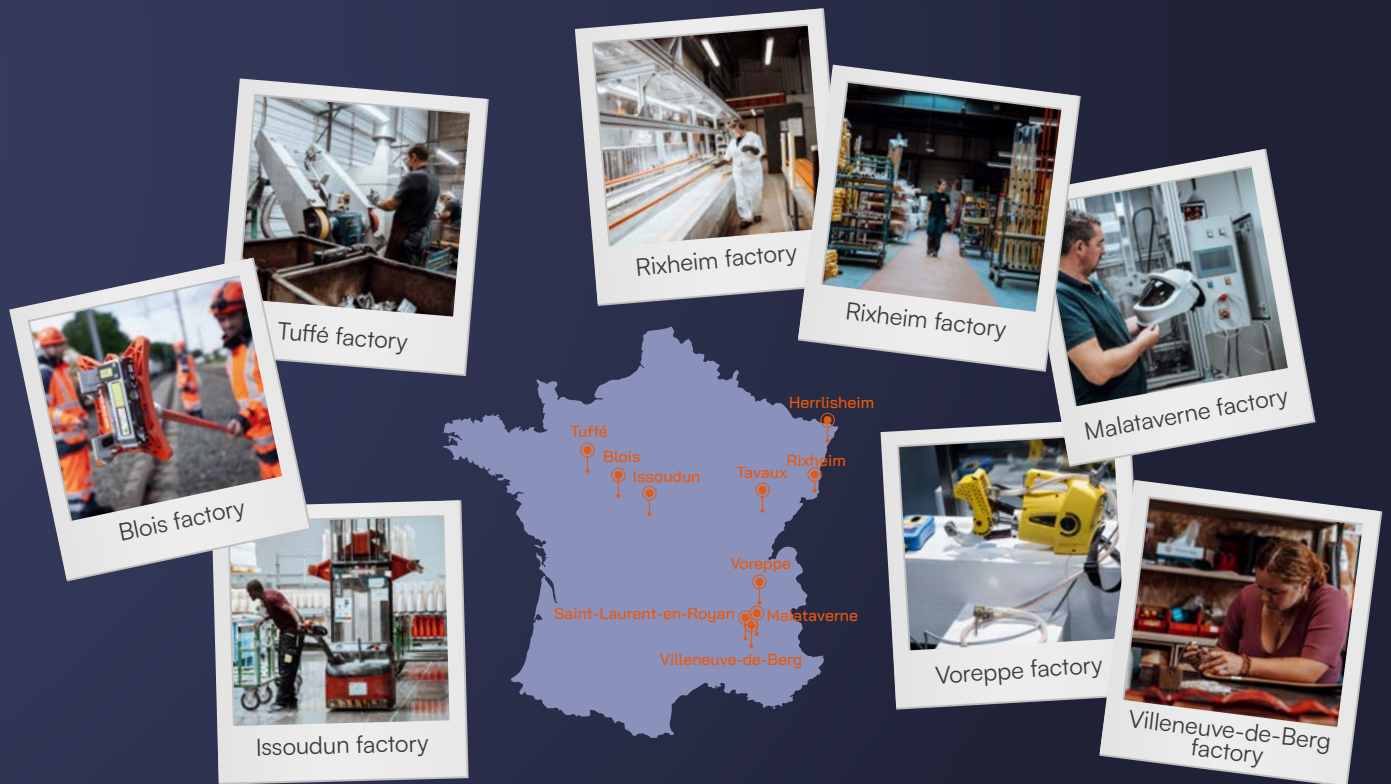

... to
our local expertise all over the world



GENERAL CATALOGUE

TABLE OF CONTENTS

To **PROTECT** :

For the Personal Protective Equipment (PPE) and Personal Protective Clothing (PPC) required for personal safety, to protect oneself and the environment.

To **SECURE** your work environment :

For all the equipment required for lockout/tagout procedures (low, medium and high voltage). To provide you with the necessary equipment for working on live systems in medium and high voltage environments.

To **WORK** on your operations with total security :

For all precision and safety-oriented tools, as well as the necessary equipment for the construction and maintenance of networks.



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.



PERSONAL PROTECTIVE EQUIPMENT & FALL PROTECTION	08	
LOCKOUT, TAGOUT TRYOUT	76	
VOLTAGE DETECTION	96	
INSULATING POLES	148	
EARTHING & SHORT-CIRCUITING	184	
CABLE IDENTIFICATION PHASING & LOAD TESTING	250	
1000V INSULATED & INSULATING TOOLS	270	
TRANSPORT & STORAGE SOLUTIONS	336	
SMART INSULATING SOLUTIONS	352	
SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS	364	
CABLE PREPARATION TOOLS	396	
SUBSTATION & RESCUE EQUIPMENT	438	
PERMANENT EARTHING	458	
SIGNAGE, LIGHTING & MARKING THE WORK AREA	464	
NETWORK CONSTRUCTION	484	





PERSONAL PROTECTIVE EQUIPMENT & WORK AT HEIGHT

/ PERSONAL PROTECTIVE EQUIPMENT	10
Head protection	10
Hand protection	20
Feet protection	32
Body protection	38
/ WORK AT HEIGHT	60
Kits	64
Harnesses	68
Linking devices	70
/ CIVIL SECURITY	74
Firefighters	74



PENTA
ELECTRICAL SAFETY PRODUCTS

**Your life,
Our work.**



PERSONAL PROTECTIVE EQUIPMENT

HEAD PROTECTION

SAFETY HELMETS

/ SAFETY HELMETS

Built for real risks. Trusted by professionals.

Whether you're working at height, inside a substation, on live installations, or in high-arc environments, your head and face are constantly exposed to serious risks — falling objects, thermal effects from an electric arc, UV radiation, molten metal splashes or lateral impacts. At PENTA Electrical Safety Products, we design helmets that go beyond basic compliance to deliver reliable and durable protection adapted to your environment.

All our helmets meet **EN 397** for industrial safety and **EN 50365** (Class 0 or Class 2) for electrical insulation up to 17 000V AC (tested up to 30 000V). When Arc Flash exposure is a risk, selected models integrate **GS-ET-29** (or IEC 62819 new standard) certified face shields, rated APC1 or APC2 (and ATPV with IEC 62819), with optical clarity and protection against radiant heat and projection.

Our flagship model, the VISARC V1-BK, combines an **EN 50365** Class 2 safety helmet with an integrated APC1 arc-rated face shield, offering certified protection against Arc Flash effects up to 4 kA at 30 cm, in accordance with IEC 62819. For higher energy levels or longer interventions, the V2-12-LPP-BK and V2-25-LPP-BK kits offer APC2 protection and a grey Arc Flash face shield with ATPV ratings of 12 or 25 cal/cm².

All models are made of high-performance thermoplastic shells, compatible with a wide range of face shields, earmuffs, and accessories. Various configurations are available with 4-point chinstraps, adjustable harnesses, or dielectric features for specific uses (linemen, confined space, overhead work). Custom colours and ID printing are available on request (please refer to the order instructions below the reference table of each product.)



STANDARDS

Standard	Description	Applies to
EN 397	Industrial safety helmets: shock absorption, penetration resistance, and optional chinstrap release	All models listed
EN 50365	Live Working - Electrically insulating helmets for use on low (and medium) voltage installations	VISARC Range, TC4812-25, TC45N, TC47N, TC48N, C45--CR
GS-ET-29 (APC1)	Face shields rated for Arc Protection Class 1 (4 kA at 30 cm, 0.5s)	VISARC V1-BK
GS-ET-29 (APC2)	Face shields rated for Arc Protection Class 2 (7 kA at 30 cm, 0.5s)	TC4812 - TC4825 V2-12-LPP-BK or V2-25-LPP-BK
IEC 62819	Combined helmet and face shield systems designed for Arc Flash protection (APC1 or APC2 and ATPV)	VISARC RANGE
EN 166 / EN 170	Optical clarity, UV protection, mechanical strength for face shields and eye protection	VISARC RANGE, All face shield and eye protection



CHOOSING THE RIGHT HELMET FOR THE JOB

— more than just meeting a standard

Not all helmets are created equal — and not all risks are visible at first glance. High temperatures, long-duration tasks, confined spaces, working at height or in arc-prone zones... the environments you face on a daily basis demand more than a one-size-fits-all approach. Here's how to choose smart:

- For mechanical risks or construction sites without electrical exposure, opt for a helmet certified EN 397. It protects against falling objects and basic shocks.
- If you're working near or on energized installations, go for a helmet certified EN 50365 (Class 0 or 2). These helmets are insulated and tested to withstand up to 30,000 V AC (for class 2) with no ventilation holes and strict dielectric performance.
- If Arc Flash is a potential hazard, choose a helmet designed to support a GS-ET-29 / (APC 1 / APC 2) certified face shield. This combination ensures protection against the intense thermal energy and pressure wave of an electric arc, especially in substations, LV and HV environments

→ A good helmet is one you don't think about once it's on — but only if you've chosen it for the right reasons. Don't rely on a checklist. Take into account your environment, your exposure level, your working time, and how your helmet will integrate with other PPE (glasses, lamp, earmuffs...). The closer your equipment is to your job's reality, the more likely it will protect you when it matters most.



REFERENCES FOR HELMET ACCESSORIES

Visual	Reference	Page	Description	TC45N	TC47N	TC4812 TC4825	TC48N	C45-CR
	C279	p. 15	Disposal hairnet for helmet (100 units pack)	✓	✓	✓	✓	✓
	CAB33	p. 18	Ear protection system for helmets SNR 33 dB	✓	✓			
	CASADH		Mounting plate for headlamp on protective helmet	✓	✓	✓	✓	✓
	CASADH-JB		Lockout supervisor identification for electrician helmets	✓	✓	✓	✓	✓
	CASADH-RB		Work supervisor identification for electrician helmets	✓	✓	✓	✓	✓
	E22E	p. 16	Face shield with helmet holder	✓				
	HOUTC42R	p. 16	Soft bag for helmet	✓	✓		✓	✓
	HOUTC25	p. 16	Anti-UV protective cover for helmet with flip-up face shield	✓	✓	✓		
	PBADH		Adhesive badge holder for helmet	✓	✓	✓	✓	✓
	S951SAFE	p. 478	1 LED headlamp 50 lm	✓	✓	✓	✓	✓
	S952SAFE	p. 478	2 LEDs headlamp 150 lm	✓	✓	✓	✓	✓
	S953SAFE	p. 478	2 LEDs rechargeable headlamp 212 lm	✓	✓	✓	✓	✓
	S954SAFE	p. 478	2 LEDs headlamp 250 lm	✓	✓	✓	✓	✓
	S955SAFE	p. 478	2 LEDs rechargeable headlamp 1000 lm	✓	✓	✓	✓	✓
	S956SAFE		ATEX headlamp 90 lm	✓	✓	✓	✓	✓
	TC42AB	p. 18	Ear protection system for helmets SNR 26 dB	✓	✓	✓	✓	✓
	TC42ESCI		Multi-position flame retardant balaclava	✓	✓	✓	✓	✓
	TCID		Adhesive helmet labels with wearer identification	✓	✓	✓	✓	✓

For all other accessories, please contact us.



PERSONAL PROTECTIVE EQUIPMENT
HEAD PROTECTION
SAFETY HELMETS

VISARC

HELMET FOR ELECTRICIANS WITH INTEGRATED ARC FLASH FACE SHIELD



V1-BK-...

APC 1 protection | 4kA/0,5s

Colorless face shield



V2-12-LPP-BK-...

APC 2 protection | 7kA/0,5s

ATPV 12 cal/cm²

Light grey tint face shield



V2-25-LPP-BK-...

APC 2 protection | 7kA/0,5s

ATPV 25 cal/cm²

Light grey tint face shield



VIDEO |

Discover VISARC's introduction video on our YouTube page or by scanning the QR code opposite



BROCHURE |

Find out more about VISARC through its technical sheets and its brochure or by scanning the QR code opposite



USER MANUAL |

Don't forget to take a look at VISARC's user manual by scanning the QR code opposite



/ STANDARDS

Helmet
EN 397, EN 50365 (Class 2, use up to 17kV AC, tested up to 30kV AC)

Face shield
GS-ET-29, ASTM F 2178, EN ISO 16321 (EN 166, EN 170)

Arc-flash protection (helmet and face shield)
IEC 62819, tested by two methods:
• Box test
• Open arc

CE 0161

made in France



* Our helmets are systematically delivered with a black full crest, clipped onto the helmet. If you wish to add a full crest in a different colour, simply add one of the following codes to the helmet reference

W = White
R = Red
Y = Yellow
G = Green
O = Orange
B = Blue

The coloured crest will then be added to the box.

Innovative helmet specially developed for electricians networks with optional electronic modules to be integrated: qualified by a notified laboratory to all Arc Flash standards.

/ MULTI-BEAM HEADLAMP

Dual beam: long-range spotlight and wide beam, with 3 intensity levels

Light output: from 20 lumens up to 140 lumens

Lighting range: up to 20/30 m for the long-range beam

Lamp runtime: up to 50h (active detection mode)



Headlamp
Dual beam
Ref: VEA-1--



Headlamp
Dual beam
with auxiliary battery
Ref: VEA-2-BK--



Headlamp
Dual beam
with auxiliary battery
with voltage detection alarm
Ref: VEA-3-L*-BR--

Electronic modules are always supplied with a black central crest. To add a coloured central crest, add the codes above after the module reference (eg: VEA-1-BK-W) for a black and white central crest with module.



YOUR CUSTOMIZED PROTECTION WITH OUR CONFIGURATOR

01 I CHOOSE MY ARC-FLASH PROTECTION

Depending on the energy incident level from the risk analysis, I choose from the 3 models:

- APC1 (4kA/0,5s) = V1-BK or V1-LPP-BK--
- APC2 (7kA/0,5s and ATPV 12 cal/cm²) = V2-12-LPP-BK--
- APC2 (25 Cal/cm²) = V2-25-LPP-BK--

03 I CHOOSE MY CREST COLOR

I customise the crest of the helmet with the chosen colour (optional):



05 I CHOOSE MY CUSTOM LOGO

A dedicated space on the helmet lets me display the name of my company.

02 I CHOOSE MY EMBEDDED ELECTRONICS

Based on my needs, I equip my helmet with:

- 1 front headlamp
- 1 front headlamp + 1 auxiliary battery
- 1 front headlamp + 1 auxiliary battery + 1 voltage detection alarm

04 I CHOOSE MY ACCESSORIES

I complete my helmet with accessories adapted to my working environment:

- Neck protector = VA-NECK
- Reflective tapes = VA-REFLECT
- Ear muffs = TC42AB



Our teams have developed a configurator to let you simulate and select all the options and versions of your future VISARC helmet.

To access the configurator, go to the "Multimedia" section on our website:
www.pentaesp.com

/ HELMET SUPPLIED WITH





PERSONAL PROTECTIVE EQUIPMENT

HEAD PROTECTION

SAFETY HELMETS

Dielectric properties up to 30kV (LD). Protection against lateral deformation.



Full face protection against splashes and Arc Flash hazards



Better color recognition and luminosity



TC48¹² TC48²⁵

INDUSTRIAL SAFETY HELMET
WITH GREY ARC FLASH FACE SHIELD

STANDARDS

- **HELMET:** EN 397 (-30°C / +50°C, LD) | EN 50365 (Class 0 — operating voltage: 1000V) | ANSI Z89.1 (Class E — tested up to 30 KV)
- **FACE SHIELD:** EN 166 | EN 170 | ANSI Z87.1 | ASTM F 2178 (ATPV = 12 or 25 Cal/cm²) | GS-ET-29 (APC 2/7kA, during 0,5 sec)

/ KEY FEATURES

- **Dielectric helmet and a light grey face shield** with anti-fog, anti-scratch, chin and side protection.
- **Protects against** intense heat, UV radiation, molten metal splashes and pressure waves.
- **Ideal for tasks near energized equipment**, in substations or in confined HV spaces.

/ TECHNICAL SPECIFICATIONS

- **Ergonomic and durable construction:** ABS shell with universal side slots for accessories; 6-point textile harness and rack-and-pinion adjustment.
- **High-performance face shield:** Flip-up face shield with anti-fog interior / anti-scratch exterior, designed to pair with a dielectric helmet for consistent and reliable Arc Flash protection.

Ref.	ATPV (ASTM F2178)	Helmet lifespan	Face shield lifespan
TC4812	12 cal/cm²	84 months	36 months
TC4825	25 cal/cm²		

Dielectric properties up to 30kV (LD). Protection against lateral deformation.



Universal slots

4-point chinstrap included



TC45

INDUSTRIAL SAFETY HELMET WITH 4 POINT CHINSTRAP

STANDARDS

EN 397 (-30°C / +50°C / LD) | EN 50365 (class 0 - operating voltage: 1kV) | ANSI Z89.1 (Class E - test voltage: up to 30000V) AS/NZS 1801

/ KEY FEATURES

- **Industrial safety helmet** designed for mechanical and electrical protection.
- **Protects against the accidental contact** with electrical conductors and mechanical impacts.
- **Ideal for electricians**, substations, industrial environments.

/ TECHNICAL SPECIFICATIONS

- **Ergonomic and durable construction:** ABS shell with universal side slots for accessories; 6-point textile harness and rack-and-pinion adjustment.
- **Electrical safety:** helmet without ventilation to ensure electrical insulation.

Ref.	Weight	Lifespan from manufacturing
TC45-CN	400 g	84 months

NEED VISIBILITY IN LOW-LIGHT ENVIRONMENTS?

COMPLETE YOUR SAFETY SETUP !

For optimal visibility in low-light or confined environments, equip your helmet with one of our LED headlamps (Refs. S951SAFE to S956SAFE). Designed for electrical work, these compact, hands-free lighting solutions ensure maximum safety and precision, without compromising comfort or mobility.

> Find all details in the "Signage, lighting and marking the work area" chapter – page 464.



TC47N

SAFETY HELMET FOR WORK AT HEIGHT

STANDARDS

EN 397 (-30°C / +50°C) | EN 50365 (Class 0 — operating voltage: 1000V) | ANSI Z89.1 (Class E — tested up to 30 kV) / AS/NZS 1801



/ KEY FEATURES

- Industrial helmet offering mechanical impact and accidental electrical contact protection.
- Protects against mechanical impacts and accidental contact with electrical conductors.
- Ideal for linemen, work at height, gallery work, etc.

/ TECHNICAL SPECIFICATIONS

- Ergonomic and robust design:** Non-vented ABS shell with universal slots for accessories, equipped with a 4-point chinstrap and rack-and-pinion adjustment.
- Comfort:** absorbent antiperspirant headband made acrylic.

Ref.	Head size	Weight	Lifespan from manufacturing
TC47-N	52 to 63 cm	420 g	84 months

TC48N

INDUSTRIAL SAFETY HELMET

STANDARDS

EN 397 (-30°C / +50°C / MM) | EN 50365 (Class 0 — operating voltage: 1 kV)



/ KEY FEATURES

- Industrial helmet for mechanical impact and accidental electrical contact protection.
- Protects against mechanical impacts and accidental contact with electrical conductors.
- Ideal for linemen, industrial workers, substation and height operations.

/ TECHNICAL SPECIFICATIONS

- Recommended for network installers, suspended work, emergency situations and confined spaces. Ideal for industry, buildings...**

Ref.	Head size	Weight	Lifespan from manufacturing
TC48N	54 to 61 cm	330 g	120 months

C45--CR

PROTECTIVE HELMET FOR ELECTRICIANS WITH RACK-AND-PINION ADJUSTMENT SYSTEM

STANDARDS

EN 397 (-10°C / +50°C / LD) | EN 50365 (Class 0 — operating voltage: 1000V)



/ TECHNICAL SPECIFICATION

Optional chinstrap: please contact us

> CAPS, FLEECE BEANIE, DISPOSABLE HAIRNET RESTRAINT

Visual	Reference	Description	Key features
	C43	Safety cap	Protection of the head against accidental bumps and scratches. This is not a safety helmet.
	C43-MINIVIS	Safety cap with short visor	Protection of the head against accidental bumps and scratches with a short visor. This is not a safety helmet.
	B107N	Fleece hat	Protection of the head against cold.
	C279	Disposable hairnet restraint for helmet	The hairnet helps maintain the helmet hygiene by reducing perspiration and protecting and protecting it from dirt.



PERSONAL PROTECTIVE EQUIPMENT

HEAD PROTECTION COVERS AND FACE SHIELDS



For marking, please contact us.

HOUTC42R

PROTECTIVE COVER FOR HELMET

/ KEY FEATURES

To protect and transport a helmet with or without face shield. Closure and with drawstrings.
Dimensions: 450x360 mm (standard size)



For marking, please contact us.

HOUTC25

ANTI-UV PROTECTIVE COVER FOR HELMET WITH FLIP-UP FACE SHIELD

/ KEY FEATURES

Black PVC coated polyamide cover, closure and carrying by cords.
• Dimensions: 350x260 mm



E30-APC1

ARC FLASH GREY FACE SHIELD ATPV 12 OR 25 CAL/CM²

STANDARDS

EN 166 | EN 170 | GS-ET-29 (APC1 — 4kA/0,5s) | ANSI Z87.1

/ KEY FEATURES

- Protection against thermal effect from electrical arc, for face.
- This PPE (Personal Protective Equipment) is part of the protection, suitable for arc-flash hazard, in addition with helmet, clothing and gloves.

FIELDS OF APPLICATION

- 3 Liquids (droplets or splashes)
- 8 Short-circuit electric arc
- 9 Liquid metal sprays and penetration of hot solids



E24

FACE SHIELD WITH HEADBAND AND BROW-GUARD

STANDARDS

EN 166 | EN 170 | EN 175

/ KEY FEATURES

- Lens marking: 2C-1.2 U 1 AT
- Frame marking: U EN 166 3 8 9 AT
- EN175 9 -B CE
- Optical class 1: Clear, allowing users to wear the face shield all day while ensuring maximum optical comfort.
- Set including a polycarbonate face shield and a polypropylene front shell.

FIELDS OF APPLICATION

- 3 Liquids (droplets or splashes)
- 8 Short-circuit electric arc



E22E

FLIP-UP FACE SHIELD FOR ELECTRICIANS, ADAPTABLE TO SAFETY HELMETS

STANDARDS

EN 166 | EN 170 | GS-ET-29 (APC 1 — 4 kA/0,5 s)

/ KEY FEATURES

- Lens marking: 2-1.2 ENH 1 B 8
- Frame marking: EN166 3 8 CE 0340
- Optical class 1: Clear, very good quality to avoid distortion.
- Compatible with most helmets on the market (helmet not included)
- No metal parts
- Set including a polycarbonate face shield and an universal face shield holder.



CHOOSING THE RIGHT SAFETY GLASSES

PPE category II – it's about more than clear vision

Sight is essential for safety, yet the eyes are frequently exposed to risks like dust, UV rays, glare, fog and splashes – especially in hot or humid environments.

Our eyewear range adapts to your needs, offering models that resist scratches and fogging, while remaining lightweight and comfortable for long-term wear.

Made from impact-resistant polycarbonate, lenses ensure reliable protection without compromising visibility in standard or even low-light environments.



Standard	Description	New standard
EN 166:2002	Personal eye protection Eye and face protection for professional use	EN ISO 16321-1:2022: Part 1: General requirements for eye and face protection
EN 170:2003	Personal eye protection Ultraviolet filters	
EN 172:1999	Personal eye protection Sun protection filters for industrial use	
EN 175:1997	Personal eye protection Equipment for eye and face protection during welding and allied processes	

TL19 & TL19S

CLEAR AND SUN-TINTED GLASSES WITH FLAT TEMPLES

STANDARDS

EN 166 | EN 170
TL19S (sun-tinted): EN 172



/ KEY FEATURES

- Lens marking: CLEAR: 2C-1.2 U 1 FT K CE
SOLAR: 2C-3/5-3.1 U 1 FT K CE
- Frame marking: U EN166 FT CE
- Optical class 1 - Clear, for low light levels & Solar, for high light level
- Box of 10 pairs

TL25 & TL25S

ADJUSTABLE, CLEAR AND SUN-TINTED GLASSES

STANDARDS

EN 166 | EN 170
TL25S (sun-tinted): EN 172



/ KEY FEATURES

- Lense marking: CLEAR: 2C-1.2 U 1 FT CE
SOLAR: 2C-3/5-3.1 U 1 FT CE
- Frame marking: U 166 FT CE
- Optical class 1 - Clear, for low light levels & Solar, for high light level
- Box of 10 pairs

TP051R

PROTECTIVE GLASSES FOR MEDIUM VOLTAGE LIVE WORKING — INFRARED SCALE 3

STANDARDS

EN 166 / EN 169 / EN 175



/ KEY FEATURES

- Lens marking: 3 U 1 FT K N CE
- Frame marking: U 175 FT CE
- Optical class 1 - Welding optical filter (3)
- Box of 10 pairs

TS52

ADJUSTABLE, CLEAR SAFETY GOGGLES

STANDARDS

EN 166 | EN 170



/ KEY FEATURES

- Lens marking: 2C-1.2 U 1 FT CE
- Frame marking: U EN166 FT CE
- Optical class 1 - Clear, for low light levels
- Box of 10 pairs

L5600

CLEAR PROTECTIVE GOGGLES

STANDARDS

EN 166 / EN 170



FIELDS OF APPLICATION

- 3 Liquids (droplets or splashes)
- 4 Large dust particles
- 9 Liquid metal sprays and penetration of hot solids

/ KEY FEATURES

- Lens marking: 2C-1.2 U 1 BT 9 K N CE
- Frame marking: U EN166 3 4 9 BT CE
- Optical class 1 - Clear, for low light levels
- Box of 5 pairs

> CASES FOR SAFETY EYEWEAR & ANTI-FOG WIPES

Visual	Reference	Description	Key features
	E62	Case for safety glasses	26 cm x 6 cm x 6 cm Hook-and-loop fastener / Belt loop
	TE4400U TE4400UN	Case for safety glasses with/without marking	16 cm x 6 cm x 6 cm Zip fastener / Belt loops
	TE4500	Case for safety goggles	20 cm x 12 cm x 10 cm Hook-and-loop fastener / Belt loop
	LAB300X5	Reusable anti-fog wipes	From 8 to 12 hours of efficiency for each use. Supplied in packs of 5.



PERSONAL PROTECTIVE EQUIPMENT

HEAR PROTECTION EAR PROTECTION



HEARING MATTERS

— Even when noise comes and goes

Hearing is essential for situational awareness and long-term well-being, yet it is often overlooked — especially in environments where noise is variable or comes in short bursts. Intermittent exposure to loud or unpredictable sound sources, such as switching operations, maintenance zones or transport areas, may seem less harmful, but can cause just as much damage as continuous noise — especially without adequate protection.

PENTA Electrical Safety Products's hearing protection range is chosen to respond to real work conditions with irregular and mixed environments, with earmuffs, plugs and helmet-integrated solutions. All our solutions comply with EN 352 standards, ensuring verified performance and peace of mind in both European and international contexts. Hearing protections are category III PPEs in regard of the European Regulation 2016/425.



NOISE REDUCTION DB

• SNR: 27 dB



C4200

METAL FREE EARMUFFS SNR 27 DB

STANDARDS

• EN 352-1

/ KEY FEATURES

For continuous use against high noise levels. Made from durable, non-conductive materials compatible with use in the electrical industry.

Ref.	Cup	Cushions	Support type	Weight
C4200	ABS	PU foam	Over-the-head	285 g

NOISE REDUCTION DB

• High: 36 dB
• Medium: 30 dB
• Low: 23 dB
• NNR: 33 dB



CAB33

EAR PROTECTION SYSTEM FOR HELMET 33 DB

STANDARDS

• EN 352-3

/ KEY FEATURES

Protection against noise in places where a safety helmet is required. Adaptable to our helmets with universal notches.

Ref.	Cup	Cushions	Support type	Weight
CAB33	ABS	PU foam	Helmet mounted earmuffs	342g

NOISE REDUCTION DB

• High: 38 dB
• Medium: 34 dB
• Low: 27 dB
• NNR: 30 dB
• SNR: 36 dB



C4500N

EARMUFFS SNR 36 DB

STANDARDS

• EN 352-1 / ANSI S3.19

/ KEY FEATURES

Protects against harmful noise and offers maximum comfort over long periods of use.

Ref.	Cup	Cushions	Support type	Weight
C4500N	ABS	PU foam	Over-the-head	325 g

NOISE REDUCTION DB

• High: 33 dB
• Medium: 32 dB
• Low: 31 dB
• NNR: 26 dB
• SNR: 34 dB



AB126N

REUSABLE EARPLUGS SNR 34 DB

STANDARDS

• EN 352-2 / ANSI S3.19

/ KEY FEATURES

Protects against harmful noise and offers maximum comfort over long periods of use.

Ref.	Earplug material	Quantity per pack (pair)	Weight
AB126N	TPR	50	11 g per unit

NOISE REDUCTION DB

• High: 31 dB
• Medium: 23 dB
• Low: 18 dB
• SNR: 26 dB



TC42AB

METAL FREE EARMUFFS FOR HELMET SNR 26 DB

STANDARDS

• EN 352-3

/ KEY FEATURES

Protection against noise in places where a safety helmet is required. Entirely non-metallic and adaptable to helmets with universal notches.

Ref.	Cup	Cushions	Support type	Weight
TC42AB	ABS	PVC	Helmet mounted earmuffs	260 g

NOISE REDUCTION DB

• High: 34 dB
• Medium: 34 dB
• Low: 31 dB
• SNR: 36 dB



AB127N

DISPOSABLE EARPLUGS SNR 36 DB

STANDARDS

• EN 352-2

/ KEY FEATURES

Protects against harmful noise and offers maximum comfort over long periods of use.

Ref.	Earplug material	Quantity per pack (pair)	Weight
AB127N	PU foam	200	2 g per unit



• RESPIRATORY PROTECTION



MRP355 MRP352 MRP353

SINGLE USE PROOF MASK
FFP2 & FFP3

STANDARDS

- EN 149: 2001 + A1: 2009 / EN 14683: 2006
- MRP355, FFP2 - Minimum filtration level 94%
- MRP352: FFP3 - Minimum filtration level 99%
- MRP353: FFP3 - Minimum filtration level 99%

/ KEY FEATURES

- Protects against fine particles: dust from concrete, cement, plaster (demolition, structural works, sanding), fine paint and resin particles, plastics (sandblasting, sanding), etc.
- Ideal for intensive use, for prolonged activities.

/ TECHNICAL SPECIFICATIONS

- **Comfortable and hygienic design:** Single-use polypropylene mask with two elastic holding straps, individually packaged to ensure cleanliness and easy use. Valve-less technology provides optimal breathing comfort for the wearer.
- **Safe and skin-friendly protection:** Hypoallergenic, latex-free and PVC-free composition, offering effective filtration against viruses and pollution without irritating the skin.



DM171N

HALF MASK KIT AGAINST GASES, VAPOURS
AND PARTICLES

STANDARDS

- EN 140:1998 / EN 14387:2004+A1:2008 (ABEK)

/ KEY FEATURES

- Compact and reliable half-mask for demanding environments.
- Protects against organic vapours (solvents with boiling point above 65°C), inorganic gases and vapours, sulfur dioxide, acid gases and vapours, ammonia and its organic derivatives.

/ TECHNICAL SPECIFICATIONS

- **Robust and ergonomic construction:** Half-mask made of soft natural rubber, fitted with an exhalation valve and two filter connectors for optimal sealing and breathing comfort.
- **Designed for safety in sensitive environments:** built to withstand the presence of gases, vapours, and particles.

> SPARE PARTS FOR DM171N MASK

Visual	Reference	Description	Key features
	DM171N-ABEK	Box of 10 filter cartridges for half mask	• Filter against gases and vapors from chemical compounds. • Cylindrical body with a lid, made of ABS.
	DM171N-FFP2	Set of 10 P2 pre-filters for half mask	• Filter against both solid and liquid particles • Several layers of non-woven fabric specially designed to provide maximum filtration efficiency



INSULATING GLOVES RANGE

Our range of insulating gloves for live working is manufactured in France at an ISO 9001:2008 certified site.

Full control over the entire industrial process ensures a very high level of quality.

made in France



100% French production



GOOD TO KNOW

/ HOW TO CHOOSE THE RIGHT GLOVES?

You should be able to identify the required level of protection based on a thorough risk assessment. Our gloves provide:

Electrical insulation (insulating gloves — it is recommended to wear leather over-gloves for mechanical protection),

Electrical and mechanical protection (2-in-1 composite gloves with integrated mechanical protection),

Electrical, mechanical and Arc-Flash protection (3-in-1 gloves).

Special properties may be required for additional protection during electrical work:

A (acid),

H (oil),

Z (ozone),

R (combined A+H+Z),

C (very low temperatures).

Most of our gloves are classified as RC.

Choosing the correct size is essential for optimal dexterity. A wide range of sizes is available (from 6 to 12 depending on the class), suitable for both women and men with larger hands. Standard glove lengths are 28 cm, 36 cm, and 41 cm.

/ RECOMMENDATION BEFORE USE

Perform a thorough visual inspection of each glove.

Use a manual air pressure test device to inflate the glove and detect any potential defects. If you believe one of the gloves in the pair is defective, neither glove should be used — the entire pair must be returned for electrical testing or discarded.



/ MEASURE YOUR GLOVE SIZE

Wrap a tailor's tape measure around your hand, excluding the thumb (see photo).

Close your hand gently without squeezing tightly, then take the measurement.

Refer to the conversion chart below to find your size.

Recommended size	6	7	8	9	10	11	12
Hand circumference (cm)	14	16	18	21	24	26	28



Unlike other industrial processes, our gloves are manufactured using a water-based process, without the use of solvents.

This environmentally conscious approach, combined with the use of natural materials (latex), ensures greater environmental respect.

Integrated directly into our production lines, our Quality Assurance laboratory enables us to perform all tests in accordance with current and upcoming EN 60903 and IEC 60903 standards.

A rigorous approach, including both visual and dielectric inspection of 100% of our production, guarantees full compliance and safety for users.

/ General information


According to the applicable EN 60903 standard.

Class	Maximum operating voltage	
	AC	DC
00	500 V	750 V
0	1 000 V	1 500 V
1	7 500 V	11 250 V
2	17 000 V	25 500 V
3	26 500 V	39 750 V
4	36 000 V	54 000 V

/ Meaning of the standard markings on each glove
Special properties

Category	Resistant to
A	Acid
H	Oil
Z	Ozone
R	Acid, oil, ozone
	Mechanical protection
C	Very low temperature

		Class of the latex gloves (GLE)					
		00	0	1	2	3	4
Size (rubber glove)	6	A	A	N/A	N/A	N/A	N/A
	7	A	A	B	B	N/A	N/A
	8	B	B	C	C	E	E
	9	B	B	C	C	E	E
	10	C	C	D	E	F	F
	11	D	D	E	F	G	G
	12	E	E	F	G	G	G



No	DESCRIPTION
1	mechanical resistance of the glove
2	inspection body no./CE marking
3	date of the periodic inspection
4	trademark logo
5	range
6	reference

No	DESCRIPTION
7	size
8	class/category
9	date of manufacture
10	validation batch
11	max. operating voltage



PERSONAL PROTECTIVE EQUIPMENT
HAND PROTECTION
INSULATING GLOVES

TOUCH-E

NATURAL RUBBER INSULATING GLOVES



GRIP
better grip on tools
and small parts



CHLORINATION
easy donning



ORANGE
the color
of electrical
risk



SHAPE
respects the anatomy of the
hand at rest, limiting fatigue
and ensuring excellent dexterity



1000 V AC / 1500 V DC
protection for high
voltage of vehicles



THICKNESS
30% thinner
than traditional gloves




Leaflet

3IN1 3 LEVELS OF PROTECTION



EN 60 903 CLASS 0
Electrical hazard



EN388 1121X
Mechanical hazard



IEC 61 482-1-2
Arc flash hazard
IEC 61 482-1-2
Classe 1 — 4kA

/ KEY FEATURES

- Extremely thin insulating gloves offering greater dexterity than traditional models.
- The non-slip finish ensures excellent grip for handling even the smallest components.

/ TECHNICAL SPECIFICATIONS

Touch-E gloves are made of natural rubber with excellent dielectric properties. The chlorinated finish makes them easy to put on.

Reference	Class	Max. operating voltage	Lenght	Size	CEI61482-1-1	CEI61482-1-2
JFO36-0/07	0	1 000 V AC / 1 500 V DC	36 cm	7	12 cal/cm ²	APC1
JFO36-0/08				8		
JFO36-0/09				9		
JFO36-0/10				10		
JFO36-0/10				11		



High dielectric properties

Excellent dexterity

Easy donning and doffing

Complete the reference with the desired size. RC available on request.

GLE ELECTROVOLT

NATURAL RUBBER INSULATING GLOVES

STANDARDS

• EN 60903 | CEI 60903

/ KEY FEATURES

Thin natural rubber insulating gloves for electrical protection up to 36 kV (class 00 to class 4).

Protects against electrical shock while ensuring excellent grip and dexterity.

Ideal for precise handling, even in damp environments.

Reference	Class	Max. operating voltage	Length	Size	Category
GLE36 00	00	500 V AC	36 cm	6 to 12	AZC*
GLE36 0	0	1 000 V AC		7 to 12	
GLE36 1	1	7 500V AC		8 to 12	RC
GLE36 2	2	17 000 V AC			
GLE36 3	3	26 500 V AC			
GLE36 4	4	36 000 V AC	41 cm		



Special formula outer coating provides an exceptional grip even in wet conditions

3 protections in 1 glove: dielectric, mechanical and thermal protection

AFG FLASH&GRIP

COMPOSITE INSULATING GLOVES WITH ARC FLASH PROTECTION

STANDARDS

• EN 60903 | CEI 60903 Test report regarding IEC 61482-1-2 (Class 2 / 7KA — 0,5 sec) Test report regarding ASTM F2675 (ATPV = 71,6 cal/cm²)

/ KEY FEATURES

Composite gloves with integrated mechanical and arc-flash protection.

Protects against shocks, arcs, and abrasion without over-gloves.

Ideal for energized work in demanding environments.

Reference	Class	Max. operating voltage	Size	CEI 61482-1-2	ARC 4 > 40 (cal/cm2) ASTM F2675
AFG36-00*	00	500 V AC	6 - 12	Class 2 (0.5s - 7kA)	26,3 cal/cm²
AFG36-0*	0	1 000 V AC			71,6 cal/cm²
AFG36-1*	1	7 500 V AC	7 - 12		42,2 cal/cm²
AFG36-2*	2	17 000 V AC			74,5 cal/cm²
AFG36-3*	3	26 500 V AC	8 - 12		73,2 cal/cm²
AFG41-4*	4	36 000 V AC			87,7 cal/cm²



Exceptional grip, even in wet or greasy conditions.

Reinforced mechanical protection.

GICN FLEX&GRIP

COMPOSITE INSULATING GLOVES

STANDARDS

• EN 60903 | CEI 60903

/ KEY FEATURES

Composite insulating gloves integrating mechanical protection—no need for leather over-gloves.

Protects against electric shock (up to 36 kV) and mechanical risks.

Ideal for energized tasks in humid, oily or high-friction environments.

Reference	Class	Max. operating voltage	Length	Size	Category
GICN36 00	00	500 V AC	36 cm	7 to 12	RC
GICN-BT/*	0	1 000 V AC	41 cm		
GICN-1/*	1	7 500V AC			
GICN-2/*	2	17 000 V AC			
GICN-3/*	3	26 500 V AC			
GICN-4/*	4	36 000 V AC		8 to 12	

Complete the reference with the desired size.
* RC available on request.



INSPECTION FREQUENCY & CONTROL

Inflation testing is mandatory before and after each use, along with a visual inspection, for all classes of gloves.

- Rubber insulating gloves have no expiration date and may be used as long as they pass periodic inspections.
- From the date of manufacture, no glove should be put into service unless it has passed an electrical test within the past 12 months, and must not be used unless it has undergone an electrical test within the last 6 months after being placed into service, for Classes 1 / 2 / 3 / 4.

See the illustration below.

(Testing can be performed either in-factory or on-site.)



/ WAREHOUSE STOCK MANAGEMENT

FACTORY DISPATCH



WAREHOUSE STORAGE

- Less than 12 months
 - No periodic inspection required
- More than 12 months
 - Perform a periodic inspection



COMMISSIONING*



/ PERIODIC INSPECTION RULE after first use

COMMISSIONING*



Date



PERIODIC INSPECTION**



Approved
The glove pair may be used for up to 6 months before the next inspection.



Rejected
The glove pair must not be used and must be discarded.

+ 6 mois

* Entry of the commissioning date or periodic inspection date using an ink stamp or ballpoint pen.

** According to Annex A of IEC 60903:2014. Periodic inspections and electrical testing must be performed only by duly trained and qualified personnel.

National requirements regarding the inspection and periodic testing of Class 00 and Class 0 gloves may be considered sufficient.

► INFLATION TEST + VISUAL INSPECTION


Reminder: Insulating gloves must be stored in their original UV-protective packaging throughout their entire service life.



HOW TO USE THE EOS?


QUICK AND EASY ATTACHMENT

Simply wrap the elastic cord and secure it using the cord lock.

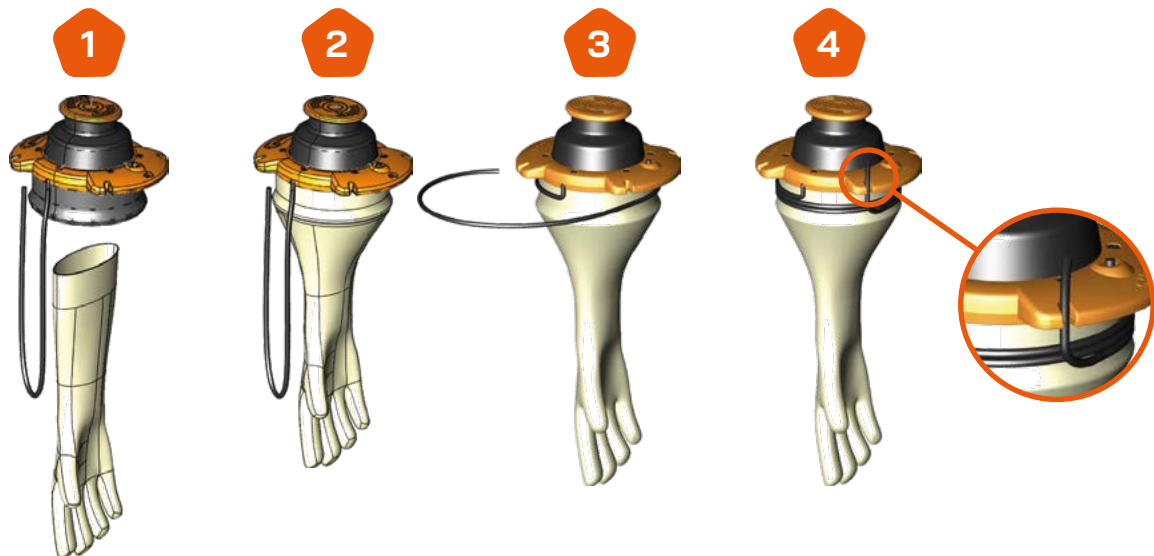


PRESSURIZATION

- Apply successive presses on the top plunger.
- Inflation is made easier by two side grips ensuring proper hold.

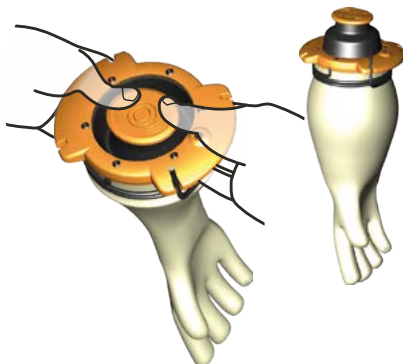

DEPRESSURIZATION

Use the dedicated button for controlled deflation.

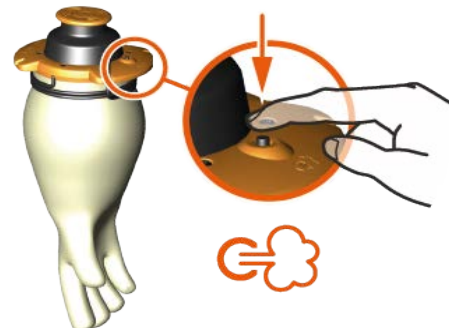

WHY TEST YOUR GLOVES?

Before each use, every insulating glove must be visually inspected and checked with an air pressure test, in accordance with EN 60903 and IEC 60903 recommendations.*.



A meticulous visual inspection of the entire glove surface helps detect possible defects such as:

- Puncture
- Cut
- Major stain
- Burn
- Material degradation

Particular attention should be paid to the palm, fingers, and between the fingers. This check must be performed before each use:

- If a defect is detected, do not use the glove.
- If in doubt, do not use the glove and return it for electrical retesting.

*for Class 00 and Class 0 gloves, air leak testing combined with visual inspection may be considered sufficient for periodic inspection (EN 60903).



PERSONAL PROTECTIVE EQUIPMENT

HAND PROTECTION

INSULATING GLOVES & OVERGLOVES



- Several diameters available.
- Ultra simple fixing : by simply winding the elastic cord and blocking it with a slot.
- Magnet option : for fixing on metal surface.
- Space-saving storage position.

EOS

PNEUMATIC TESTER FOR INSULATING GLOVES

/ USE

Recommended for field inspection before/after each use, but also for periodic visual inspection. It allows to check the entire surface of a glove, including the sleeve (according to the recommendations of EN 60903* and IEC 60903). The visual and meticulous inspection of the entire surface of the glove then makes it possible to detect any perforations or other defects (holes, cuts, important stains, burns, material alterations).

* for Class 00 and 0 gloves, air leakage verification and visual inspection may also be considered suitable for periodic inspection (EN 60903)

/ TECHNICAL SPECIFICATIONS

- Anti-UV treated ABS material body
- Bellows in NBR
- Depressurization button: For a controlled deflation
- Removable ring $\varnothing$ 150mm in EPDM
- Delivered with fabric bag in cardboard box 210 x 160 x 160 mm.

Reference	Version	With magnet	Poids (g)
EOSE9030	Diameter 100mm for Touch-E gloves	No	290
EOSEM9030	Diameter 100 for Touch-E gloves	Yes	290
EOS9030	Diameter 130mm (EN/CEI 60903 gloves)	No	345
EOSM9030	Diameter 130mm (EN/CEI 60903 gloves)	Yes	345

Legislation : Neodymium magnets are not intended for distribution/export to the USA, Canada or Japan. It is therefore strictly forbidden to export, directly or indirectly, the "with magnet" versions of this tester to the countries mentioned above. "with magnet" versions subject to IATA regulations.



TV10

PNEUMATIC TESTER FOR INSULATING GLOVES

/ USE

The purpose of the tester is to ensure that the glove is absolutely air-tight.

/ TECHNICAL SPECIFICATIONS

- Truncated end with two grooves for holding the glove under test
- A central piston at the bottom of the tester
- A flexible valve at the bottom of the bowl on the upper part
- Two rubber rings to hold the glove during inflation.

SINGLE GLOVES STICK TESTER

/ USE

Durable PENTA Glove Stick Tester designed for fast, reliable daily air inspections of rubber insulating gloves, supporting compliance and improving electrical safety for field and industrial workers.

/ TECHNICAL SPECIFICATIONS

- Colour: Blue / Orange — coming soon
- Material: Plastic
- Hand Orientation: Ambidextrous
- Product Length: 30 cm
- Made in Australia

VIDEO |

Discover Gloves stick tester introduction video on our YouTube page or by scanning the QR code opposite





GLFR

INSULATING NATURAL RUBBER GLOVES

STANDARDS

- IEC 60903:2014 / EN 60903:2003 / 13E001 as per EN61482-1-2 equivalent to IEC61482-1-2:2014 / ASTM F2675:2021

/ KEY FEATURES

- ☑ Insulating rubber gloves for live working up to 1 000 V AC.
- ☑ Protects against electric shock and arc flash (APC 2, ATPV 4.8 cal/cm²).
- ☑ Ideal for tasks requiring full protection without under- or overglove



GICN80

LONG COMPOSITE INSULATING GLOVES

STANDARDS

- EN 60903 / IEC 60903

/ KEY FEATURES

- ☑ Composite insulating gloves for live working up to 1 000 V AC (Class 0), ergonomic and chlorine-treated for easy donning.
- ☑ Protects against electric shock, arc flash, mechanical and chemical hazards (RC category, EN 60903 / IEC 60903 certified).
- ☑ Ideal for medium-voltage maintenance tasks, offering built-in mechanical protection without leather overgloves.



RGX-SG

OVERGLOVES FOR INSULATING GLOVES TOUCH-E

STANDARDS

- EN 388: 2122X

/ KEY FEATURES

- ☑ Full leather protectors to wear over Electrovolt insulating gloves for enhanced durability and comfort.
- ☑ Protects against mechanical hazards with grain cowhide leather and reinforced cuff.
- ☑ Ideal for live work requiring dexterity and reliable overglove protection.



DETAILS

- Abrasion: 1
- Tear: 4
- Cut ISO: F
- Dexterity: 5
- Arc Flash APC:1
- HRC:1

RGX-SGT

OVERGLOVES FOR INSULATING GLOVES TOUCH-E

STANDARDS

- EN388+A1:2018 /EN407:2004 / EN ISO21420 / IEC61482-1-2

/ KEY FEATURES

- ☑ Protective overglove designed to fit Touch-e insulating gloves, ensuring grip and dexterity.
- ☑ Protects against cuts (level F), heat, and arc flash (APC 1, ATPV 5.8 cal/cm²), with leather reinforcements.



RGX-MC

COTTON FINGERLESS INNER GLOVES

STANDARDS

- EN 388: 2122X

/ KEY FEATURES

- ☑ Cotton undergloves to use beneath insulating rubber gloves.
- ☑ Improves comfort by absorbing sweat and reducing skin irritation.
- ☑ Ideal for daily wear under electrical gloves.



DID YOU KNOW

Hand injuries often start with fatigue.

Prolonged grip, repetitive tasks, sweat accumulation or glove stiffness can lead to muscle fatigue and micro-stress in the hands and forearms. Over time, this reduces precision, increases reaction time and can contribute to serious accidents — especially during live electrical work or when handling tools in constrained environments.

At PENTA Electrical Safety Products, we design hand protection with ergonomics, breathability and tactility in mind.

From undergloves to insulating gloves, our solutions reduce effort and maintain dexterity over time, even in high-risk or precision applications.

Because protecting your hands also means preserving your control, grip and responsiveness.

G86SP

FLAME RESISTANT INNER GLOVES

STANDARDS

- EN 420 / EN 407 / EN 388

/ KEY FEATURES

- ☑ Nomex® inner gloves, heat resistant up to 250 °C.
- ☑ Protects against heat and mechanical risks.
- ☑ Ideal for dry, hot work with sharp components.





PERSONAL PROTECTIVE EQUIPMENT

HAND PROTECTION

STORAGE BAGS



RGX-BG RGX-BGT

INSULATING
STORAGE BOX
FOR ELECTRICIAN
GLOVES

/ KEY FEATURES

- Shock-resistant plastic box for storing electrician gloves and accessories.
- Holds one pair of gloves, overgloves and a powder flask.
- Wall-mountable or portable.




RGX-SGL

CANVAS
STORAGE BAG
FOR ELECTRICIAN'S
GLOVES

/ KEY FEATURES

- Durable canvas storage bag designed for long insulating gloves.
- Protects gloves from UV, dust and deformation during transport or storage, helping preserve their dielectric integrity.



RGX-SAC

CANVAS
STORAGE BAG
FOR ELECTRICIAN'S
GLOVES

/ KEY FEATURES

- Reinforced waterproof canvas bag for transporting electrician's gloves.
- Snap closure with internal gusset for talcum flask (flask not included).
- Fits in vehicles, toolboxes or bags.

> MISCELLANEOUS (TALC, CLEANER, ETC.)

Visual	Reference	Description	Key features
	TS10T	Talcum bottle	• 100 ml Luzenac talc for use with insulating gloves. • Improves comfort and ease donning/doffing.
	RGX-1704/200	Rubber cleaner	• 200 ml spray cleaner for rubber gloves and surfaces. • Removes dirt and dust, dries quickly.




EXTEND THE LIFESPAN OF YOUR GLOVES

STORAGE IS PROTECTION, TOO

Proper storage between uses preserves shape, surface condition and dielectric strength. Whether in a vehicle, substation or workshop, dedicated bags and cases help prevent wear, contamination and accidental damage.

> See all solutions in the "Transport & storage solutions" chapter – page 336.

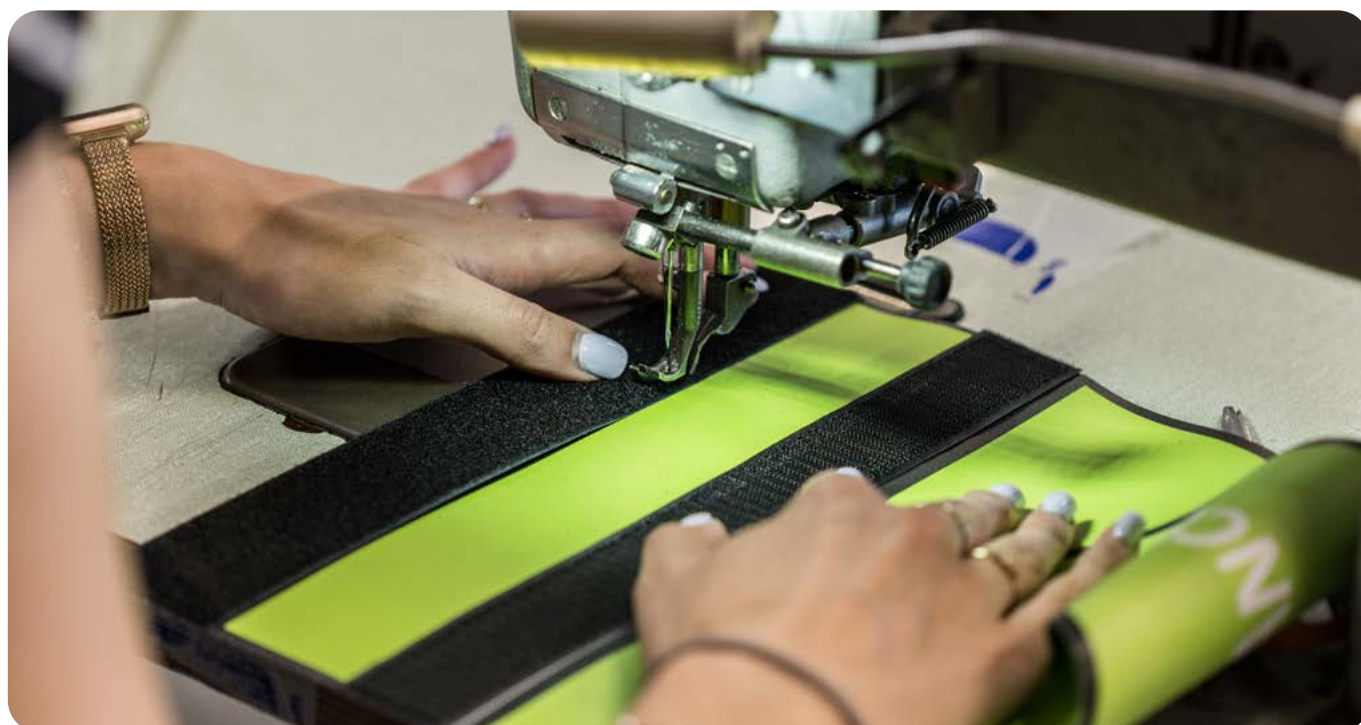




MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting: X/5 (EN 388)
- Tearing: 4/4
- Perforation: 3/4
- Cutting (EN ISO 13997): F/F

HEAT PROTECTION

- Behavior in fire: X/4
- Contact heat: 1/4
- Convective heat: X/4
- Radiant heat: X/4
- Small liquid metal splashes: X/4
- Large liquid metal splashes: X/4

 05 TO 13

GLV-CUTF

CUT-RESISTANT TOUCHSCREEN GLOVE

STANDARDS

- EN 21420 / EN 388 / EN 407

/ KEY FEATURES

 Robust yet flexible glove designed for high-precision handling of dry or greasy sharp-edged parts.

 Protects against cuts (level F), abrasion, tearing, and minor thermal contact (suitable for contact with objects up to 100°C).

 Ideal for precise industrial and mechanical work requiring both cut protection and tactile sensitivity.

/ TECHNICAL SPECIFICATIONS

- High-density polyethylene glove, stainless steel fiber, 13 gauge
- Engineered to deliver level F cut resistance without compromising dexterity (level 5), ideal for precision tasks in demanding environments.
- Its nitrile foam coating enhances grip reliability and reduces the risk of handling errors on dry or oily parts.
- Elasticated wrist with nitrile reinforcement in grip.

MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting: (EN397): X/4
- Tear: 4/4
- Perforation: 3/4
- Cutting: (EN ISO 13997): D/F

G115N
CUT RESISTANT GLOVES WITH PU COATED PALM

STANDARDS

- EN 21420 / EN 388

/ KEY FEATURES

- Excellent cut resistance with the technical fibers of the support
- Increased flexibility and resistance with the polyurethane coating
- Back of the hand ventilated thanks to the only palm coating

 07 TO 11

MECHANICAL PROTECTION

- Abrasion: 3/4
- Cutting: (EN397): 1/4
- Tear: 2/4
- Perforation: 1/4
- Cutting: (EN ISO 13447): X/4

G116N
PU COATED HANDLING GLOVES

STANDARDS

- EN 21420 / EN 388

/ KEY FEATURES

- Non-irritating and easy to adjust with the seamless knitted support.
- Reinforced strength with the polyester support.
- Good support of the gloves with the elastic knitted wrist.



MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting (EN 388): X/5
- Tearing: 4/4
- Perforation: 3/4
- Cutting (EN ISO 13997): F/F

HEAT PROTECTION

- Behavior in fire: X/4
- Contact heat: 1/4
- Convective heat: X/4
- Radiant heat: X/4
- Small liquid metal splashes: X/4
- Large liquid metal splashes: X/4

 07 TO 12

GLV-CUTF-HV

HIGH-VISIBILITY CUT-RESISTANT TOUCHSCREEN GLOVES

STANDARDS

- EN 21420 / EN 388 / EN 407

/ KEY FEATURES

 Highly visible cut-resistant glove combining optimal dexterity and grip for secure handling in industrial settings.

 Protects against daily mechanical hazards and handling risks, even on sharp or greasy components

 Ideal for industrial maintenance, mechanical work or logistics where both hand protection and visual signalisation are essential.

/ TECHNICAL SPECIFICATIONS

- Fibre high-performance polyethylene and stainless-steel wire and elastane, this glove offers level F cut protection with superior flexibility (gauge 13) and touch sensitivity.
- Its bright yellow back and orange nitrile-foam coating palm ensure excellent visibility and control in demanding conditions.



 06 TO 12

G86

COTTON WHITE GLOVES

/ TECHNICAL SPECIFICATIONS

- This glove made of 100% fine cotton is ideal for making all kinds of handling in dry conditions and requiring good dexterity.
- Protects the product handled from fingerprints, dirt...
- To be used as inner glove (heat/cold).



PERSONAL PROTECTIVE EQUIPMENT

HAND PROTECTION

HANDLING GLOVES



MECHANICAL PROTECTION

- Abrasion: 2/4
- Cutting: X/5 (EN 388)
- Tearing: 4/4
- Perforation: 4/4
- Cutting (EN ISO 13997): D/F

COLD PROTECTION

- Convective cold: 0/4
- Contact cold: 2/4
- Impermeability: X/4



06 TO 12

GLV-COLD

COLD-WEATHER CUT-RESISTANT GLOVE

STANDARDS

- EN 21420 / EN 388 / EN 511

/ KEY FEATURES

Handling sharp parts in cold weather combining cut protection and comfort.

Protects against cold exposure, handling risks and mechanical hazards

Ideal for outdoor or unheated industrial settings.

/ TECHNICAL SPECIFICATIONS

- High performance polyethylene knitted glove (gauge 13)
- 10-gauge brushed acrylic and lycra interior ensures thermal insulation and all-day comfort in cold conditions.
- Full latex foam coating provides high grip performance and cut resistance (level D), even in damp handling tasks.
- Dexterity: Level 5

Nitrile foam coating for excellent grip in wet and dry conditions



Breathable seamless liner

Wrist strap for secure fitting

Dexterity level 3, 13 gauge liner for durability and precise fitting,

MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting (EN 388): X/5
- Tearing: 4/4
- Perforation: 3/4
- Cutting (EN ISO 13997): C/F
- Impact resistance: P

HEAT PROTECTION

- Behavior in fire: X/4
- Contact heat: 1/4
- Convective heat: X/4
- Radiant heat: x/4
- Small liquid metal splashes: X/4
- Large liquid metal splashes: X/4



07 (S) TO 12 (3XL)

GLV-IMP-NIT

CUT AND IMPACT RESISTANT GLOVES

STANDARDS

- EN ISO 21420 / EN 388 / EN 407 / ANSI/ISEA 105 (Cut level A4 - Abrasion level 6) / ANSI/ISEA 138 (level 2)

/ KEY FEATURES

Protective work glove featuring cut and impact resistance for heavy-duty handling applications, ensuring enhanced grip and effective protection against impacts, cuts, and abrasion, while remaining comfortable and flexible.

Recommended for use in oil and gas, construction, logistics, transportation, and other demanding industrial environments.

/ TECHNICAL SPECIFICATIONS

- Reinforced thumb crotch for extra protection and durability.
- Double dipped coating for durability.

GLV-IMP-HV

HIGH-VISIBILITY IMPACT-RESISTANT GLOVE

STANDARDS

- EN 21420 / EN 388 / ANSI / ISEA 105 (cutting A1 / Abrasion 6) / ANSI / ISEA 138 (Level 2)

/ KEY FEATURES

Durable glove combining back-of-hand impact protection, high visibility and excellent grip, even in oily environments.

Protects against repetitive handling impacts, mechanical risks, and grip loss in demanding industrial conditions.

Ideal for high-risk handling tasks in logistics, maintenance or heavy industry.

/ TECHNICAL SPECIFICATIONS

- Double-dipped nitrile coating delivers superior abrasion resistance and grip, even on greasy or wet surfaces.
- TPR reinforcements on the back of the hand absorb shocks while the breathable 13-gauge liner ensures comfort and dexterity.



MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting (EN 388): 2/5
- Tearing: 4/4
- Perforation: 1/4
- Cutting (EN ISO 13997): X/F
- Impact resistance: P (test method with EN 13594)



MECHANICAL PROTECTION

- Abrasion: 4/4
- Cutting by slicing: X/5 (to EN 388)
- Tearing: 4/4
- Perforation: 3/4
- Cutting: D/F (to EN ISO 13997)



07(S) TO 12(7XL)

GLV-ETN

DOUBLE-LAYER NITRILE WATERPROOF GLOVE

STANDARDS

- EN 21420 / EN 388 / ANSI/ISEA 105 (Cutting level A6)

/ KEY FEATURES

Gloves specially designed for high resistance to water.

Protects against non aggressive liquids, cuts and abrasion in tough environments.

Ideal for wet, oily or dirty environments (e.g., utilities, industry, waste management).



MECHANICAL PROTECTION

- Abrasion: 3/4
- Cutting (EN 388): 1/5
- Tearing: 2/4
- Perforation: 2/4
- Cutting (EN ISO 13997): X/F

Ref.	Size
TG73 08	8
TG74 09	9
TG75 10	10
TG76 11	11

TG73 TO TG76

WATER-REPELLENT GOAT LEATHER GLOVE

STANDARDS

- EN 21420 / EN 388

/ KEY FEATURES

Water - repellent goat leather gloves, providing good flexibility, dexterity and enhanced abrasion resistance.

Elastic cuff around the wrist, equipped, with artery guard.

Handling work, dry parts requiring dexterity, metallurgie, road construction

/ TECHNICAL SPECIFICATIONS

- To ensure proper tightening and wrist protection.
- Equipped with buttonhole and elastic cuff with artery protection.
- Length from 250 to 280 mm depending on size dexterity: level 5.



MECHANICAL PROTECTION

- Abrasion: 3/4
- Cutting (EN 388): 1/5
- Tearing: 3/4
- Perforation: 1/4
- Cutting: A/F (to EN ISO 13997)

Ref.	Size
TG47 08	8
TG40 09	9
TG45 10	10
TG48 11	11

TG40 TO TG48

LEATHER OVERGLOVE WITH CUFF & SELF-GRIPPING BAND

STANDARDS

- EN 21420 / EN 388

/ KEY FEATURES

Full grain cowhide leather glove, and polyamide thread stitching.

- Dexterity: level 5.

Protection against mechanical hazards, for electrical works. To be worn over insulating gloves.

100mm split cowhide leather cuff limiting accidental exposure or areas near the wrist that can, be critical during electrical handling.



HEAT PROTECTION

- Behavior in fire: 4/4
- Contact heat: 1/4
- Convective heat: 3/4
- Radiant heat: 2/4
- Small liquid metal splashes: 4/4
- Large liquid metal splashes: X/4

MECHANICAL PROTECTION

- Abrasion: 3/4
- Cutting (EN 388): 1/5
- Tearing: 4/4
- Perforation: 3/4
- Cutting (EN ISO 13997): A/F

TG05

LEATHER WELDING GLOVES - SIZE 10

STANDARDS

- EN 21420 / EN 407 / EN 388 / EN 12477 (type B)

/ KEY FEATURES

High-resistance welding gloves combining thermal protection and dexterity.

Protects against sparks, radiant heat, molten metal splashes, and mechanical risks.

Ideal for welding operations, arc-related applications, and handling hot or rough materials.

/ TECHNICAL SPECIFICATIONS

- Glove with palm in natural grain cowhide leather
- Natural crust leather back
- 150 mm natural split leather cuff with protection
- Aramid thread stitching
- Other sizes available (08/09/11): please contact us.
- Another welding gloves available (ref GO2) compliant with EN 12477 (Type A) standard



PERSONAL PROTECTIVE EQUIPMENT

FEET PROTECTION

SAFETY FOOTWEAR

/ SAFETY FOOTWEAR

Built for tough conditions. Engineered for lasting protection.

From substations to muddy worksites, climbing steel structures or moving through industrial floors, your feet face constant threats – crushing impact, sharp punctures, static electricity, chemical exposure, heat, and water ingress. At PENTA, we offer safety footwear that combines robust protection with functional comfort, tailored to the realities of electrical and industrial environments.

All our safety shoes are certified to EN ISO 20345:2022, with configurations ranging from SB to advanced S7L. Depending on your needs, models include key features such as: toe protection, heel energy absorption, anti-perforation midsoles (metallic or non-metallic), anti-static or ESD properties, hydrocarbon and slip resistance, and water-repellent uppers or full water resistance (WR).

Whether you need metal-free insulation, contact heat resistance (HRO), or winter-ready thermal outsoles (CI/HI), each pair is designed to meet real-world challenges. Our dielectric footwear options are tested up to 20 kV and offer full compatibility with live working PPE kits. Models are available in low or high cuts, with sizes and fits adapted to all profiles.



STANDARD EN ISO 20345: 2011 & 2022

Marking	Description	EN ISO 20345: 2022													
		EN ISO 20345: 2011													
		SB	S1	S1P	S1PS	S1PL	S2	S3	S3S	S3L	S6	S7	S7S	S7L	
	Toe protection (safety toecap)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Slip resistance (ceramic floors + detergent)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
E	Heel energy absorption		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
A	Anti-static		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
P	Penetration resistance (metal insert, tested with 4.5 mm large pin)			✓				✓				✓			
PS	Penetration resistance (non-metal insert) PS → Small pin (3 mm)				✓				✓				✓		
PL	Penetration resistance (non-metal insert) PL → Large pin (4.5 mm)					✓				✓					✓
FO	Hydrocarbon Resistance	✓	✓	✓			✓	✓							
WRU / WPA	Water-repellent upper material						✓	✓	✓	✓	✓	✓	✓	✓	✓
WR	Waterproof										✓	✓	✓	✓	✓



CHOOSING THE RIGHT FOOTWEAR FOR THE JOB

— more than just meeting a standard

The EN ISO 20345:2022 standard defines the minimum safety requirements for safety footwear used in professional environments. Each footwear model is assigned a protection level (e.g., SB, S1P, S3S, S7L), which corresponds to a base level of performance (toe cap, slip resistance, heel energy absorption, etc.) and may include additional features depending on the work context and risk exposure.

• **Base criteria according to a level of protection** (see tables above).

• **Additional criteria** (selected depending on environment and job role):

- ESD: ElectroStatic Dissipation
- FO: Hydrocarbon Resistance (option for version 2022)
- CI: Cold Insulation of the sole
- HI: Heat Insulation of the sole
- HRO: Heat Resistance of the Outsole (up to 300°C)
- LG: Heel for Ladder Grip
- SRC / SR: Slip Resistance
- SC: Abrasion Resistance of Scuff Cap

How to read the table:

Each tick ✓ shows which features are required by a given protection level. For example, S3 includes all S1 properties, plus puncture resistance and water penetration resistance. New 2022 levels (S6, S7, etc.) offer improved clarity on waterproofing and non-metallic insert types. For dielectric properties, our safety shoes with insulating soles are certified ASTM F2413 and our insulating boots are certified EN 50321-1.

Always choose your footwear based on actual worksite risks, task specificity, and user comfort.



MARKING

C20B-ISOL C20H-ISOL

SAFETY SHOES
WITH INSULATING
SOLES UP TO 20 KV



- EN ISO 20345:2011:
- SB E PL WPA FO CI SR
- ASTM F2413-11: EH

Safety shoe built for durability and stability. Sole tested up to 20 kV, more than what is asked by the ASTM 2413-11.

Protects against toe impact (200J), puncture risks (non-metallic insert), anti-slips and contact heat. Protection against step voltage in dry conditions.

Ideal for tough industrial or indoor conditions.

/ TECHNICAL SPECIFICATIONS

Designed with a padded collar and metal-free build for all-day comfort and mobility.

Ref.	Ankle	Upper material	Outsole material	Size range
C20B-ISOL	Low	Suede	PU3D	36-47
C20H-ISOL	High	leather		

MARKING

TC52

SAFETY RANGERS
DESIGNED FOR
LIVE WORKING



- EN ISO 20345:2011
- SB E P FO WR
- HTA 70A index E (april 2012)

Individually tested regarding the Technical Specification HTA 70A from EDF, but up to 10kV instead of 6kV.

Protects against toe impact (200J), puncture. Protection against risks step voltage in dry conditions.

Ideal for live working. They are really sturdy and comfortable.

/ TECHNICAL SPECIFICATIONS

Leather inner mid sole and inner lining, as well as rustproof eyelets for a long product life.

Ref.	Ankle	Upper material	Outsole material	Size range
TC52	High	Leather	Nitrile	38-48

MARKING

TC55

LIVE WORKING BOOTS
WITH INSULATING SOLES



- EN ISO 20345:2011: SBEP
- SB E PL WPA FO SR LG
- ASTM F2413-18: EH

High-cut live working boot with electrically insulating soles tested up to 18 kV according to the ASTM 2413-18.

Protects against toe impact (200J), puncture risks (non metallic insert). Protection against step voltage in dry conditions.

They are resistant to abrasion in kneeling position and have an excellent grip on all types of ground thanks to the design and material of the sole.

/ TECHNICAL SPECIFICATIONS

Full-grain leather upper, metal-free construction and cold-insulating sole make the TC55 a robust and versatile partner in the field.

Ref.	Ankle	Upper material	Outsole material	Size range
TC55	High	Full-grain leather	PU2D	39-48





PERSONAL PROTECTIVE EQUIPMENT

FEET PROTECTION

SAFETY FOOTWEAR

MARKING

- EN ISO 20345:2022
- S7L HRO CI HI SR SC

C975N

SAFETY RANGERS
FOR LINEMEN



C974: low ankle available under certain conditions: please contact us.



 Robust and antistatic safety boot designed for challenging outdoor conditions and extended wear.

 Protects against toe impact (200J), puncture risks, and resists to oil and fuel, water, cold and heat.

 Ideal for utility work, outdoor maintenance, or high-risk environments.

/ TECHNICAL SPECIFICATIONS

Reinforced design with all-day comfort features: ideal for demanding tasks on wet, cold or uneven terrain.

Ref.	Ankle	Upper material	Outsole material	Size range
C975N	High	WR Leather	PU/ Rubber	39-47



MARKING

- EN ISO 20345:2011
- S3 CI SRC

C92LADY C92BLADY

SAFETY FOOTWEAR
FOR SMALL SIZES



 Antistatic safety footwear designed specifically for women's feet, combining full S3 protection, durability, and flexibility in small sizes.

 Protects against toe impact (200 J), puncture risks, and protects the malleoli.

 Ideal for indoor or outdoor industrial use.

/ TECHNICAL SPECIFICATIONS

Flexible sole with multiple flex notches, indoor and outdoor.

Ref.	Ankle	Upper material	Outsole material	Size range
C92BLADY	Low	Full-grain leather	PU2D	35 - 42
C92LADY	High			

MARKING

- EN ISO 20345:2011
- S3 SR

C90B C90H

SAFETY FOOTWEAR



 Antistatic non-metallic safety footwear.

 Protects against toe impacts (200 J), puncture risks, and resists to oil and fuel exposure.

 Ideal for indoor/ outdoor industrial and maintenance tasks.

/ TECHNICAL SPECIFICATIONS

Durable grain-leather upper, comfortable wide fit, deliver all-day protection indoors or outdoors.

Ref.	Ankle	Upper material	Outsole material	Size range
C90B	Low	Leather	PU2D	35 - 48
C90H	High			



MARKING

C800
C801

SAFETY FOOTWEAR



- EN ISO 20345:2022
- S3S FO CI HI SR LG SC

High quality, antistatic safety footwear built for harsh environments, with an excellent grip and durability.

Protects against toe impact (200 J), puncture risks, and resists to abrasion in kneeling position.

Ideal for outdoor or industrial work. Great to climb ladders thanks to its heel.

/ TECHNICAL SPECIFICATIONS

Metal-free construction, ideal for intensive outdoor work.

Ref.	Ankle	Upper material	Outsole material	Size range
C800	Low	Leather	PU2D	36-51
C801	High			

MARKING

C85B
C85H

SAFETY FOOTWEAR



- EN ISO 20345:2022
- S3 FO CI SR

Robust and antistatic safety shoe designed for indoor and outdoor wear.

Protects against toe impact (200 J), puncture risks.

Ideal for utility work, outdoor maintenance.

/ TECHNICAL SPECIFICATIONS

Designed for daily wear.

Ref.	Ankle	Upper material	Outsole material	Size range
C85B	Low	Leather	PU2D	35 - 48
C85H	High			

MARKING

C91H

SAFETY BOOTS



- EN ISO 20345:2011
- S3 HRO SR

Wide-fit antistatic safety boot designed for indoor and outdoor works.

Protects against toe impact (200 J), puncture risks, fuel and oil exposure, contact heat (HRO), and slip hazards on various surfaces.

Ideal for warm and humid work environments thanks to its HRO sole.

/ TECHNICAL SPECIFICATIONS

Wide fit and hydrolysis-resistant design offer long-term durability and comfort.

Ref.	Ankle	Upper material	Outsole material	Size range
C91H	High	Full-grain leather	PU/Nitrile	39-47

MARKING

C91HN

SAFETY BOOTS
WITH QUICK
RELEASE SYSTEM



- EN ISO 20345:2022
- S3S HRO FO CI HI SR LG SC

Wide-fit antistatic safety boot designed for indoor and outdoor works.

Protects against toe impact (200 J), puncture risks, fuel and oil exposure, contact heat (HRO), and resists to abrasion in kneeling position.

Great to climb ladders thanks to its heel.

/ TECHNICAL SPECIFICATIONS

Wide fit and hydrolysis-resistant design offer long-term durability as well as an easy and fast system of release.

Ref.	Ankle	Upper material	Outsole material	Size range
C91HN	High	Leather	PU/Nitrile	36-48



PERSONAL PROTECTIVE EQUIPMENT

FEET PROTECTION

SAFETY FOOTWEAR

MARKING

- EN ISO 20345:2011
- S3 HRO CI HI SRC

C100H

SAFETY BOOTS



Wide-fit antistatic safety boot designed for indoor and outdoor works.

Protects against toe impact (200 J), puncture risks, fuel and oil exposure, contact heat (HRO), and slip hazards on various surfaces.

Ideal for warm and humid work environments thanks to its HRO sole.

/ TECHNICAL SPECIFICATIONS

Wide fit and hydrolysis-resistant design offer long-term durability and a better visibility of the wearer thanks to its retroreflective insert.

Ref.	Ankle	Upper material	Outsole material	Size range
C100H	High	Leather	PU2D/Rubber	39-47

MARKING

- EN ISO 20345:2011
- S1P FO SRC

C80BSN C80HSN

SAFETY FOOTWEAR



Antistatic safety footwear designed for indoor and outdoor works.

Protects against toe impact (200 J), puncture risks.

Ideal for indoor use in logistics, and industrial works.

/ TECHNICAL SPECIFICATIONS

Wide fit and simple design for industrial or electrical maintenance tasks.

Ref.	Ankle	Upper material	Outsole material	Size range
C80BSN	Low	Leather	PU	37 - 47
C80HSN	High			36 - 48

MARKING

- EN ISO 20347:2012: OB
- Heat resistance: HRO
- Slip resistance 2011: SRC



TBOB

DIELECTRIC RUBBER OVERBOOTS UP TO 20KV

/ KEY FEATURES

All-terrain safety boots with waterproof membrane, metal-free construction, and full S3 protection for demanding outdoor work.

Protects against toe impact (200 J), puncture risks, water ingress, cold (CI), fuel exposure, slips, and electrostatic discharge.

Ideal for utility and industrial fieldwork in wet, cold/ rugged conditions requiring comfort, weather resistance.

/ TECHNICAL SPECIFICATIONS

TBOB keeps your feet protected and dry in the harshest environments.

Ref.	Upper material	Outsole material	Size range
TBOB	Synthetic leather + waterproof membrane	SRC, FO, WR, CI, ESD	35 - 42

MARKING

- EN ISO 20347:2012: OB
- Heat resistance: HRO
- Slip resistance 2011: SRC



TB20KV-AF

DIELECTRIC SAFETY RUBBER BOOTS 20 KV WITH ARC FLASH PROTECTION

/ KEY FEATURES

Protection against step voltage on electrical network, up to 20 KV AC (proof test for 3 minutes), withstand test to 30kV. Added Arc-Flash protection.

Knee length dielectric safety boots, flex and resistant natural rubber upper, ergonomically designed to secure the foot and enhance stability..

Comfort system insole for day long comfort, improved foot health and better heel stability. Fully waterproof

/ TECHNICAL SPECIFICATIONS

Natural rubber upper, steel toe cap, and arc-rated performance make TB20K-AF ideal for high-risk network work in tough conditions.

Ref.	Upper material	Outsole material	Size range
TB20KV-AF	Natural rubber	SRC, FO, WR, CI, ESD	38 - 48



SAFETY FOOTWEAR

– Why your choice of safety footwear matters more than you think

Foot protection is more than toe caps.

While most professionals focus on impact protection, true safety footwear for electrical and industrial environments must account for all the risks happening from the ground up – especially in unpredictable conditions like water, current leakage, or mixed surfaces.

The outsole is your first line of defense.

A slip or fall is one of the most common causes of workplace injury. Choosing a shoe with SRC-certified grip, cold insulation (CI), or fuel/oil resistance (FO) helps avoid preventable incidents in outdoor, industrial, or substation areas.

Dielectric ≠ Standard Safety

Only dielectric boots, certified to EN 50321-1, and safety shoes with insulating soles can protect

against step voltage in live working conditions. Standard safety shoes (EN ISO 20345) do not provide electrical insulation. Safety shoes with insulated outsoles may only be used in dry conditions, otherwise insulated rubber boots must be worn.

ESD vs insulation – don't confuse them.

An ESD-compliant shoe prevents static buildup (to protect sensitive equipment), but does not insulate you from electric current. ESD shoes deal with dissipation of electrostatic charges.

Comfort matters – for safety.

Foot fatigue increases the risk of errors and slower reactions in critical environments. Features like heel energy absorption, ergonomic insoles, and metal-free flexibility contribute directly to long-term focus and reduced musculoskeletal stress.



MARKING

- EN ISO 20345:2011: SBEP
- Heel energy absorption: E
- Slip resistance 2011: SRC



MARKING

- EN ISO 20345:2011: SBEP
- Heel energy absorption: E
- Slip resistance 2011: SRC



TB19BTE: insulating safety boots, class 1 with toe cap



MARKING

- EN ISO 20345:2011: SBEP
- Heel energy absorption: E
- Slip resistance 2011: SRC



TB30KV-LG: insulating safety boots with wider calf

TB19

LIVE WORKING SAFETY BOOTS

/ KEY FEATURES

- For live working on alternating current (AC) electrical networks with a nominal voltage less than or equal to 33,000 V. The operator may be exposed to step voltage up to a maximum of 10,000 V AC.
- Protection against step voltage in the event of a phase-to-earth fault.
- Also used whenever there is a risk of moisture absorption for leather footwear.
- 100% of the boots are tested up to 15,000 V AC in accordance with ASTM F1116-14A for 1 minute. Non-metallic protective components with isothermal properties.

/ TECHNICAL SPECIFICATIONS

Natural rubber upper, steel toe cap, and arc-rated performance make TB20K-AF ideal for high-risk network work in tough conditions.

Ref.	Upper material	Outsole material	Size range
TB19	Natural rubber	SBPE, SRC	36 - 49/50

TB19BT

INSULATING SAFETY BOOTS

/ KEY FEATURES

- For live working or working in the vicinity of live parts in installations up to 7,500 V AC and 11,250 V DC.
- Protection against step voltage in the event of a phase-to-earth fault.
- Also used whenever there is a risk of moisture absorption for leather footwear.
- 100% of the boots are tested up to 10,000 V AC in accordance with EN 50321-1, with a leakage current below 5 mA at 10,000 V AC (standard requirement: maximum 10 mA). Boot tested under alternating current up to 70 mm from the top of the shaft.

/ TECHNICAL SPECIFICATIONS

Natural rubber upper, steel toe cap, and arc-rated performance make TB20K-AF ideal for high-risk network work in tough conditions.

Ref.	Toe cap	Upper material	Marking	Size range
TB19BT	No	Natural rubber	OBE, HRO, SRC	36-49/50
TB19BTE	Yes	Natural rubber	SDE, HRO, SRC	

TB30KV

INSULATING SAFETY BOOTS

/ KEY FEATURES

- Protection against step voltage on electrical network, up to 26,500 V AC (Tested individual boots at 30kV under wet condition.)
- Ideal for working environment with high voltage hazards. Power station operations. Substation operations. Electrical hazards with wet conditions / water exposure. High current leakage current. Electrical installations.

/ TECHNICAL SPECIFICATIONS

Seamless, leak-proof construction and bright green shaft ensure electrical protection up to 30 kV with standout visibility on site.

Ref.	Upper material	Marking	Size range
TB30KV	Vulcanized rubber	SBC, HRO, FO, SBA	36-50

*Under conditions, please contact us.

The background image is a dark, atmospheric photograph. In the center, a large, dark tree stands against a cloudy, overcast sky. The foreground is a wide, gravelly path or clearing. The overall tone is somber and industrial, suitable for a safety-related document.

ARC FLASH RISK BODY PROTECTION

WORK CLOTHING AND ACCESSORIES





LEGISLATION & STANDARDS

Our range meets the requirements for PPE against the thermal hazards of an electric arc in accordance with the international standards currently in force

	European Principles	American and International Principles
Legislation	EN 50110-1 standard (operation of electrical installations — Part 1: general requirements)	Rules issued by the United States federal government agency: OSHA
Regulations	PPE Regulation 2016/425	NFPA 70E regulation
Reference standards Body	EN 61482-2 EN 61482-1-2	IEC 61482-2 IEC 61482-1-1, two methods: Method A (fabric) or Method B (garment, if method A is already carried out) ASTM F1959: Method A (fabric) and ASTM F1506: Method B (garment)
Reference standards Head and face	GS-ET-29 → IEC 62819	ASTM F2178 → IEC 62819
Test method	BOX TEST	OPEN ARC
Interpretation of results according to the original test method	Classifications: APC 1 (Arc Protection Class 1) APC 2 (Arc Protection Class 2)	Arc rating in cal/cm ² : - ATPV: - Ebt ² - ELIM ³

¹ ATPV: Arc Thermal Performance Value

² Ebt: Breakopen threshold energy value

³ ELIM: Incident Energy Limit

The National Fire Protection Association in the United States (NFPA 70E) classifies the Arc Flash risk into 4 categories. Thanks to this regulation, and once the risk analysis has been carried out for each installation, users can determine the protection required to protect themselves against the risk of second-degree burns.

Arc Flash Risk Category – ARC (Arc Rating Category)	1	2	3	4
ATPV (cal/cm ²)	from 1.2 to 4 cal/cm ²	from 4.1 to 8 cal/cm ²	from 8.1 to 25 cal/cm ²	from 25.1 to 40 cal/cm ²

NB: Experience shows that in certain situations, the incident thermal energy may exceed 40 cal/cm².

> Protective garment test methods

The performance of a garment against electric arc hazards can be assessed using two test methods in accordance with the general requirements of IEC 61482-2:

/ IEC 61482-1-2: BOX TEST Method
European principle




Determination of the class according to the electrical installation current intensity level:

APC 1: 4 kA for 0.5 s at 30 cm

APC 2: 7 kA for 0.5 s at 30 cm

Test relating to the density/intensity of the electric current, classifying garments into two classes and limited to a maximum of 7 kA only. Not suitable for electrical installations above 7 kA.

/ IEC 61482-1-1: OPEN ARC Method
American principle

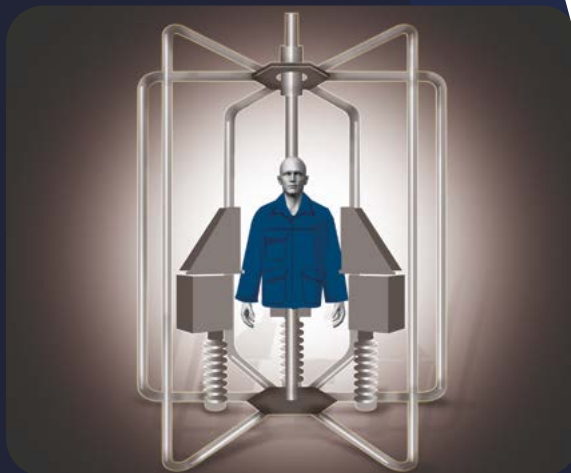

Determination of the garment ATPV and ELIM values expressed in calories/cm².

The most representative test method and the closest to real conditions, corresponding to numerous levels of thermal energy (above 7 kA). This method simulates the thermal effects on the body, expressed in cal/cm².



ARC FLASH AND MULTI-RISK PROTECTIVE CLOTHING

> Protection against industrial hazards



EN 1149-5:2018

PROTECTIVE CLOTHING ELECTROSTATIC PROPERTIES PART 5: DESIGN AND MATERIAL PERFORMANCE REQUIREMENTS

Specifies the requirements relating to materials and the design of electrostatic dissipative protective clothing used in conjunction with an earthing system in order to prevent incendiary discharges.



EN 13034+A1:2009

PROTECTIVE CLOTHING AGAINST LIQUID CHEMICALS TYPE 6 AND TYPE PB (6) EQUIPMENT

Specifies the minimum requirements for chemical protective clothing for limited use or reusable clothing offering limited chemical protection.

Situations involving light spray, liquid aerosols or low pressure, light splashes, where a total barrier against liquid permeation is not necessary.



EN ISO 11611:2015

PROTECTIVE CLOTHING USED DURING WELDING AND ALLIED PROCESSES

Specifies the essential minimum safety requirements and test methods for protective clothing. It defines two performance classes according to fabric resistance to small molten metal splashes and to radiant heat transfer through the fabric.



EN ISO 11612:2016

PROTECTIVE CLOTHING AGAINST HEAT AND FLAME MINIMUM PERFORMANCE REQUIREMENTS

The performance requirements apply to garments that must provide properties of limited flame spread and to garments to which the wearer may be exposed to heat emitted by radiation, convection or contact, or to small splashes of molten metal.



IEC 61482-2:2018

LIVE WORKING PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF AN ELECTRIC ARC

IEC 61482-1-1 OPEN ARC test method: Determination of the assigned arc value (ELIM, ATPV and/or EBT) of materials for garments and protective clothing using an open arc.

IEC 61482-1-2 BOX TEST method: Determination of the arc protection class for materials and garments using a directed and constrained arc (test enclosure).

> Protection against environmental hazards

EN 17353:2020



PROTECTIVE CLOTHING

Enhanced visibility equipment for moderate-risk situations
- Test methods and requirements

EN ISO 20471:2013



HIGH-VISIBILITY CLOTHING

Test methods and requirements

EN 343:2019



PROTECTIVE CLOTHING

Protection against rain

EN 14058+A1:2023



PROTECTIVE CLOTHING

Protective garments for cool environments (temperatures down to -5°C)

EN 342:2017



PROTECTIVE CLOTHING

Clothing ensembles and garments for protection against cold (temperatures below -5°C)

EN 14404:2010



PERSONAL PROTECTIVE EQUIPMENT

Knee protection for work in the kneeling position



GOOD TO KNOW

Working in ATEX zones (EXplosive ATmospheres) requires garments with FR (Flame Retardant) and antistatic properties, and without metallic parts.



FABRIC SELECTION

> Selection of a technical fabric with flame-retardant properties (FR: Flame Retardant)

/ Fabric with a predominance of FR treated natural fibers

Examples of natural fibres:

Cotton, wool, lyocell, viscose

Product reference examples:

AFSIB-12 (see p. xx)

🔥 Protection by applied FR treatment

Natural fibres are not inherently flame-retardant. A specific surface treatment is applied to give them FR performance.

Therefore, for each garment, it is essential to comply with the number of washes indicated in the care instructions in order to maintain the certified level of protection.



✅ Strengths

with the example of cotton



Thermal comfort: breathability and good moisture regulation



Wearing comfort, softness and flexibility



Practical and accessible solution

Ideal when **everyday comfort** is the priority

/ Fabric with a predominance of inherent FR synthetic fibres

Product reference examples:


Aramid, FR viscose, modacrylic

Product reference examples:

AFPRO-41 (p. xx)

🔥 Protection by inherent FR fibres

These synthetic fibres are inherently flame-retardant: their performance does not diminish, even after numerous washing cycles (cycle = washing + drying).



✅ Strengths

with the example of aramid



Excellent resistance to abrasion and tearing



Good resistance to chemicals



Extended service life (FR properties inseparable from the fibre)

Suitable for demanding environments where **robustness is essential**


/ Fabric with a blend of FR treated and inherent FR fibres

Product reference examples:

AFSIB-25 (p. xx)

🔥 Protection by FR treatment and inherent FR fibres

These fabrics combine natural and synthetic FR fibres to combine comfort, resistance and technical performance. Inherent FR synthetic fibres provide flame resistance for the entire lifetime of the garment, while natural fibres contribute complementary benefits such as strength and colour fastness.



✅ Strengths

with the example of polyester



Good colour fastness



Enhanced resistance to abrasion and tearing



Excellent resistance to garment wrinkling

A versatile choice to **combine the best properties** of each fibre



CUSTOMISATION

GARMENTS DESIGNED TO REFLECT YOUR BRAND

To strengthen your company's brand image, we offer a range of customisation options:

- Addition of your company logo using non-flame-retardant transfer.
- Choice of fabric colours, number of pockets, addition or removal of RETROREFLECTIVE TAPES in accordance with what is provided in the certification of each garment.

Contact us for any technical questions and to obtain detailed technical data sheets, size guides, user instructions, and quotations for customisation options.



GARMENT RANGES

/ Defining the use of protective clothing

| What type of activity?

Our Arc Flash garment range is organised according to its intended use. The **Daily Wear** range includes technical garments designed for everyday or prolonged use, while the **Switching Wear** range is intended for occasional use, notably for switching and manoeuvring operations.

| What is the working environment?

Depending on the working environment, you may require high-visibility Arc Flash garments to ensure operators are visible both during the day and at night. Work carried out in outdoor environments requires Arc Flash garments that also provide protection against weather conditions (cold, rain, sun, etc.).

> ALL WEATHER CONDITIONS RANGE



AFPLUI-HV
• ATPV N/A
• ELIM N/A
* APC 1



AFPRO-SS-16
• ATPV 16 cal/cm²
• ELIM 11 cal/cm²
* APC 1



AF-LEO20
• ATPV 23 cal/cm²
• ELIM 22 cal/cm²
* APC 2

AF-HV
/ ORANGE / YELLOW
• ATPV 30 cal/cm² • ATPV 23 cal/cm²
• ELIM 25 cal/cm² • ELIM 22 cal/cm²
* APC 2 * APC 2

> DAILY WEAR RANGE



AFPTA-POLO10
• ATPV 10 cal/cm²
• ELIM 8,2 cal/cm²
* APC 1



AFPTA-SWEAT15
• ATPV 15 cal/cm²
• ELIM 15 cal/cm²
* APC 1



AFPRO-JEANS15
• ATPV N/A
• ELIM 8,3 cal/cm²
* APC 1



ARCBLOUSE11-B-BR
• ATPV 11 cal/cm²
• ELIM 9,1 cal/cm²
* APC 1



AFPRO-9-BR
• ATPV 9,6 cal/cm²
• ELIM 9 cal/cm²
* APC 1



AFPRO-COM9
• ATPV 9,4 cal/cm²
• ELIM N/A
* APC 1



AFPRO-COM10
• ATPV 10 cal/cm²
• ELIM 9 cal/cm²
* APC 1



AFHVO-7
• ATPV 8,8 cal/cm²
• ELIM 7,9 cal/cm²
* APC 1



AFHVJ-10
• ATPV 10 cal/cm²
• ELIM 9 cal/cm²
* APC 1



AFSIB-12
• ATPV 15 cal/cm²
• ELIM 13 cal/cm²
* APC 1



AFSIB-12-BR
• ATPV 15 cal/cm²
• ELIM 13 cal/cm²
* APC 1



AFPTA-COAT12-BR
• ATPV 15 cal/cm²
• ELIM 13 cal/cm²
* APC 1



ENSEMBLE ROUGE
• ATPV N/A cal/cm²
• ELIM N/A cal/cm²
* APC 1



AFPRO-COM13OR-BR
• ATPV 13 cal/cm²
• ELIM 11 cal/cm²
* APC 1



AFSIB-25
• ATPV 35 cal/cm²
• ELIM 32 cal/cm²
* APC 2



AFPRO-41
• ATPV 43 cal/cm²
• ELIM 36 cal/cm²
* APC 2

> SWITCHING WEAR RANGE



ARC-40
• ATPV 40 cal/cm²
• ELIM 36 cal/cm²
* APC 2



ARC-53
• ATPV 53 cal/cm²
• ELIM 47 cal/cm²
* APC 2



ARC-65
• ATPV 75 cal/cm²
• ELIM N/A
* APC 2



ARC-100
• ATPV 100 cal/cm²
• ELIM N/A
* APC 2



PERSONAL PROTECTIVE EQUIPMENT
ARC FLASH PROTECTION
DAILY WEAR

> DAILY WEAR RANGE

This range covers workwear designed for everyday or prolonged use with ATPV levels from 8 cal/cm² to 41 cal/cm² (APC 1 and APC 2). Garments in our Daily Wear range contain no metallic parts. They are suitable for use in ATEX zones.



AFPTA-POLO10

ARC FLASH POLO SHIRT

> APC 1 > ATPV 10 Cal/cm² > ELIM 8,2 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 A2 B1 C1 F1 / EN 1149-5:2018 /
IEC 61482-2:2020 / IEC 61482-1-2 APC 1 /
IEC 61482-1-1 ATPV 10 cal/cm², ELIM 8,2 cal/cm²

/ TECHNICAL SPECIFICATIONS

- Soft and flexible knit fabric, very comfortable to wear thanks to cotton fibres.
- Inherent fabric with FR (Flame Retardant) properties intrinsic to the modacrylic fibre.
- Breathable and comfortable knit, can be worn directly next to the skin without risk of allergy.
- Lightweight garment perfectly suited for working in hot climates.

Inherent FR knit fabric

48% modacrylic, 42% cotton, 5% para-aramid, 3% polyamide, 2% antistatic fibre, metal-free



S TO 5XL

Complete the reference with the required size, for example: AFPTA-POLO10-XL



AFPTA-SWEAT15

ARC FLASH SWEATSHIRT

> APC 1 > ATPV 15 Cal/cm² > ELIM 15 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1+A2 B1 C2 F2 / EN 1149-5:2018 /
IEC 61482-2:2020 / IEC 61482-1-2 APC 1 /
IEC 61482-1-1 ATPV 15 cal/cm², ELIM 15 cal/cm²

/ TECHNICAL SPECIFICATIONS

- Soft and flexible knit fabric, very comfortable to wear thanks to cotton fibres.
- Inherent fabric with FR (Flame Retardant) properties intrinsic to the modacrylic fibre.
- Breathable and comfortable knit, can be worn directly next to the skin without risk of allergy.
- Ideal for working in cool environments.

Inherent FR knit fabric

60% modacrylic, 38% cotton, 2% antistatic fibre, without metallic parts



S TO 5XL

Complete the reference with the required size, for example AFPTA-SWEAT15-S



ATPV 15 cal



PERSONAL PROTECTIVE EQUIPMENT

ARC FLASH PROTECTION DAILY WEAR



Complete your
PPE with the
GENPOLY
> see page 56

Weight:
345 g/m²



AFPRO-JEANS15

ARC FLASH JEANS

> **APC 1** > **ELIM 8,3 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 F1 / EN 1149-5:2018 /
IEC 61482-2:2018 / IEC 61482-1-2 APC 1 /
IEC 61482-1-1 (Method A) ELIM 8,3 cal/cm² /
EN 14404:2004+A1:2010 Level 1, Type 2 with **GENPOLY**



36 TO 60

Complete the reference with the required size,
for example: AFPRO-JEANS15-36

Inherent FR fabric

58% modacrylique 36% cotton, 4% elasthanne 2%
antistatique, metal free

Weight:
350 g/m²



ARCBLOUSE11-B-BR

ARC FLASH COAT

> **APC 1** > **ATPV 11 Cal/cm²** > **ELIM 9,1 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 A2 B1 C1 E1 F1
EN ISO 11611:2015 A1+A2 Class 1 /
EN 13034:2005+A1:2009 Type PB [6] /
EN 1149-5:2018 /
IEC 61482-2:2020 / IEC 61482-1-1 APC 1 /
IEC 61482-1-1 (Method A) ATPV 11 cal/cm² ELIM 9,1 cal/cm²

FR-treated fabric

64% cotton, 35% polyester, 1% antistatic fibre,
metal-free



S TO 3XL

Complete the reference with the required size,
for example: ARCBLOUSE11-B-BR-S



Complete your
PPE with the
GENPOLY
> see page 56

Weight:
260 g/m²



AFPRO-VES9-BR



AFPRO-PAN9-BR

AFPRO-9-BR

ARC FLASH SET WITH RETROREFLECTIVE TAPES

> **APC 1** > **ATPV 9,6 Cal/cm²** > **ELIM 9 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E3 F1 /
EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+A1:2009 Type PB [6] /
EN 1149-5:2018 / IEC 61482-2:2020 /
IEC 61482-1-2 APC 1 / IEC 61482-1 (Method A)
ATPV 9,6 cal/cm² ELIM 9 cal/cm² / EN 17353:2020 Type B2
AFPRO-PAN9-BR: EN 14404:2004+A1:2010
Level 1, Type 2 with **GENPOLY**

Ref.	Description
AFPRO-VES9-BR	Jacket
AFPRO-PAN9-BR	Trousers

Inherent FR fabric

51% modacrylique, 41% cotton, 7% polyamide, 1%
antistatic fibre, metal free



JACKET: XS TO 5XL
TROUSERS : 36 TO 62

Complete the reference with the required size, for example:
AFPRO-VES9-BR-M and AFPRO-PAN9-BR-48

Weight:
260 g/m²



AFPRO-COM9G

AFPRO-COM9B

AFPRO-COM9B.G

ARC FLASH COVERALL WITH RETROREFLECTIVE TAPES AND DOUBLE ZIP FASTENING

> **APC 1** > **ATPV 9,4 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E2 F1 /
EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+A1: 2009 Type 6 /
EN 1149-5:2018 / IEC 61482-2:2020 /
IEC 61482-1-2 APC 1 / IEC 61482-1-1 (Method A)
ATPV 9,4 cal/cm² / EN 17353:2020 Type B3

Ref.	Description
AFPRO-COM9B	Blue coverall
AFPRO-COM9G	Grey coverall

FR-treated fabric

79% cotton, 20% polyester, 1% antistatic fibre,
metal-free



XS TO 5XL

Complete the reference with the required size,
for example: AFPRO-COM9G-5XL



AFPRO-COM10B



Complete your PPE with the **GENPOLY**
> see page 56



AFPRO-COM10G

Weight:
320 g/m²

AFPRO-COM10B.G

ARC FLASH COVERALL
WITH RETROREFLECTIVE TAPES

> APC 1 > ATPV 10 Cal/cm² > ELIM 9 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E3 F1 /
EN ISO 11611:2015 A1 Class 1 / EN 13034:2005+
A1:2009 Type 6 / EN 1149-5:2018 / IEC 61482-
2:2020 / EN 61482-1-2 APC 1 / EN 61482-1-1
(Method A) ATPV 10 cal/cm² ELIM 9 cal / cm² / EN
17353:2020 Type B3 / EN 14404:2004
+ A1:2010 Level 1, Type 2 with **GENPOLY**

Ref.	Description
AFPRO-COM10B	Blue coverall
AFPRO-COM10G	Grey coverall

FR-treated fabric

74% cotton, 25% polyester, 1% antistatic fibre,
metal-free



XS TO 5XL

Complete the reference with the required size,
for example: AFPRO-COM10B-XL



AFHVO-VES7

High stand-up collar
closed with snap buttons

Adjustable cuffs

Double zip
fastening

Standards
pictograms

Standards
pictograms



AFHVO-PAN7



AFHVO-COM7



Complete your PPE with the **GENPOLY**
> see page 56

Weight:
295 g/m²

AFHVO-7

ARC FLASH SET
WITH RETROREFLECTIVE TAPES

> APC 1 > ATPV 8,8 Cal/cm² > ELIM 7,9 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E2 F1 / EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+A1:2009 Type PB[6] / EN 1149-5:2018 /
IEC 61482-2:2018 IEC 61482-1-2 APC 1, IEC 61482-1-1 (Method A) ATPV 8,8 cal/cm²
ELIM 7,9 cal/cm² / EN ISO 20471:2013+A1:2016 Class 3
AFHVO-PAN7: EN 14404:2004+A1:2010 Level 1, Type 2 with **GENPOLY**

Ref.	Description
AFHVO-VES7	Jacket
AFHVO-PAN7	Trousers
AFHVO-COM7	Coverall



XS TO 4XL

Complete the reference with the required size,
for example: AFHVO-COM7-3XL

FR-treated fabric

50% polyester, 49% cotton, 1% antistatic fibre,
metal-free



AFHVJ-VES10

High stand-up collar
closed with snap buttons

Adjustable cuffs

Double zip
fastening

Standards
pictograms

Standards
pictograms



AFHVJ-PAN10



AFHVJ-COM10



Complete your PPE with the **GENPOLY**
> see page 56

Weight:
320 g/m²

AFHVJ-10

ARC FLASH SET
WITH RETROREFLECTIVE TAPES

> APC 1 > ATPV 10 Cal/cm² > ELIM 9 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E3 F1 / EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+A1:2009 Type PB[6] / IEC 61482-2:2018 /
IEC 61482-1-2 APC 1 / IEC 61482-1-1 (Method A) ATPV 10 cal/cm²
ELIM 9 cal/cm² / EN ISO 20471: 2013+A1:2016 Class 3 /
AFHVJ-PAN10: EN14404:2004+A1:2010 Level 1, Type 2 with **GENPOLY**

Ref.	Description
AFHVJ-VES10	Jacket
AFHVJ-PAN10	Trousers
AFHVJ-COM10	Coverall



S TO 4XL

Complete the reference with the required size,
for example: AFHVJ-VES10-3XL
and AFHVJ-PAN10-4XL

FR-treated fabric

74% cotton, 25% polyester, 1% antistatic fibre, metal free



PERSONAL PROTECTIVE EQUIPMENT
ARC FLASH PROTECTION
DAILY WEAR



AFSIB-12-BR

ARC FLASH SET WITH OR WITHOUT
RETROREFLECTIVE TAPES

> APC 1 > ATPV 15 Cal/cm² > ELIM 13 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E2 F1 / EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+ A1:2009 Type PB(6) / IEC 61482-2:2020
IEC 61482-1-2 APC 1, IEC 61482-1-1 (Method A) ATPV 15 cal/cm² ELIM 13 cal/cm²
(Method B) ATPV 13,5 cal/cm² / AFSIB-PAN12POCK: EN 14404:2004+A1:
2010 Level 1, Type 2 with GENPOLY / AFSIB-12-BR EN 17353:2020 Type B2

Ref.	Description
AFSIB-VES12	Jacket
AFSIB-PAN12	Trousers
AFSIB-PAN12POCK * Under conditions, please contact us.	Trousers with kneepad pockets
AFSIB-COM12	Coverall
AFSIB-VES12-BR * Under conditions, please contact us.	Jacket with RETROREFLECTIVE TAPES
AFSIB-PAN12-BR * Under conditions, please contact us.	Trousers with RETROREFLECTIVE TAPES

FR-treated fabric

79% cotton, 20% polyester, 1% antistatic fibre, metal free

XS TO 5XL

Complete the reference with the required size,
for example: AFSIB-VES12-L and AFSIB-PAN12POCK-2XL





COMBINATION RECOMMENDATIONS IN A HAZARDOUS ELECTRICAL ENVIRONMENT

- / We recommend combining certain items of equipment and optimising your protection in order to enable you to operate under the best possible conditions and ensure your safety in hazardous environments.
- / Following your risk analysis, we offer an Arc Flash protection kit APC 1 — ATPV 12 cal/cm².

/ Example of a kit for Arc Flash protection Arc Flash APC 1 - ATPV 12 cal/cm²

Réf.	Description	Available sizes
AFSIB-VES12-**	Arc Flash jacket APC 1, ATPV 15 cal/cm ² , ELIM 13 cal/cm ²	XS to 4XL
AFSIB-PAN12-**	Arc Flash trousers APC 1, ATPV 15 cal/cm ² , ELIM 13 cal/cm ²	
V1-BK⁽¹⁾	Visarc helmet with Arc Flash face shield APC 1 — 4 kA / 0.5 s. Option to choose with or without lateral protection	One size
AFG-41-*/**	Insulating gloves with mechanical protection against the thermal effects of short-circuit	7 - 12
C20B-ISOL*	Low safety shoes with insulating soles tested up to 20 kV	36 - 47
RBCL*	Insulating mat	Please contact us

** Complete with the required size..

(1) Complete the reference with the desired colour: BK (standard black) - W (white) - R (red) - Y (yellow) - G (green)

V1-BK*

Visarc helmet

See page 12

AFSIB-VES12-**

Arc Flash Jacket

See page 48

AFG-41-*/**

Insulating gloves

See page 23

AFSIB-PAN12-**

Arc Flash trousers

See page 48

C20B-ISOL-**

Safety shoes with insulating soles

See page 33

RBCL*

Insulating mat





PERSONAL PROTECTIVE EQUIPMENT
ARC FLASH PROTECTION
DAILY WEAR



Weight:
300 g/m²

AFPTA-COAT12-BR

ARC FLASH LONG COAT
 WITH RETROREFLECTIVE TAPES

> **APC 1** > **ATPV 15 Cal/cm²** > **ELIM 13 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E2 F1 / EN ISO 11611:2015 A1 Class 1 / EN 13034:2005+A1:2009 Type PB(6) / EN 1149-5:2018 / IEC 61482-2:2020 / IEC 61482-1-2 APC 1, IEC 61482-1-1 (Method A) ATPV 15 cal/cm² ELIM 13 cal/cm² (Method B) ATPV 13,5 cal/cm² / EN 17353:2020 Type B2

TECHNICAL SPECIFICATIONS

- Anti-panic zip fastening allowing the coat to be removed quickly when required.
- Durable and robust, with good resistance to wear and tearing.
- Flame Retardant (FR) fabric tested after 50 washing cycles in accordance with EN ISO 11612.
- Ease pleat at the back to ensure comfort and protection during everyday movements.

* Under conditions, please contact us.

FR-treated fabric

79% cotton 20% polyester 1% antistatic fibre, metal free



S/M, L/XL,
2XL/3XL, 4XL/5XL

Complete the reference with the required size, for example: AFPTA-COAT12-BR-S/M



Complete your
PPE with
GENPOLY
> see page 56



VESROUGE



PANTROUGE

Weight:
320 g/m²

RED SET

ARC FLASH SET WITH RETROREFLECTIVE TAPES

> **APC 1**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E3 F1 / EN ISO 11611:2015 A1 Class 1 / EN 13034:2005 +A1:2009 Type 6 / EN 1149-5:2018 / IEC 61482-2:2020 / IEC 61482-1-2 APC 1 / EN 17353:2020 Type B3 / PANTROUGE EN 14404:2004+A1:2010 Level 1, Type 2 with GENPOLY

Ref.	Description
VESROUGE	Jacket
PANTROUGE	Trousers

FR-treated fabric

74% cotton, 25% polyester, 1% antistatic fibre, metal free



XS TO 4XL

Complete the reference with the required size, for example: VESROUGE-XS



Weight:
340 g/m²

AFPRO-COM13OR-BR

ARC FLASH COVERALL
 WITH RETROREFLECTIVE TAPES

> **APC 1** > **ATPV 13 Cal/cm²** > **ELIM 11 Cal/cm²**

MARKINGS & STANDARDS

EN ISO 11612:2015 A1+A2 B1 C1 E2 F1 / EN ISO 11611:2015 A1+A2 Class 2 / EN 13034:2005+A1:2009 Type 6 / EN 1149-5:2018 / IEC 61482-2:2020 / IEC 61482-1-2 APC 1 / IEC 61482-1-1 ATPV 13 cal/cm² ELIM 11 cal/cm² / EN 17353:2020 Type B2 / ASTM F1959/ F1959M-12 ATPV=16 Cal/cm²

FR-treated fabric

80% cotton, 19% polyester, 1% antistatic fibre, metal free



S TO 3XL

Complete the reference with the required size, for example: AFPRO-COM13OR-BR-XL





PERSONAL PROTECTIVE EQUIPMENT
ARC FLASH PROTECTION
DAILY WEAR



AFSIB-25

ARC FLASH SET

> APC 2 > ATPV 35 Cal/cm² > ELIM 32 Cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B1 C1 E2 F1 / EN ISO 11611:2015 A1 Class 1 /
EN 13034:2005+ A1:2009 Type 6 / IEC 61482-2:2020 /
EN 61482-1-2 APC 2, EN 61482-1-1 (Method A) ATPV 35 cal/cm² ELIM 32 cal/cm²
(Method B) ATPV 35 cal/cm²

/ TECHNICAL SPECIFICATIONS

- Fabric with inherent FR properties from aramid fibres and treated cotton fibres, combining comfort (softness and flexibility).
- Kidney protection panel and extended back for optimal protection even in a bent position.
- Good mechanical resistance of the fabric (to wear and tearing) thanks to aramid fibres.

Ref.	Description	Inherent FR fabric
AFSIB-VES25	Jacket	35% modacrylique, 30% cotton, 14% para-aramid, 20% viscose FR, 1% antistatique, metal free
AFSIB-PAN25	Trousers	
AFSIB-COM25*	Coverall	

* Under conditions, please contact us.



XS TO 5XL

Complete the reference with the required size, for example: AFSIB-PAN25-XL

Weight:
440 g/m²





COMBINATION RECOMMENDATIONS

IN A HAZARDOUS ELECTRICAL ENVIRONMENT

- / We recommend combining certain items of equipment and optimising your protection in order to enable you to operate under the best possible conditions and ensure your safety in hazardous environments.
- / Following your risk analysis, we offer an APC 2 kit — ATPV 25 cal/cm².

/ Example of a kit for Arc Flash protection Arc Flash APC 2 - ATPV 25 cal/cm²

Ref.	Description	Available sizes
AFSIB-VES25-**	Arc Flash jacket APC 2, ATPV 35 cal/cm ² , ELIM 32 cal/cm ²	XS to 5XL
AFSIB-PAN25-**	Arc Flash trousers APC 2, ATPV 35 cal/cm ² , ELIM 32 cal/cm ²	
V2-25-LPP-⁽¹⁾	Visarc helmet with Arc Flash face shield APC 2 — ATPV 25 cal/cm ² — integrated lateral protection	On size
AFG-41-*/**	Insulating gloves with mechanical protection and thermal effects of short-circuit	7 - 12
C20H-ISOL-**	High safety shoes with insulating soles tested up to 20 kV	36 - 47
RBCL*	Insulating mat	see page 34

(1) Complete the reference with the desired colour: BK (standard black) - W (white) - R (red) - Y (yellow) - G (green)

* Complete with the desired Class.. ** Complete with the required size.

V2-25-LPP-BK*
Visarc Helmet
See page 12

AFSIB-VES25-**
Arc Flash jacket
See page p. 52

AFG-41-*/**
Insulating gloves
See page 23

AFSIB-PAN25-**
Arc Flash trousers
See page p. 52

C20H-ISOL-**
safety shoes with insulating soles





PERSONAL PROTECTIVE EQUIPMENT
ARC FLASH PROTECTION
DAILY WEAR



AFPRO-41

ARC FLASH SET

> APC 2 > ATPV 43 cal/cm² > ELIM 36 cal/cm²

MARKINGS & STANDARDS

EN ISO 11612:2015 A1 B2 C2 / EN 1149-5:2018 /
EN ISO 11611:2015 A1 Class 1 / EN 61482-2:2020
EN 61482-1-2 APC 2, EN 61482-1-1 ATPV 43 cal/cm² ELIM 36 cal/cm²

Ref.	Description
AFPRO-VES41	Jacket
AFPRO-PAN41	Trousers

Inherent FR fabric

75% aramid, 13% modacrylique, 10,5%
cotton, 1,5% antistatique, metal free

* Under conditions, please contact us.

/ TECHNICAL SPECIFICATIONS

- Inherent fibre ensuring garment performance throughout its entire service life.
- Aramid fibre providing an excellent balance between fabric lightness and level of protection.
- Kidney protection panel and extended back for optimal protection even in a bent position.

XS TO 3XL

Complete the reference with the required size,
for example: AFPRO-VES41-S and AFPRO-PAN41-M







PERSONAL PROTECTIVE EQUIPMENT

ARC FLASH PROTECTION ALL WEATHER CONDITIONS

> ALL WEATHER CONDITIONS RANGE

In this range, you will find workwear designed for prolonged outdoor use in order to provide protection against difficult weather conditions, in addition to protection against electric arcs. Garments in our Weather Protection range contain no metallic parts. They are suitable for ATEX zones.



Complete your PPE with
AFBRE
> see page 56



Weight:
390 g/m²

AFPLUI-HVO

AFPLUI-HVJ

AFPLUI-HVO•J

HIGH-VISIBILITY ARC FLASH RAIN SET
WITH RETROREFLECTIVE TAPES

> APC 1

MARKINGS & STANDARDS

- EN ISO 11612:2015 A1 B1 C1 / EN 1149-5:2018 /
- IEC 61482-2:2018 / EN 61482-1-2 APC 1 /
- EN ISO 20471:2013+A1:2016 Class 3 /
- EN 343:2009 [3;1]

/ TECHNICAL SPECIFICATIONS

- Elasticated cuffs, stand-up collar, windproof and rainproof.
- High-frequency welded seams ensure perfect waterproofness and resistance to weather conditions.
- Adjustable hood with the possibility of storage in the collar.

Ref.	Description
AFPLUI-VES-HVO	Orange jacket
AFPLUI-VES-HVJ	Yellow jacket
AFPLUI-PAN-HVO	Orange trousers
AFPLUI-PAN-HVJ	Yellow trousers

FR-treated fabric

67% polyester, 33% cotton - 100% PVC-free coating



XS TO 3XL

Complete the reference with the required size, for example: AFPLUI-PAN-HVOHVO**3XL**



AFPRO-SS-M16

AFPRO-SS-HVO16

AFPRO-SS-HVJ16

Weight:
360 g/m²

AFPRO-SS-M•HVO•J16

ARC FLASH SOFTSHELL
WITH RETROREFLECTIVE TAPES

> APC 1 > ATPV 16 Cal/cm² > ELIM 11 Cal/cm²

MARKINGS & STANDARDS

- EN ISO 11612:2015 A1 B1 C2 / EN ISO 11611:2015 A1 Class 2 / EN 13034:2005 + A1:2009 Type PB[6] / EN 1149-5:2018 /
- IEC 61482-2:2018 EN 61482-1-2 APC 1, EN 61482-1-1 ATPV 16 cal/cm² ELIM 11 cal/cm² /
- AFPRO-SS-HV:** EN ISO 20471:2013+A1: 2016 Class 2

Inherent FR fabric

60% modacrylique, 39% cotton, 1% antistatique, metal free

Ref.	Description
AFPRO-SS-M16	Blue softshell
AFPRO-SS-HVO16	Orange softshell
AFPRO-SS-HVJ16	Yellow softshell



S TO 3XL

Complete the reference with the required size, for example: AFPRO-SS-M16-L

> ACCESSORIES

Visual	Reference	Description	Key points
	AFCAP23	Arc Flash hood for parka - IEC 61482-2 - EN 61482-1-1: ATPV 23 cal/cm², ELIM 22 cal/cm² - EN 61482-1-2: APC 2 (7kA)	- Double-layer waterproof hood for protection against cold and rain. - Fabric tested against electric arc hazards. - Elastic closure, one-size-fits-all.
	DOUBLEFR	Flame-retardant fleece lining for parka EN ISO 11612:2015 (Heat and flames): A1, B1, C1	- Zip fastening with double sliders and round collar. - Available sizes: S, M, L, XL, 2XL, 3XL.
	AFBRE	Adjustable and removable braces for over-trousers	- All-plastic quick-release buckle. - One size.
	GENPOLY	Pair of kneepads EN 14404 + A1 Level 1	- Knee protection for garments equipped with kneepad pockets. 15 mm thickness, material made of 100% polyethylene.



AF-PARKA-LEO20

AFOVERPAN-LEO

Weight:
420 g/m²

Complete your PPE with **AFCAP23, DOUBLEFR** for parka
AFBRE for over-trousers

AF-LEO.20

ARC FLASH SET WITH RETROREFLECTIVE TAPES

> APC 2 > ATPV 23 Cal/cm² > ELIM 22 Cal/cm²

MARKINGS & STANDARDS

EN ISO 14116:2015 Indice 3 /
EN ISO 11612:2015 A1 B1 C1 E1 F1 / EN ISO 11611:
2015 A1 Class 2 / EN 13034:2005+A1:2009
Type PB(6) / EN 1149-5:2018 / IEC 61482-2:
2020 EN 61482-1-2 APC 2 / EN 61482-1-1 ATPV 23 cal/cm²
ELIM 22 cal/cm² / EN 343:2003+A1:2007 [3;2]



S TO 3XL

Complete the reference with the required size
for example: AF-PARKA-LEO20-L and AFOVERPAN-LEO-XL

Ref.	Description
AF-PARKA-LEO20	Parka
AFOVERPAN-LEO	Over-trousers

Inherent FR fabric
50% modacrylique, 41% cotton, 7% PU.
2% antistatique, metal free



Complete your PPE with
AFCAP23, DOUBLEFR for parka
> see page 56



Complete your PPE with
AFBRE for over-trousers
> see page 56

Yellow:
270 g/m²

Orange:
350 g/m²

AF-HVJ.0

HIGH-VISIBILITY ARC FLASH SETS
WITH RETROREFLECTIVE TAPES

> APC 2

YELLOW > ATPV 23 Cal/cm² > ELIM 22 Cal/cm²

ORANGE > ATPV 30 Cal/cm² > ELIM 25 Cal/cm²

MARKINGS & STANDARDS

EN ISO 14116:2015 Indice 3 / EN ISO 11612:2015 A1 B1 C1 E1 F1 /
EN ISO 11611: 2015 A1 Class 2 / EN 13034:2005+A1:2009
Type PB(6) / EN 1149-5:2008 / EN 61482-2:2020 EN 61482-1-2
APC 2, (Yellow) EN 61482-1-1 ATPV 23 cal/cm² ELIM 22 cal/cm² (Orange) EN 61482-
1-1 ATPV 30 cal/cm² ELIM 25 cal/cm² / EN 343:2003+A1:2007 [3;2]
EN ISO 20471:2013+A1:2016 Class 2

Ref.	Description
AF-PARKA-HVJ	Yellow jacket
AF-PARKA-HVO	Orange jacket
AF-PRO-OVERPAN-HVJ	Yellow over-trousers
AF-PRO-OVERPAN-HVO	Orange over-trousers

Metal free

/ TECHNICAL SPECIFICATIONS

- Anti-panic zip fastening to allow rapid removal of the parka if required.
- Waterproof and breathable membrane to protect against wind and rain.
- Compatible with various accessories such as the FR lining, ideal for working in cold environments.



S TO 3XL

Complete the reference with the required size
for example: AF-PARKA-HVJ-M and AF-PRO-OVERPAN-HVJ-M





PERSONAL PROTECTIVE EQUIPMENT

ARC FLASH PROTECTION SWITCHING WEAR

> SWITCHING WEAR RANGE

In this range, you will find workwear designed for occasional use, for switching and manoeuvring operations.



ARC40

ARC FLASH SET AND ARC-LFH40 HOOD

- > APC 2
- > ATPV 40 Cal/cm² > ELIM 36 Cal/cm²

MARKINGS & STANDARDS LONG JACKET & BIB AND BRACE

EN ISO 11612:2015 A1 A2 B1 C1 F1 / EN 1149-5:2008 /
IEC 61482-2:2020 EN 61482-1-2 APC 2, EN 61482-1-1 (Method A)
ATPV 40 cal/cm² ELIM 36 cal/cm²

MARKINGS & STANDARDS FACE SHIELD

ARCCOI40 face shield: EN 166:2002 / EN 170:2002 /
GS-ET-29:2019 / ASTM F2178 / ARC-LFH40 face shield: same standards
as the ARCCOI40 and the newest IEC 62819:2023 / EN ISO 16321-1:2022

ARC-LFH40

NEW



Ref.	Description
ARCCOI40	Hood
ARC-LFH40	Hood with flip-up face shield
ARCVES40	Long jacket
ARCSAL40	Bib and brace
ARCGAN40	Over-gloves

HOOD ONE SIZE
LONG JACKET S TO 4XL
BIB AND BRACE S TO 4XL
OVER-GLOVES M TO 2XL

Complete the reference with the required size,
for example: ARCSAL40-2XL
FR-treated fabric (two layers): 87% cotton,
12% nylon, 1% antistatic fibre



ARC53

ARC FLASH SET

- > APC 2 > ATPV 53 Cal/cm² > ELIM 47 Cal/cm²

MARKINGS & STANDARDS LONG JACKET & BIB AND BRACE

EN ISO 11612:2015 A1 A2 C2 F2 / IEC 61482-2:2020 EN 61482-1-2
APC 2, EN 61482-1-1 (Method A) ATPV 53 cal/cm² ELIM 47 cal/cm²

MARKINGS & STANDARDS FACE SHIELD

EN 166:2001 / EN 170:2002 / GS-ET-29:2019 / ASTM F2178

Ref.	Description
ARCCOI53	Hood
ARCVES53	Long jacket
ARCSAL53	Bib and brace
ARCGAN53	Over-gloves

HOOD ONE SIZE
LONG JACKET S TO 5XL
BIB AND BRACE S TO 5XL
OVER-GLOVES M TO 2XL

Complete the reference with the required size,
for example: ARCGAN53-2XL

FR-treated fabric (three layers):
87% cotton, 12% nylon, 1% antistatic fibre



ARC65

ARC FLASH SET

> APC 2 > ATPV 75 Cal/cm²

MARKINGS & STANDARDS FABRIC

IEC 61482-2:2020 IEC 61482-1-2 APC 2 / ASTM F1506
ATPV 75 cal/cm² / ASTM F1959 / NFPA 70E / EN 1149-2 A

MARKINGS & STANDARDS FACE SHIELD

ASTM F2178 / ANSI Z87.1 / EN 166:2002 / EN 170:2002 /
GS-ET-29:2019 Class 2

Ref.	Description
ARCCOI65	Hood
ARCVES65	Long jacket
ARCSAL65	Bib and brace
ARCGAN65	Over-gloves

HOOD ONE SIZE
LONG JACKET S TO 3XL
BIB AND BRACE S TO 3XL
OVER-GLOVES M TO XL



Complete the reference with the required size, for example: ARCVES65-XL



ARC100

ARC FLASH SET

> APC 2 > ATPV 100 Cal/cm²

MARKINGS & STANDARDS FABRIC

IEC 61482-2:2020, IEC 61482-1-2 APC 2 / ASTM F1506
ATPV 100 cal/cm² / ASTM F1959 / NFPA 70E / EN 1149-2 A

MARKINGS & STANDARDS FACE SHIELD


ASTM F2178 / ANSI Z87.1 / EN 166:2002 / EN 170:2002 /
GS-ET-29:2019 Class 2

Ref.	Description
ARCCOI100	Hood
ARCVES100	Long jacket
ARCSAL100	Bib and brace
ARCGAN100	Over-gloves

HOOD ONE SIZE
JACKET S TO 3XL
BIB AND BRACE S TO 3XL
OVERGLOVES M TO 2XL



Complete the reference with the required size, for example: ARCSAL100-M

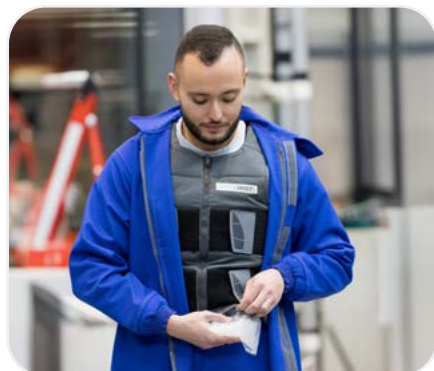

CRYOVEST

THERMOREGULATING VEST AGAINST HEAT STRESS

TECHNICAL SPECIFICATIONS

High-performance thermoregulating vest designed for operators performing physical exertion in thermal environments above 28°C.

Physiological benefits

- Reduction and stabilisation of heart rate
- Stabilisation of hydration status (reduced sweating)
- Improved thermal comfort
- Promotes recovery after exertion

Psycho-cognitive benefits

- Preserves memory, cognitive processing and fine motor skills
- Preserves coordination of movements and improves reaction times



GOOD TO KNOW

Never wear the CRYOVEST over Arc Flash garments, as this may compromise their level of protection. It must be worn under Arc Flash garments.



PPE AGAINST FALLS FROM A HEIGHT

/ Device or means intended to be carried or held by a person to protect them against one or several risks that may threaten their safety or health.

It must comply with 2016/425 European Regulation which determines

- Essential health and safety requirements
- Commercialization of PPE
- The definition of PPE
- Conformity between member states and free intra-community circulation.
- Design according to the 3 categories of PPE
- PPE certification processes
- The scope of EU type examination
- Manufacturer's obligations




LIST OF EUROPEAN STANDARDS

Standards	Description
EN 341	Descenders devices
EN 353-1	Guided type fall arresters with a rigid anchor line
EN 353-2	Guided type fall arresters with a flexible anchor line
EN 354	Restraint lanyards with fixed length
EN 355	Energy absorbers
EN 358	Belts and lanyards for work positioning or restraint
EN 360	Self-retracting lifelines
EN 361	Safety harnesses
EN 362	Connectors
EN 363	Personal fall protection systems
EN 364	Test methods for materials, components and systems
EN 365	General requirements for instructions for use, maintenance, periodic examination, repair, marking and packaging
EN 795	Anchorage devices and their components
EN 813	Requirements, testing, marking and information
EN 1891	Low stretch textile ropes of kernmantel construction




LIST OF HARMONIZED EUROPEAN STANDARDS


PPE should only be used as a last resort when collective protection cannot be provided. The fall arrest system allows a person to be connected to an anchorage point in such a way that the fall is safely arrested.




/ RETENTION SYSTEM



/ FALL ARREST SYSTEM



/ FASTENING SYSTEM
ON THE WORK ENVIRONMENT

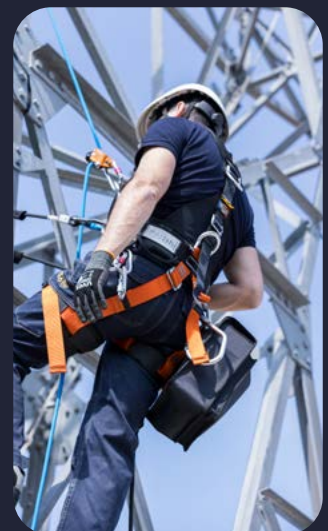




POWER PLANTS

EN 361: Full body harnesses
EN 795: Single-user anchor devices
EN 360: Retractable type fall arresters
EN 355: Energy absorbers



TRANSFORMERS

EN 361: Full body harnesses
EN 795: Single-user anchor devices
EN 360: Retractable type fall arresters
EN 355: Energy absorbers

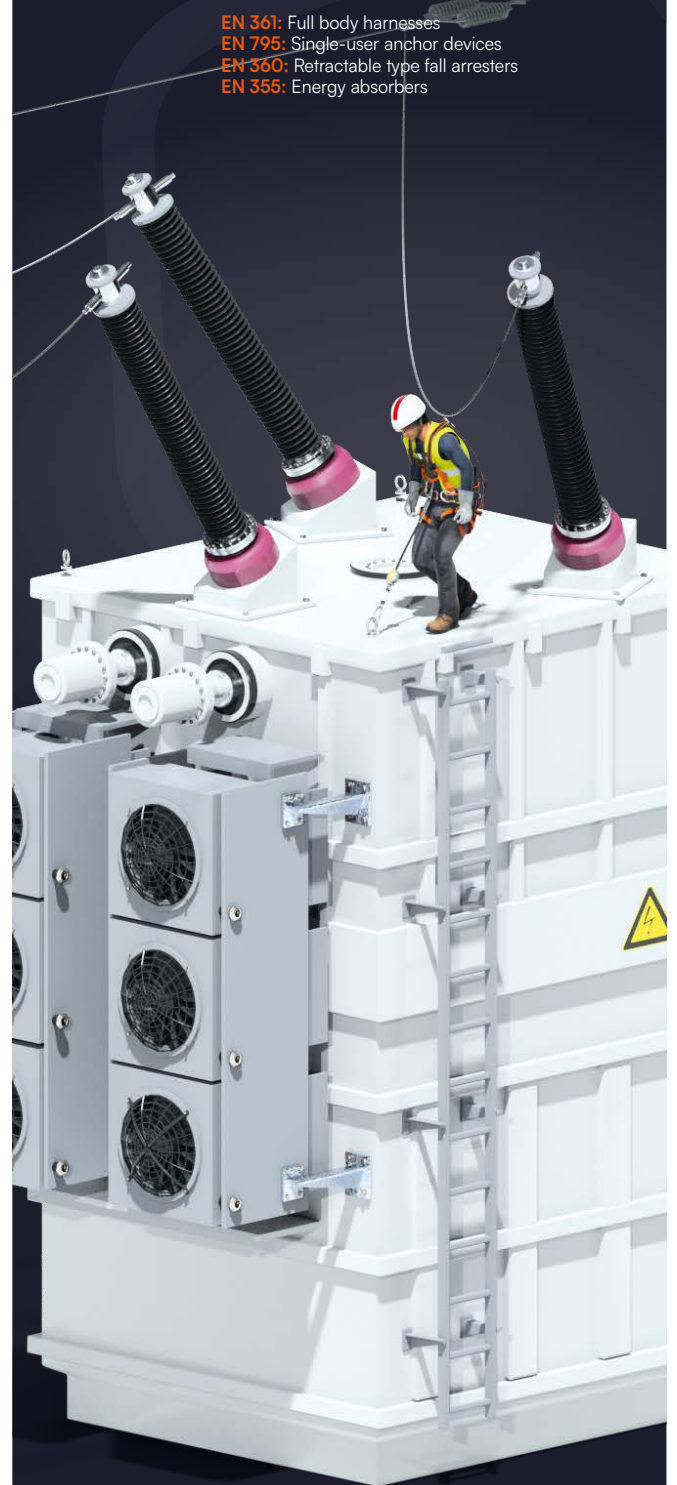



TRANSMISSION

- EN 361: Full body harnesses
- EN 358: Belts and lanyards for work positioning or restraint
- EN 795: Anchorage devices
- EN 353-2: Guided type fall arresters with a flexible anchor line
- EN 355: Energy absorbers




MEDIA TENSION

- EN 361: Full body harnesses
- EN 358: Belts and lanyards for work positioning or restraint
- EN 795: Anchorage devices
- EN 353-2: Guided type fall arresters with a flexible anchor line
- EN 355: Energy absorbers
- EN 360: Self-retracting lifelines





PERSONAL PROTECTIVE EQUIPMENT WORK AT HEIGHT COMPLETE LINEMEN SET

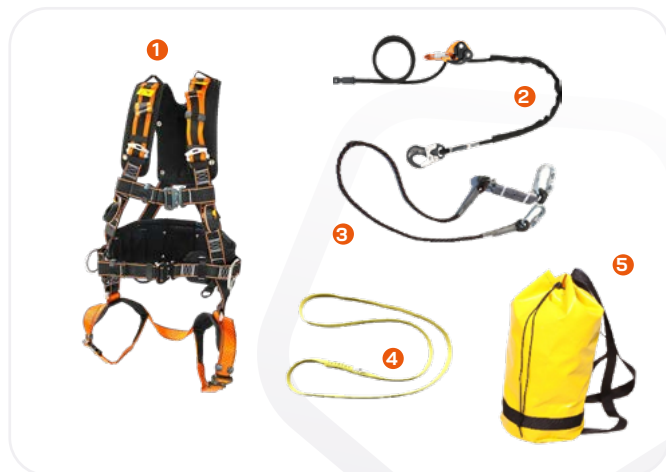

Ref.	Description
K310H1ACTM	Complete set - Size M/XL
K310H1ACGT	Complete set - Size XXL

K310H1ACTM K310H1AC^{GT}


COMPLETE LINEMEN SET
(ELECTRICAL DISTRIBUTION)

STANDARDS

EN 361 | EN 355 | EN 358 | EN 795

/ This kit contains:

N°	Ref.	Description
1	H1ACTM or H1ACGT	Comfort safety harness with automatic buckles. Size M/XL (H1ACTM) or XXL (H1ACGT)
2	FINCH+SHELTER-500	Work positioning lanyard with progressive adjustment, 5 m
3	ABD118200	Energy absorber with fixed safety lanyard and 2 manual connectors 18mm
4	ANS2120	Anchorage ring 1,2m
5	TS75	Carrying bag

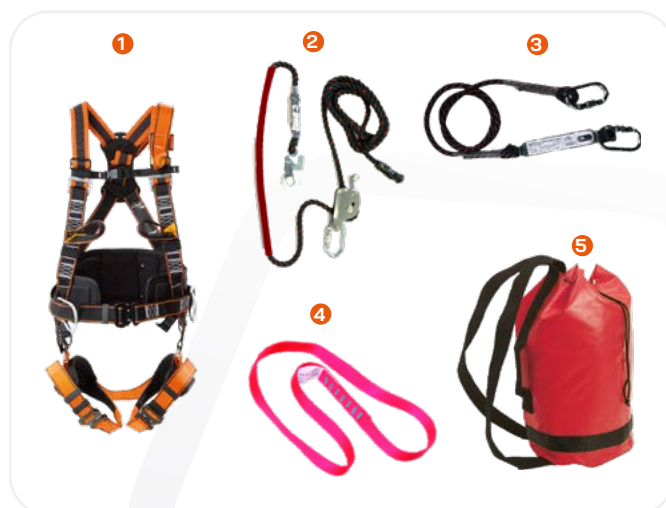

K310H1A


COMPLETE LINEMEN SET (ELECTRICAL DISTRIBUTION)

STANDARDS

EN 361 | EN 355 | EN 358 | EN 795

/ This kit contains:

N°	Ref.	Description
1	H1A	Harness for linemen with moving belt 180° and automatic buckles
2	LT1400	Work positioning lanyard twisted rope 4 meters with snap hook and fall arrester
3	ABD118200	Tear webbing energy absorber with fixed safety lanyard 2 meters
4	ANS2120	Anchorage webbing sling 1,20 meters
5	TS75	Equipment carrier bag, 42 L

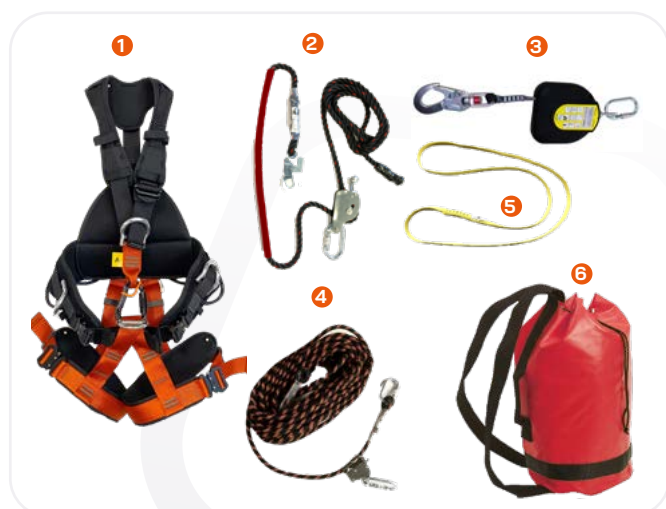

Ref.	Description
K630H3NTM	Complete set - Size M/XL
K630H3NGT	Complete set - Size XXL

K630H3NTM K630H3N^{GT}


COMPLETE SUSPENSION LINEMEN SET
(ELECTRICAL TRANSPORT)

STANDARDS

EN 361 | EN 813 | EN 358 | EN 360 | EN 353/2 | EN 795

/ This kit contains:

N°	Ref.	Description
1	H3NTM or H3NGT	Comfort suspension harness with automatic buckles size M/XL (H3NTM) or XXL (H3NGT)
2	LT1200	Work positioning lanyard in twisted rope, 2m
3	ARS3	Retractable type fall arrester 6m
4	AMD130	Guided type fall arrester on rope 30m
5	ANS2120	Anchorage ring 1,2m
6	TS75	Carrying bag

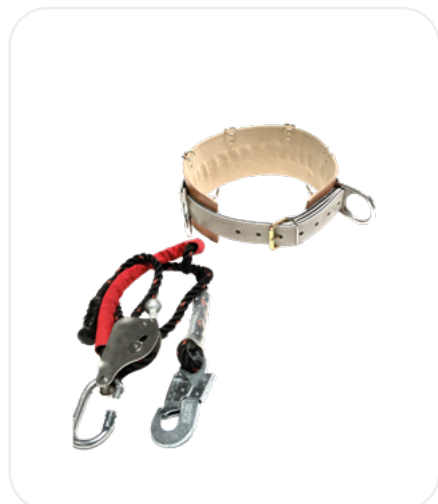

C67N2

WORK POSITIONING KIT

/ This kit contains:

N°	Ref.	Description
1	C65TM	Work positioning belt, medium size 950/1250 mm
2	LT1400	Work positioning lanyard twisted rope 4 meters with snap hook and fall arrester

Ref.	Description
C67N2	Work positioning kit




C67N3

WORK POSITIONING KIT

/ This kit contains:

N°	Ref.	Description
1	C65TM	Work positioning belt, medium size 950/1250 mm
2	C62A	Lanyard securing rope Ø 12 mm length 1,5 m with connector
3	LT1400	Work positioning lanyard twisted rope 4 meters with snap hook and fall arrester

Ref.	Description
C67N3	Work positioning kit

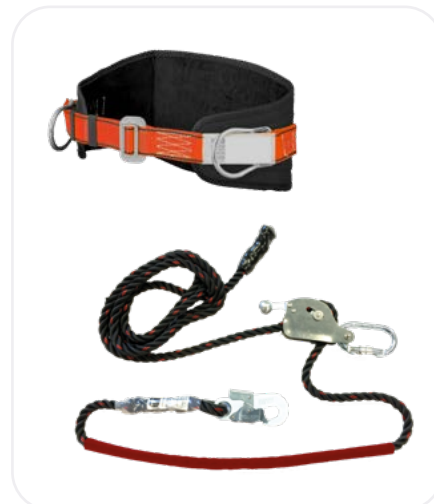

KCT2D-1200

WORK POSITIONING KIT TEXTILE BELT

/ This kit contains:


N°	Ref.	Description
1	CT2D	Textile work positioning belt
2	LT1200	Work positioning lanyard in twisted rope 2 meters

Reference	Size
KCT2DTM-1200	M/XL
KCT2DGT-1200	XXL



MP15

PLASTIC CASE FOR CARRYING EQUIPMENT

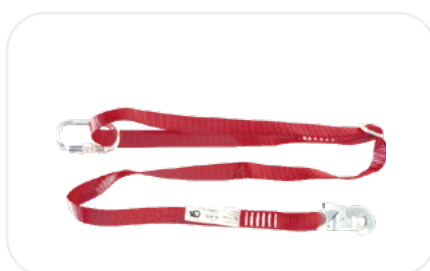

LSR1200

ADJUSTABLE WORK POSITIONING LANYARD 2M

STANDARDS

EN 358: 1999

/ TECHNICAL SPECIFICATIONS

30 mm wide polyester webbing work positioning lanyard, length adjustable by steel buckle. At one end, a steel connector with manual locking by means of an 18 mm opening screw. At the other end of the lanyard, an integrated zinc-plated steel connector with automatic locking by double latch, opening 18 mm.





PERSONAL PROTECTIVE EQUIPMENT
WORK AT HEIGHT
FALL ARREST KITS



Ref.	Description
K700H6PRO TM	Complete set - Size M/XL
K700H6PRO ^{GT}	Complete set - Size XXL

K700H6PROTM K700H6PRO^{GT}


FALL ARREST KIT FOR AERIAL WORK PLATFORM

STANDARDS

EN 361 | EN 358

/ This kit contains:

N°	Ref.	Description
1	H6PRO TM or H6PRO ^{GT}	Safety harness comfort / size M/XL (H6PRO TM) or XXL (H6PRO ^{GT})
2	ARS4	Retractable type fall arrester 2m
3	MP15	Carrying plastic case

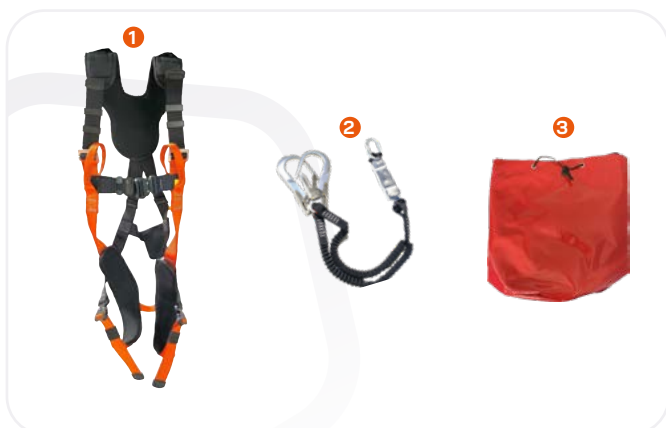

Ref.	Description
K100H6PRO TM	Complete set - Size M/XL
K100H6PRO ^{GT}	Complete set - Size XXL

K100H6PROTM K100H6PRO^{GT}


FALL ARREST KIT WITH ADJUSTABLE LANYARD
FOR AERIAL WORK PLATFORM

STANDARDS

EN 361 | EN 358

/ This kit contains:

N°	Ref.	Description
1	H6PRO TM or H6PRO ^{GT}	Safety harness comfort / size M/XL (H6PRO TM) or XXL (H6PRO ^{GT})
2	ABS160Y130	Energy abosber with elastic webbing fork lanyard
3	STEPIR-16	Carrying plastic case

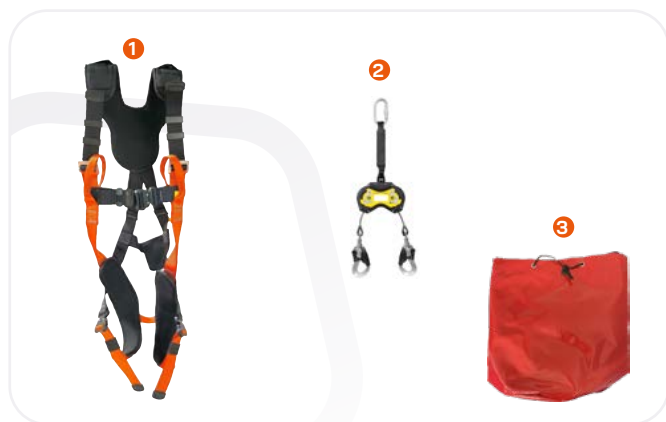

Ref.	Description
K110RH6PRO TM	Complete set - Size M/XL
K110RH6PRO ^{GT}	Complete set - Size XXL

K110RH6PROTM K110RH6PRO^{GT}


SCAFOLDING COMFORT KIT
WITH RETRACTABLE FALL ARRESTER

STANDARDS

EN 361 | EN 360

/ This kit contains:

N°	Ref.	Description
1	H6PRO TM or H6PRO ^{GT}	Safety harness comfort / size M/XL (H6PRO TM) or XXL (H6PRO ^{GT})
2	AR2S	Automatic fall arrester with double webbing max extended 2M
3	STEPIR-16	Carrying plastic case

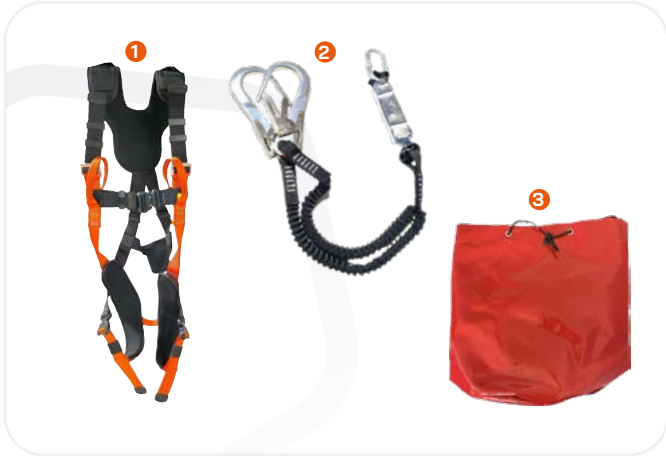

K130H6PROTM K130H6PRO^{GT}

FALL ARREST KIT FOR INDUSTRIAL MAINTENANCE

STANDARDS

EN 361 | EN 358

/ This kit contains:

N°	Ref.	Description
1	H6PRO TM or H6PRO ^{GT}	Safety harness comfort / size M/XL (H6PRO TM) or XXL (H6PRO ^{GT})
2	AR2S	Automatic fall arrester with double webbing max extended 2M
3	STEPIR-16	Carrying plastic case



K340H1A

FALL ARREST KIT SPECIALLY DESIGNED FOR WORK ON CATENARY LINES AND OVERHEAD STRUCTURES

STANDARDS

EN 361 | EN 358

/ This kit contains:

N°	Ref.	Description
1	H1ATM or H1AGT	Comfort safety harness with automatic buckles_size M/XL (H1ATM) or XXL (H1AGT)
2	LT1200	Work positioning lanyard in twisted rope, 2m
3	AMD110	Guided type fall arrester with 10m rope
4	TS75	Carrying bag





PERSONAL PROTECTIVE EQUIPMENT

WORK AT HEIGHT HARNESSES

H6

INDUSTRY 3-POINT FALL
ARREST HARNESS

STANDARDS

EN 361



• Dorsal
extension

/ USE

- Full body harness with three anchorage points (2 back and 1 front);
- Composition: polyamide/polyester straps.
- Metallic buckles in zinc plated steel.

Ref.	Size
H6TM	M-XL
H6GT	XXL

H6PRO

FULL BODY HARNESS "PRO"
MAINTENANCE

STANDARDS

EN 361



/ USE

- Full body harness with three anchorage points (2 back and 1 front);
- Composition: polyamide/polyester straps.
- Metallic buckles in zinc plated steel.

Ref.	Size
H6PROTM	M-XL
H6PROGT	XXL

H6CPRO

FULL BODY HARNESS "PRO"
MAINTENANCE

STANDARDS

EN 361



/ USE

- Fall arrest harness with work positioning belt.
- Harness with aluminium buckle and two fall arrest attachment points.

Ref.	Size
H6CPRO-TM	M-XL
H6CPRO-GT	XXL

H1AL

FULL BODY HARNESS 180°
FOR ELECTRICIAN WORKS

STANDARDS

EN 361 | EN 358



/ USE

- Full body harness for lineworker working on electrical supports, with work positioning belt.

Reference	Size
H1AL-PT	S
H1AL-TM	M - XL
H1AL-GT	XXL

H1AC

FULL BODY HARNESS 180°
FOR ELECTRICIAN WORKS

STANDARDS

EN 361 | EN 358



/ USE

- For lineworker working on electrical supports, with work positioning belt.

Ref.	Size
H1ACPT	S
H1ACTM	M-XL
H1ACGT	XXL
H1ACTGT	XXXL

H1A-TST

FULL BODY HARNESS WITH
180° SEAT BELT
FOR HVA LIVE WORKING

STANDARDS

EN 361 | EN 358



/ USE

- Full body harness with two fall arrest attachment points, one back metallic D-ring and two webbing sternal loops to link.

Ref.	Size
H1ATST-PT	S
H1ATST-TM	M-XL
H1ATST-GT	XXL



H3N

FULL BODY HARNESS
FOR WORKS IN SUSPENSION

STANDARDS

EN 361 | EN 358 | EN 813



FRONT

BACK

/ USE

- Personal Protective Equipment against fall from a height.
- Full body harness for works in suspension and work positioning

Reference	Size
H3NPT	S
H3NTM	M - XL
H3NGT	XXL

H8

FULL BODY HARNESS
FOR WORKS IN SUSPENSION

STANDARDS

EN 361 | EN 358 | EN 813



FRONT

BACK

/ USE

- Personal Protective Equipment against fall from a height.
- Full body harness for works in suspension and work positioning

Ref.	Size
H8TM	M-XL
H8GT	XXL



ABD1

TEAR WEBBING ENERGY
ABSORBER WITH FIXED
SAFETY LANYARD

STANDARDS

EN 355

Reference	Opening	Length
ABD118150	18 mm	1,50 m
ABD118200	18 mm	2 m



ABS1Y

TEAR WEBBING ENERGY
ABSORBER WITH FIXED
DOUBLE ELASTIC SAFETY
LANYARD

STANDARDS

EN 355

/ TECHNICAL SPECS

- 32 mm polyamide energy absorber with 18 mm snap hook and double elastic lanyard.
- 40 mm elastic lanyard with double locking snap hooks (openings: 50, 60, 88 mm).

Reference	Opening	Length
ABS150Y130	50 mm	1,30 m
ABS188Y180	88 mm	1,80 m
ABS160Y180	60 mm	1,80 m
ABS188Y130	88 mm	1,30 m
ABS160Y130	60 mm	1,30 m
ABS150Y180	50 mm	1,80 m



ABD1Y

TEAR WEBBING ENERGY
ABSORBER, WITH FIXED
DOUBLE ROPE SAFETY
LANYARD

STANDARDS

EN 355

/ TECHNICAL SPECS

- 32 mm polyamide energy absorber with screw snap hook (C1) and fixed double lanyard.
- 10,5 mm polyamide rope lanyard with double locking snap hooks at both ends.

Reference	Opening	Length
ABD150Y150	50 mm	1,50 m
ABD160Y200	60 mm	2 m
ABD188Y150	88 mm	1,50 m
ABD188Y200	88 mm	2 m
ABD150Y200	50 mm	2 m
ABD160Y150	60 mm	1,50 m



AMD1

GUIDED TYPE FALL
ARRESTER

STANDARDS

EN 352-2

/ USE

Device is designed for one person only and has to be used with Ø 12 mm work ropes.

/ TECHNICAL SPECS

Openable guided type fall arrester equipped with a screw snap hook (manual locking) opening 18 mm, ref. C1.



PERSONAL PROTECTIVE EQUIPMENT

WORK AT HEIGHT

FALL ARRESTERS AND ANCHORS



BACKUP

FALL ARRESTER

STANDARDS

EN 353-2 | EN 358 | EN 567

/ TECHNICAL SPECS

Allows the user to follow the user in his ascent and descent and to stop a fall.



AMT1

GUIDED TYPE FALL ARRESTER WITH ENERGY ABSORBER

STANDARDS

EN 353-2

/ TECHNICAL SPECS

For use on 14/16 mm stranded rope, to be connected to the harness.



ARC

STEEL CABLE RETRACTABLE TYPE FALL ARRESTER

STANDARDS

EN 360

/ TECHNICAL SPECS

Retractable 10/20/30 meters galvanised steel cable.



ARS4

WEBBING RETRACTABLE FALL ARRESTER WITH ENERGY ABSORBER

STANDARDS

EN 360

/ TECHNICAL SPECS

Retractable 2,25 meters polyamide webbing



ARS1

WEBBING RETRACTABLE FALL ARRESTER WITH ENERGY ABSORBER

STANDARDS

EN 360

/ TECHNICAL SPECS

Retractable 2,25 meters polyamide webbing



ARS3

WEBBING RETRACTABLE FALL ARRESTER WITH ENERGY ABSORBER

STANDARDS

EN 360

/ TECHNICAL SPECS

- 6 m polyester/kevlar webbing (17 mm) with swivel eye, fall indicator, and auto-lock snap hook.
- Plastic casing with aluminium swivel eye and 18 mm manual screw snap hook.



ANS2

ANCHORAGE WEBBING SLING

STANDARDS

EN 795 — class B

/ TECHNICAL SPECS

Polyamide anchorage webbing sling, width 20 mm.
Lengths/colors combos available:
ANS2050:0,5m, orange
/ ANS2080:0,8m, blue
/ ANS2100:1m, green /
ANS2120:1,2m, yellow /
ANS2150:1,5m, red / ANS2200:
2m, purple



CI85

INSULATED ANCHOR CONNECTOR OPENING 83 MM

STANDARDS

EN 795 — class B

/ TECHNICAL SPECS

Retractable 2,25 meters polyamide webbing



CO110

ANCHORAGE CONNECTOR FOR TELESCOPIC POLE, OPENING 110MM

STANDARDS

EN 795 — class B

/ TECHNICAL SPECS

Anchorage connector for telescopic pole, to connect a fall arrest system, form the ground. For one person



ACTP150

CABLE ANCHORAGE FOR TELESCOPIC POLE, LENGTH 1,5M.

STANDARDS

EN 795 — class B



TR

TRIPOD ANCHORAGE SYSTEM FOR CONFINED SPACE

STANDARDS

EN 795 — class B

/ TECHNICAL SPECS

Transportable temporary anchorage device, used in confined space to descend/ascend operator in safety condition during work and to make a rescue operation.



C7

ALUMINIUM CONNECTOR
SIDE OPENING

STANDARDS

EN 795 — class B

/ TECHNICAL SPECS

Aluminium base connector, a symmetric shape, automatic locking with rotating ring.



C1

GALVANIZED STEEL
CONNECTOR

STANDARDS

EN 362 — class B

/ TECHNICAL SPECS

Basic connector, length 110 mm with manual locking by screw.



C2

ALUMINIUM ALLOY
CONNECTOR OPENING
24 MM

STANDARDS

EN 362 — class B

/ TECHNICAL SPECS

Basic connector, length 113 mm, opening 24 mm, with automatic locking gate device by swivel ring.



C5

ALUMINIUM ALLOY
CONNECTOR, OPENING
61 MM

STANDARDS

EN 362 — class A

/ TECHNICAL SPECS

Anchorage snap hook, length 245 mm, with pivoting gate, automatic locking by sliding ring (twist lock) and inside latch.



FINCH+SHELTER

GRADUALLY ADJUSTABLE WORK
POSITIONING LANYARD

STANDARDS

EN 358 | EN 795

/ TECHNICAL SPECS

- Work positioning lanyard in polyamide rope 11 mm diameter with a sewn end connector light alloy with double locking 21 mm opening, and at the other end a stopper.
- With light alloy turnbuckle integrating a handle and with a 21 mm opening connector with manual screw lock.



Reference	Length	Weight
FINCH+SHELTER-200	2 m	710 g
FINCH+SHELTER-300	3 m	790 g
FINCH+SHELTER-400	4 m	870 g
FINCH+SHELTER-500	5 m	950 g



C62C1•A

LANYARD SECURING ROPE
WITH CONNECTOR

STANDARDS

EN 354

Ref.	Connector	Length
C62C1	C1	1,50 m
C62A	C7	



LD1

WORK POSITIONING LAN-YARD IN
BRAIDED ROPE

STANDARDS

EN 358

Ref.	Length	Weight
LD1200	2 m	1 kg
LD1400	4 m	1,2 kg



LT1

WORK POSITIONING LAN-YARD IN
TWISTED ROPE

STANDARDS

EN 358

Ref.	Length	Weight
LT1200	2 m	1,080 kg
LT1400	4 m	1,330 kg



PERSONAL PROTECTIVE EQUIPMENT
WORK AT HEIGHT
BELTS, DESCENDERS AND EVACUATION KIT



KCT2D

WORK POSITIONING BELT KIT

STANDARDS

EN 795 — class B



C4D

WORK POSITIONING BELT

STANDARDS

EN 358

/ TECHNICAL SPECS

- Full-grain leather belt with backpad, lateral D-rings, and roller pin buckle.
- Reinforced seams with copper rivets and 2 accessory holders.



C65-TM

WORK POSITIONING BELT

STANDARDS

EN 358

/ TECHNICAL SPECS

Medium: 950/1250 mm



Complete set containing the EASYUP haul system to ease the victim elevation, and the INDYEVO anti-panic descender.

SPARROW200R

SELF-BRAKING DESCENDER UP TO 200 KG

STANDARDS


EN 341 | EN 12841

/ USE

- Emergency set for the evacuation of a fallen worker suspended to its working space.
- Emergency kit for max. 20 m height.

/ TECHNICAL SPECIFICATIONS

- Control handle with auto-return for safe descent and workstation stop, plus retractable friction point.
- EBS braking reduces speed; safety lever allows easy rope installation over edges.

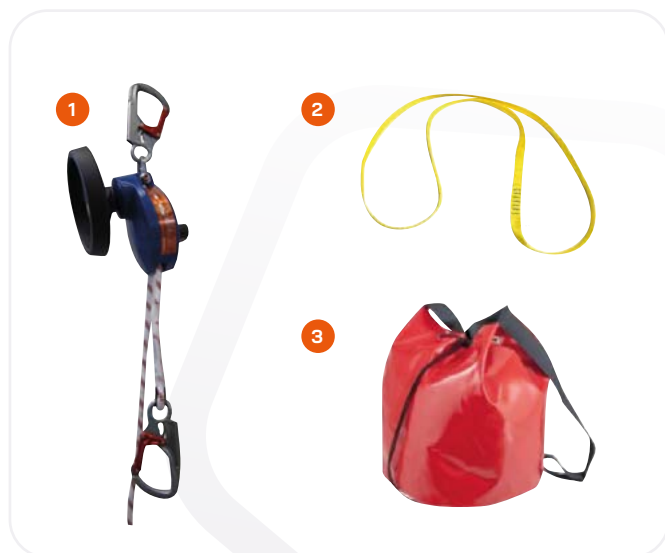

RESCUEWHEEL-20

EVACUATION KIT WITH HAND WHEEL AND ROPE 20 M

STANDARDS

EN 341 CLASS A | EN 1496 CLASS B

/ TECHNICAL SPECS

- Complete kit for downspout by descent, facilitating the recovery of the victim.
- Maximum descent height 20 m.

/ This kit contains:

N°	Ref.	Description
1	H1A	Harness for linemen with moving belt 180° and automatic buckles
2	LT1400	Work positioning lanyard twisted rope 4 meters with snap hook and fall arrester
3	ABD118200	Tear webbing energy absorber with fixed safety lanyard 2 meters



KSAFE01-20

EMERGENCY KIT FOR 20 M HEIGHT

STANDARDS

EN 362 | EN 795 | EN 12278 | EN 567

/ TECHNICAL SPECS

- Emergency set for the evacuation of a fallen worker suspended to its working space.
- Emergency kit for max. 20 m height.

/ This kit contains:

N°	Ref.	Description
1	TSAFE	Evacuation harness
2	ANS2200	Anchorage webbing sling 2 m
3	EASYUP	Haul system with 2 double pulleys
4	C2 x2	2 connectors opening 24 mm
5	C1 x2	2 connectors opening 18 mm
6	CORSTA10520	Static rope 20 m
7	INDYEVO	Anti-panic descender
8	SAFECUT	Knife
9	TS75	Equipment carrier bag, 42L



TSAFE

EVACUATION HARNESS

STANDARDS

EN 1498 class B

/ TECHNICAL SPECIFICATIONS

- Emergency situation, evacuation by a signe person of people working at height.
- Elastic straps. Maximum load: 130 kg.



CORSTA105

STATIC ROPE 10,5 MM


STANDARDS

EN 1891 TYPE A

/ TECHNICAL SPECS

- With plastic-sleeved ends and protected safety stitching.
- Breaking load 3000 daN; 2400 daN with sewn ends or figure-eight knot.

Reference	Length
CORSTA10510	10 m
CORSTA10520	20 m
CORSTA10530	30 m
CORSTA10550	50 m
CORSTA105100	100 m

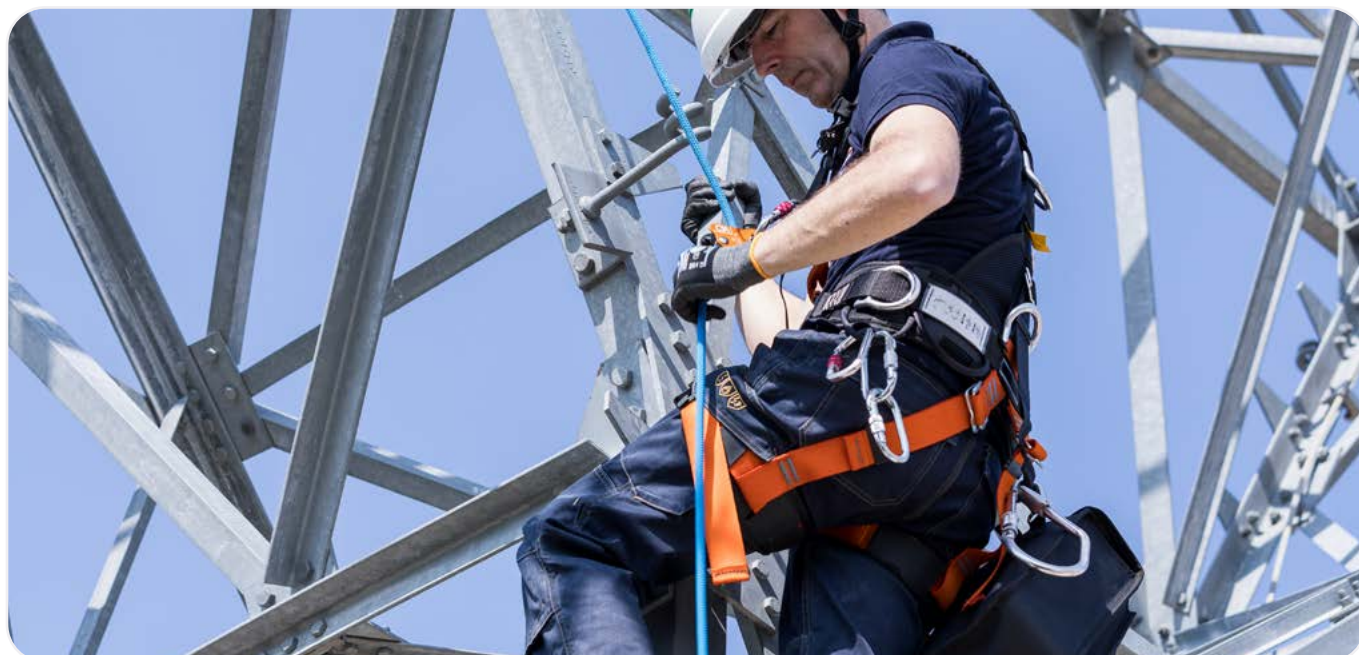



PERSONAL PROTECTIVE EQUIPMENT
CIVIL SECURITY
FIREFIGHTERS

FIREFIGHTERS

CIVIL SECURITY



BELTS

CPA

Belt for accessories

CPAR

Belt for accessories
with reflective elements

CI326-2

Intervention belt



UNITAG

BAGS

SAT-72

Bag for transporting pipes

SET-55 / SIT-100

Training bag for PPE transporting
55 L & 100 L

SEDT-55 / SIDT-100

Training bag for PPE transporting
55 L & 100 L

SITT-100

Carrying trolley bag for PPE 100 L

SM-110

Sailor's clothing bag 110 L

SDP-40

Backpack for PPE transporting 40 L



SDTJ•B•R-LS

BAG FOR TRANSPORTING RESCUE EQUIPMENT

/ TECHNICAL SPECIFICATIONS

Backpack for carrying rescue kit equipment used in high-altitude victim evacuation operations: rope, harness, evacuation triangle, connectors, descender, anchoring rings, pulley, etc.



SEPI

FIRST INTERVENTION BREAK-IN BAG FOR FIREFIGHTERS

/ TECHNICAL SPECIFICATIONS

- Roll-up leather bag, with interior storage fixed by copper rivets.
- On the top of the bag a webbing handle and a 45mm shoulder strap adjustable by automatic metal buckle and incorporating a comfort foam for shoulder pad.

Complete

Easy-to-use kit

Protected and transported in a case with identification label (year of manufacture)



KAIRBAG

AIR BAG PROTECTION KIT (LV AND HV)

/ TECHNICAL SPECIFICATIONS

- Yellow = light vehicles
- Red = heavy vehicles
- High-strength PVC-coated canvas steering wheel cover with safety webbing reinforcements and safety seams.

LSPCC

RESCUE AND FALL PROTECTION KIT WITH ANTI-PANIC DESCENDER CONTROL



/ USE

- To evacuate a victim in danger.
- The equipment is heavy and strong, enabling firefighters to carry out their duties quickly, even in extreme situations before the GRIMP arrives.
- This new generation of rescue kit includes a manual descender with rope lock function and a backpack for attaching a seal.

/ This kit contains:

N°	Ref.	Description	LSPCCJ: basic package for pump, VID and VSR machines	LSPCCB: batch for MEA, EPAS, EPC, BEA, etc.	LSPCCR: batch for MEA, EPAS, EPC, BEA, etc.
1	SLPCC	Backpack	SJ-LSPCC Yellow	SB-LSPCC Blue	SR-LSPCC Red
2	CORSTA110	Static rope 11 mm	CORSTA110-30 (30m)	CORSTA110-60 (60m)	CORSTA110-80 (80m)
3	ANS2080	Anchorage ring blue 0,80 m	x 3	x 6	x 6
4	ANS2150	Anchorage ring 1,50m red		x 3	x 3
5	ORBITER F	Single fixed pulley			
6	SPARROW 200R	Anti-panic descender	x 1	x 1	x 1
7	T-SAFE	Rescue triangle			
8	AZO12	Screw connector	x 6	x 9	x 9
9	C2	Automatic connector		x 1	x 1
10	H6PRO	Automatic buckles harness	x 1	x 2	x 2





LOCKOUT TAGOUT - TRYOUT

/ LOCKOUT PADLOCKS **76**

/ LOCKOUT - TAGOUT ACCESSORIES **84**



CS-KA / CS-K NEW

LOCKOUT PADLOCKS WITH INTERCHANGEABLE SHACKLE SYSTEM



TECHNICAL SPECIFICATIONS

- Non-metallic body padlock, with the possibility of 8 interchangeable shackles, to be chosen when ordering.
- Shackles available: metal, composite.
- 8 colours available.
- High security keys.

THE KEY SYSTEMS

On the lockout padlock market, it is usual to see two different key systems.

The 2 key systems are available for all our PENTA padlocks.

KEYED DIFFERENT PADLOCKS



Each padlock has its own unique key.
The key can only open one padlock and no others.

KEYED ALIKE PADLOCKS Padlock WITH NUMBERED KEYS



The padlock and the key are numbered.
Only a key bearing the same number as the padlock can open it. A same key can thus open a set of padlocks bearing the same number, thereby simplifying the management of keys.

THE FIRST LOCKOUT PADLOCK WITH INTER-CHANGEABLE SHACKLE

This feature allows the quick adaptation of the shackle to the installation to lock out without needing to change the padlock.

We offer 8 different shackles that adapt to all our padlocks:

- Height 38 or 76 mm.
- Metal or composite material.
- 4,5 mm or 6 mm diameter

Pressing the push button on the front face once releases the shackle when the padlock is open in order to replace the shackle.



AN EXCLUSIVE DATING SYSTEM

We have developed a padlock that has a built-in dating wheel function that is exclusive on the market.

- Permanent information: the date is impossible to change when the padlock is closed.



We also offer a classic lockout padlock without a dater function.

CUSTOMISE YOUR PADLOCKS

We offer to customise your lockout padlocks using laser engraving to add a lockout supervisor name, a company name or a training organisation name. Under specific conditions, Please contact us.





LOCKOUT PADLOCKS WITH DATER

ADAPT YOUR PADLOCK USING OUR INTERCHANGEABLE SHACKLES:

- Metal or composite material.
- Diameter: 4,5 or 6 mm.
- Height: 38 or 76 mm.

SECURITY KEYS

- Over 1 million possible blade profile variations.
- Captive key system and automatic return cylinder.
- Punch colour identical to the padlock colour.

ULTRA-STRONG COMPOSITE BODY

Non-conductive, UV, hydrocarbon and extreme environment resistant.

Height: 54 mm.

Width: 46 mm.

Thickness: 21 mm.

Weight: 80 g.

EXCLUSIVE DATER SYSTEM

Set the date during the lockout to gain peace of mind about information protection.

LOCKOUT TAG

- Lockout warning.
- Supervisor identification.
- Heavy duty tags: UV and abrasion resistant.
- Set of 6 languages.



ALL THE COLOUR AND SHACKLE LINE AVAILABLE





HOW TO ORDER YOUR PADLOCK

1. Select the body model



/ CLASSIC PADLOCK
Code: CS



/ DATER PADLOCK
Code: CD

2. Select the key system (and the padlock number)



/ KEYED DIFFERENT
PADLOCKS
Code: KD



/ KEYED ALIKE PADLOCKS
Code: KA
add the required key n° 0301 to 0332
(please contact us for specific key numbers)

3. Select your colour



Orange
Code: 1
(CS/CD)



Red
Code: 2
(CS/CD)



Blue
Code: 3
(CS)



Green
Code: 4
(CS)



Yellow
Code: 5
(CS)



Brown
Code: 6
(CS)



White
Code: 7
(CS)



Black
Code: 8
(CS)

4. Select the shackle fitted to the padlock



5. Add extra shackles if you so require (optional)

Shackle code	Shackle material	Shackle inside height	Shackle diameter
M438	Metal	38 mm	4,5 mm
M638			6 mm
M476		76 mm	4,5 mm
M676			6 mm
P438	Composite	38 mm	4,5 mm
P638			6 mm
P476		76 mm	4,5 mm
P676			6 mm

- Mounted shackle: code of the shackle to be added to the padlock reference.
- Additional shackles: the shackles must be ordered individually.

6. Customise your padlock if required (optional)

BREAKDOWN OF A COMPLETE REFERENCE





LOCKOUT PADLOCK REFERENCES

/ CLASSIC - KEYED DIFFERENT

Reference	Choice of colours (corresponding code)	Shackle material	Shackle inside height	Shackle diameter
CS-KD-x-M438	Orange (1)	Metal	38 mm	4,5 mm
CS-KD-x-M476	Red (2)		76 mm	
CS-KD-x-M638	Blue (3)		38 mm	6 mm
CS-KD-x-M676	Green (4)		76 mm	
CS-KD-x-P438	Yellow (5)	Composite	38 mm	4,5 mm
CS-KD-x-P476	Brown (6)		76 mm	
CS-KD-x-P638	White (7)		38 mm	6 mm
CS-KD-x-P676	Black (8)		76 mm	

Replace the reference x by the required colour code as shown in the table (1 to 8).
The padlock is supplied with 1 shackle, 1 key and 1 set of lockout tags in 6 languages

/ CLASSIC - KEYED ALIKE

Reference	Available key numbers	Choice of colours (corresponding code)	Shackle material	Shackle inside height	Shackle diameter
CS-KA#-x-M438	0301 to 0332	Orange (1)	Metal	38 mm	4,5 mm
CS-KA#-x-M476		Red (2)		76 mm	
CS-KA#-x-M638		Blue (3)		38 mm	6 mm
CS-KA#-x-M676		Green (4)		76 mm	
CS-KA#-x-P438		Yellow (5)	Composite	38 mm	4,5 mm
CS-KA#-x-P476		Brown (6)		76 mm	
CS-KA#-x-P638		White (7)		38 mm	6 mm
CS-KA#-x-P676		Black (8)		76 mm	

Replace the reference # by the required key number (4 digits). For specific key numbers, contact us. Replace the reference x by the required colour code as shown in the table (1 to 8). The padlock is supplied with 1 shackle, 1 key and 1 set of lockout tags in 6 languages

/ WITH DATER - KEYED DIFFERENT

Reference	Choice of colours (corresponding code)	Shackle material	Shackle inside height	Shackle diameter
CD-KD-x-M438	Orange (1) Red (2)	Metal	38 mm	4,5 mm
CD-KD-x-M476			76 mm	
CD-KD-x-M638			38 mm	6 mm
CD-KD-x-M676			76 mm	
CD-KD-x-P438		Composite	38 mm	4,5 mm
CD-KD-x-P476			76 mm	
CD-KD-x-P638			38 mm	6 mm
CD-KD-x-P676			76 mm	

Replace the reference x by the required colour code as shown in the table (1 to 8).
The padlock is supplied with 1 shackle, 1 key and 1 set of lockout tags in 6 languages.

For dater padlocks, other colors are available depending on the number of pieces.

/ WITH DATER - KEYED ALIKE

Reference	Available key numbers	Choice of colours (corresponding code)	Shackle material	Shackle inside height	Shackle diameter
CD-KA#-x-M438	0301 to 0332	Orange (1) Red (2)	Metal	38 mm	4,5 mm
CD-KA#-x-M476				76 mm	
CD-KA#-x-M638				38 mm	6 mm
CD-KA#-x-M676				76 mm	
CD-KA#-x-P438		Orange (1) Red (2)	Composite	38 mm	4,5 mm
CD-KA#-x-P476				76 mm	
CD-KA#-x-P638				38 mm	6 mm
CD-KA#-x-P676				76 mm	

Replace the reference # by the required key number (4 digits). For specific key numbers, contact us. Replace the reference x by the required colour code as shown in the table (1 to 8). The padlock is supplied with 1 shackle, 1 key and 1 set of lockout tags in 6 languages.

For dater padlocks, other colors are available depending on the number of pieces.



LOCKOUT - TAGOUT - TRYOUT

LOCKOUT PADLOCKS

COMPOSITE BODY PADLOCKS

All components are non-magnetic and spark-proof



Captive key system ensures that the padlock does not remain unlocked



COMPOSITE BODY PADLOCKS

VARIOUS OTHER PADLOCKS

/ KEY FEATURES

✓ This padlock is resistant to chemicals, corrosion and UV exposure, and is built to withstand extreme temperatures.

🔑 Includes "Danger" and "Locked out" labels in English, French, Spanish and Arabic.

🔑 Supplied with a single key, the padlock is designed for reliable use in standard lockout procedures.

/ Accessories

Reference	Shackle	Body width	Body height	Shackle height	Key retaining padlock	Weight
C406V	Composite Ø 6 mm	38 mm	44 mm	38 mm	Yes	72 g
C410V	Hardenned steel Ø 6 mm			76 mm		108 g
C410VLT				38 mm		128 g
C411V			76 mm	105 g		
C411VLT			76 mm	125 g		
C412V	Composite Ø 4,76 mm	35 mm	48 mm	38 mm	No	70 g
C31V	Hardenned steel Ø 6 mm			76 mm		75 g
C31VLT				76 mm		90 g

COMPOSITE BODY PADLOCKS

OTHER PADLOCKS WITH NUMBERED KEYS

/ KEY FEATURES

✓ This padlock is resistant to chemicals, corrosion and UV exposure, and is built to withstand extreme temperatures.

🔑 Supplied with "Danger" and "Locked out" labels in English, French, Spanish, and Arabic for clear multilingual visibility.

🔑 Keys are sold separately or in sets, with padlocks available in packs of 4, 6 or 10 with a storage rack.

6-pin cinlender with various keys and over 40 000 key combinations



Durable, lightweight, non-conductive thermoplastic body



/ Accessories

Reference	Key numbers available	Shackle	Shackle height	Dimensions	Weight
C410B---	252 to 263	Hardened steel Ø 6 mm	38 mm	90 x 38 x 20 mm	96 g
C406B---	240 to 251	Composite Ø 6 mm			
C410BLT---	264 to 275	Hardened steel Ø 6 mm	76 mm	132 x 38 x 20 mm	116 g



BRASS BODY PADLOCKS WITH REMOVABLE NYLON SHELL

/ KEY FEATURES

35 mm brass padlock with labeling space and "Locked out — Do not operate" marking.

Identification : Colour-coded padlocks, each colour linked to a unique serial number for easy tracking and management.


Delivered without key - keys must be ordered separately.

Reference	Colour	Shackle diameter	Shackle height	Dimensions	Weight
MC1--	R, BL, V, J, N, B, O, BR, VI, G, BN, BB, BRO	Brass Ø 5 mm	45 mm	80 x 35 x 17 mm	125 g
MC1C--	R, BL, V, J		20 mm	49,5 x 35 x 17mm	110g

Complete the reference with the desired colour code.

/ Accessories

CC1-- Colour coded key (code to be precised)

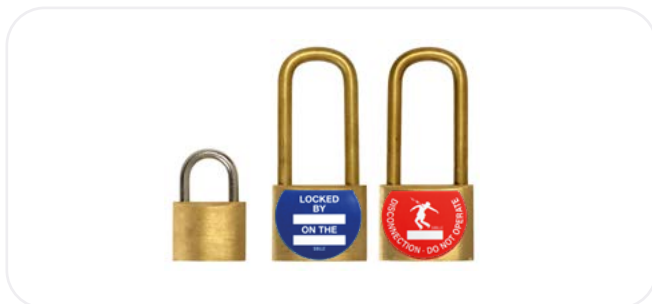

BRASS PADLOCKS

/ TECHNICAL SPECIFICATIONS

- Brass body, delivered with 2 keys. Model C16D is labelled with lockout stickers.

Ref.	Label	Shackle	Shackle height	Dimensions	Weight
C10	No	Hardenned steel Ø 5 mm	20 mm	55 x 35 x 20 mm	105 g
C12		Hardenned steel Ø 7 mm	26 mm	70 x 45 x 10 mm	180 g
C16D-GB	Yes	Brass Ø 7 mm	60 mm	105 x 45 x 10 mm	230 g



BRASS PADLOCKS WITH ABS SHELL

/ TECHNICAL SPECIFICATIONS

- Brass body, ABS shell, delivered with 2 keys.
- Width of the body with shell: 50 mm.
- Models C14D and C22D are labelled with lockout stickers.

Ref.	Label	Shackle	Shackle height	Dimensions	Weight
C14	No	Hardenned steel Ø 7 mm	26 mm	75 x 50 x 18 mm	200 g
C14D-GB	Yes			110 x 50 x 18 mm	210 g
C22D-GB		Brass Ø 6 mm			



BRASS PADLOCKS

/ TECHNICAL SPECIFICATIONS

- Brass body and shackle.
- Delivered without key, the keys have to be ordered separately.

Reference	Number	Shackle	Shackle height	Dimensions	Weight
C15 CAD 72423	72423	Brass Ø 7 mm	26 mm	71 x 45 x 10 mm	180 g
C15 CAD 72432	72432				

/ Accessories

Reference	Description
C15 CLE 72423	Single key n° 72423
C15 CLE 72432	Single key n° 72432



LOCKOUT - TAGOUT - TRYOUT

LOCKOUT TAGOUT ACCESSORIES ARTILLERY PADLOCK



/ Accessories

Reference	Description
C20TC	Triangular shaped key
C20DLC	Half-moon shaped key

C20 C20DL C21PT

Ref.	Number	Shackle	Dimensions	Weight
C20T	Padlock with triangular shape opening	Brass Ø 7 mm height 32 mm	60 x 50 x 15 mm	80 g
C21PT		Brass Ø 6 mm, height 50 mm	65 x 60 x 14 mm	
C20DL	Padlock with half-moon opening	Brass Ø 7 mm height 32 mm	60 x 50 x 15 mm	

● PADLOCK RACKS



IS47 OUR SELECTION

PADLOCKS RACK

/ TECHNICAL SPECIFICATIONS

- Rack made in composite material, fitted with handle.
- Delivered without padlock and without key.

Reference	Number of holes	Dimensions	Weight
IS474TROUS	4	150 x 115 x 9 mm	85 g
IS476TROUS	6		
IS4710TROUS	10		
IS47-20TROUS	20	340 x 80 mm	90 g

SC2

PADLOCKS RACK - 30 PADLOCKS

/ KEY FEATURES

- 🔒 **Fixation:** Hook for easy storage or attachment to metallic structures during lockout.
- 🔑 **Construction:** Stainless steel body with integrated key storage in the handle.

Reference	Dimensions	Weight
SC2	310 x 115 x 190 mm	560 g

B7604

MULTIPLE LOCKING DEVICE

/ KEY FEATURES

- 🔑 Stainless steel device accommodates up to 4 padlocks and is delivered without padlock or key.

Reference	Dimensions	Weight
B7604	165 x 40 x 22 mm	150 g



ADC-CDG12

NEW

GROUP LOCKOUT CENTRE

Station with carrying handle
Includes a work authorization display board

Wall mounted for easy access

Waterproof compartment

Handle for padlocks allowing up to 12 padlocks to be transported to isolation points

Transparent, impact resistant panel allows keys and lockout sheet to be checked



/ KEY FEATURES

Design & Durability: Heavy-duty lockout centre made of powder-coated stainless steel, resistant to impact, corrosion and outdoor conditions.

Security & Organisation: 12 numbered holes for personal padlocks and one for the control padlock. Removable key tray ensures visibility and simplifies key management during lockout.

Usage & Communication: Wall-mounted station ideal for multiple lockouts. Includes a rewritable label for site-specific instructions and a removable caddy to transport padlocks to isolation points.

ADC-CDG8

NEW

GROUP LOCKOUT BOX

Stainless steel with heavyduty powder coat for durability and corrosion resistance

Internal storage capacity for small to medium lockouts.



Carrying handle for easy transport of locks to energy insulation points.

Front Latch secures door during transit.



/ KEY FEATURES

Construction: Robust group lock box and wall bracket in stainless steel for outdoor use.

Communication & Visibility: Rewritable labels and impact-resistant window ensure clear operational tracking. Includes 4 key hooks for quick identification of keys and numbers.

Organisation & Use: 8 slots for padlocks and hasps, with wall-mount system to manage and relocate boxes. Ideal for small to medium-sized lockout programs.

ADC-CGLB

NEW

COMPACT GROUP LOCK BOX



/ KEY FEATURES

Visibility & Capacity: Transparent top-hinged window for quick key checks. 6 internal hooks for visible key storage. Holds up to **6 padlocks inside**, with **8 lockout points** on the sliding rail.

Organisation & Extras: 2 external hooks for permits, tags, or accessories. Designed for group lockout convenience in varied environments from -40°C to $+65^{\circ}\text{C}$.

Portability & Mounting: Lightweight, compact red plastic box for small team use. Can be wall-mounted or carried on site.

Reference	Overall height	Overall width	Largest depth	Window Height	Weight
ADC-CGLB	18 cm / 7,1 inch	10,1 cm / 4 inch	14 cm / 5,5 inch	15,2 cm / 6 inch	250 g / 0,61 lb



LOCKOUT - TAGOUT - TRYOUT

LOCKOUT - TAGOUT ACCESSORIES

GROUP LOCKOUT BOXES AND LOCKOUT STATIONS

Portable group lockout box

Exclusive mechanism ensures that keys cannot be accessed until the last padlock has been removed



The translucent lockable lid protects the contents from dust

Labels available in FR, EN, ES

Polycarbonate for ultimate heat and impact resistance



SFES503RED

GROUP LOCK BOX

/ KEY FEATURES

Key Management: Holds up to 12 keys or bulk keys. Accommodates 14 workers with their own padlocks or hasps.

Dual Use: Can be wall-mounted or used as a portable box. Secures multiple lockout points with a personal padlock.

SFES1900

LOCKOUT STATION

/ KEY FEATURES

Lockout station with adjustable dividers and peg hook options for organising bulky devices. Holds up to 16 suspension clips, each capable of holding up to 2 padlocks or hasps and stores up to 150 tags. Delivered empty.

Reference	Dimensions
SFES1900	67,3 x 55,9 x 10,5 cm

SFE148


OUR SELECTION

PADLOCK STATIONS

An innovative hinge holds the lid for easy product selection.

Transparent cover protects contents.

Labels available in FR, EN, ES



SFE1484B




/ KEY FEATURES

One-piece moulded construction for enhanced ruggedness. Polycarbonate material offers 2x heat resistance and 4x impact resistance compared to standard stations.

Security & Use: Lockable with a combination padlock for controlled access. Delivered empty, designed to safely store padlocks and lockout accessories.

Reference	Description	Dimensions
SFE1482B	Unfilled padlock station for 4 padlocks, 2 hasps and 1 set of 12 labels	311 x 406 x 44 mm
SFE1483B	Unfilled padlock station for 10 padlocks, 2 hasps and 2 sets of 12 labels	394 x 559 x 44 mm
SFE1484B	Unfilled padlock station for 20 padlocks, 4 hasps and 4 sets of 12 labels	559 x 559 x 44 mm

POLYMERE LOCKOUT HASP

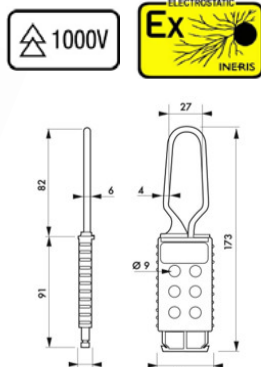

SFE428N

POLYMERE LOCKOUT HASP

/ KEY FEATURES

field-Ready desing: Non-conductive nylon, impact and corrosion resistant. ATEX compatible, insulated up to 1000 V.

Enhanced Group Safety: Prevents re-energizing until all padlocks are removed. LOTO-compliant for individual or team maintenance.

Functionality & capacity: Holds 6 padlocks (Ø9 mm). Jaw stays locked until last padlock is removed. Ø6 mm shackle for quick setup.

Reference	Weight
SFE428N	30 g



ADC-MDC4 ADC-MDC6 LOCKOUT HASP

NEW

Insulated nylon
shackle

High-strength non-
conductive plastic



ADC-MDC4



ADC-MDC6

/ KEY FEATURES

Non-conductive nylon jaw with 4 padlock holes (Ø 7.35 mm). Jaw remains locked until all padlocks are removed.

Reference	Colour	Shackle
ADC-MDC4	Red	Ø 3 mm
ADC-MDC6	Yellow	Ø 6 mm

STEEL LOCKOUT HASPS



SFE420N

SFE421N

SFE420N SFE421N

STEEL LOCKOUT HASPS

/ KEY FEATURES

Enhanced safety: Holds up to 6 padlocks and keeps equipment de-energized until all locks are removed. Prevents accidental restart.

Robust & ATEX-Compatible: Stainless steel body with non-conductive ABS shell, suitable for ATEX zones and harsh environments.

Reference	Inside jaw diameter
SFE420	26 mm
SFE421	39 mm

SFES430

LOCKOUT HASP 4MM

/ KEY FEATURES

Applications: The steel hook fits small locking points.

Locking system: Equipped to be locked with **up to 2 padlocks** for secure isolation.

Construction: Steel hasp with composite body, **UV-stable**, resistant to chemicals and extreme temperatures.

Reference	Lockout hook length	Shackle diameter	Dimensions
SFES430	76 mm	4 mm	76 x 57 x 25 mm





ADC-CA74


NEW

RETRACTABLE LOCKOUT CABLE

Ergonomic take-up wheel retracts the cable.
Deep pockets for easy operation

Stores unused cable, making the device more manageable: whether in use or in storage

Ratcheting mechanism allows post-locking tensioning; opens via control lever. Secures with 4x Ø10 mm padlocks or hasps

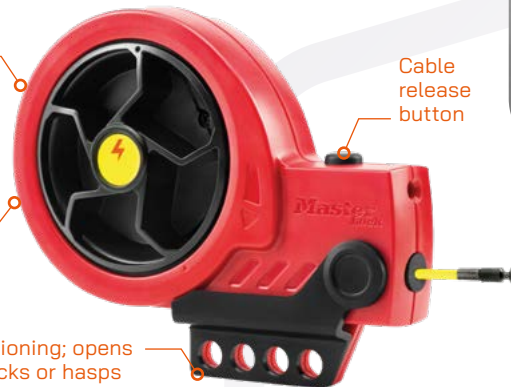

Nylon cable body
Cable release button




/ KEY FEATURES

Adjustable nylon lockout cable (Ø 3.3 mm, 2.74 m) with yellow coating for high visibility. Rugged thermoplastic housing lightweight, chemical-resistant body with trilingual writable safety labels (EN, FR, ES).

Reference	Cable diameter	Cable length
ADC-CA74	3,3 mm	2,74 m

Tough, flexible multi-stranded steel cable is insulated with a clear plastic coating (PVC-free)

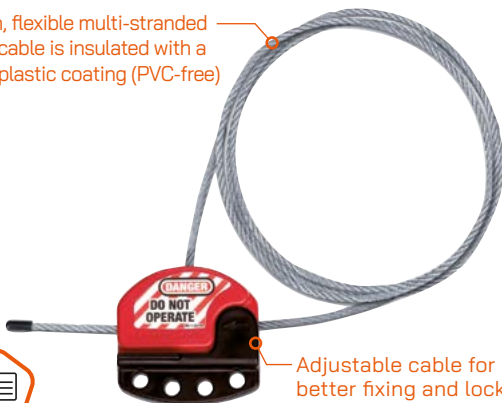

Adjustable cable for a better fixing and lockout

SFES806

ADJUSTABLE LOCKOUT CABLE

/ KEY FEATURES

Robust & Lightweight:
Lightweight thermoplastic body, chemical- and heat-resistant (–57 °C to +177 °C).

Lockout system:
Integrated hasp and cable for multiple circuit breakers or valves. Cable remains adjustable when locked.

Identification :
Writable safety labels (EN/FR/ES) included. Holds up to 4 padlocks for group lockout.

Reference	Cable diameter	Length	Weight
SFES806A	4 mm	1 830 mm	160 g
SFES806B		4 572 mm	260 g

● ELECTRICAL PLUG LOCKOUT



Unique, patent-pending rotation design allows for easier installation in confined space applications

SFE487

SFE488

ELECTRICAL PLUG LOCKOUTS

/ KEY FEATURES

Durability:
Dielectric thermoplastic body, lightweight and chemical-resistant. Performs in temperatures from –46 °C to +177 °C.

Lockout system:
Delivered without padlock, compatible with standard lockout systems. Protects against accidental reconnection.

Identification:
Permanent high-visibility labels in English, French, and Spanish.

Ref.	Lock for electrical outlet	Dimensions	Weight
SFE487	110V and 220V	110 x 111 x 70 mm	90 g
SFE488	220V to 550V	190 x 130 x 90 mm	140 g



SFE485

NEW

ADJUSTABLE VALVE LOCKOUT



Adjustable lockout
from 25 to 165 mm

/ KEY FEATURES

⚡ Dielectric safety:
Non-conductive
polypropylene body
for safe electrical
isolation.
Provides effective
dielectric protection.

**✂️ Resistant
materials:** Withstands
heat, cold, abrasion
and chemicals.
Equipped with a
durable ABS casing.

🔒 Locking capacity:
Padlockable with 3
holes (Ø10mm) for
secure isolation.

Reference	Valve diameter	Dimensions
SFE485	25 to 165 mm	211 x 133 x 55 mm

SFE48

ROTATING GATE VALVE LOCKOUT DEVICES

/ KEY FEATURES

**🔧 Durable &
Dielectric:** Lightweight
thermoplastic body,
chemical-resistant and
dielectric, effective
from -46 °C to
+177 °C.


🔒 Modular design:
rotating, nestable sizes
for compact storage.
Knockout centre
removable for rising stem
gate valves.

🔑 Identification:
High-visibility permanent
labels (EN, FR, ES),
writable and erasable to
track responsible users.

Reference	Outer diameter	Valve diameter	Weight
SFE483	300 mm	152 to 254 mm	550 g
SFE484	400 mm	203 to 330 mm	1 060 g

● CIRCUIT BREAKER LOCKOUT

SFES2390N



The mini circuit breaker
lockout is simple to
use, quick to apply



SFES2391N

SFES2390N SFES2391N

MINI CIRCUIT BREAKER LOCKOUT

/ KEY FEATURES

⚡ Electrical safety:
Prevents accidental
re-energization during
maintenance, with a
reinforced nylon body
ensuring insulation
and lasting durability.
operations. ATEX
compatible, insulated
up to 1000 V.


**🔒 Durable Reinforced
Nylon:** High-strength,
insulating material
providing excellent
resistance to shocks and
wear while remaining
lightweight and reliable
for professional use.

🔦 High visibility :
Bright red finish for
immediate identification
of the lockout device on-
site, improving safety and
operational efficiency.



LOCKOUT - TAGOUT - TRYOUT

LOCKOUT - TAGOUT ACCESSORIES LOCKOUT HASPS AND LOCKOUT CABLES

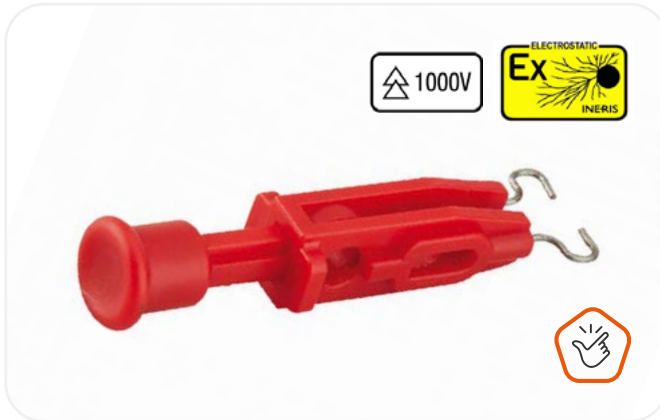

SFES2392N

LV CIRCUIT-BREAKER LOCK-OUT

/ KEY FEATURES

⚡ **Electrical safety:**


Locks the toggle switch to prevent accidental re-energization during electrical work, ensuring operator protection at all times. ATEX compatible, insulated up to 1000 V.

🔒 **Reinforced Nylon:**

Made from strong, insulating reinforced nylon offering excellent resistance to shocks and wear while remaining lightweight and reliable.

🔦 **High visibility :**

Compact format (40x25x100mm) ideal for tight spaces, with a red finish for instant identification on panels and switchboards.

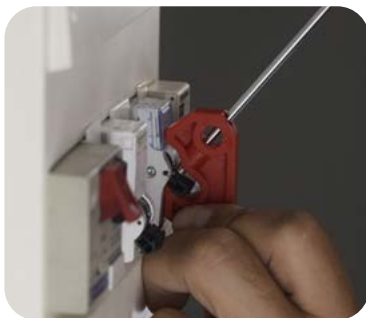

SFES2393N

UNIVERSAL MINIATURE CIRCUIT-BREAKER LOCK-OUT (LV)

/ KEY FEATURES

🔧 **Universal fit:**

Fits most toggle-type circuit breakers for wide compatibility across devices.

🔒 **Safe Lockout:**

Accepts a padlock (not included) to prevent accidental re-energizing and ensure operator safety.

✂️ **Quick & secure mounting :**

Integrated screw system allows fast installation and reliable fixing during lockout procedures.



SFES2394N

MINIATURE CIRCUIT-BREAKER LOCKOUT DEVICE

/ KEY FEATURES

🔧 **Universal fit:** Fits most toggle-type circuit breakers, ensuring versatility across devices.

🔒 **Safe Lockout:** No tool required — easy tightening with built-in screw knob and padlock system (not included) to prevent accidental re-energizing.

✂️ **Quick & secure mounting:** Dual locking positions allow flexible installation and two padlocks if needed for shared work safety.



PADLOCKS, HASPS, TAGS: WHAT DOES WHAT?

In a LOTO procedure, each item plays a defined role:

- The lockout padlock blocks access to the energy source (switch, valve, plug, etc.).
- The lockout hasp allows multiple workers to secure the same isolation point.
- The tags and labels indicate a prohibition to operate and identify the responsible person.

- These devices are complementary and must be used together, in a specific order.
- A tag without a lock = simple signage.
- A padlock without identification = no traceability.

> Opening callout for "LOTO system" pages with logical chain pictogram diagram (NFC 18-510).



**SFESCG**

INNOVATION

UNIVERSAL CIRCUIT BREAKER LOCKOUT

/ TECHNICAL SPECIFICATIONS

- Red nylon body. Extendable metal spring to fit all circuit breaker widths.
- Can be locked with Ø 4 or 6 mm shackle padlocks.



Reference	Dimensions	Weight
SFES2393	147 x 31 x 14 mm	25 g



Compact device easy
to transport and store



Adjusts to breaker with simple
thumb turn and then close clamping
handle for a tight grip on the toggle



Secure and simple
mounting for solid
lock-out

SFE491BN
SFE493BN

LV CIRCUIT-BREAKER LOCKOUT

/ KEY FEATURES

Reliable lockout safety: Secure padlock locking system (padlock not included) prevents accidental re-energizing during maintenance.

Durable & compact design: made of reinforced nylon for high mechanical strength; compact profile allows side-by-side installation and easy storage.

Reference	Lever/handle width	Distance between modules
SFE491B	Around 8 to 12mm	17,5 mm (standard)
SFE493B	Around 12 to 18mm	18 to 27 mm

ADC-BDBM

NEW

CIRCUIT BREAKER LOCKOUT DEVICE
MOLDED CASE CIRCUIT BREAKERS (480/600V)


Thumbscrew and curved
blade provide a tight grip on
the circuit breaker handle so
device remains secure



The fixed cleat
provides added
physical blocking
to prevent switch
movement into "on"

One-piece
design
for easy
installation

Reference	Dimensions	Weight
ADC-BDBM	75,44 x 26,16 x 43,69 mm	47 g

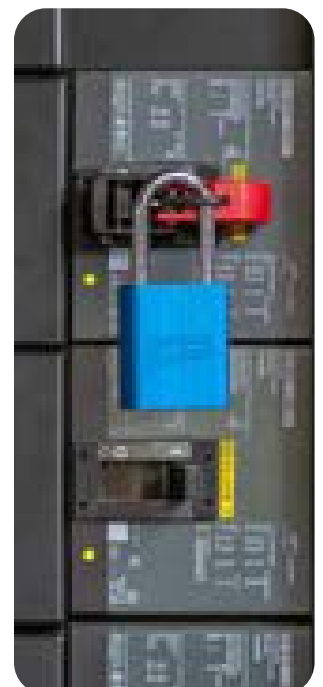



SFES3823

NEW

CIRCUIT BREAKER LOCKOUT FOR CIRCUIT BREAKER WITH LARGE HANDLE (480/600V)

The clamping screw and curved blade hold the breaker handle firmly in place, securing the unit




The hinged cleat allows for better locking of the switch interlocks if required

/ KEY FEATURES



Robust construction: Lightweight one-piece design with black nylon body. Red PC/ABS thermoplastic cover and folding cleat



Durability & grip: Large stainless steel knurled screw and curved blade ensure secure attachment on large breakers (480/600 V).



Wide compatibility: Fits a variety of circuit breaker handles, regardless of shape or size.

Reference	Dimensions	Weight
SFES3823	102,61 x 86,36 mm	98 g



DV3

NEW

LV CIRCUIT BREAKER LOCKOUT 3 HOLES

Very easy and quick to install

Reliable safety device



Two locking options

/ KEY FEATURES



Locking options: 3 locking holes (Ø 7 mm)
Accepts 1 to 3 padlocks with 2 possible spacings depending on breaker type.



Durable design: Steel body with anti-corrosion coating and black epoxy finish. Provides long-term resistance in industrial environments.



Mechanical locking: 2 sliding steel plates block the switch by spreading apart. Ideal for toggle circuit breakers (NS/NSE/NSF/NSJ/NSA — Schneider).



GOOD TO KNOW: LOTO BECOMES LOTOTO

A restart test must **always** be performed before any intervention. Stopping the machine doesn't guarantee zero energy. A wrong diagnosis, residual voltage, or faulty automation... and an accident can happen.

✓ The Try Out step confirms that the lockout is effective:

- Voluntary power-on test
- Mechanical check (actuator)
- Voltage absence verification



LOCKOUT - TAGOUT - TRYOUT

LOCKOUT - TAGOUT ACCESSORIES CIRCUIT BREAKER LOCKOUT

USB14X200

INNOVATION

LOCKOUT DEVICE FOR ULTRA-FINE HOLES
OF ELECTRICAL INSTALLATIONS



Ultra-fine and
ultra-resistant
cable

/ KEY FEATURES

Cable design: Multi-stranded steel cable with vinyl coating. Max cable Ø 1.3 mm, for precision use.

Fine locking solution: Ideal for situations where standard padlocks can't be used. Allows mechanical lockout of ultra-fine holes in electrical devices.

Identification & compatibility: Passage hole for padlock shackle Ø 5 mm (padlock not included).

Reference	Dimensions	Weight
USB14X200	147 x 31 x 14 mm	25 g



● LOCKOUT DEVICE FOR 1/4 TURN VALVE



Lightweight
and compact
for easy
carrying and
storage



SFES3068MLP

LOCKOUT DEVICE FOR HANDLES ON 1/4 TURN VALVE

/ KEY FEATURES

Robust & heat-resistant: Aluminium and steel body, corrosion-resistant and heat-resistant up to 538 °C.

Efficient Lockout: Locks valves in OFF position by clamping to handle stop. Fits valves from 6 to 100 mm. Works on insulated pipes and in tight spaces.

Multilingual identification: Includes labels in 12 languages (EN, FR, ES, DE, IT, CN, JP, etc.). Padlockable (padlock not included).

SFES3080

ADJUSTABLE LOCKOUT DEVICE FOR 1/4 TURN VALVE

/ KEY FEATURES

Durable & resistant: Lightweight thermoplastic body, chemical-resistant and suitable for extreme environments.

Secure lockout: Four locking holes for padlocks. Locks ball valves in ON/OFF position to prevent accidental activation.

Adjustable fit: Fits valves from 13 to 51 mm. Compatible with SFES806 cable lockout for maximum security.

Reference	Description
SFES3080	For turn valves from 12,7 to 50,8 mm
SFES3079	For XL turn valves from 51 mm to 20 cm



SFEKDCMGB

OUR SELECTION

LV CIRCUIT BREAKER LOCKOUT KIT

/ This kit contains :

Reference	Description
S350 GBC11	Plastic tag 80 mm « Do not operate - Disconnection »
SFET201	Bras padlock 25 mm with 2 keys
SFES2393	Universal miniature circuit-breaker lock-out (LV)



P. 128



S350C11



S349



S350 GBC11



S349 S350C11 S350 GBC11

80 MM PLASTIC STICKER "EQUIPMENT OUT OF ORDER, DO NOT OPERATE"

Référence	Diameter	Weight	Hole
S350C11	80 mm	7 g	Ø10 mm on top
S349			
S350 GBC11			

C26GB C26RGB

STICKERS FOR LOCKOUT OR DISCONNECTION
PADLOCKS

Reference	Marking	Diameter
C26GB	"Locked by..." "On the..."	40 mm
C26RGB	"Disconnection" "Do not operate"	

* Label available in Arabic

ETI-01GB


NEW

LOCKOUT TAGS

Centered hole at the top
with a diameter of 7 mm

Rigid label and reusable
with non-permanent marker

Key and holder identified;
access only by user

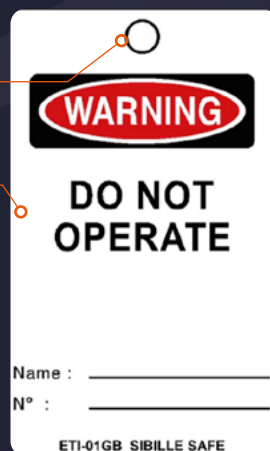

Reference	Material	Dimensions
ETI-01GB	PVC (0,3mm)	56 x 90 mm

* Sold in packs of 10 units

SFES453L

NEW

OVERSIZED PLUG CONTROL COVER



/ KEY FEATURES

Versatile application: Cinch sack for large or irregular connectors — adaptable to multiple lockout applications.

Locking capacity: Holds up to 6 padlocks or hasps.

Identification: Made of durable nylon with trilingual warning label (English, French, Spanish) printed on the bag.





VOLTAGE DETECTION

/ AC VOLTAGE DETECTORS	98
Low voltage detectors	98
Medium voltage detectors and kits	106
High voltage detectors and kits	114
Direct current voltage detectors	120
/ SAFETY CABLE CUTTER FOR UNDERGROUND NETWORKS	124
/ PERSONAL VOLTAGE ALARMS	138



PENTA
ELECTRICAL SAFETY PRODUCTS

**Your life,
Our work.**



VOLTAGE DETECTION

AC VOLTAGE DETECTORS

LOW VOLTAGE DETECTORS

PRO-ELITE

TAGLITE

INNOVATION

LOW VOLTAGE DETECTOR

STANDARDS

IEC 61243-3 / CAT IV 1000 V / IP65

- Optimum visual indications in all working positions:
 - Front: 360° visual indications ;
 - Back: the main indications are shown on the back of the detector.
- Revolutionary IP2X system: Trigger system on the back of the device to release the pusher.
- Safe IP2X sheath: 2 position IP2X system to avoid short circuits on metal-encased meters:
 1. Retract the first 5 mm using the trigger on the back of the device ;
 2. Push for full removal.
- Ergonomic button: Prominent button for easy gripping with insulated gloves.
- Ultra-flexible, robust, double-insulated lead with no shape memory.
- 2x AA battery with quick access (lithium battery option) for extended battery life.

ULTRA-BRIGHT 360° DISPLAY

Visibility of indications in all positions.



/ USE

This new Low Voltage Voltage Detector allows the following functions to be implemented on both indoor installations and overhead lines:

- Proof of no voltage operation
- Voltage level control from 12 to 1000V AC / 1500 V DC
- Polarity test on DC voltage
- Phase / Neutral discrimination
- Single pole phase indication
- Phase sequence test
- Continuity check
- Complete internal self test including measurement circuit control, lead continuity control and battery control.

/ TECHNICAL SPECIFICATIONS

- Standard: CEI 61243-3
- Overvoltage category: CAT IV 1000 V
- Protection class: IP 65 according to CEI 60529 (DIN 40050) : can be used in damp conditions: suitable for outdoor use.
- Nominal voltage range: 12–1000 V AC / 12–1500 V DC
- Current consumption, measurement circuit: AC/DC max. < 3.5 mA
- Polarity display: “+” and “–” symbols
- Voltage level display: 12, 24, 50, 120, 230, 400, 690, 1000 V AC/DC and 1500 V DC
- Rated frequency range: 50 and 60 Hz
- Phase display: $U_n \geq 200$ V, 50 & 60 Hz
- Test current, continuity test: max. 2 μ A.
- Test range, transverse resistance: 0 - 100 Ω
- Acoustic signal sound level: 55 dB
- Automatic activation at measuring voltage: ≥ 50 V
- Extra-low voltage (ELV) safety range: < 50 V AC or < 120 V DC
- Integrated control device
- Power supply: 2 x LR06/AA batteries (lithium batteries optional)
- Weight: approx. 285 g
- Double-insulated, silicone-jacketed test lead: approx. 1200 mm
- Operating temperature range: -15 °C to +45 °C
- Relative humidity: 20% to 96% (climatic category N)

MEASUREMENT POINT LIGHTING

Allows you to reach the correct test point in poorly lit areas.



AA BATTERIES WITH QUICK ACCESS

Easy battery change 1.5V batteries for up to 2 times longer battery life than AAA batteries




AUTOTEST

Checking the integrity of the measuring circuit, the lead and the battery.

CONTINUITY TEST WITHOUT PRESSING THE BUTTON

After the autotest, the operator has 90 seconds to perform the continuity tests.



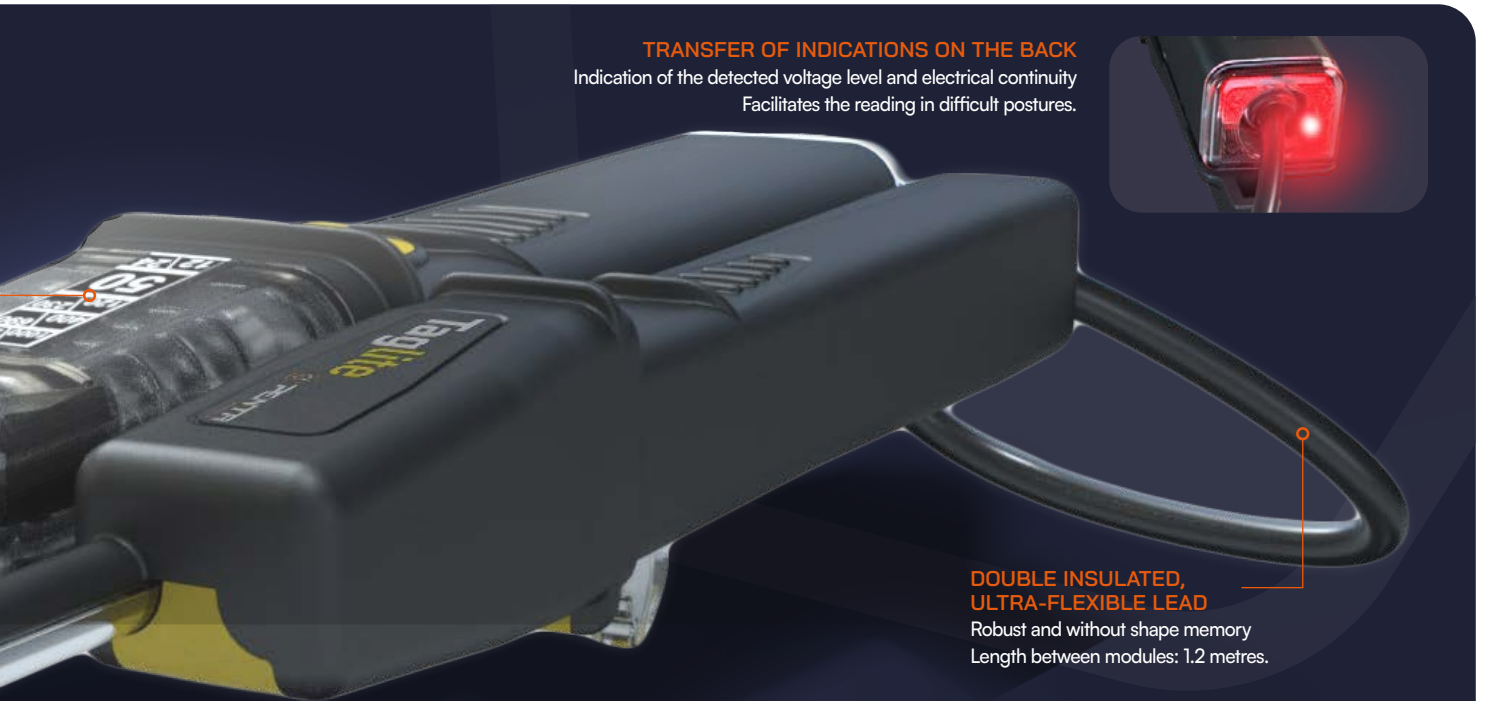

TRANSFER OF INDICATIONS ON THE BACK
Indication of the detected voltage level and electrical continuity
Facilitates the reading in difficult postures.



**DOUBLE INSULATED,
ULTRA-FLEXIBLE LEAD**

Robust and without shape memory
Length between modules: 1.2 metres.

/ ANTTAGLITERS

Lightweight and rigid contact electrode extensions for substations.
Contact tips with pointed test probes Ø 4 mm.
Supplied with storage pouch.



/ ANTTAGLITERA

Lightweight and rigid contact electrode extensions for overhead lines.
Contact parts: V-shaped electrode + contact hook also serving as a hanging hook.
Supplied with storage pouch



/ ANTTAGLITEX

The ANTTAGLITEI models are designed to allow the use of the TAGLITE LV voltage detector both in substations and on overhead networks.



**DOUBLE
DIAMÈTRE
(2MM/4MM)
IP2X SAFETY
PROBE TIPS**
Protected by retractable plastic sleeves controlled by the triggers



**19 MM
SPACING**

**FIXING
OF BOTH
MODULES**
For easy storage

BOUTON
Self-test and continuity
function activation
Easy access,
ergonomic design
for use with insulated
gloves

TRIGGERS
For retracting sleeves
up to 8 mm.
Then complete
retraction by pressing
on the sleeve



Refs	Application	Length	Weight
ANTTAGLITERS	Busbar and cabinet use	0,78 m	500 g
ANTTAGLITERA	Overhead network	1,49 m	700 g
ANTTAGLITEX	Combined cabinet and overhead use	1.40 m	800 g

OPTIONAL CONTACT ELECTRODE EXTENSIONS

Several models for overhead, underground or substation use.
Easy to read results thanks to the indications on the back.

OTHER FUNCTIONS COMPLETE THIS VOLTAGE DETECTOR

Battery level indicator
Measurement point lighting



TAGlite	TAGlite	TAGlite	TAGlite	TAGlite
Test probe	IP2X	IP2X	IP2X	IP2X
Standard functions*	✓	✓	✓	✓
Phase/neutral discrimination	✓	✓	✓	✗
Phase rotation	✓	✓	✗	✗
Digital display	✓	✗	✗	✗
Soft case	TAGliteDIFE	TAGliteRIFE	TAGliteVIFE	TAGliteSIFE
Without case	TAGliteDIFS	TAGliteRIFS	TAGliteVIFS	TAGliteSIFS

* Up to 1000 V AC / 1500 V DC — Hazardous voltage indication (even when batteries are defective) — Self-test



VOLTAGE DETECTION
AC VOLTAGE DETECTORS
LOW VOLTAGE DETECTORS

SUPERIOR

TAG780

VOLTAGE DETECTOR

STANDARDS

IEC 61243-3 / NFC 18510

- Unique bright LED display can be read in sunlight.
- Ergonomically shaped to fit comfortably in the palm with gloves.
- A revolutionary IP2X system (retractable tip sleeve): "pull and hold" grip at back of device.
- Tip sleeve pulling is controlled, offering higher safety and visibility of contact area.
- Ultra flexible cord (no memory effect).
- Watertight and dustproof device (IP65).
- Built for network electricians with CAT IV 1000V. Provides the required protection against over voltage.



A REVOLUTIONARY IPX SYSTEM RETRACTABLE TIP SLEEVE : "pull and hold" grip at back of device



- unparalleled comfort: use of the index finger
- controlled sleeve retraction, safe visibility of contact
- the thumb is freed up for the test button.



/ USE

Heavy duty voltage detector for checking the absence of voltage and giving voltage level indication on low voltage up to 1000V.

This device provides additional features as :

- Integrated self-test
- Phase search in single-pole mode (any of the two contact tips may be used)
- Polarity display (-/+)
- Continuity test ($< 80\Omega$)

/ TECHNICAL SPECIFICATIONS


- Voltage range: 12 to 1000V DC and AC (15 to 60 Hz).
- Audible alarm indicating the presence of voltage with a different tone according to voltage level (discontinuous tone up to 230V and continuous tone above 400V).
- Polarity indication (-/+).
- Built-in self-test.
- Continuity testing (threshold 80Ω).
- Phase identification in single-pole mode (either test probe may be used).
- Phase rotation indication
- Front light.
- Comes with 2 AAA batteries



Spot light



Self-test



Removable
spring blade
contact element



Retractable
sleeve



/ ACCESSORIES

SET OF CONTACT ELECTRODE EXTENSIONS FOR IP2X TAG780

(VERSION AVAILABLE FOR NON-IP2X TAG 780)



/ USE

Use the voltage detector TAG780 on overhead networks and connection boxes.

/ TECHNICAL SPECIFICATIONS

- Ø10 mm fiberglass sheath, Ø 4 mm connection probes, Ø 4 mm contact tips.
- Reliable impact-resistant internal connection even if device is dropped.
- Length adapted to the needs of the operator (short model for bus bars, long model for overhead lines).
- Contact parts adapted to the type of use.

Reference	Length	Weight
ANT780RS	0,78 m	500 g
ANT780RA	1,30 m	700 g
ANT780I	1.40 m	800 g


/ ANT780RS

Lightweight rigid contact electrode extensions for substations, installations and pavement boxes. Contact parts adapted for the type of use, Ø4 mm touch tips. Storage bag.



/ ANT780RA

Lightweight rigid contact electrode extensions for overhead lines. V-shaped contact parts and contact hook for hanging it. Storage bag.

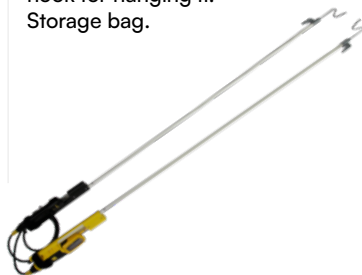

/ ANT780I

ANT780I has been designed to allow the use of the TAG780 voltage detector both in substations and in overhead lines (bare conductors).



TAG780 RANGE	TAG780 D		TAG780 R		TAG780 V		TAG780 S	
Touch tips	IP2X	Fine touch tip	IP2X	Fine touch tip	IP2X	Fine touch tip	IP2X	Fine touch tip
Standard functions*	✓	✓	✓	✓	✓	✓	✓	✓
Phase/N discrimination	✓	✓	✓	✓	✓	✓	✗	✗
Phase rotation	✓	✓	✓	✓	✗	✗	✗	✗
Digital display	✓	✓	✗	✗	✗	✗	✗	✗
Soft case	TAG780DIFE	TAG780DPFE	TAG780RIFE	TAG780RPFE	TAG780VIFE	TAG780VPFE	TAG780SIFE	TAG780SPFE
No case	TAG780DIFS	TAG780DPFS	TAG780RIFS	TAG780RPFS	TAG780VIFS	TAG780VPFS	TAG780SIFS	TAG780SPFS

* 1000V - IP65 protection - Hazardous voltage indication (even when the cells are faulty)
- Integrated self-test - Continuity - Lighting of tested point - Polarity +/-




VOLTAGE DETECTION
AC VOLTAGE DETECTORS
LOW VOLTAGE DETECTORS

SUPERIOR

DR706

PHASE SEQUENCE TESTER

STANDARDS



REPLACEABLE LEADS



VOLTAGE TESTING ON L1 L2 L3

Additional element for diagnosing three-phase systems: all three leds must be lit to show current goes through!

INTELLIGENT DISPLAY

A slow led cahaser reproduces the rotation of a motor.


The **GREEN** clockwise direction and the **RED** anticlockwise direction make it easier to memorise the initial condition.

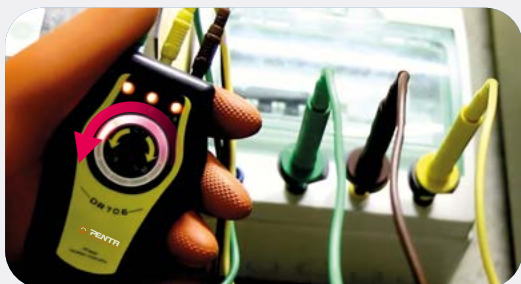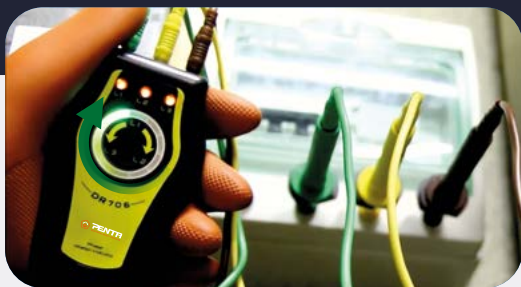

AN ULTRA-RESISTANT AND WATERPROOF CASE

Electronics embedded in insulating resin
& IP65 for Cat IV version



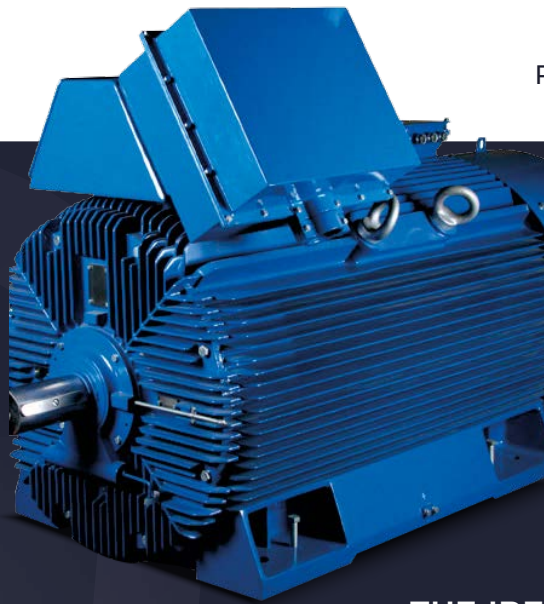

/ ROTATION DIRECTION

When a three-phase system is commissioned, the phase order must be tested. Many industrial processes using electric motors have a required rotation direction. That rotation direction is related to the order of connection of phase conductors. It is therefore imperative to make sure that the "rotation direction", when it is put back into service, is the same as the initial rotation direction.

/ CAT IV

This device is specifically intended for working on low-voltage distribution networks. It has been designed to achieve the requirements of measurement category IV, which is the most stringent for use on distribution systems.

Measurement category (formerly known as surge category): All low-voltage electrical installations can experience transient surges that can exceed several thousand volts. For example, such surges may be generated by the making and breaking of circuits or lightning impacts.

THE IDEA OF OVERVOLTAGE CATEGORY EXPRESSES THE ABILITY OF DEVICES TO WITHSTAND SUCH SURGES:

CAT III

IF YOU WORK AFTER THE METER, CAT III IS SUFFICIENT.

CAT IV

IF YOU WORK BEFORE THE METER, YOU MUST SELECT A HIGHER CATEGORY, I.E. CAT IV

/ TECHNICAL SPECIFICATIONS

- Voltage range: 80- 400 VAC
- For use on generating sets
- Frequency: 50 Hz & 60 Hz
- Maximum voltage: 440 V rms
- Class N = -70 °C to +55 °C
- Standard IEC 67557-7
- IP2X touch tips, Ø 4 mm on elastic cages
- Supplied with bag, leads and crocodile clips
- Measurement category III or IV depending on model
- CE



Reference	Overvoltage Category	Protection rating	Touch tips	Leads	Weight (Inc.cover)
DR706III XFR	CAT III 600 V	IP54	IP2X	Green, yellow, brown	390 g
DR706III NEU			Standard	Brown, black, grey	350 g
DR706IV XFR	CAT IV 600 V	IP65	IP2X	Green, yellow, brown	500 g
DR706IV NEU			Standard	Brown, black, grey	



VOLTAGE DETECTION
AC VOLTAGE DETECTORS
PHASE DETECTORS



PHASE DETECTOR 100-600V

PHASE SEQUENCE - CONTACT - PHASE DETECTOR 100-600 V

STANDARDS

EN 61010-1 CAT III 600 V/CAT IV 300 V

/ TECHNICAL SPECIFICATIONS


- Input Voltage: 100-600 V
- Frequency Range: 45-70 Hz
- Circuitry: All electronic
- Power consumption: Approx. 7 mA
- Dimensions: 102 (L) x 78 (W) x 32.5 (H) mm
- Weight: 212 g (including test leads)
- Accessories: Instruction Manual, Soft Case, Test Leads

DISCOVER

ALL OUR PRODUCTS IN OUR CATALOGUES AND BROCHURES

We invite you to explore
our catalogues and brochures
on our website.

www.pentaesp.com



Scan the QR
code to access
our website
directly.



You can also request a printed copy
from our Sales Department.



VOLTAGE DETECTION
AC VOLTAGE DETECTORS
MV VOLTAGE DETECTORS

MTAG

INNOVATION

HIGH VOLTAGE DETECTOR

FOR DISTRIBUTION SYSTEM

STANDARDS

IEC 61243-1

DESIGNED FOR "PROVING DEAD"
ON HIGH VOLTAGE DISTRIBUTION
SYSTEM BETWEEN 1 KV AND 69 KV

(Voltage ranges calibrated according to IEC recommendations)

CE



OPTIMUM SOUND
INDICATION



OPERATING
RELIABILITY



DIRECT ACCESS TO THE BATTERY,
WATERTIGHT SEALED ELECTRONICS
COMPARTMENT



ENHANCED VISUAL
INDICATION





PREMIUM

MTAG

INNOVATION

MV VOLTAGE DETECTOR 1 - 69 kV

STANDARDS

IEC 61243-1 : NF EN 61243-1 : 2021

• ENHANCED AUDIBLE INDICATION

The 100 dB sound signal is designed to remain audible even in traffic or strong wind, thanks to its acoustic "horn".



• ENHANCED VISUAL INDICATION

The visual indication is visible in all usual working environments, in sunlight or fog, with a wide angle of visibility and from the side thanks to an optic ring.



• DIRECT ACCESS TO THE BATTERY, WATERTIGHT SEALED ELECTRONICS COMPARTMENT

When the battery is replaced, this design prevents the following:

- accidental interchange of housing or circuitry;
- damage to electronic circuits ;
- humidity ingress into the device when the battery is replaced outdoors.



• OPERATING RELIABILITY

- Low battery level indicated by a dedicated ORANGE LED.
- Latest generation of electronics.



/ ACCESSORIES

INTERCHANGEABLE POLE ADAPTERS



ADVECAPV* ADVECU* ADVECEAM* ADVECBV* ADVECUCR*

* Please contact us for other pole adaptaters

/ Soft case with conductive lining for EMC protection



SBHMTAG : soft case with conductive lining for EMC protection



/ USE

These voltage detectors are designed for "proving dead", making sure that nominal voltage is actually absent on a circuit in an HV distribution system between 1 kV and 69 kV (no-voltage verification):

- The device will detect any nominal voltage on overhead lines and stations.
- It will avoid detecting most induced voltages in order to allow grounding operations.

/ TECHNICAL SPECIFICATIONS

AC voltage range possible choice from 1 - 4 kV to 69 kV
Network frequency: 50 and 60 Hzz.

- Permanent standby status with automatic wake up function.
- The presence of voltage within the calibrated range or above is indicated by a RED light and a beeping sound.
- Self test OK the OK status (ready for use) of the device is indicated by a GREEN light.
- The self test checks all the circuits, the reference detection level and the battery voltage.
- The "ready for use" state is indicated by the green indication for 15 minutes.
- A low battery level is indicated by an ORANGE light.
- Designed for outdoor and indoor use.
- Operating temperature : -25° C to 55°C.
- Humidity 96 max.
- Power supply voltage 9 V alkaline cell IEC 6 LR 61.
- Accepts the use of rechargeable battery with identical supply voltage.
- Yellow polycarbonate housing.
- Dimensions Ø 59 mm, L 280 mm without the contact electrode.
- Net weight 0,390 kg with stick adaptor.
- Operating manual with a choice of languages, depending on the package.

Description	Visual	Ref
1200mm lenght electrode extension for 15kV and 25kV catenary network		ANTSMTAGRAIL200R*
226mm electrode extension with V shape fixed mount		ANTM226V**
Electrode extension for Magnefix system		ANTMTAGMAGNEFIX
Underground bushing probe		ANTMURDIMC
Underground elbow probe		ANTMURDIF

*Pole end fitting to specify when ordering **Other lenght available on request

Reference	Voltage range	Frequency	Housing colour	Stick adapter	Contact electrode	User manual**	Packaging***
MTAG0104FHUA	1 - 4 kV	50 / 60 Hz	Yellow	Universal & EAM	V56	Pack F	Soft case with conductive lining for EMC protection
MTAG0310FHUA	3 - 10 kV						
MTAG1036FHUA	10 - 36 kV						
MTAG2069FHUA	20 - 69 kV						
MTAG1036FHUA-FR	10 - 36 kV				Universal (for nevers pole)	Also available in Pack G (change the ref to GHUA)	

** Pack F : Notices in FR/GB/DE/ES/PT/PL. Pack G : Notices in GB/GR/BG/IT/NL/AR/TR. *** Metal case available on request.



VOLTAGE DETECTION

AC VOLTAGE DETECTORS

MV VOLTAGE DETECTORS AND KITS


PRO-ELITE

MTAGX

INNOVATION

VOLTAGE DETECTOR MULTI RANGE

STANDARDS



USE

These two or three operating voltage ranges are calibrated according to IEC recommendations between 1 kV and 69 kV.

This multi-range detector can simulate up to 3 voltage detectors with 3 separate ranges: lower range, middle range and upper range.

TECHNICAL SPECIFICATION

This contact voltage detector is designed for Verification of Absence of Rated Voltage (VATn) operations, verifying that a rated voltage is effectively absent from a circuit in a HV system.

Reference	Voltage range	Frequency	Housing colour	Stick adapter	Contact electrode	User manual*	Packaging**
MTAGX0369FHUA-3	3 - 6,6 kV 10 - 36 kV 45 - 69 kV	50 / 60 Hz	Yellow	Universal & APV	V56	Pack F	Metal case
MTAGX1166FHUA-3	11 kV 33 kV 66 kV					Also available in Pack G (change the ref to GHUA)	
MTAGX0669FHUA-2	6 - 20 kV 30 - 69 kV						

* Pack F : Notices in FR/GB/DE/ES/PT/PL. Pack G : Notices in GB/GR/BG/IT/NL/AR/TR.

** Metal case available on request.

/ Soft case with conductive lining for EMC protection



PRO-ELITE

KIT MTAG

INNOVATION

VOLTAGE DETECTOR KIT & INSULATING POLE

STANDARDS

IEC 61243-1 / ASTM F 1826 / ASTM F 711 / IEC 62193 / IEC 60855-1



USE

Fameca offers a wide range of "detector + pole" assemblies, all 100% compliant with the requirements of IEC standards (IEC 61243-1 for the voltage detector and IEC 62193 DEC60855 for the pole).

TECHNICAL SPECIFICATIONS

This will allow your agents to intervene in complete safety with a pole whose insulating length is adapted to the level of tension used, all protected and transportable in a suitable sheath.

/ Soft bag



Type of pole	1 - 4 kV	3 - 10 kV	10 - 36 kV	Weight
Fixed 0,8 m	VDP0104TM0808DMTAGFBL	VDP0310TM0808DMTAGFBL	VDP1036TM0808DMTAGFBL	1,045 kg
Telescopic 1,5 m	VDP0104P0815DMTAGFBL	VDP0310P0815DMTAGFBL	VDP1036P0815DMTAGFBL	1,245 kg
Telescopic 0,8M / 2 m	VDP0104P0820DMTAGFBL	VDP0310P0820DMTAGFBL	VDP1036P0820DMTAGFBL	1,485 kg

Other compositions based on different tension range, pole length or accessories are possible, please contact us.



PRO-ELITE

MTAG DR INNOVATION

1-69 KV VOLTAGE DETECTOR DUAL RANGE

STANDARDS

IEC 61243-1 / CE / Compliance with European directives




- 2 in 1 : this dual range detector acts as 2 voltage detectors with 2 separated ranges : lower range and upper range.
- The presence of nominal voltage within the calibrated ranges is indicated as shown below :

- Two RED led lights and a beeping sound = nominal voltage detected within the lower range



- Four RED led lights and a beeping sound = nominal voltage detected within the upper range



- The 100db sound signal is designed to remains audible even in traffic or strong wind, thanks to natural amplification by an acoustic «horn»

/ USE

This Go NoGo Contact voltage detector is designed for «proving dead», making sure that nominal voltage is actually absent on a circuit of an HV distribution system. It's two operating ranges are calibrated according to IEC recommendations between 7 kV and 69 kV:

- The device will detect any nominal voltage when in contact with the part of the installation to be tested on overhead lines and substations.
- It will not indicate voltage presence when detecting induced voltages but will display green lights in order to allow grounding operations.


/ TECHNICAL SPECIFICATIONS

Two operating ranges can be chosen between 1 and 69 kV

- Network frequency : 50 and 60 Hz
- Complies to bridging test indoor and outdoor: no flashover when inserted between two live parts
- Designed for outdoor and indoor use
- Operating temperature: -25° C to +55° C
- Humidity: 96% max.
- Power supply voltage: 9 V alkaline cell — IEC 6LR61
- Dimensions: © 59 mm. L = 280 mm without the contact electrode
- Net weight: 0.390 kg with stick adaptor

/ ACCESSORIES

INTERCHANGEABLE POLE ADAPTERS

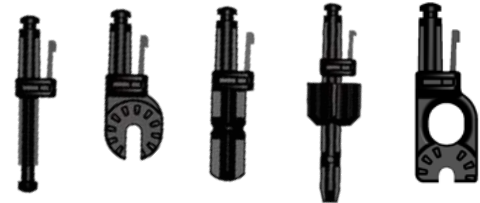

ADVECAPV* ADVECU* ADVECEAM* ADVECBV* ADVECUCR*

* Please contact us for other pole adaptaters

Reference	Voltage range	Frequency	Housing colour	End fitting*	Contact electrode	User manual**	Packaging***
MTAGDR0669FCU	6 - 25 kV 30 - 69 kV	50 / 60 Hz	Yellow	Universal	V56	Pack F	Metal case
MTAGDR0333FCU	3.3 - 6.6 kV 11-33 kV						
MTAGDR1166FHU	11 - 33 kV 66 kV						
MTAGDR0236FHUA	2-7.2 kV 12-36 kV			Universal & APV			Soft case with conductive lining for EMC protection

Other compositions based on different tension range, pole length or accessories are possible, please contact us.

*Other stick adaptor available on request

** Pack F : FR/GB/DE/ES/PT/PL -- Pack G : GB/GR/NL/BG/IT/AR/TR

*** Metal case or soft case version available on request



VOLTAGE DETECTION

AC VOLTAGE DETECTORS

MV VOLTAGE DETECTORS AND KITS



- Visual indication: 2 red flashing LEDs (voltage present), 2 green LEDs (no voltage)
- Audible signal: intermittent beeping for voltage presence

RT1030/U-AD

LIVE LINE DETECTOR HV NON CONTACT TYPE

STANDARDS

IEC 61243-6 / EA0499

/ TECHNICAL SPECIFICATIONS

- Voltage range: 50-765 kV
- Frequency: 50 / 60 Hz
- Suitable for use in wet condition, either indoors or outdoors.
- Double indications of operative voltage presence: intermittent acoustic and flashing of 2 red ledlights.
- The absence of operative voltage is indicated by 2 green led-lights permanent on.
- Built-in self control check for testing the accurate working of the voltage detector before use.
- Cylindrical box made of ABS diameter 58 mm.
- Universal splined end fitting for connection onto the head of the insulating rod.
- Supply: alkaline battery 9 V.
- Supplied into a plastic case with foam



R-VISOR

ELECTRONIC CAPACITIVE DETECTOR OF MEDIUM VOLTAGE PRESENCE / ABSENCE THROUGH ACOUSTIC AND VISUAL SIGNALS CLEARLY VISIBLE FROM BOTTOM AND LATERAL SIDE OF THE DETECTOR

STANDARDS

IEC 61243-1

/ TECHNICAL SPECIFICATIONS

- Range from 3kV to 66kV (range to be defined in case of order)
- Suitable for use in wet condition, either indoors or outdoors.
- Suitable for use in three-phase MV network.
- Double indication of operative voltage presence: intermittent acoustic and flashing of red LEDs in the lower and lateral side of the detector.
- The absence of operative voltage is indicated by green permanent LEDs on in the lower and lateral side of the detector.
- The presence of an adjacent active or earthed part does not affect the in phase and out phase conditions.
- It does not respond in case of DC voltage.
- It does not detect the presence of voltage for normal electromagnetic interference values.
- The lighting of the orange LED-light is the indication of low battery.
- Response time: less than 1 second.
- Fork shaped electrode.
- Built-in self-control check for testing the accurate working of the voltage detector before use. Self-control test every 3 seconds and positive confirming with a green led flashing and signal sound with buzzer.
- Operating time without faults when applied to operating voltage: more than 5 minutes.
- Cylindrical box made of ABS, diameter 58 mm.
- Power: alkaline battery 9 V included.
- No. 3 fittings into the package: Universal, hexagonal, threaded M10 interchangeable fittings to be used with rod with different heads.
- Plastic case with protective, shockproof foam.



SUPERIOR

MTAG BC

OUR SELECTION

VOLTAGE DETECTOR FOR CAPACITIVE
TEST POINT OF ELBOW CONNECTOR

STANDARDS

CE: COMPLIANCE WITH EUROPEAN DIRECTIVES. COMPLIES
WITH EDF-SPS TECHNICAL SPECIFICATION N° 42.

Optimised indication that can be understood clearly in all
working conditions:

- The visual indication is visible in all usual working
environments, in sunlight or fog, with a wide angle of
visibility and from the side thanks to an optic ring.
- The **100 dB** sound signal is designed to remains audible
even in traffic or strong wind, thanks to its acoustic "horn".

Direct access to the battery and sealed electronics compartment.
When the battery is replaced, this design guarantees the following:

- NO accidental interchange of housing or circuitry;
- NO damage to electronic circuits;
- NO humidity ingress into the device when the battery is replaced outside.



/ USE

These voltage detectors are designed for "proving dead", making sure that nominal voltage is
actually absent on capacitive test point of elbow connector (no-voltage verification):

- The device will detect any nominal voltage on capacitive test point.
- It will avoid detecting most induced voltages in order to allow grounding operations.

/ TECHNICAL SPECIFICATIONS

AC voltage on Capacitive Test Point of elbow connector

Network frequency: 50 and 60 Hz

- Permanent standby status with automatic wake-up function
- The presence of voltage within the calibrated range or above is indicated by a **RED** light and a
beeping sound.
- Self-test OK: the OK status (ready for use) of the device is indicated by a **GREEN** light.
- The self-test checks all the circuits, the reference detection level and the battery voltage.
- The "ready for use" state is indicated by the green indication for 2 minutes.
- A low battery level is indicated by an **ORANGE** light.
- Designed for outdoor and indoor use
- Operating temperature: -25° to +55°C
- Humidity: 96% max.
- Power supply voltage: 9 V alkaline cell — IEC 6LR61
- Accepts the use of rechargeable battery with identical supply voltage
- Orange polycarbonate housing with integrated universal pole tip
- Dimensions: L = 260 mm — I = 100 mm
- Net weight: 0.450 kg
- Operating manual with a choice of languages, depending on the package.



Reference	Voltage range	Frequency	User's Manual*	Packaging
MTAGBC0310FHU	3—10 kV	50 / 60 Hz	Pack F Also available in Pack G (change the ref to GHUA)	Metallic bag with EMC protection
MTAGBC0336FHU	3—36 kV			
MTAGBC0520FHU	5—20 kV			
MTAGBC0536FHU	5—36 kV			
MTAGBC1036FHU	10—36 kV			

* Pack F : FR/GB/DE/ES/PT/PL — Pack G : GB/GR/NL/BG/IT/AR/TR





VOLTAGE DETECTION

AC VOLTAGE DETECTORS

MV VOLTAGE DETECTORS (DISTRIBUTION)

ESSENTIAL



Low Voltage	Ph-G distance
Un < 12 kV	150 mm
12 < Un < 17,5	180 mm
17,5 < Un < 24	215 mm
24 < Un < 36	325 mm

TAG100

VOLTAGE DETECTOR

STANDARDS

NF —C18311

/ USE

Voltage detector for MV networks.

- TAG100 is designed to check absence of nominal voltage by direct contact to the line.
- It is usually used prior to earthing operation of a three-phase voltage system.

/ TECHNICAL SPECIFICATIONS

AC voltage range possible choice from 1 to 36 kV

Network frequency: 50 or 60 Hz


- Category: L = without electrode extension.
- All weather use (under light rain after whipped with siliconed cloth !).
- Temperature: -25°C to +55°C.

- Power supply: 9 V alkaline battery 6LR61.
- Dimensions: Ø 49 mm, L = 195 mm excluding electrode
- **Limitation:** Distance between phase and ground must be above the following: no other electrode than Y40 and Y56 can be used.

Reference	Voltage range	Frequency	End fitting	Contact electrode	User's manual*
T10F0310H	03-10 kV	50 / 60 Hz	Universal	Y56	Pack F Pack G also available
T10F1036H	10-36 kV				

* Pack F : FR/GB/DE/ES/PT/PL * Pack G : GB/GR/NL/BG/IT/AR/TR

ESSENTIAL

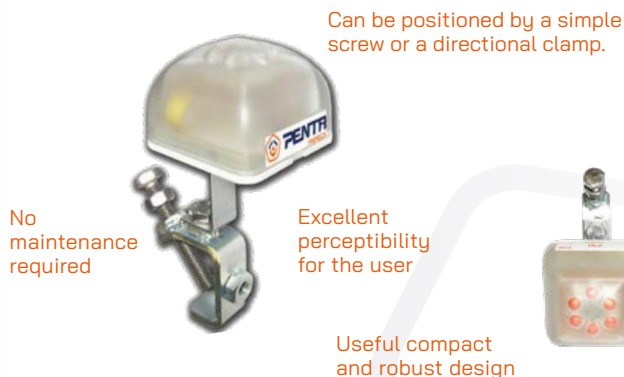

PVI

PERMANENT VOLTAGE INDICATOR, FROM 5 TO 75KV AC

/ USE

The unipolar permanent voltage indicator installed on the conductor is intended to announce the presence of high voltage.

/ TECHNICAL SPECIFICATIONS

- The PVI consists of an external type box containing red led's with strong luminosities.
- A simple bracket allows the mounting of round conductor from 5 to 25 mm and the flat bars from 1 to 25 mm
- Its operating range is 5 to 75 kV.

Reference	Dimension	Weight
PVI	11x13x6	150 g

SUPERIOR

V CHECK

NEW

CAPACITIVE VOLTAGE DETECTORS PROVING UNIT

- High voltage signals generated by V CHECK allow to test most of IEC 61243-1 capacitive voltage detectors.
- Easy to use: touch the voltage detector contact electrode with the V CHECK proving unit, and press the button.
- Compact, lightweight, and easy to use.
- Battery powered (autonomy: up to 1000 tests).
- Red led warning during the test.
- Low battery indication by orange LED.
- Real conditions test



/ USE

- V CHECK proving unit is designed to check most of capacitive voltage detectors that comply with IEC61243-1.
- The proving unit allows you to make sure your MTAG, or other capacitive detector, is working properly when no "known real voltage" is available.
- The V CHECK proving unit could be used before and after using your capacitive voltage detector on-site or periodically to check its full integrity.
- The VCHECK don't allow to test capacitive voltage detector with resistive contact electrode extension.

This product does not replace the built-in self-test which **MUST** be used before and after using your voltage detector.

/ TECHNICAL SPECIFICATIONS

- Powered with 1 x 9V alkaline battery
- Use temperature: -25°C to +55°C
- Size: 123 x 72 x 49 mm
- Weight: 228 g (without battery).

Reference	User's Manual *	Packaging
VCHECKHF	Pack F	Soft case
VCHECKHG	Pack G	

* Pack F : FR/GB/DE/ES/PT/PL Pack G : GB/GR/NL/BG/IT/NL/AR/TR





VOLTAGE DETECTION
AC VOLTAGE DETECTORS
HIGH VOLTAGE DETECTOR

HTAG

HIGH -VOLTAGE DETECTOR

INNOVATION

IEC 61243-1

DESIGNED TO CHECK THE ABSENCE OF NOMINAL
VOLTAGE IN A CIRCUIT OF HIGH VOLTAGE AND VERY
HIGH VOLTAGE SYSTEMS FROM 50 KV TO 765 KV
(voltage range according to IEC recommendation)



FUNCTIONAL
RELIABILITY



DIRECT ACCESS
TO THE BATTERY
AND SEALED ELECTRONICS
COMPARTMENT



OPTIMUM SOUND
INDICATION



OPTIMAL LIGHT
INDICATION



PRO-ELITE

HTAG

50 — 765 KV VOLTAGE DETECTOR

STANDARDS

IEC 61243-1

- **OPTIMISED INDICATION** that can be understood clearly in all working conditions:

- The visual indication is visible in all usual working environments, in sunlight or fog, with a wide angle of visibility and from the side thanks to an optic ring.

- The 100 dB sound signal is designed to remain audible even in traffic or strong wind, thanks to its acoustic "horn".

- **Direct access to the battery and sealed electronics compartment.** When the battery is replaced, this design prevents the following:

- Accidental interchange of housing or circuitry;
- Damage to electronic circuits;
- Humidity ingress into the device when the battery is replaced outdoors.



/ ACCESSORIES
INTERCHANGEABLE POLE ADAPTERS



ADVECAPV* ADVECU* ADVECEAM* ADVECBV** ADVECUCR*

* Other adapters are available, please contact us.

/ USE

These voltage detectors are designed for "proving dead", making sure that nominal voltage is actually absent on a circuit in an HV transmission system between 50 kV and 765 kV (no-voltage verification)

- The device will detect any nominal voltage on overhead lines and stations.
- It will avoid detecting most induced voltages in order to allow grounding operations.

/ TECHNICAL SPECIFICATION

AC voltage range possible choice from 50 to 765 kV.

Network frequency: 50 or 60 Hz (to be specified with the order)

- Permanent standby status with automatic wake-up function ;
- The presence of voltage within the calibrated range or above makes a **RED** indicator light up, and an audio signal is generated.
- Self-test OK: the OK status (ready for use) of the device is indicated by a **GREEN** indicator lamp.
- The self-test checks all the circuits, the reference detection level and the cell voltage.
- The self-test is repeated automatically throughout the ready for use state as indicated by the green indicator lamp (for 1.5 minutes).
- The battery low level is indicated by a dedicated **ORANGE** LED indicator going on.
- Designed for outdoor use
- Operating temperature: -25 °C to +55 °C
- Humidity: 96 % max.
- Power supply voltage: 9 V alkaline cell — IEC 6LR61
- Accepts the use of accumulators with identical supply voltage
- Yellow or red polycarbonate housing
- Dimensions: Ø 80 mm, L = 225 mm without the electrode
- Net weight: 0.618 kg with stick end fitting, without electrode
- Operating manual with a choice of languages, depending on the package.
- Package with three electrodes : 2 hooks: Ø 60 mm (AC 60) and Ø 120 mm (AC 120) and 1 straight electrode (D 100).

Reference	Voltage range	End fitting**	Electrode type	User manual*	Packaging
HTAG060090FC	60-90 kV	Universal & EAM	AC60/AC120/ D100	Pack F	Metal case
HTAG060132FC	60-132 kV			Also available in	
HTAG220500FC	220-500 kV			Pack G	

** Pack F (user manual) FR/GB/DE/ES/PT/PL — Pack G (user manual) GB/GR/BG/IT/NL/AR/TR — For any other voltage range, available please contact us.




VOLTAGE DETECTION

AC VOLTAGE DETECTORS

HIGH VOLTAGE DETECTORS

SUPERIOR

Devices features an electronic detection system with miniature gas discharge tubes.



This original configuration gives it very high performances, especially in the case of high induction and/or parasitic electric fields.

TAG330

ELECTRONIC HV NO-VOLTAGE TESTER,
FROM 50 TO 765 kV

STANDARDS

IEC 61243-1

/ USE

Electronic HV no-voltage tester, from 50 to 765 kV.

/ TECHNICAL SPECIFICATIONS


- Mains frequency range : 16.66 ; 50 or 60 Hz (specify when ordering).
- Indication of the absence of voltage and the correct operation of the device by a green LED.
- Very sturdy polycarbonate casing.
- Self-test device.
- Electronic cut-out if battery drops under threshold voltage of 8V.
- Can be used in all weathers.
- Temperature range: from -25°C to +55°C.
- Power supply: one 9V alkaline battery.

Device comes in a metal case with hooks $\varnothing$ 60 and 120 mm and straight electrode 100 mm.

Reference	Description	Voltage range	Colour
330F060090C5	Electronic HV no-voltage tester, from 60 kV to 90 kV	60 kV to 90 kV	Yellow
330F150150C5	Electronic HV no-voltage tester, 150 kV	150 kV	Red
330F225400C5	Electronic HV no-voltage tester, from 225 kV to 400 kV	225 kV to 400 kV	
330F400765C5	Electronic HV no-voltage tester, from 400 kV to 765 kV	400 kV to 765 kV	

** Other settings available with a ratio of 1/3 up to 735 kV. Available in 60 Hz.

- Audible signal: intermittent beeping for voltage presence
- Visual indication: red LEDs (voltage present), green LED (no voltage), orange LED (low battery)

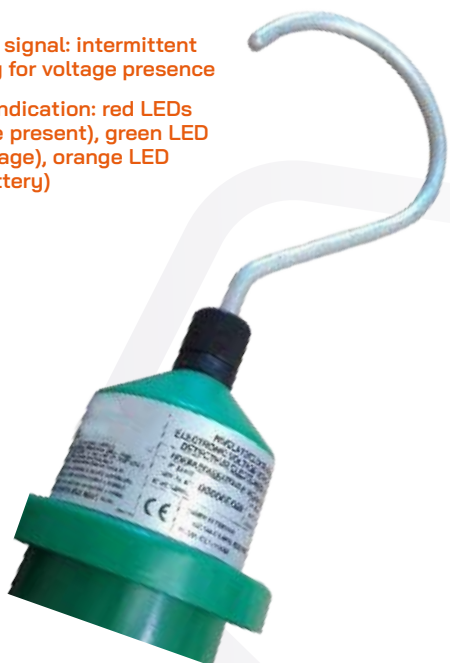

RMT3090/U

ELECTRONIC CAPACITIVE DETECTOR OF VOLTAGE
PRESENCE / ABSENCE ON HV LINES AND
INSTALLATIONS BY VISUAL AND ACOUSTIC SIGNALS

STANDARDS

IEC 61243-1

/ USE

Electronic capacitive voltage detector for verifying presence or absence of voltage on high-voltage lines and installations (60—380 kV). Suitable for indoor or outdoor use in wet conditions. Ensures safe and reliable "proving dead" operations.

/ TECHNICAL SPECIFICATIONS

- Voltage range: 60-380 kV
- Integrated self-test function for operational verification before use
- Contact probe: metallic hook, 360° swivel type
- Connection: universal splined end fitting for insulating rod
- Power supply: 9 V alkaline battery



INNOVATION



Advantages

The Proxy Tester detects AC voltages with up to 12 selectable levels, clearly displayed on an integrated digital screen. Its indication remains easy to read in all conditions, and it features direct access to the battery and sealed electronic compartment.



ADVECBV * ADVECU * ADVECEAM * ADVECAPV *



PROXY TESTER

PROXIMITY VOLTAGE DETECTOR

STANDARDS

- Compliance with European directives.
- EN 61000-6-2, EN 61000-6-4

/ USE

- The Proxy Tester is an all-weather device for checking the presence of a selected AC voltage in a wide voltage range from low voltage, medium up to high voltage. It can be used in substations, switchyards as well as on overhead lines. It can integrate up to twelve positions of voltages to select between a wide range from 110 V AC to 750 kV AC (the possible selection depends on the version).

/ TECHNICAL SPECIFICATIONS

- Up to 12 selectable voltages (upon versions) within a wide range from 110 V to 750 kV
- Network frequency: 50/60 Hz
- Installation type: Indoor/Outdoor
- Climate class: N = from -25°C to +55°C
- Humidity: 96% max.

Automatic features:

- Automatic self-test when the device is switched on
- The self-test checks all the circuits and the battery level
- Selection of the voltage position by pressing the button successively
- "Ready for use" status indicated by the → **GREEN** light
- Switch off by a long press on the button
- Presence of voltage (as per selected position) →

flashing RED light and beep

- Low battery level → **ORANGE** light

Construction:

- Power supply: 9 V alkaline cell — IEC 6LR61
- Red polycarbonate housing
- Dimensions: Ø 80 mm, L = 225 mm (Ø 3.14 in, L = 8.85 in)
- Net weight: 0.700 kg (1.54 pounds) with stick end fitting
- Interchangeable adapter for all types of insulated pole end fitting

Reference	Voltage range	Number of level	Voltage levels*	End fitting**	User's Manual***	Packaging
PT033L03FHU	0.24—33 kV	3	0.24-11-33	Universal	Pack F***	Soft bag with EMC protection
PT275L09FHU	0.24—275 kV	9	0.24-11-22-33-66-110-132-210-275		Also available in Pack G	
PT500L10FHU	0.24—500 kV	10	0.24-3.3-11-22-33-66-110-220-330-500			

*Other range available on request
Specific setting on demand for the voltage levels

**Other stick adaptor available on request

***Pack F: FR/GB/DE/ES/PT/PL

HBPVD

PROXIMITY NOT CONTACT VOLTAGE DETECTOR LV-MV-HV

STANDARDS

IEC TR 61243-6

/ USE

Twelve voltage detection settings from 240Vac to 275kVac. Physical contact with electrical conductors is not necessary when testing for live lines. This tester works by proximity. Its sensor senses the radiated field which surrounds live conductors.

/ TECHNICAL SPECIFICATIONS

- Frequency 50/60 Hz
- 12 voltage settings: 240Vac, 2kV, 3.3kV, 6kV, 11kV, 22kV, 33kV, 66kV, 110kV, 132kV, 220kV and 275kV
- High bright LEDs visual indication
- Sound indication
- Automatic cyclic self-check
- Self turn-on and automatic timed shut-off plus manually switch on/off
- Self-test selection
- Non-contact work by proximity
- Suitable for indoor and outdoor use
- Detect low voltage on any system
- Low battery indication
- EMC Electromagnetic Compatibility





VOLTAGE DETECTION REMOTE ELECTRICAL FIELD DETECTOR

ESSENTIAL

- This adjustment is made using a sliding sleeve fitted around the antenna.



- The DCEDB382 features an original system that enables it to detect only the targeted fields by changing the device's acceptance angle.

Recommendations : It is very important to stand exactly below the conductor and take several comparative measurements (figures A and B).

In general, note that detection is always much better from the pole.

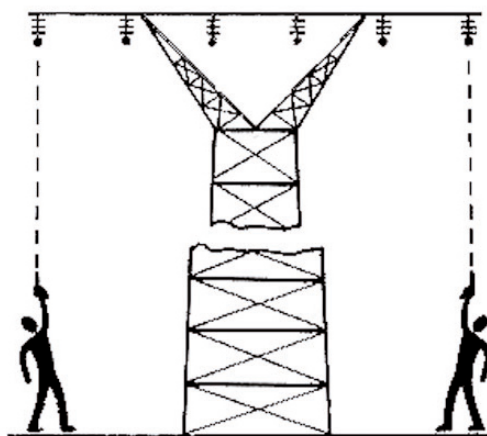


Figure A

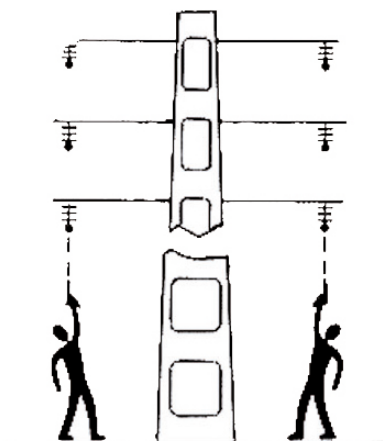


Figure B

DCEDB382

REMOTE ELECTRICAL FIELD DETECTOR

/ USE

The DCEDB382 remotely detects the presence of electrical fields from the pylon or even from the ground on all high voltage lines. It has been specially designed to avoid linemen climbing the wrong pylon. Established directives and procedures must be followed.

/ TECHNICAL SPECIFICATIONS

- Aluminium casing equipped with a zoom type adjustable field antenna.
- 10-position bargraph indicator, trigger start and green battery level LED.
- Self-checking.
- Power supply: 9V battery, IEC T LR61 ref. S413.
- Temperature range: from 25°C to 55°C.
- Comes in a leather holster.

NB : This detector is not a voltage detector.

Reference	Description	Weight
DCEDB382	Remote electrical field detector	750 g

/ Accessories

Reference	Description	Weight
SCDCEDB	Leather case	168 g



TOGETHER

#WEARE **PENTASTIC**



FOLLOW US !



@PENTAESP



VOLTAGE DETECTION

DIRECT CURRENT VOLTAGE DETECTOR
ELECTRICAL TRACTION DETECTION

DCC

DIRECT CURRENT VOLTAGE DETECTOR

DESIGNED ACCORDING TO IEC 612343-2



DC BIPOLAR VOLTAGE DETECTOR
RANGE 120V – 3600 V DC



AVOIDS FALSE NOMINAL
VOLTAGE DETECTION



PERMANENT CHECKING
OF THE EARTH LEAD



WARNING EXCESS VOLTAGE
RANGE (>5000V) VISUAL
AND CONTINUES SOUND
INDICATION



DIRECT ACCESS
TO THE BATTERY
AND SEALED ELECTRONICS
COMPARTMENT



OPTIMIZED INDICATION
THAT CAN BE UNDERSTOOD
CLEARLY IN ALL WORKING
CONDITIONS



#wearepentastic



PRO-ELITE

DCC

INNOVATION

DC VOLTAGE DETECTOR 120V — 3600 V DC

STANDARDS

IEC 61243-2

- **AVOIDS FALSE NOMINAL DC VOLTAGE DETECTION** : double measurement circuit distinguishing nominal and stray voltages.



- **PERMANENT CHECKING OF THE EARTH LEAD** : Permanent earth lead continuity monitoring.



- **DIRECT ACCESS TO THE BATTERY** and sealed electronics compartment. When the battery is replaced, this design prevents the following :

- damage to electronic circuits ;
- humidity into ingress the device when the battery is replaced outdoors.

- **OPTIMIZED INDICATIONS** that can be understood clearly in all working conditions :

- **High-visibility indicator light, clearly readable in all working conditions.**
- **100 dB audible signal, clearly perceptible in noisy environments, thanks to an acoustic "horn".**



- Integrated self-test button with lead continuity and battery status check.



- Each indicator light is dedicated to a single function.

• A THOUGHTFUL DESIGN

- Robust shell with shock-absorbing adapter (adapters available on request – APV R).
- Counter nut allowing electrode locking in any direction.
- Ergonomic button suitable for use with insulating gloves.



/ A measurement module is available for this product!

Voltage Detector – Measurement Version

This advanced model provides accurate AC and DC voltage readings along with detailed diagnostics when leakage current is detected, offering enhanced support for rapid and reliable network analysis.



/ USE

This device is used for proving dead operation of direct current overhead conductor especially railway catenary (metro, trains)

- Detection of DC voltage (presence or absence of voltage)
- Detection of residual DC voltage measure the unloading of the line
- Detection of nominal or induced AC voltage (presence or absence of voltage)

/ TECHNICAL SPECIFICATIONS

- Nominal voltage range : $U_n = 120 \text{ V}$ to 3000 V DC .
- Double voltage indication, powerful sound and a flashing light indication.
- Presence of real DC voltage indicated by audible and flashing high-brightness **red** light.
- Bright **orange** LED indication: presence of interference voltage (DC residual charge) or stray voltages coming from surrounding circuits (faulty insulators)
- Presence of induced alternative voltage indicated by high-brightness **blue** light.
- Auto-test OK and no voltage indicated by **green** high-brightness light.
- Self-check incorporated to ensure correct functioning of device in the field before and after use.
- Operating temperature: -25° to $+55^\circ \text{ C}$, humidity 20% to 96%.
- IP65: 1st index = 6 dustproof. 2nd index = 5 = Waterproof.
- Outdoor use
- Battery: 9 volt alkaline CEI / IEC 6LR61
- Delivered in metal case of soft case
- Complet device approx. height: 3,200 kg



Reference	Voltage range	End fitting	Packaging
DCC3600U	120 — 3600V DC	Universal	Soft case
DCC3600R		R	
DCC3600APV		APV	
DCC3600MU	120 — 3600 V DC (voltage indication on remote module)	Universal	Robust and waterproof case
DCC3600MR		APV	
DCC3600MAPV		R	



VOLTAGE DETECTION
DIRECT CURRENT VOLTAGE DETECTOR
DC BIPOLAR VOLTAGE DETECTOR

SUPERIOR

SUPERIOR

ESSENTIAL

DC3600BPM – DC3600 – DC36

OUR SELECTION

DC BIPOLAR VOLTAGE DETECTORS, RANGE 500 / 3.600 V DC

STANDARDS

IEC 61243-2

- Instant detection of residual DC voltage (measure the unloading of the line).
- Detection of actual and induced AC voltage (presence or absence of voltage).
- Detection of DC voltage (presence or absence of voltage).
- Warning excess voltage range (> 4000V) visual and continues sound indication.
- Current limitation in the cable below <3.5 mA.
- Surge resistant up to 36 kV.
- Indication of the voltage level on the AC or DC receiver (± 3 %).
- Robust shell with flexible adapter coupling (AFLEX).
- Full auto control with self test button (cable is also tested).
- Dedicated display for each function => clear information.



/ USE

These devices are used for No-Voltage Testing of direct current overhead lines (mainly transport overhead lines : trams, metro, trains). Certain models in this range also indicate the presence of voltage due to residual electric charges (DC) and the presence of AC voltages (induced or actual).

/ TECHNICAL SPECIFICATIONS

Voltage range: 400-3600V DC. Audible and visual indication of the presence of voltage (red LEDs)
The current passing through the detector cable is always lower than the standardised danger threshold (3.5 mA). Designed to resist temporary over voltages up to 36kV. DC36 simplified model : simple DC voltage detection from 500V to 3600V. DC3600BP detector: complete detector able to indicate:

- detection of DC voltages (red LEDs) from 500V to 3600V
- presence of residual DC voltages while discharging (audible signal and orange LEDs)
- presence of actual or induced AC voltages (blue LED)
- overvoltage alarm

Reference	Nominal voltage	End fitting	Packaging
DC36HR	500 — 3600V DC	AFLEX R	Soft case
DC36HU		AFLEX U	
DC36HAPV		AFLEX APV	
DC36HB		AFLEX B	
DC3600BPHR		AFLEX R	
DC3600BPHU		AFLEX U	
DC3600BPHAPV		AFLEX APV	
DC3600BPHB		AFLEX B	
DC3600BPM	-	-	Robust and water-proof case
DC3600BPMAV	500—3600 V DC (voltage indication on remote module from 50 V AC and 120 V DC))	AFLEX APV	
DC3600BPMB		AFLEX B	
DC3600BPMR		AFLEX R	
DC3600BPMU		AFLEX U	



SUPERIOR

HVDC

OUR SELECTION

HIGH VOLTAGE DC DETECTOR

- Exclusive patent for using peak effect.
- Aluminum electrodes, for peak effect and conductor contact
- Permanent stand-by mode
- Built-in self-test checking the circuit and the battery level
- Green LED for "ready to use" indication
- Acoustic and Red LED indication for "Nominal Voltage present"
- Housing made of impact resistant polycarbonate.



/ USE

Single-pole Voltage Detector for Direct Current, HVDC is designed to check absence or presence of nominal voltage on high voltage Direct Current, DC, installations, both in switchgear and on lines.

/ TECHNICAL SPECIFICATIONS

DC voltage range possible choice from 50 to 800 kV

- Detector operating exclusively with DC Voltages
- Rejection of AC Voltages
- Permanent stand-by mode, turning back to stand-by mode after 90s w/o detecting
- Use indoor outdoor category N: -25° à +55°
- Supply: 4 Batteries AA
- Carrying case with instruction manual
- Dimensions: Ø 80 mm — L = 350 mm
- Weight: 550 g.



Reference	Voltage range	End fitting	Packaging
HVDC050150GB	50 - 150 kV	Universal	Plastic case
HVDC150500GB	150 - 500 kV		
HVDC450800GB	450 - 800 kV		



D.E.T.

DE-ENERGIZED TESTING FOR UNDERGROUND NETWORKS

On tripolar cables and networks protected by a circuit breaker, it is strongly recommended to carry out a DET using a dual function spiking and cutting tool in order to limit the short circuit to a phase-to-earth fault.

THE EARTHING EVACUATES THE CURRENT from the short circuit in case of voltage presence.

IN CASE OF CUTTING A TRIPOLAR CABLE protected by a switch sensitive to phase to earth current, the spike integrated in the blades and their calibrated speed will make sure the network is protected in case of voltage presence.

Wide variety of blades available, with or without spike.

SECURE IDENTIFICATION



De-energized and dual grounded.



De-energized testing.

DE-ENERGIZED TESTING FOR UNDERGROUND NETWORKS SAFETY CABLE CUTTER FOR UNDERGROUND NETWORKS



OUR EXPERTISE FOR SAFER DE-ENERGIZED TESTINGS ON UNDERGROUND NETWORKS

- 25 years of expertise in de-energized testing (DET) spiking and cutting tools.
- Thousands of DET tools sold worldwide to electrical utilities.
- Short Circuit Intensity Rating (SCIR) of earth leads tested in third party laboratory up to 31.5kA.ls
- 0 accidents with the use of the Range PICOUP® since first delivery.
- Choose your safe DET solution in our wide range of products according your level of requirements.
- Compliance to existing standards NFC1850, EN 50340: Enedis specification.

REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	IP67 CRETIFIED	SAFETY GUARANTEED	Tools type	Tool reference	Wire diame- ter	Type of fault	DET Certainty Underground Cable Number of operations to be performed	Underground cables		
													LT	HV	VHV
×	×	×	×	×	×	×	×	MANUAL cable cutter	SPCS120M	120 mm	two-phase	1 spiking	•	•	•
×	×	×	×	×	×	×	×	CARTRIDGE cable spiker	SPC80WC	80 mm	two-phase	1 spiking	•	•	•
×	×	×	×	×	×	×	×		SPC114WJ	114 mm	two-phase	1 spiking	•	•	•
×	×	×	×	×	×	×	×		SPC114WJC	114 mm	two-phase	1 spiking	•	•	•
×	×	×	×	×	×	×	×		SPC152WC	152 mm	two-phase	1 spiking	•	•	•
×	×	×	×	×	×	×	×		SPCC80NM	80 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×	×	×	Cable cutter MANUAL	SPCC100SM	100 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×	×	×		SPCC120WM	120 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×	×	×		SPCC80NMC	80 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×	×	×		SPCC100SMC	100 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×	×	×		SPCC120WMC	120 mm	two-phase	1 cut	•	•	
✓	✓	✓	×	×	×	×	×		SPCC80NEP	80 mm	two-phase	1 cut	•	•	
✓	✓	✓	×	×	×	×	×		SPCC100SEP	100 mm	two-phase	1 cut	•	•	
✓	✓	✓	×	×	×	×	×	Cable cutter COMFORT	SPCC120WEP	120 mm	two-phase	1 cut	•	•	
✓	✓	✓	✓	×	×	×	×		SPCCS100SEP	100 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCC50	50 mm	two phase	1 cut	•		
✓	✓	✓	✓	✓	✓	×	×	Cable cutter INTE- GRATED	SPCC65	65 mm	two phase	1 cut	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCC80	80 mm	two phase	1 cut	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCCS50SI	50 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCCS65SI	65 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCCS80SI	80 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	✓	×		PICOUP 50	50 mm	single phase	1 spiking & cutting	•		
✓	✓	✓	✓	✓	✓	✓	×		PICOUP 65	65 mm	single phase	1 spiking & cutting	•		
✓	✓	✓	✓	✓	✓	✓	×	Chop and cut ULTRA- SAFE	PICOUP 80	80 mm	single phase	1 spiking & cutting	•		
✓	✓	✓	✓	✓	✓	✓	✓		PICOUP110EXP	110 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCCS140WI	140 mm	single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓	×	×		SPCC140WI	140 mm	single phase	1cut			•
✓	✓	✓	✓	✓	✓	×	×								



Function performed
by device.



Function not provided
by the device.

ICC during a VAT on a live wire
DC phase-ground = 1kA = single phase fault
DC phase-phase = 3.5kA = two-phase fault
3-phase DC = 12.5kA = 3-phase fault



PRO-ELITE

PICOUP 50, 65 & 80 MAK EXP

ULTRA-SAFE WATERPROOF CABLE CUTTING AND PIERCING TOOLS – ULTRASAFE RANGE

- Safety cable cutter for voltage absence verification.
- Maximum short-circuit current (P–T) discharged:
10.5 kA/1s or 14.5 kA/0.5s.
- Remote-controlled up to 25 metres for user safety.
- Powered by a standard 18 V – 4 Ah battery.
- Waterproof for all-weather use and flooded trench operations.
- Robust and lightweight, with hardened steel blades.
- Compact electro-hydraulic pump with automatic double speed (fast approach / working mode).
- Eliminates the risk of injury from hose puncture and associated maintenance costs.
- Fast cutting speed enables melting of LV fuses.
- The PICOUP reduces risks during possible live cutting on MV cables.
- Supplied with a robust carrying bag with storage pockets.



PICOUP 50



PICOUP 65



PICOUP 80

/ USE

Fully integrated, waterproof electro-hydraulic cable cutter.

Ultra-safe, hose-free, and remote-controlled device for verifying voltage absence on underground networks.

				
Ref.	Outer diameter	Max total conductor cross-section	Steel tape armour	Flat or round wire armour
PICOUP 50 MAK EXP	Up to 50 mm	3 x 240 + 120 mm ² / 1 x 630 mm ² Alu 4 x 185 + 150 mm ² / 1 x 300 mm ² Copper	Thickness up to 2 mm	Thickness up to 2.4 mm
PICOUP 65 MAK EXP	Up to 65 mm	3x240 + 120 mass / 1x630mm ² Alu 3x150mm ² + 95mm ² / 1x300mm ² Copper		Thickness up to 2 mm
PICOUP 80 MAK EXP	Up to 80 mm	3x240 + 120 mass / 1x1300mm ² Alu 3x150mm ² + 95mm ² / 1x300mm ² Copper	Thickness up to 1 mm	Thickness up to 1 mm (flat wire only)

/ TECHNICAL SPECIFICATIONS

Ref.	PICOUP 50 MAK EXP	PICOUP 65 MAK EXP	PICOUP 80 MAK EXP
Cutting head			
Cutting head weight with earth lead + battery + remote control	7,2 kg	7,4 kg	10 kg
Cutting head dimensions	555x115x180 mm		
Cutting force	8,8 †	7,7 †	5,8 †
Battery life (on 3 × 50 mm² aluminium cable)	100	90	75
Blade treatment	Oil-treated		
Integrated electro-hydraulic pump			
Blade reopening	Decompression button + spring return		
Interchangeable battery (CAS METABO or MAKITA 18)	18v 4Ah		



/ PICOUP COMPONENTS & ACCESSORIES

PICOUP	Aluminium earth braid with earth clamp	Remote control	METABO battery 18 V – 4 Ah	MET. charger 18 V
PICOUP80 (PICOUP65) (PICOUP50)	MALT-AL-70-020	PHE71-RADIO-TE	BATT-18V-4AH-MAK	CHARG-18V-MAK
				
(PICOUP65) (PICOUP50)				
Carrying case	Explosion-proof protective cover	Earth rod	Suspension strap	Retaining strap
SPCCS80SI-01	BACHE-PICOUP	PIQTER-500	SANG-SUSP-P80	SANG-MAINT-P80
				



VOLTAGE DETECTION
DE-ENERGIZED TESTING
SAFETY CABLE SPIKERS

PRO-ELITE

PICOUP 110 EXP

ULTRASAFE CABLE SPICKING AND CUTTING TOOLS SAFETY RANGE

- Network protection by creating a phase-to-earth fault using the spike integrated in the blade.
- Remotely operated cable cutter to check absence of voltage in an underground cable.
- Safety distance guaranteed between the remote control and the tool: 3m.
- Maximum transited short-circuit current (Ph-G): Al 70mm² = SCI 14,5 kA (0,5s) or SCI 10,5kA (1s).
- Remote-controller / tool distance up to 40 meters.
- Powered by standard MAKITA batteries 18 V - 4 Ah (up to 5 Ah).
- Waterproof for all-weather use.
- Robust & compact, hardened steel blades to cut armoured cables.
- Electro-hydraulic pump with automatic dual speeds (fast approach/cut).
- Eliminates the hydraulic insulating hose and associated maintenance costs.
- Spikes and cut the cable all in a row: when cutting 3 live phases simultaneously the spike creates a single phase-to-ground fault which operates circuit breakers thus avoiding short circuits between phases causing irreversible damages to the line.



/ USE

Ultra safe integrated electrohydraulic cable cutter without hydraulic hose to check absence of voltage on underground power cables. Use on the following cables :



Overall diameter	Maximum total cross-section of conductors	Round steel wire armour	Steel sheath armour	Flat steel wire armour
Up to 110 mm	Up to 1300 mm ² Aluminum Up to 4x240 mm ² Copper	Up to Ø 2 mm	Thickness up to 2 mm	Thickness up to 2 mm

/ TECHNICAL SPECIFICATIONS

Ref.	P110
Characteristics of the cables to be cut:	
Total section copper conductors (mm ²)	3 x 240 mm ² copper
Total section aluminium conductors (mm ²)	1 x 1300 mm ² Aluminium
Round steel wire armour (mm)	2,5
Flat steel wire armour (mm)	2,5
Steel sheath armour (mm)	2
Fault following network protection:	
Fuses	Three-phase fault
Circuit breaker	Single phase fault on one phase
Earthing cable :	
70 Al 2m	SCI 14,5 kA (0,5s) ou SCI 10,5kA (1s)



Ref.	P110
Cutting head :	
Maximum cutting diameter (mm)	110
Weight with battery (kg)	17
Dimensions (mm) (L x l x H)	545 x 185 x 305
Cutting blades hardness (Hrc)	55
Anti-corrosion treatment of the blades	Oil Quenching
Main Material	Steel
Hydraulic Power (tons)	17
Dust and water ingress protection grade	IP67
Integrated electro-hydraulic pump:	
Hydraulic pressure (bar)	560
Battery	18v 4Ah MAKITA (Up to 5Ah available in the market with same size)
Minimum number of cuts at 20°C	10
Hydraulic distributor	Double acting with selector
2 speeds pump approach/cut (l/min – mm/s)	4/1 - 1.3/0.4
Blades reopening	With hydraulic pump
Oil capacity	300
Remote control :	
Maximum distance from the tool	30m
Batteries	3 x AAA
Radio frequency	Bluetooth 2,4 GHz
Safety distance between tool and user	3m (Operator needs to be at least 3m from the tool to start the cut)
Radio frequency	
Total weight in case (kg)	30
Case dimensions (mm)	687x528x286
Operating temperature (°C)	-20/50

/ SPCCI COMPONENTS & ACCESSORIES

PICOU P 110 EXP	Ground rod	Aluminum earthing braid with clamp	Remote control	Makita 5Ah Battery
PICOU P-110	PIQTER-500	MALT-AL-70-020	PCCH110-01-RADIO-TEL	BATT-18V-4AH-MAK
				
18V Charger	Case with wheels	Explosion-proof tarpaulin	Blade spike kit	Suspension strap
CHARG-18V-MAK	EASYCASE-P110	BACHE-PICOU P	PCCH110-56-LAME-PIC-INT	SANG-SUSP-P80
				
Maintain strap (x2) PCCH110-37-SANGLE-MAINT				





VOLTAGE DETECTION DE-ENERGIZED TESTING SAFETY CABLE SPIKERS

PRO-ELITE

SPCCS140WI

ULTRA-SAFE CABLE PIERCING AND CUTTING TOOLS – ULTRASAFE SAFETY RANGE

- Network protection by creating a phase-to-earth fault via the PIC system.
- Maximum short-circuit current (P–T) discharged: 31 kA/1 s or 43 kA/0.5 s.
- Direct earthing of the spike as close as possible to the conductor.
- Powered by a standard 24 V – 3 Ah battery.
- Safe positioning of the tool on the cable.
- Suspension straps allowing overhead operation.
- Compact integrated electro-hydraulic unit with automatic double speed (fast approach / working mode).
- Eliminates the risk of injury from hose puncture and associated maintenance costs.
- Robust and lightweight: reinforced polyamide structure, aluminum hydraulic body, and hardened steel blades.
- Removes the need to use a cartridge or manual cable piercer before cutting operations.
- Supplied with either a soft carrying case or a rigid wheeled transport box.



/ USE

Fully integrated, ultra-safe electro-hydraulic cable cutters, hose-free, designed for verifying absence of voltage on underground network cables.


Outer diameter	Maximum total cross-section of conductors	Round steel wire armour	Steel sheath armour	Flat steel wire armour	
Up to 140 mm	Up to 2 500mm ² Aluminium Up to 2 500 mm ² Cuivre	Up to Ø 4 mm	Thickness up to 4 mm	Thickness up to 4 mm	

/ TECHNICAL SPECIFICATIONS

Ref.	SPCCS140WI
Cable characteristics:	
Total copper conductor cross-section	2500 mm ²
Total aluminium conductor cross-section	2500 mm ²
Round wire armour (diameter)	4 mm
Cutting head:	
Weight without earthing	20 kg
Maximum cutting diameter	140 mm
Cutting force	21 t
Blade hardness	55 Hrc
Anti-corrosion blade treatment	Zingage
Integrated electro-hydraulic unit:	
Blade reopening	Selector with hydraulic return
Interchangeable battery (BOSCH)	24v 3Ah



/ PICOUP 400 SPCCI COMPONENTS & ACCESSORIES

PICOUP400	Cutting head 140-HTB	Piercing blade PCCH400	Wire brush	Shoulder strap
PCCH400I	PCCH400I-RTE	PCCH400-42-K	BROSSEMETAL	EASYBAGBH
				
Control unit	Rigid wheeled case	Soft wheeled carrying case	Battery	Battery charger
PCCH250-BT-CSF	EASYCASE-L	EASYBAG-250	BATTERIE24V3	CHARGEUR220/24
				
Remote control	Straps for overhead work	Protective mat	Earth rod	
PCCH250-38	SANGLE2B	TAPISPICOUP	PIQTER-500	
				



VOLTAGE DETECTION DE-ENERGIZED TESTING SAFETY CABLE SPIKERS



- No detonation cartridge.
- No battery.
- Standard drill.

PCMT 95

CABLE-SPIKING EQUIPMENT FOR SINGLE POLE AND THREE POLES INSULATED CABLES UP TO 100 MM OUTSIDE DIAMETER AND MAX 45 KV

STANDARDS

IN CONFORMITY WITH ENEL SPECIFICATIONS

/ TECHNICAL SPECIFICATIONS

- Application: single- or three-pole insulated cables up to Ø 100 mm / 45 kV
- Piercing body: light alloy with helicoidal piercing element
- Protection: insulating tiles and fiberglass-reinforced resin rods (pole & handle)
- Ground lead: 25 mm² copper cable, 5 m length, transparent PVC sheath
- Ground clamp: forged brass, clamping capacity up to 33 mm
- Connections: tinned copper lugs with heat-shrink reinforcement
- Complete with metallic carrying case
- Conformity: ENEL technical specifications

/ USE

Cable-piercing equipment for single-pole and three-pole insulated cables up to 100 mm diameter and 45 kV. Designed to safely pierce and short-circuit cable metallic parts (sheath, shielding, conductors) before grounding.

REMOTE OPERATOR PREVENTS STEP VOLTAGE STABILIZED PUMP USER SECURIZED DURING SPIKING PHASE TO EARTH SHORT CIRCUIT GUARANTEED NO HYDRAULIC HOSE END OF DET INDICATOR						Application: single- or three-pole insulated cables up to Ø 100 mm / 45 kV Piercing body: light alloy with helicoidal piercing element Protection: insulating tiles and fiberglass-reinforced resin rods (pole & handle) Ground lead: 25 mm² copper cable, 5 m length, transparent PVC sheath Ground clamp: forged brass, clamping capacity up to 33 mm Connections: tinned copper lugs with heat-shrink reinforcement Complete with metallic carrying case Conformity: ENEL technical specifications								Cable-piercing equipment for single-pole and three-pole insulated cables up to 100 mm diameter and 45 kV. Designed to safely pierce and short-circuit cable metallic parts (sheath, shielding, conductors) before grounding.			
						Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable	Underground cables						
										Number of operations to be performed	LT	HV	VHV				
✕						Manual cable cutter	PCMT95	100 mm	One phase	Spiking	•	•	•				

Ref.	SCIR (kA-0,5s)	Cable max.	Dimensions	Weight
SPCS	8	120mm	170x21x27 cm	25,8 kg

REMOTE OPERATOR PREVENTS STEP VOLTAGE STABILIZED PUMP USER SECURIZED DURING SPIKING PHASE TO EARTH SHORT CIRCUIT GUARANTEED NO HYDRAULIC HOSE END OF DET INDICATOR						SPC CARTRIDGE CABLE SPIKER USE Cartridge cable spiker for checking the absence of nominal voltage on underground network cables. Advantages No battery. Remote trigger (rope).							
						Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable	Underground cables		
							Number of operations to be performed	LT	HV	VHV			
✕						MANUAL cable cutter	SPCS120M	120 mm	two-phase	3 prong cable	•	•	•
✕							SPC80WC	80 mm	two-phase	3 prong cable	•	•	•
✕						MANUAL CARTRIDGE	SPCT114WJ	114 mm	two-phase	3 prong cable	•	•	•
✕						cable snare	SPCT114WJC	114 mm	two-phase	3 prong cable	•	•	•
✕							SPCT152WC	152 mm	two-phase	3 prong cable	•	•	•

Ref.	Cable max Ø	Cable max.	Dimensions	Weight
SPC80WC	80mm	N/A	N/A	7.5 kg
SPC110WC	110mm	N/A	N/A	20 kg
SPC152WC	152mm	N/A	N/A	21 kg



SPC

CARTRIDGE CABLE SPIKER

/ USE

Cartridge cable spiker for checking the absence of nominal voltage on underground network cables.

Advantages

- No battery.
- Remote trigger (rope).



SPCCM MANUAL SAFETY CABLE CUTTER

STANDARDS

Certified Pump EN 50340

/ USE

Manual hydraulic cable cutters for de-energized testing of underground power cables.

/ TECHNICAL SPECIFICATIONS

- Robust & light, aluminum structure and hardened steel blades.
- Cable head earth lead: maximum rated short-circuit intensity: up to 14kA.1s (or 20kA.0.5s) phase to phase.
- Hydraulic pressure 700 bar
- 700 bar hydraulic hose, certified insulation up to 60kV, flexible, Kevlar reinforced with anti-pinch sleeves.
- Quick connection couplings with captive dust caps. Available with CEJN T15/T17 or EDF coupler
- 3 cutting heads 80, 100 and 120 mm interchangeable with the pump. Integrated carry handles, balanced weight.
- Packaging: wheeled case or 2 Waterproof tarpaulin transport bags with wide shoulder straps and storage pockets.

• Eliminates the need to use a cable spiker before the cutting operation.

• Without external energy.



REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable Number of operations to be performed	Underground cables		
											LT	HV	VHV
✓	x	x	x	x	x	Cable cutter MANUAL	SPCC80NM	80 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x		SPCC100SM	100 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x		SPCC120WM	120 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x		SPCC80NMC	80 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x		SPCC100SMC	100 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x		SPCC120WMC	120 mm	two-phase	1 cut	•	•	
✓	x	x	x	x	x								

Ref.	Ø of cut	Cutting force	Ø Steel wire armour	SCIR	SCIR (kA.0.5s)	Type of short circuit	Certified EN50340
SPCC80NMC	80 mm	8 †	0 mm	9 kA.1s	13 kA.0.5	three-phase fault	Yes
SPCC100SMC	110 mm	9,6 †	1 mm				
SPCC120WMC	120 mm	13 †	2 mm				
SPCC80WM	80mm	8 †	0 mm	14 kA.1s	20 kA.0.5		No
SPCC100WM	110 mm	9,6 †	1 mm				
SPCC120WMB	120 mm	13 †	2 mm				



VOLTAGE DETECTION

DE-ENERGIZED TESTING SAFETY CABLE SPIKERS



SPCC100SMC MANUAL SAFETY CABLE CUTTER

STANDARDS

Certified EN 50340

/ TECHNICAL SPECIFICATIONS

- Robust & light, aluminum structure and hardened steel blades.
- Cable head earth lead: maximum rated short-circuit intensity: up to 14kA.1s (or 20kA.0.5s) phase to phase.
- Hydraulic pressure 700 bars
- 700 bars hydraulic hose, certified insulation up to 60kV, flexible, Kevlar reinforced with anti-pinch sleeves.
- Quick connection couplings with captive dust caps. Available with CEJN 115
- Cutting heads 100mm
- Packaging With 2 bags, one for the cutting head and one for the footpump

/ USE

Manual hydraulic cable cutters for de-energized testing of underground power cables.

- Remote controlled 25m = safety for the user
- Comfort of use: electrical energy = effortless

REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	• Cable head earth lead: maximum rated short-circuit intensity: up to 14kA.1s (or 20kA.0.5s) phase to phase. • Hydraulic pressure 700 bars • 700 bars hydraulic hose, certified insulation up to 60kV, flexible, Kevlar reinforced with anti-pinch sleeves. • Quick connection couplings with captive dust caps. Available with CEJN 115 • Cutting heads 100mm • Packaging With 2 bags, one for the cutting head and one for the footpump • Remote controlled 25m = safety for the user • Comfort of use: electrical energy = effortless underground power cables.							
						Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable	Underground cables		
										Number of operations to be performed	LT	HV	VHV
✓	×	×	×	×	×	Cable safety cutter MANUAL	SPCC100SMC	100 mm	two-phase	1 cut	•	•	



New 18 V 4 Ah batteries with high mechanical resistance and tropicalized design.

SPCCEP COMFORT SAFETY CABLE CUTTERS

/ USE

Electrohydraulic cable cutters for de-energized testing of underground power cables.

/ TECHNICAL SPECIFICATIONS

- Bluetooth remote control range 25 m
- Earth lead of the cutting head: maximum SCIR (Ph-G) 25kA/0.5s (or 18kA/1s).
- Compact electrohydraulic pump with automatic double speed (fast approach / work).
- Hydraulic hose 700 bar insulation up to 60kV certified, flexible, Kevlar reinforced with anti-pinch sleeves.
- Quick connection couplings with captive dust caps. Available as CEJN 115/117 or EDF coupler.
- 3 cutting heads 80, 100 and 120 mm interchangeable with the pump.
- CAS metabo18V 4Ah battery
- Packaging: wheeled case or 2 Waterproof tarpaulin transport bags with wide shoulder straps and storage pockets

REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	• Remote controlled 25m = safety for the user • Comfort of use: electrical energy = effortless • Quick connection couplings with captive dust caps. Available as CEJN 115/117 or EDF coupler. • 3 cutting heads 80, 100 and 120 mm interchangeable with the pump. • CAS metabo18V 4Ah battery • Packaging: wheeled case or 2 Waterproof tarpaulin transport bags with wide shoulder straps and storage pockets							
						Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable	Underground cables		
										Number of operations to be performed	LT	HV	VHV
✓	×	×	×	×	×	COMFORT SAFETY CABLE CUTTERS	SPCC80NEP	80 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×		SPCC100SEP	100 mm	two-phase	1 cut	•	•	
✓	×	×	×	×	×		SPCC120WEP	120 mm	two-phase	1 cut	•	•	



SUPERIOR



SPPCSEP

POWER CABLE SPIKING AND CUTTING TOOL - COMFORT RANGE

- Remote controlled cable cutter for proving dead operations.
- Maximum short circuit current (P-T) elapsed: 25kA.0,5s or 18kA.1s.
- Earthing of the cutting head.
- Compact electro-hydraulic pump with automatic double speed (fast approach/working).
- Hydraulic hose 700 bar, insulating up to 60 kV certified, flexible, Kevlar-reinforced with anti-pinch cuffs.
- A 100 mm cutting head with spike for use on circuit breaker protected networks. The spike creates a phase-to-ground fault.
- Eliminates the need to use a cartridge or manual cable spiker prior to the cutting operation.
- No physical connection to the tool = optimum safety for the user.
- Quick connect couplings with captive dust caps.
- Robust carrying bags with wide shoulder straps and storage pockets.

/ USE

Electrohydraulic spiking and cutting tool for proving dead underground cables.

/ TECHNICAL SPECIFICATIONS

Double pump hydraulic unit 700 bar.
Available with CEJN 115/117 or EDF coupling.
Standard battery 24 V 3 Ah.
Bluetooth remote control with 25 m range.
Packaging: trolley case or trolley bag.

Reference	Cutting Ø	Cutting force	Ø reinforcement round wire	Icc (kA-1s)	Icc (kA-0,5 s)	Type of short-circuit
SPPCS100SEP	100 mm	9,6 t	1 mm	18	25	single-phase fault



VOLTAGE DETECTION DE-ENERGIZED TESTING SAFETY CABLE SPIKERS



- Adapted to street lighting, industry, low voltage, single core distribution cables and telecom cables
- Remote controlled up to 25m : safety for the user
- Integrated spike for single Phase-earth short circuit : safety for the line
- All integrated tool, no hydraulic hose:
 - no maintenance costs ;
 - safety for the user (700 bars) ;
 - quick set up and storage after the cut is complete.
- New cable retention strap for a successful remote-controlled cut.

SPCC50, 65 AND 80 INTEGRATED SAFETY CABLE CUTTERS

/ USE

Ultra safe integrated electrohydraulic cable cutters without hydraulic hose for de-energized testing of underground power cables.

/ TECHNICAL SPECIFICATIONS

- Bluetooth or radio remote controlled
- Integrated spike
- Compact all integrated electro-hydraulic unit with automatic double speeds
- Extended range of blades opening: 50mm, 65mm, 80mm, for uses from street lighting to transmission cables
- Powerful enough to cut steel wire armoured cables, refer to product sheets.
- Systems to maintain the tool on the cable to cut
- Autocut system on request
- 700 bar double pump hydraulic unit.
- Protection tarpaulin
- Packaging: softbag

REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable Number of operations to be performed	Underground cables		
											LT	HV	VHV
✓	✓	✓	×	✓	✓	CUTTING HEAD INTEGRATED	SPCC50	50 mm	Two-phase	1 cut	•		
✓	✓	✓	×	✓	✓		SPCC65	65 mm	Two-phase	1 cut	•	•	
✓	✓	✓	×	✓	✓		SPCC80	80 mm	Two-phase	1 cut	•	•	



SPCCS 50, 65 AND 80 SI INTEGRATED SAFETY CABLE SPIKER&CUTTERS

/ USE

Ultra safe integrated electrohydraulic cable cutters without hydraulic hose for de-energized testing of underground power cables.

/ TECHNICAL SPECIFICATIONS

- Bluetooth remote controlled
- Integrated spike
- Compact all integrated electro-hydraulic unit with automatic double speeds
- Extended range of blades opening: 50mm, 65mm, and 80mm for uses from street lighting to transmission cables
- Powerful enough to cut steel wire armoured cables, refer to product sheets.
- Systems to maintain the tool on the cable to cut
- Double pump hydraulic unit.
- Protection tarpaulin
- Packaging: softbag



- Adapted to street lighting, industry, low voltage, single core distribution cables and telecom cables
- Remote controlled up to 25m : safety for the user
- Integrated spike for single Phase-earth short circuit : safety for the line
- All integrated tool, no hydraulic hose:
 - no maintenance costs
 - safety for the user
 - quick set up and storage after the cut is complete.
- New cable retention strap for a successful remote-controlled cut.
- The spike protects your network.



SPCCS 50 SI

SPCCS 65 SI

SPCCS 80 SI

REMOTE OPERATOR PREVENTS STEP VOLTAGE	STABILIZED PUMP	USER SECURIZED DURING SPIKING	PHASE TO EARTH SHORT CIRCUIT GUARANTEED	NO HYDRAULIC HOSE	END OF DET INDICATOR	Tools type	Tool reference	Wire diameter	Type of fault	DET Certainty Underground Cable	Underground cables		
										Number of operations to be performed	LT	HV	VHV
✓	✓	✓	✓	✓	✓	Spike and cut ULTRASAFE	SPCCS50SI	50 mm	Single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓		SPCCS65SI	65 mm	Single phase	1 spiking & cutting	•	•	
✓	✓	✓	✓	✓	✓		SPCCS80SI	80 mm	Single phase	1 spiking & cutting	•	•	



VOLTAGE ALERT

PERSONAL VOLTAGE DETECTORS PERSONAL VOLTAGE ALARMS

PRO-ELITE

ALADIN

INNOVATION

INDIVIDUAL VOLTAGE ALARM
WITH HEADLAMP

STANDARDS

EN 61000-6-2 / EN 61000-6-4



THE ELECTRICIANS
LIFEGUARD !

/ Rail version
For 25 kV railway
overhead networks



/ USE

ALADIN is a personal electric field detector combined with a professional headlamp. It provides the wearer with an audible safety alarm if a high AC voltage level occurs. This makes it possible to manage unintentional proximity to live facilities by alerting the operator to the danger. The frequency of the audible alarm increases as the detected electric field increases.

The audible alarm alerts the operator as soon as they are close to a voltage source. On arrival at the work site, a personalized calibration of the voltage that triggers reactivation of the smart alarm may be obtained by pressing the Smart button. The alarm then remains on silent watch as long as its readings are below this level and as soon as the measured voltage is higher than the defined level, the user is warned. The closer is the voltage source, the shorter the reactivation distance will be.

The detector acts as a complementary warning by alerting the operators when they are in presence of live equipments : maintenance works, rescue, painting, pruning, etc.

Advantages

• ADJUSTABLE, 5-POSITION ANGLE:

The lamp's angle is adjustable to 5 positions by moving the detector on its fixing plate.

• UNIVERSAL FASTENING

ALADIN is adjustable to all models of protective helmet or cap and its fastening interface includes:

- A clip for fixing to a protective helmet that has a slot for a headlamp.
- An adhesive pad system for fixing onto traditional helmets without this slot (several models available).
- An elastic strap with fixing hooks so that the detector may be worn with a protective cap.



/ A PROFESSIONAL QUALITY MULTI-BEAM LAMP

ALADIN is equipped with an integrated high-performance LED headlamp and professional lenses for excellent light quality and will adapt to any requirements.

ALADIN is fitted with two light beams, suitable for all uses.


LONG RANGE BEAM : a focused or long-range beam to provide lighting at a distance: path, overhead lines or electrical poles.

BROAD BEAM : a broad or close beam to light the immediate vicinity: work close at hand, movements, stairs.

Type of beam	Light intensity	Beam angle	Lighting distance	Autonomy
	140 lumens	11°	20-30 m	4 h
	High strength	65°	10-15 m	4 h
	Medium strength		5-10 m	25 h
	Low strength		< 3 m	50 h
Vigilance	/	/	/	80 h



/ 360° DETECTION AROUND THE WEARER

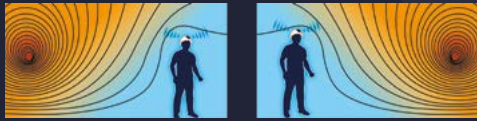

The ideal position of the detector on top of the protective helmet makes detection of an electric field equally effective, whether the field is in front of or behind the wearer.



/ SMART MUTE FEATURE: SMART ALARM

The audible alarm alerts the operator as soon as they are close to a voltage source. On arrival at the work site, a personalized calibration of the voltage that triggers reactivation of the smart alarm may be obtained by pressing the Smart button. The alarm then remains on silent watch as long as its readings are below this level and as soon as the measured voltage is higher than the defined level, the user is warned.

The closer is the voltage source, the shorter the reactivation distance will be.



/ COMPACT AND LIGHTWEIGHT

PENTA FAMECA has used all its know-how to reduce the volume and weight of its detector. ALADIN is lighter than most other headlamps with equivalent performance.



/ WIDE VOLTAGE DETECTION RANGE : FROM 2 kV TO 400 kV

ALADIN's wide voltage range from 2 kV to 400 kV makes it suitable for a great variety of electrical environments.



• FIRST ALARM DISTANCE BEFORE SMART MUTE

KV	Distance*
1	2 m
15	4,5 m
20	5 m
25	5,5 m

Distances given as an indication, obtained in laboratory conditions using single voltage on a 2-metre bar at 1.5 metres from the ground

* Version ALADINCEFC

/ TECHNICAL SPECIFICATIONS

- Detector operating range : 2 kV to 400 kV.
- Reference detection distance: 2 metres from a conductor located at a height of 1.5m at a voltage of 1 kV (live-earth).
- Detects the electric field level but does not measure the distance. The higher the voltage, the greater the distance at which it may be detected.
- Detection of a 50 Hz and 60 Hz electric field at 360° around the wearer.
- Use for outside and indoor electrical equipment.
- Detects Low Voltage on residential and commercial electrical sockets.
- IP65 protection : protection against dust and water splashes.
- Power supply : Lithium Polymer battery, rechargeable using a micro USB cable.



The standard version of detector ALADINCEFC is supplied in a cardboard box with a universal charger and micro USB cable, interface for fitting to a helmet, an elasticated band and four hooks, a reinforced protective case and Users' Instructions.

Reference	Voltage range	Sensitivity	Application	User's Manual*	Packaging
ALADINMVOSCEFC	2 - 400 kV	+++++	Compact 10kV metal walled cabinets in substations, overhead lines	Pack F	Cardboard box: includes metalized soft bag, pads interface (x 3), USB charger & elastic strap, cleaning tissue.
ALADINCEFC	2 - 400 kV	++++			
ALADINMVOHCEFC	10 - 69 kV	+++	Only use on overhead line from Mobile Elevating Work Platform	also available in Pack G	
ALADINRAIL25CEFC**	25 kV single phase	++	25kV railway tracks environment only		
ALADINHVCEFC	50 - 400 kV	+	Transmission overhead line and switchyard		

* Pack F: FR/GB/DE/ES/PT/PL - Pack G: GB/GR/BG/IT/NL/AR/TR

** Pack F: FR/GB/DE/ES/PT/PL - Pack G: GB/GR/BG/IT/NL/AR/TR

Position	250 mm / 100 in	9" / 65"	20-50 m / 10-15 m	40%
----------	-----------------	----------	-------------------	-----



VOLTAGE ALERT

PERSONAL VOLTAGE DETECTORS PERSONAL VOLTAGE ALARMS

SUPERIOR

ODIN

INNOVATION

INDIVIDUAL VOLTAGE WARNING

STANDARDS

EN 61000-6-2 | EN 61000-6-4

- Sound alert of voltage proximity which rhythm increases up on the level of electric field detected.
- The "smart mute" is a Dynamic Voltage Detection :
 - it is used to silence the warning sound once at working place, the device is remaining in vigilance and still measuring the electric field.
 - The warning sound will automatically restart in case of increase of the level of detected electric field (closer or sudden presence of voltage).
 - Acts as an additional fencing which can be set at the working place.
- The device can be fixed on helmets or hard hats by various means. In this position, the device will detect 360° around the operator.
- No influence of the electromagnetic fields.
- Light and compact device.
- Rechargeable by standard micro USB 5 V plug.
- Robust shell with flexible adapter coupling (AFLEX), range of adapters available on request (U, APV & R)
- Counter nut allowing the electrode to be locked in position.
- Ergonomic button easy to operate even with insulating gloves.



/ USE

- ODIN is designed to provide extra safety level for workers operating near energized equipment (during maintenance, rescue operations, painting, pruning,...) in electrical environment.
- This device is a personal voltage alarm.

Do not replace safety procedure.

- Example of situation where ODIN provided an efficient warning.
- Misunderstanding : the operator approach the wrong spot
- Voltage unexpected return : mistake during an operation on disconnected network.
- Involuntary approach : quick move in direction of energized area during operation
- Diversion: the operator is diverted by a bad news or urgency and moves toward a high potential energized conductor unconsciously.

/ TECHNICAL SPECIFICATIONS

- 360° detection of electric field 50 & 60 Hz around the worker.
- Convenient for outdoor and indoor electrical systems.
- Detects the level of electric field. It does not measure the distance of the source of the electric field.
- Higher is the voltage, bigger is the distance of detection.
- It may even detect low voltage near wall outlet.
- Range of use up to 400 kV environments.
- Battery capacity 2000mAh
- Temperature: -25°+55°C
- Humidity: up to 96 %.

In all these situations and many others
ODIN will provide the ultimate WARNING.

Reference	Voltage range	Options	User manual*	Packaging
ODINMVOSCEFC	2 - 400 kV	Charger USB Elastic strap	Pack F also available in Pack G	Cardboard box: includes Soft bag, many pads interface (x 3)
ODINCEFC				
ODINMVOHCEFC	10 - 69 kV			
ODINHVCEFC	50 - 400 kV			

* Pack F : User manual FR/GB/DE/ES/PT/PL - Pack G : User manual GB/GR/BG/IT/NL/AR/TR



PREMIUM

RODIN-RS

OPERATING REPEATER
FOR PERSONAL VOLTAGE ALARM

STANDARDS

EUROPEAN DIRECTIVE (2014/53/EU)

Advantages

- Provides the benefit of the functional and ergonomic features of ALADIN RS plus possible specific commands and alerts
- Enhance the ALADIN RS audible alarm to a level suitable for working environments (lift vehicle engine, surrounding traffic, etc)



/ USE

RODIN-RS linked with ALADIN-RS by Bluetooth is designed to provide additional safety alert to a worker team operating in an electrical environment close to presumably live equipment (maintenance work, painting, pruning etc. It will warn the workers and operate on chosen auxiliary systems (warning beacons, siren, stopping equipment motion, ...) when voltage is detected by the ALADIN-RS to which it is paired.

Does not replace safety procedures;

- The detection of an electric field by ALADIN-RS activates audio and visual alarms and operate selected auxiliary functions to which RODIN-RS has been linked.
- The operator can adjust the alarm distance in relation to the live conductor using the Smart Mute function of ALADIN-RS audio indication stops but the light indication remains active
- RODIN-RS copies (emulates) all the sound and visual indications of ALADIN-RS (smart mute, low battery, etc.)
- RODIN-RS can be used paired with ALADIN-RS to enhance safety when closing to or operating near live installations in the voltage and configuration range of the ALADIN-RS used.
- ALADIN-RS refer to the related product data sheet.

Caution : RODIN-RS is designed to only operate with the ALADIN-RS electric field detector or any PENTA FAMECA device that will be designed in order to be compatible with this technology (RODIN-RS upgrade being probably necessary).

/ TECHNICAL SPECIFICATIONS

- Supply : 12 V or 24 V DC
- Dry contact control input (NO/NC)
- Protection : IP69 K
- Shocks resistance : IK03
- Operating temperature : -25 to +55° C
- Fitting by four M6 screws
- Dimension 141 x 227,5 x 90 mm
- Weight : 1,5 Kg

Reference	Application	Voltage Range	Dimensions	User manual*
RODIN-RS	repeat ALADIN alarm and stop the bucket	12 V or 24 V DC	141 x 227,5 x 90 mm	Pack F

* Pack F: FR/GB/DE/ES/PT/PL - Pack G: GB/GR/BG/IT/NL/AR/TR



VOLTAGE ALERT

PERSONAL VOLTAGE DETECTORS PERSONAL VOLTAGE ALARMS

PRO-ELITE

GAZEL

NEW

VOLTAGE ALARM FOR GAS PIPE BYPASS




The GAZEL is a Pipe Bypass equipped with a Voltage alarm.


- It warns the operator of the risk of electric shock during gas meter change operations by showing presence of voltage with :
 - Sound
 - Light indication in all directions

/ SPECIFICATIONS

- Voltage detection
- Dimensions : 85 x 47 x 31 mm
- Alert the user as soon the device is brought into contact with an AC voltage above 50V AC.
- Detection of the electric field 50Hz and 60Hz.
- IP 54, outdoor use.
- Sound level: 55 dB at 1m.
- No influence of electromagnetic fields beyond 150 KHz.
- Self Test: Performed by pressing the "Test" button.
- Power source: 2x AAA alkaline batteries, indication "low battery" level by red diode fixed after AUTOTEST.
- Weight : 95 g (excluding the Bypass).

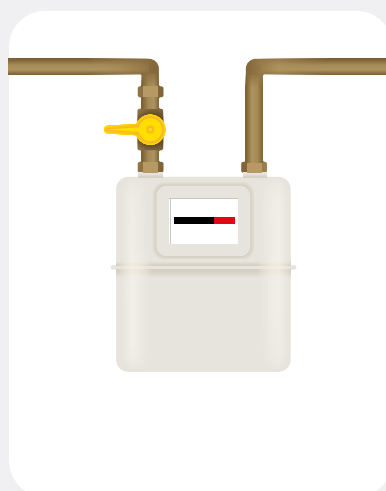

1 OLD GAS METER BEFORE DISMANTLING

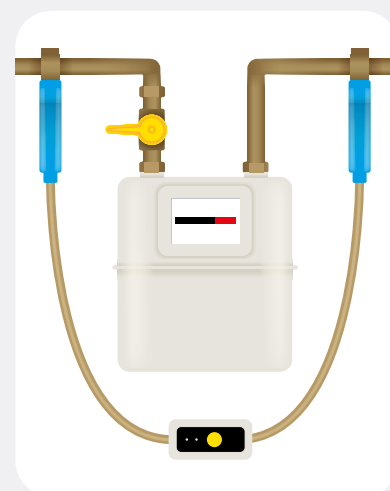

2 FIX THE 2 CLAMPS ON EACH SIDE OF THE GAS METER




STOP If the detector beeps and lights up : abnormal presence of voltage on the pipe !


Reference	Braid length	Weight	User's Manual*	Packaging
GAZELFTA	0,7 m	1,4 kg	Pack F	Soft bag with EMC protection
GAZELFTB	2 m	1,9 kg	also available in Pack G	
GAZELFTX	Device alone for assembly on bypass with 35mm ² section cable			

* Pack F: FR/GB/DE/ES/PT/PL


Pack G: GB/GR/BG/IT/NL/AR/TR

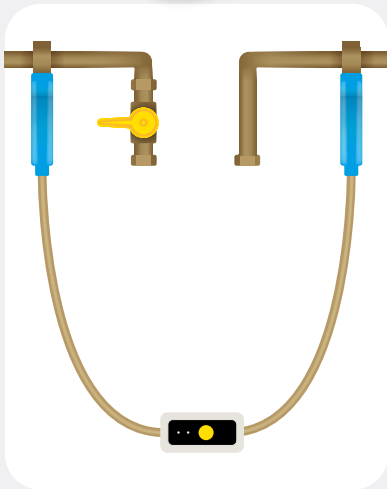

3 THE BYPASS MAINTAINS THE CONTINUITY WHEN THE OLD GAS METER IS REMOVING TO AVOID ANY SPARK

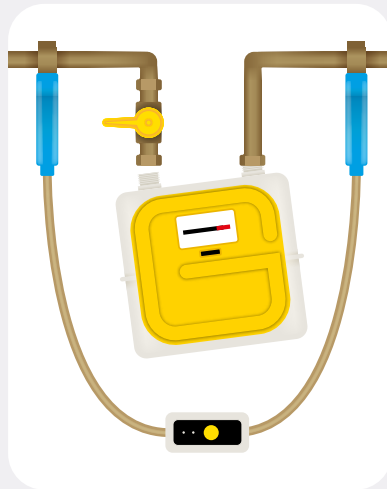

4 NEW GAS METER CAN BE INSTALLED

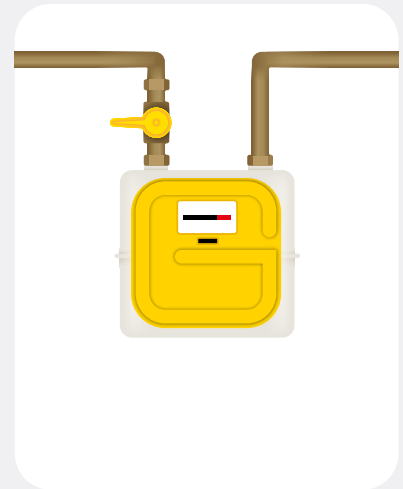

5 THE BYPASS CAN BE REMOVED





VOLTAGE ALERT

PERSONAL VOLTAGE DETECTORS PERSONAL VOLTAGE ALARMS

UNITAG

ELECTRO-ALERT DETECTOR FOR SAFE APPROACH
OF DISTRIBUTION INSTALLATION (LV/HV)

STANDARDS

1000V CAT IV - IP65

- Sound and light alert on voltage presence.
- UNITAG 1000V for using on networks.
- Can be used by hands or on insulating stick.
- Indication of detection level.
- Tip length designed for access to LV panel and test point.
- Audible beeping speed proportional to the level of detection.
- Visual indication of level of detection on a bright LED bar graph.
- Automatic self-test when switched on with green LED indication.
- Multi purpose detector : street light, insulating twisted cables, rescue team, fire fighters...



/ USE

UNITAG is a unipolar detector designed to test the presence of phase on insulated or bare LV conductors.

The level of detection is indicated by a LED bargraph and a beeping sound which speed increases as device approaches a live source. It is commonly used for detecting stray voltage on poles and cross arms, conductor disconnection on overhead insulated LV conductors. UNITAG will not replace a standard "proving dead" device but is an ideal complement to bipolar LV detector.

/ TECHNICAL SPECIFICATIONS

- AC system
- AC mains frequency : 50-60 Hz
- Field of use : from 50V up to 1000V
- Detection by direct contact at 50V
- CAT IV 1000V
- IP65
- Temperature : - 15 ° C to +45 ° C
- 2 x LR03 1.5 volt alkaline (AAA)
- Delivered with soft bag suitable for belt fixing




Reference	Type of use	Length	Insulating length	User manual*	Dimensions	Weight
UNITAGHFE	Hand-held	2.40m	520mm / 36Kv	Pack F Also available in Pack G	227 x 45 x 37 mm	160 g
UNITAGUFE	Hand-held + stick interface				241 x 67 x 51 mm	210 g
UNITAGUFX	Hand-held soft shell + telescopic stick + «Insulating»				51 x 67 x 1100 mm	710 g

/ Accessories

Reference	Description	Weight
CPUNITAGUO	Protective shell UNITAG, Universal adapter	100 g

* Pack F : User manual FR/GB/DE/ES/PT/PL - Pack G : User manual GB/GR/BG/IT/NL/AR/TR

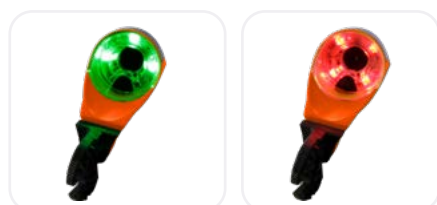

Advantages

Optimised indication (clearly understood in all working conditions)

- The visual indication is visible in all usual working environments, in sunlight or fog, with a wide angle of visibility and from the side thanks to an optic ring.
- The 100 dB sound signal is designed to remain audible even in traffic or strong wind, thanks to its acoustic "horn".

Direct access to the battery and sealed electronics compartment

When the battery is replaced, this design prevents:

- Accidental interchange of housing or circuitry
- Damage to electronic circuits
- Humidity ingress into the device when the battery is replaced outdoors

LTAG

110—1000 V VOLTAGE DETECTOR

STANDARDS

CE: Compliance with European directives

/ USE

- These voltage detectors are designed for "proving dead", making sure that nominal voltage is actually absent on a circuit in an LV distribution system between 110 V and 1000 V (no-voltage verification):
 - The device will detect any nominal voltage on overhead lines and stations.
 - It will avoid detecting most induced voltages in order to allow grounding operations.

/ TECHNICAL SPECIFICATIONS

AC voltage range: possible choice from 110 to 1000 V

Network frequency: 50 and 60 Hz

- Permanent standby status with automatic wake-up function
- The presence of voltage within the calibrated range or above is indicated by a **RED** light and a beeping sound
- Self-test OK: the «ready for use» status is indicated by a **GREEN** light
- The self-test checks all circuits, the reference detection level and the battery voltage
- The "ready for use" state is indicated by the green indication for 1.5 minutes

- A low battery level is indicated by an **ORANGE** light
- Designed for outdoor and indoor use
- Operating temperature: -25°C to +55°C
- Humidity: 96% max
- Power supply: 9 V alkaline cell — IEC 6LR61
- Accepts the use of rechargeable battery with identical supply voltage
- Orange polycarbonate housing
- Dimensions: Ø 59 mm, L = 280 mm without the contact electrode
- Net weight: 0.390 kg with stick adaptor
- Operating manual with a choice of languages, depending on the package


/ ACCESSORIES



/ Metal case



/ Soft case with conductive lining for an EMC protection equivalent to metal case one

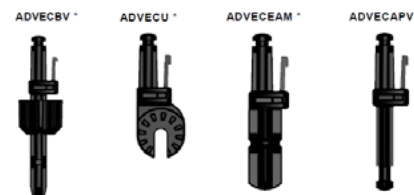

/ Replaceable adaptor for different sticks end fitting

Reference	Voltage range	Frequency	Housing color	End fitting*	Contact electrode	User's Manual**	Packaging***
LTAGFHUA	110—1000 V	50 / 60 Hz	Orange	Universal & APV	V56	Pack F/G	Soft case with conductive lining for EMC protection

* Other stick adaptor available on required
***Metal case version available on required

**Pack F : User manual FR/GB/DE/ES/PT/PL

Pack G : User manual GB/GR/BG/IT/NL/AR/TR
Also Available in Pack G



TDP

VOLTAGE DETECTOR

STANDARDS

CE: Compliance with European directives

/ USE

- TDP is designed to check Voltage presence by direct contact. It is usually used prior to personal rescue operations in MV substations.
- TDP was specially adapted to be used in MV substations through 50 mm diameter spy holes.

/ TECHNICAL SPECIFICATIONS

- Normal voltage from 5 kV up to 72 kV
- Frequency: 50Hz-60Hz
- Delivered with 40mm - Ø10 mm straight probe
- Black polycarbonate shell
- Temperature : -20°C to +40°C
- Light indication only

Reference	Voltage range	Frequency	Dimensions / Weight
TDP572	5—72 kV	50 / 60 Hz	Ø50, L = 400 mm / 0.3 kg
TDP536	5-36 kV		



VOLTAGE ALERT

PERSONAL VOLTAGE DETECTORS PERSONAL VOLTAGE ALARMS



R-FASER

WIRELESS PHASING COMPARATOR SET MV

STANDARDS

IEC 61481-1 / 61243-1

/ USE

Device for voltage presence detection and phase comparison with radiofrequency connection and display receiver.
Kit composed of 2 voltage detection transmitters and one display receiver.
Display receiver is connected in radiofrequency with the transmitters for phase comparison or for a clear reading of the voltage detection working in cabins or in situations of poor visibility and audibility of the transmitter signals.
Device in compliance with both norms as voltage detector (single transmitter) and as phase comparator (complete kit).
Range 6-20 kV or 15-36 kV (to be indicated in case of order).

/ TECHNICAL SPECIFICATIONS

- Suitable indoor and outdoor use.
- Water-Proof (IP43)
- Double indication of operative voltage presence: intermittent acoustic and flashing of 2 LEDs on display receiver for both transmitters.
- The absence of operative voltage is indicated by green LEDs permanent on, on display receiver for both transmitters.
- Phase Concordance signaled by green LEDs in the center of display receiver
- Phase Discordance signaled by red LEDs in the center of display receiver
- Built-in self-control check for testing the accurate working of the voltage detector transmitters and display receiver before and after use.
- Carrying plastic case with internal foam housing.



- All indications are displayed on the user's smartphone via an Android Application.
- Optimized indication that can be understood clearly in all working conditions.
- Direct access to the battery and sealed electronics compartment. When the battery is replaced, this design prevents the following.

MVI

VOLTAGE INDICATOR WITH DISPLAY ON SMARTPHONE VIA AN ANDROID APPLICATION

STANDARDS

IEC 61243-1

/ USE

The MVI is designed to investigate medium-voltage networks from 0.5 to 100 kV (phase-to-ground). Within this range, it indicates the presence and level of voltage as well as network frequency. All measurements are sent to the user's smartphone via an Android app.

/ TECHNICAL SPECIFICATIONS

- Network frequency: 50 / 60 Hz.
- Installation Type: Indoor/Outdoor.
- Category: L = without electrode extension.
- Climate class: N = from -25°C to +55°C
- Humidity: 96 % max.
- Power supply voltage: 9 V alkaline cell — IEC 6LR61
- White polycarbonate housing
- Dimensions: Ø = 59 mm, L = 280 mm without the contact electrode
- Net weight: 0.390 kg with stick adaptor
- Supplied with a standard system for attaching the user's smartphone to an insulating pole



Reference	Voltage range	Frequency	End fitting**	Electrode	User's Manual ***	Packaging ****
MV100FHUA	0,5 - 100 kV	50 / 60 Hz	Universal & APV	V56		160 g

** Other stick adaptor available on required
***Metal case version available on required

*** Pack F : FR/GB/DE/ES/PT/P -- Pack G : GB/GR/NL/BG/IT/AR/TR



PRUNEL BUCKET

VOLTAGE ALARM FOR MOBILE ELEVATING WORK PLATFORM (MEWP) FOR HIGH-VOLTAGE NETWORKS

STANDARDS

Complying with European Directives / EN 61000-6-2 / EN 61000-6-4

- **360° Detection:** Measurement module positioning on the platform allows complete detection of the electric field around the machine.
- **Smart Mute Function:** Allows to temporary disables the sound alarm when the work area is close to a powerline, while keeping detection active. If the platform moves closer to the line, the lockout feature automatically reactivates.
- **Simplified Integration:** Easy connection to the platform's control panel for intuitive control.
- **Powerful Sound Alert:** The sound signal is loud enough to be heard by all operators, including ground technicians, even in noisy environments.
- **Safety Lockout Function:** The device can alert and automatically stop the platform when approaching danger. An unlock feature allows for a safe move away from the hazardous area.
- **No additional power supply:** The system is powered directly by the machine's battery, avoiding the need for external energy sources.
- **Wired Communication System, designed to ensure:**
 - Continuous communication between measurement modules and the central module
 - Compatible with approach speed: negligible latency
 - Measurement modules powered by the central module
 - Shielded and mechanically protected communication wires
 - Quick and easy installation on platforms of various sizes

/ USE

PRUNEL Bucket is a safety collective protective equipment designed to enhance the protection of operators working in the vicinity of potentially live electrical equipment (maintenance work, painting, tree trimming, etc.). This system detects when the platform enters a hazardous area and automatically activate an audible and visual alert. Designed to stop the platform's movement in case of an alert, PRUNEL Bucket helps to prevent any accidental contact with a live line.

Main Functions:

- **Danger Alert:** Emits an audible and visual signal when the platform approaches a hazardous area (electrical risk).
- **Accident Prevention:** Significantly reduces the risk of unexpected contact with live installations.

Covered Situations:

- **Misunderstanding of the work area:** The operator heads toward an unplanned zone.
- **Voltage unexpected return:** An error occurs during a task assumed to be de-energized.
- **Involuntary approach:** Movement toward a live component during a maneuver.
- **Emotional disturbance:** Operator distraction leads to risky behavior.

In each of these cases, PRUNEL Bucket acts as an additional safety barrier, providing a final warning before a potential incident.

/ TECHNICAL SPECIFICATIONS

- Detection sensitivity adjustable during installation
- Detection available from 5 kV
- Power Supply : 12 to 36 V DC / 2 A, supplied from the vehicle
- Central module visual and sound Indications :
 - Power supply operational -> Green LED
 - All measurement module detected by the central module -> Blue LED
 - Voltage detected / movement lockout -> Red LED + audible beep
 - Smart Mute function activated -> Orange LED + audible beep (every 30 seconds)
- Acknowledgment and movement release button
- Automatic self-test of all functions, including measurement module presence, when switched on
- Protection : IP 66 rated for water and dust resistance
- Two Electrical Contacts NO/NC for opening or closing an external circuit (arm lock, remote alarm activation, ...)
- Size and Weight :
 - Measurement module: 150 x 75 x 35 mm / 220 g (per unit, without cable)
 - Central module : 200 x 90 x 120 mm / 780 g
- Wired connection between measurement modules
- Spiral cables with adjustable length from 0.75 m to 3 m
- Measurement module fixing on the platform
- Mounting plate with 4x M8 nut







INSULATING POLES


/ TELESCOPIC POLES	154
/ TELESCOPIC POLES EXTENDER	160
/ EXTENDABLE POLES	163
/ RAILWAY POLES	168
/ END FITTINGS AND ADAPTERS FOR POLES	169
/ LIVE WORKINGS POLES	171
/ DISCHARGE POLES	174
/ TOOLS FOR POLES	176
/ SUPPORT FOR DEPLOYING THE POLE	177
/ VERIFIES AND MAINTAINS POLES	178
/ TOOLS FOR POLES	179



PENTA
ELECTRICAL SAFETY PRODUCTS

**Your life,
Our work.**

FROM PROTOTYPE TO PRODUCTION

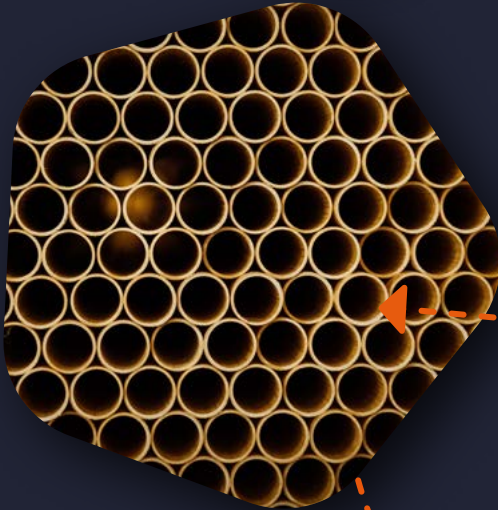



/ INSULATING POLES

Working safely near or directly on electrical installations requires maintaining a minimum approach distance. In this context, the insulated pole is an indispensable tool: it becomes the vital barrier between humans and electricity, allowing technicians to work safely on high and very high voltage lines.

The result of decades of expertise and research, the Penta range of poles is designed to offer safety, ergonomics, and reliability in the most demanding environments.

Insulating poles are used in a wide range of applications: installation of grounding devices (MALT), disconnection of equipment, voltage testing, control operations, measurements, checks, or handling of accessories. They are subject to strict requirements in terms of compliance with standards, mechanical strength, and dielectric performance.

At PENTA Electrical Safety Products, we design and manufacture our insulated poles in accordance with the main international standards:

- IEC 60855-1 / ASTM F711: Foam-filled insulating tubes
- IEC 61235 / F1826: Hollow insulating tubes
- EN50508: Telescopic insulated poles
- IEC62193/ASTMF1825: Telescopic insulating poles
- IEC60832: Poles for live working

All our models are tested under real-world conditions: humidity, UV exposure, mechanical stress, etc.


This unique process combines mechanical strength with exceptional dielectric properties to create a tube that is lightweight, rigid, and perfectly insulated.

Depending on operational requirements, models can be telescopic, extendable, or hook-shaped, offering a wide range of working options.

This chapter will guide you in choosing the pole best suited to your working environment. You will find our ranges of telescopic poles (PPOLE, TR, PEC, PTUM), extendable models (PXV, PXL, RTTE), and high mechanical strength poles (PRE).

To complete your equipment, we also offer insulated extensions (RI-PPOLE), control heads, universal hooks, multi-format adapters, and various measuring and pruning accessories.

Each pole is designed as part of a coherent, safe, and high-performance system that can be configured according to your intervention protocol.

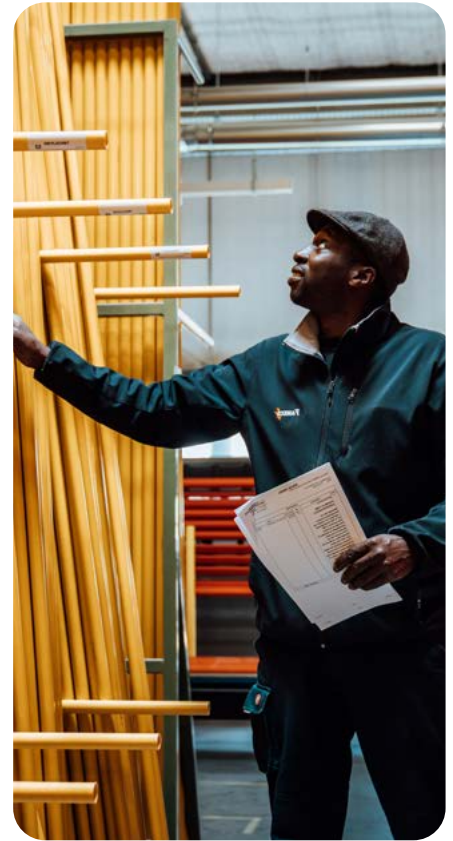

INSULATING POLES GUIDE : TYPES, APPLICATIONS AND PERFORMANCE

Range	Features	Applications	+ Product advantages
PPOLE STANDARD / COMPACT / SPECIFIC / REIN- FORCED / LIGHT	Telescopic	• Voltage testing • Switch disconnector operation • Work near live lines • Vertical earthing rod installation • Pruning or conductor cleaning	Length from 1.5 m to 12 m Easy vertical handling Pentagonal tube for secure grip Minimal folded length
PPOLE MEASURING		• Measurement during operations	Direct graduation Metric and imperial versions
TR / TRL / TRC		• Voltage testing • MV earthing & LV substation work	Length from 1 m to 6 m Lockable in folded and extended positions
PTUM		• Switch disconnector operation • Work near live lines	Length from 5.9 m to 10.4 m Adjustable extended length
PXV	Extendable	• Voltage testing • MV earthing • Work near live lines • Medium mechanical stress	Length from 0.5 m to 8 m From 1 to 4 sections
PRE		• HV earthing • High mechanical load applications	Length from 1 m to 8 m Interchangeable end fittings available
PRL		• High mechanical stress • Dry conditions	Length from 1 m to 8 m Interchangeable end fittings Cost-effective solution
RTTE		• VAT up to 400 kV	Length from 1.6 m to 5.1 m Rain skirt for effective water drainage
PEC		• Handling of catenary tools	Length from 4.5 m to 6.5 m Quick clamp sleeve system for easy length adjustment
LW03		• Handling of tools and accessories equipped with rings or gripping lugs	Length from 1.2 m to 3.8 m
PDD / MDI / MDD	Discharge pole and module	• Specific interventions with stored energy	2 models available, depending on discharge energy required
RESCUE	See rescue equipment range		

HV (High voltage) :

51kV to 400 kV (up to 1 M kV in some countries).
Used to transport electricity over long distances.
Very high voltage lines

MV (Medium voltage) :

From 1 kV to 50 kV.
Used to distribute electricity in cities, rural areas, and industries.
Underground or overhead network (medium-voltage **cables**)



WHEN SHOULD AN INSULATING POLE BE USED ?

— more than just meeting a standard


An insulating pole is used whenever it is necessary to operate at a safe distance from a live conductor or a component that may become energized, in order to prevent current from passing through the operator's body.

It is used in several situations :

- Voltage testing (VAT) before intervention,
- Remote disconnection or reactivation of devices,
- Installation of mobile earthing (MALT) or safety shunts,
- Height measurement or line inspection without direct contact,
- Removal of components (fuses, insulators, branches, etc.),
- Operation of insulated clamps, hooks, or tools.

The choice of pole depends on several factors: nominal system voltage, required safety distance, work environment (substation, overhead line, or industrial installation), and the type of operation (simple VAT or high-voltage earthing).

A well-chosen insulating pole makes the operator's work easier, optimizes intervention time, and ensures regulatory compliance.

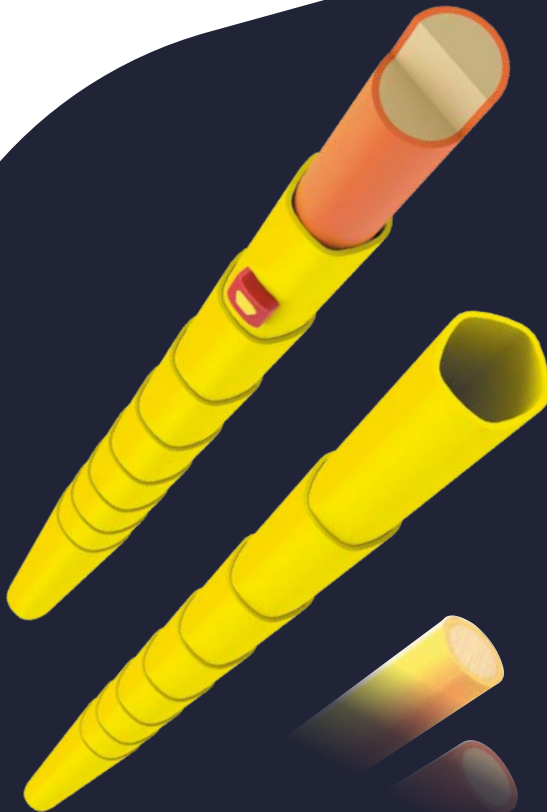

The main advantages of IEC 60855-1 foam-filled tube compared to hollow tubes are :

- **ITS RESISTANCE TO THE PENETRATION OF HUMIDITY**, making it the ideal material for all-weather outdoor uses.
- **ITS UNIQUE INSULATION AND DIELECTRIC PROPERTIES** which prevents, no matter the weather conditions, to be a source of ignition when working in contact with or near live electrical lines.
- **ITS HIGH MECHANICAL STRENGTH AND RIGIDITY** which allows to improve its lifespan and the gesture's precision of the operators during handlings

Always concerned to improve the service life and reliability of our products in order to continually extend their essential safety function, PENTA Electrical Safety Products now has a range of tubes with better shock resistance properties. This range continues to comply with IEC 61235 for hollow tubes and IEC 60855-1 for foam-filled tubes.

The constant search for innovation in the service of solutions for our customers has allowed us in recent years :

- **TO PROPOSE A NEW RANGE OF PENTAGONAL TUBE.** These tubes were developed to create the Penta POLE telescopic pole. Reaching 12m in length, it offers lightness and excellent rigidity. As for its shape, it allows exceptional grip and can transmit a torque.
- **TO INCORPORATE A STRUCTURAL FINISH** that further enhances the mechanical properties of the tubes used for the sticks to increase their longevity,
- **TO CREATE NEW FINISH VARNISHES** (almost non-existent in all of our competitors), which further increases the UV resistance properties and the hydrophobic and oleophobic properties of the tube surface, thereby reducing pollution and dirt on the poles and facilitating periodic maintenance.
- **TO BE CONSTANTLY ON THE LOOKOUT FOR NEW MATERIALS THAT BRING EVER MORE BENEFITS TO USERS.**



CONTEXT

The PPOLE range covers the essential needs for operations on electrical networks. Thanks to its modular design, the versatility of available fittings, and its extension options, it stands out as a reference pole for LV, MV, and HV applications alike.

PPOLE

MULTI-PURPOSE TELESCOPIC INSULATING POLE PENTA-POLE

STANDARDS

IEC 62193, IEC 60855-1 / ASTM F1826, ASTM F711



- All-weather use up to 132 kV.
- Up to 900 kV in dry conditions.
- Quick deployment with bi-material push button.
- Wide range of terminal fittings available.
- Supplied with CMU2.



/ KEY FEATURES

Specifications : 7 models available


Dimensions & structure : From 3.7 m to 12 m
Terminal tube Ø28 mm on foam, followed by a pentagonal hollow tube for a secure grip.

Performance & Use : Bi-material push-button deployment system for quick and safe extension.


Dielectric test after wet conditioning: 100kV / 30cm from the top element on foam. 50kV / 30cm from the bottom elements. For the entire PPOLE range except PPOLE Light



Universal end fitting to fix multiple accessories and adapters



Bi-material push button: simple operation



Round top tube Ø 28 mm in accordance with IEC 60855-1 standard



Cover	Other packaging than HPPOLE
HPPOLE/150	H2P140H
HPPOLE/170	H2P160H
HPPOLE/190	H2P180H

PPOLE STANDARD

STANDARDS

IEC 62193, IEC 60855-1 / ASTM F1826, ASTM F711

A solution for all voltages
and heights until 12 meters




/ KEY FEATURES


Construction : Made of 2 to 8 pentagonal tubes with a top Ø28 mm on foam section, protective base, and universal end fitting for multiple accessories.

Dimensions & structure : Extends up to 12 m while maintaining a compact 1.78 m retracted length.
Available in 3 to 9 elements, adaptable to all configurations.


Performance & Use: Lightweight and rigid for precise movements.
Pentagonal shape ensures a secure, comfortable grip.
For voltage testing, cable handling, or grounding operations, indoors or outdoors.



U



USC



B



APV

multipurpose
end fitting,
12 mm 6 sided
with automatic
locking

Reference	Number of sections	Extended length	Folded length	Max. operating voltage all weather	Max. operating voltage dry weather	Cover	Weight (Kg)
PPOL3/035*	3	3700 mm	1450 mm	132 kV	170 kV	HPPOLE/150	1.89
PPOL4/050*	4	5000 mm	1510 mm	132 kV	245 kV	HPPOLE/170	2.48
PPOL5/060*	5	6300 mm	1580 mm	132 kV	420 kV	HPPOLE/170	3.16
PPOL6/075*	6	7700 mm	1650 mm	132 kV	525 kV	HPPOLE/170	3.96
PPOL7/090*	7	9100 mm	1710 mm	132 kV	765 kV	HPPOLE/190	4.70
PPOL8/105*	8	10600 mm	1780 mm	132 kV	900 kV	HPPOLE/190	5.52
PPOL9/120*	9	12000 mm	1780 mm	132 kV	900 kV	HPPOLE/190	6.35

* Add the end fitting reference.

PPOLE COMPACT

STANDARDS

IEC 62193, IEC 60855-1 / ASTM F1826, ASTM F711

Optimized retracted length,
easy to store in small vehicles



/ KEY FEATURES

Construction : Compact telescopic insulating pole consisting of 2 to 9 sections. With a Ø28mm on foam and coated tube at the end, followed by hollow pentagonal tubes.

Dimensions & Options : Compact folded length for easy transport and handling.
Option to add a hand guard and/or sheath.
Protective cap
Add *G or *GG to the end of the reference number.
Several end fitting available.


Performance & Use : Suitable for use in all weather conditions from 36 to 132 kV and up to 420 kV in dry conditions.
For voltage testing, cable handling, or grounding operations, indoors or outdoors.



U



USC



B



APV

Reference	Number of elements	Extended length	Folded length	Max. operating voltage all weather	Max. operating voltage dry weather	Cover	Weight
PPOL2/015*	2	1520	880	45 kV	72 kV	HPPOLE/100	0.92 Kg
PPOL2/020*	2	2000	1090	72 kV	110 kV	HPPOLE/130	1 Kg
PPOL2/025*	2	2500	1355	132 kV	150 kV	HPPOLE/150	1.25 Kg
PPOL3/013*	3	1290	580	36 kV	72 kV	HPPOLE/100	0.7 Kg
PPOL3/020*	3	2020	880	45 kV	132 kV	HPPOLE/100	1.08 Kg
PPOL3/025*	3	2460	995	72 kV	132 kV	HPPOLE/100	1.35 Kg
PPOL4/015*	4	1500	560	20 kV	132 kV	HPPOLE/100	0.73 Kg
PPOL5/024*	5	2315	745	36 kV	110 kV	HPPOLE/100	1.26 Kg
PPOL5/035*	5	3455	1000	45 kV	170 kV	HPPOLE/100	1.84 Kg
PPOL6/050*	6	5000	1110	72 kV	245 kV	HPPOLE/130	2.57 Kg
PPOL7/065*	7	6560	1380	72 kV	420 kV	HPPOLE/150	3.35 Kg
PPOL8/070*	8	6930	1710	110 kV	420 kV	HPPOLE/190	3.59 Kg
PPOL9/062*	9	6220	1225	45 kV	420 kV	HPPOLE/130	3.28 Kg

* Add the end fitting reference.

PPOLE REINFORCED

STANDARDS

IEC 62193, IEC 60855-1 / ASTM F1826, ASTM F711



Improved rigidity, doubled elasticity of the terminal section for an even more precise gesture



/ KEY FEATURES


Construction : Reinforced insulating telescopic pole consisting of 2 to 8 sections.
With a Ø32mm on foam and coated tube at the end, followed by hollow pentagonal tubes.

Dimensions & Options : Extended length from 2.6 m to 10.8 m, retracted length 1.76 m. Protective cap
Designed to withstand high mechanical stress and ensure precise and stable movements.


Performance & Use : Suitable for use in all weather conditions up to 132 kV and in dry conditions up to 900 kV.
Several terminal fittings available for adaptable use in the field.
For voltage testing, cable handling, or grounding operations, indoors or outdoors.



U



USC



B



APV

Reference	Number of sections	Extended length	Folded length	Max. operating voltage all weather	Max. operating voltage dry weather	Cover	Weight (Kg)
PPOLR2/025*	2	2600 mm	1400 mm	132 kV	132 kV	HPPOLE/150	0.92
PPOLR3/040*	3	3840 mm	1440 mm	132 kV	170 kV	HPPOLE/150	1
PPOLR4/050*	4	5150 mm	1560 mm	132 kV	245 kV	HPPOLE/170	1.25
PPOLR5/065*	5	6520 mm	1630 mm	132 kV	420 kV	HPPOLE/170	0.7
PPOLR6/080*	6	7900 mm	1690 mm	132 kV	525 kV	HPPOLE/170	1.08
PPOLR7/095*	7	9300 mm	1760 mm	132 kV	765 kV	HPPOLE/190	1.35
PPOLR8/110*	8	10800 mm	1760 mm	132 kV	900 kV	HPPOLE/190	0.73

* Add the end fitting reference

PPOLE LIGHT

STANDARDS

IEC 62193 / IEC 61235



Indoor and wet condition



/ KEY FEATURES

Construction : Telescopic insulating pole made of 2 to 5 hollow pentagonal tubes. Designed as a cost-effective solution for standard operations.

Dimensions & Configuration : Extended length from 1.5 m to 2.4 m. Compact, lightweight, and easy to handle. Multiple terminal fittings available.

Performance & Applications : For dry conditions only, suitable up to 110 kV. Ideal for Test voltage, rescue operations, cable handling, and earthing.



U



USC



B



APV

Reference	Number of sections	Extended length	Folded length	Max. operating voltage dry weather	Soft cover	Weight (kg)
PPOL2L/015*	2	1500 mm	880 mm	36 kV	HPPOLE/100	1
PPOL2L/020*	2	2000 mm	1100 mm	72 kV	HPPOLE/130	1.06
PPOL3L/020*	3	2000 mm	800 mm	110 kV	HPPOLE/100	1.06
PPOL4L/026*	4	2560 mm	900 mm	110 kV	HPPOLE/100	1.28
PPOL5L/024*	5	2400 mm	830 mm	110 kV	HPPOLE/100	1.28

* Add the end fitting reference



PPOLE MEASURE

STANDARDS

IEC 62193, IEC 60855-1 / ASTM F1826, ASTM F711



Indelible graduation, printed in the support,
UV and handling-proof




/ KEY FEATURES

Construction : Telescopic insulating stick made of 4 to 9 pentagonal tubes, with a fluorescent Ø28 mm on foam upper section, universal end fitting, and operating hook.

Measurement & range : Features millimetric graduations on each section for easy height measurement from 3 m to 12 m. Protective cap Enables direct measurement through the pole.

Performance & equipment : Suitable for all-weather use up to 132 kV and dry conditions up to 900 kV. Delivered with CMU2 for complete operational setup.

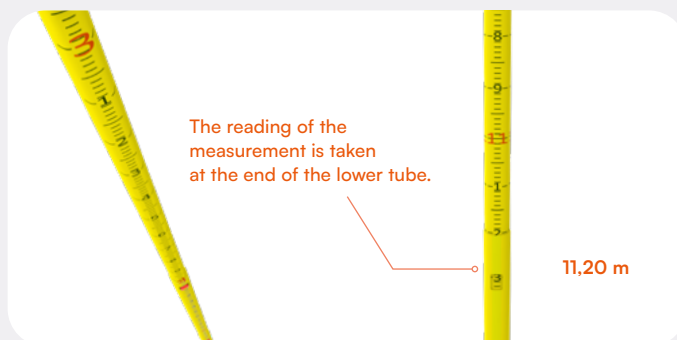

Reference	Number of sections	Extended length	Folded length	Max. operating voltage all weather	Max. operating voltage dry weather	Cover	Weight (Kg)
PPOL5/060MU	5	6300 mm	1580 mm	132 kV	420 kV	HPPOLE/170	3.16
PPOL6/075MU	6	7700 mm	1650 mm	132 kV	525 kV	HPPOLE/170	3.96
PPOL7/090MU	7	9100 mm	1710 mm	132 kV	765 kV	HPPOLE/190	4.70
PPOL8/105MU	8	10600 mm	1780 mm	132 kV	900 kV	HPPOLE/190	5.52
PPOL9/120MU	9	12000 mm	1780 mm	132 kV	900 kV	HPPOLE/190	6.35



CONTEXT

The RI-PPOLE extension allows you to increase the length of a PPOLE rod and expand its maximum all-weather voltage range.

RI-PPOLE

INSULATING EXTENSIONS FOR PENTA-POLE

STANDARDS

IEC 60855-1

Allows the use of penta-pole poles in damp conditions over 132 kv

/ KEY FEATURES


Construction : Made of Ø28 mm foam-filled composite tube, compliant with IEC 60855-1. Designed for high-voltage operations.

Measurement & range : Universal female fitting on pole side and Universal (U) fitting at the opposite end, compatible with a wide range of accessories.

Performance & equipment : Suitable for all-weather use up to 225 kV and up to 400 kV. Ensures maximum operator safety in high-voltage environments.

Reference	Max Operating Voltage*	Le	Li	Lti
RIPPOL225KV	225 kV	1370 mm	1170 mm	2300 mm
RIPPOL400KV	400 kV	2620 mm	2420 mm	3600 mm

* PPole compatible for all-weather operating at maximum voltage
PPOL3/035U — PPOL4/050U — PPOL5/060U — PPOL6/075U — PPOL7/090U — PPOL8/105U — PPOL9/120U

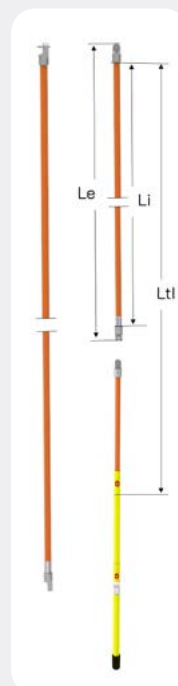



CONTEXT

The TR telescopic poles offer great versatility, suitable for voltage testing, MV earthing, or LV substation operations, while remaining easy to use. Their modular design and robustness make them ideal for intensive use, while ensuring a high level of dielectric safety.

TR

TRL

TELESCOPIC POLES

STANDARDS

IEC 62193 / IEC 60855-1 / IEC 61235

Varnish finish (high UV resistance and longevity)




U

/ KEY FEATURES

Construction : 2 to 4 elements, end tubes on foam, Ø32 mm or Ø26 mm (30% lighter design)
Followed by hollow tube Ø32, Ø39, Ø48 mm

Measurement & range : Push-button system with locking in retracted or extended position for easy handling.
Protective cap
Extension option on certain TR2 models, see reference table.

Performance & equipment : usable in all weather conditions from 36 to 275 kV, up to 525 kV in dry conditions.
Performance and equipment: can be used in all weather conditions from 36 to 275 kV, up to 525 kV in dry conditions.
Ideal for checking the absence of voltage in earthing, MV/LV and medium load operations.
Ensures maximum safety for the operator in high-voltage environments.



B



APV

Type	Reference	Sections number	Retracted length	Extended length	Max. use voltage dry conditions	Max. use voltage any conditions	Weight	Upper tube from filed composite	Soft cover
TR2	TR2105	2 sections	0,70 m	1,10 m	36 kV	36 kV	1,00 kg	Ø 32 mm	H1P080V
TR2	TR245	2 sections	0,85 m	1,50 m	72 kV	36 kV	1,05 kg	Ø 32 mm	H1P100V
TR2	TR275*	2 sections	1,10 m	2,00 m	90 kV	72 kV	1,20 kg	Ø 32 mm	H1P120V
TR2	TR276	2 sections	1,10 m	2,00 m	90 kV	72 kV	1,20 kg	Ø 32 mm	H1P120V
TR2	TR2225*	2 sections	1,75 m	3,20 m	225 kV	132 kV	1,50 kg	Ø 32 mm	H1P180V
TR2	TR2245	2 sections	2,15 m	4,00 m	300 kV	225 kV	2,20 kg	Ø 32 mm	H1P220V
TR3	TR3450	3 sections	1,75 m	4,50 m	330 kV	150 kV	3,00 kg	Ø 32 mm	H1P180V
TR3	TR3600	3 sections	2,27 m	6,00 m	525 kV	275 kV	5,00 kg	Ø 32 mm	H1P220V
TRL2	TRL2092	2 sections	0,55 m	0,92 m	36 kV	36 kV	0,42 kg	Ø 26 mm	H1P060V
TRL3	TRL3150	3 sections	0,64 m	1,50 m	72 kV	36 kV	0,89 kg	Ø 26 mm	H1P080V
TRL3	TRL3450	3 sections	1,76 m	4,50 m	345 kV	150 kV	2,20 kg	Ø 26 mm	H1P180V
TRL3	TRL3500	3 sections	1,93 m	5,00 m	380 kV	225 kV	2,45 kg	Ø 26 mm	H1P200V
TRL3	TRL3600	3 sections	2,27 m	6,00 m	525 kV	275 kV	3,20 kg	Ø 26 mm	H1P220V
TRL4	TRL4500	4 sections	1,62 m	5,00 m	420 kV	150 kV	4,20 kg	Ø 26 mm	H1P180V
TRL4	TRL4600	4 sections	1,87 m	6,00 m	525 kV	170 kV	4,70 kg	Ø 26 mm	H1P200V

*Extension (see table below). ** Unsheathed shaft.

/ EXTENSION

Reference	Length
RTR100	1,00 m
RTR180	1,80 m
RTR215	2,15 m

TRC

NEW

INSULATING TELESCOPIC POLE WITH TOP LOCK

STANDARDS

IEC 62193 / IEC 61235 / IEC 60855-1

Locked in folded position
= optimized

/ KEY FEATURES

Construction : Two-piece insulating pole made of foam-filled composite material with a diameter of 32 mm for good strength and durability.

Design & Handling : Locking system in folded and extended positions (mounted on top) for easier and safer handling. Designed for intensive use.

Performance & Use : Suitable for use in all weather conditions from 132 kV to 380 kV and up to 525 kV in dry conditions.

Reference	Extended length	Folded length	Dry condition rating	All-weather rating	Carrying bag	Height
TRC2300MT535URU	3 m	1.6 m	225 kV	132 kV	H1P120V	1.5 kg
TRC2300B						
TRC2400B	4 m	2.1 m	300 kV	225 kV	H1P220V	2.2 kg
TRC2400CANU						
TRC2400BCH						
TRC2500B	5 m	2.6 m	525 kV	380 kV	H2P260H	3.2 kg
TRC25001560						



PTUM

COMPACT TELESCOPIC INSULATING STICK
FOR WORK AT GREAT HEIGHTS

STANDARDS

IEC 60855-1 / IEC 62193

/ KEY FEATURES

Construction : 4 to 8-section insulating pole with foam-filled Ø26 mm upper tube and rigid hollow lower tubes. UV-protected glossy finish for durability.

Design & Handling : Length from 5.9 m to 10.4 m, adjustable by deployment.

Performance & Use : For 132 kV all-weather use and up to 900 kV dry. Lightweight yet highly rigid.



Reference	Number of elements	Folded length	Extended length	1 st section diameter	Max. Operating Voltage - All weather	Max. Operating Voltage - Dry weather	Weight	Cover
PTUM18X600*	4	1.8 m	5.9 m	38 mm	132 kV	420 kV	2.3 kg	H1P180V
PTUM18X700*	5		7.1 m	42 mm			2.8 kg	
PTUM18X850*	6		8.3 m	46 mm		525 kV	3.4 kg	
PTUM18X950*	7		9.4 m	50 mm		765 kV	4.1 kg	
PTUM18X1050*	8		10.4 m	54 mm		900 kV	4.7 kg	

* Adding the end fitting reference

** (Always extend the end section fully whatever the use)



CONTEXT

These poles are easy to use thanks to their interlocking sections, allowing them to cover most operations such as VAT (Voltage Absence Test), earthing and handling tasks.

PXV

CONNECTABLE INSULATING POLES MADE OF Ø 32 MM TUBE

STANDARDS

IEC 60855-1 / EN 50508

Ribbed non-slip shaft

Varnish finish (high UV resistance and longevity)

APV

EAF

B

U

/ KEY FEATURES

Construction : Modular insulating pole composed of 1 to 4 composite sections filled with foam, extendable insulating poles made of Ø32 mm on foam tube. S37 screw connectors made of aluminum alloy. Elastomer hand guard marking the limit of the grip zone. Ribbed sheath for a secure grip.

Dimensions & configuration : Length from 0.8 m to 8 m. adaptable to multiple configurations.

Performance & Use : or dry conditions only, suitable for 15 kV to 900 kV.

Composition :

The multi-part PXV range always consists of:

- A PXVH handle sections
- One or more PSL pole extensions, as required.
- A PSM* terminal element incorporating a permanently mounted fixed tip.

Designed for voltage test, MV/LV earthing and disconnection operations.

/ Full poles

Reference	Overall length	Section numbers	Insulating length	Max operating voltage all weather	Weight	Soft cover
PXV1080*	0,80 m	1 section	0,55 m	15kV	0,50 kg	HTR1950
PXV1125*	1,25 m		1,00 m	72kV	0,90 kg	H10
PXV1150*	1,50 m		1,10 m	72kV	1,00 kg	H10
PXV1200*	2,00 m		1,30 m	110kV	1,40 kg	H11
PXV1250*	2,50 m		1,80 m	170kV	1,60 kg	HTR12750
PXV1300*	3,00 m	2 sections	2,00 m	225kV	2,00 kg	H12
PXV2200*	2,00 m		1,30 m	110kV	1,50 kg	H2P120H
PXV2300*	3,00 m		2,00 m	225kV	2,10 kg	H2P180H
PXV2400*	4,00 m		2,80 m	300kV	3,30 kg	H2P220H
PXV2500*	5,00 m		3,60 m	400kV	3,30 kg	H2P260H
PXV2600*	6,00 m	3 sections	4,60 m	480kV	4,10 kg	H2P320H
PXV3300*	3,00 m		2,30 m	225kV	2,15 kg	H2P120H
PXV3450*	4,50 m		3,50 m	400kV	2,90 kg	H2P160H
PXV3600*	6,00 m		4,80 m	480kV	4,30 kg	H2P220H
PXV4400*	4,00 m		3,30 m	300kV	3,20 kg	H2P120H
PXV4600*	6,00 m	4 sections	5,00 m	480kV	4,50 kg	H2P160H
PXV4750*	7,50 m		6,30 m	765kV	5,20 kg	H2P220H
PXV4800*	8,00 m		6,80 m	900kV	5,40 kg	H2P220H

* Add the end fitting code at the end of the reference (ex : PSM250U / PXV3450APV).

/ Terminal Sections

Reference	Overall length	Insulating length	Weight
-----------	----------------	-------------------	--------

Terminal sections

PSM100*	1,00 m	850 mm	0,80 kg
PSM150*	1,50 m	1385 mm	1,00 kg
PSM188*	1,88 m	1730 mm	1,20 kg
PSM200*	2,00 m	1850 mm	1,30 kg
PSM250*	2,50 m	2350 mm	1,50 kg
PSM300*	3,00 m	2850 mm	1,80 kg

Intermediate sections

PSM100	1,00 m	850 mm	0,80 kg
PSM150	1,50 m	1385 mm	1,00 kg
PSM188	1,88 m	1730 mm	1,20 kg
PSM200	2,00 m	1850 mm	1,30 kg
PSM250	2,50 m	2350 mm	1,50 kg
PSM300	3,00 m	2850 mm	1,80 kg

Handle sections

PVXH100	1,00 m	300 mm	0,70 kg
PXVH150	1,50 m	500 mm	0,95 kg
PXVH188	1,88 m	680 mm	1,10 kg
PXVH200	2,00 m	800 mm	1,20 kg
PXVH250	2,50 m	1100 mm	1,50 kg
PXVH300	3,00 m	1600 mm	1,75 kg

PXL

EXTENDABLE INSULATING POLES
MADE OF Ø32MM HOLLOW TUBE

STANDARDS

EN 50508 / IEC 61235

Lightweight and
easy to handle

/ KEY FEATURES

Construction : modular insulated pole consisting of 1 to 4 hollow composite sections, Ø32 mm.
S37 aluminum alloy screw connectors.
Elastomer hand protection marking the limit of the grip zone.
Ribbed sheath for a secure grip.

Dimensions & configuration : length from 0.8 m to 8 m.
Adaptable to multiple configurations.

Performance & Use : for dry conditions only, suitable for 15 kV to 900 kV.

Composition :

The multi-part PXL range always consists of:

- A PXLH handle sections
- One or more PSL mast extensions, as required.
- A PSL* terminal element incorporating a permanently mounted fixed tip.

Designed for indoor and dry condition use for voltage testing, MV/LV earthing, and disconnection operations.

/ Full poles

Reference	Overall length	Section numbers	Insulating length	Max operating voltage in dry conditions	Weight	Soft cover
PXL1080*	0,80 m	1 section	0,55 m	15 kV	0,44 kg	HTR1950
PXL1125*	1,25 m		1 m	72 kV	0,80 kg	H10
PXL1200*	2 m		1,30 m	110 kV	1,24 kg	H11
PXL1300*	3 m		2 m	225 kV	1,76 kg	H12
PXL2200*	2 m	2 sections	1,30 m	110 kV	1,34 kg	H2P120H
PXL2300*	3 m		2 m	225 kV	1,86 kg	H2P180H
PXL2500*	5 m		3,60 m	400 kV	2,90 kg	H2P260H
PXL2600*	6 m		4,60 m	480 kV	3,62 kg	H2P320H
PXL3300*	3 m	3 sections	2,30 m	225 kV	1,91 kg	H2P120H
PXL3600*	6 m		4,80 m	480 kV	3,82 kg	H2P220H
PXL4400*	4 m	4 sections	3,90 m	300 kV	2,88 kg	H2P120H
PXL4600*	6 m		5 m	480 kV	4,02 kg	H2P160H

/ Terminal sections

Reference	Overall length	Insulating length	Weight
PSL100*	1,00 m	0,85 m	0,72 kg
PSL150*	1,50 m	1,38 m	0,88 kg
PSL188*	1,88 m	1,73 m	1,05 kg
PSL200*	2,00 m	1,85 m	1,14 kg
PSL250*	2,50 m	2,35 m	1,30 kg
PSL300*	3,00 m	2,85 m	1,56 kg

/ Poles extension

Reference	Overall length	Insulating length	Weight
PSL100	1,00 m	0,85 m	0,72 kg
PSL150	1,50 m	1,38 m	0,88 kg
PSL188	1,88 m	1,73 m	1,05 kg
PSL200	2,00 m	1,85 m	1,14 kg
PSL250	2,50 m	2,35 m	1,30 kg
PSL300	3,00 m	2,85 m	1,56 kg

/ Handle sections

Reference	Overall length	Insulating length	Weight
PXLH100	1,00 m	0,30 m	0,62 kg
PXLH150	1,50 m	0,50 m	0,83 kg
PXLH188	1,88 m	0,68 m	0,94 kg
PXLH200	2,00 m	0,80 m	1,04 kg
PXLH250	2,50 m	1,10 m	1,30 kg
PXLH300	3,00 m	1,60 m	1,51 kg


* Add the end fitting code at the end of the reference
ex: PSL250U / PXL3450APV).

PRE

SPECIAL HEAVY DUTY EXTENDABLE INSULATING
POLES MADE OF Ø 39 MM ON FOAM TUBE

STANDARDS

IEC 60855-1 / EN 50508

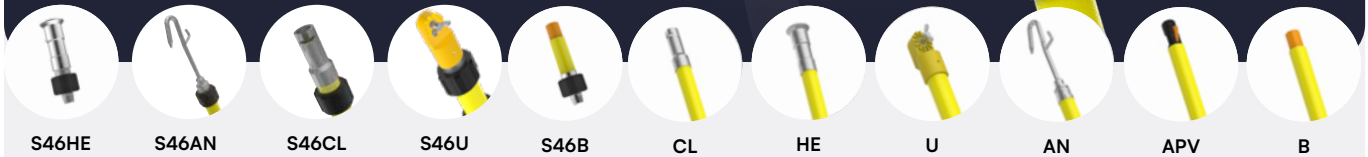Anti-slip
ribbed shaftHigh
mechanical
strengthVarnished finish (high UV resistance
resistance and durability)

S46HE

S46AN

S46CL

S46U

S46B

CL

HE

U

AN

APV

B

/ KEY FEATURES

Construction : Special heavy duty extendable insulating poles made of Ø39 mm on foam tube compliant with IEC 60855-1 (series test against moisture penetration).

- S46 light alloy screw connections with brake and protective sleeve.
- Elastomer hand guard marking the limit of the grip zone.
- Non-slip ribbed shaft.
- Length and part numbers to order: see table.

Dimensions & configuration : the PRE pole in several sections always consists of :

- a PFE base section.
 - one or more PSE upper sections.
 - an interchangeable S46 terminal adapter adapted to the tip of the maneuvering clamp
- OR
- a terminal element incorporating a fixed tip (AN, HE, CL, B, etc.) permanently mounted

Performance & Use : Grounding on lines and in high and very high voltage substations.

All-weather use from 15 kV to 900 kV.

Any work involving significant mechanical stress.

/ Base section : PFE (handle)

Reference	Length	Handle length	Insulating length	Weight
PFE100	1,05 m	0,70 m	0,30 m	1,10 kg
PFE150	1,55 m	1,00 m	0,50 m	1,50 kg
PFE175	1,80 m	1,10 m	0,65 m	1,70 kg
PFE200	2,05 m	1,10 m	0,90 m	1,90 kg
PFE225	2,30 m	1,40 m	0,85 m	2,15 kg
PFE250	2,55 m	1,50 m	1,00 m	2,40 kg
PFE300	3,05 m	1,50 m	1,50 m	2,90 kg

/ Upper sections

Terminal element	Intermediate	Length	Insulating length	Weight
PSE100*	PSE100	1,10 m	0,88 m	1,10 kg
PSE150*	PSE150	1,60 m	1,38 m	1,50 kg
PSE175*	PSE175	1,75 m	1,63 m	1,75 kg
PSE200*	PSE200	2,00 m	1,88 m	1,90 kg
PSE225*	PSE225	2,25 m	2,13 m	2,15 kg
PSE250*	PSE250	2,50 m	2,38 m	2,40 kg
PSE300*	PSE300	3,00 m	2,88 m	2,90 kg

/ PRE complete poles

Reference	Length	Number of elements	Handle length	Insulating length	Max operating voltage all weather	Weight	Soft cover
PRE1100**	1,05 m	1	0,25 m	0,75 m	36 kV	1,10 kg	H1P100V
PRE1150**	1,55 m	1	0,50 m	1,00 m	72 kV	1,50 kg	H1P160V
PRE1200**	2,05 m	1	0,80 m	1,10 m	110 kV	1,90 kg	H1P200V
PRE1250**	2,55 m	1	0,90 m	1,60 m	132 kV	2,30 kg	H2P250H
PRE1300**	3,05 m	1	1,00 m	2,00 m	225 kV	2,60 kg	H12
PRE1400**	4,05 m	1	1,20 m	2,60 m	300 kV	3,40 kg	H14H
PRE2200**	2,10 m	2 (2 x 1 m)	0,80 m	1,10 m	110 kV	2,30 kg	H2P120H
PRE2300**	3,10 m	2 (2 x 1.5 m)	1,00 m	2,08 m	225 kV	3,00 kg	H2P160H
PRE2400**	4,10 m	2 (2 x 2 m)	1,50 m	2,88 m	300 kV	3,80 kg	H2P220H
PRE2500**	5,10 m	2 (2 x 2.5 m)	1,50 m	3,88 m	400 kV	4,70 kg	H2P260H
PRE3300**	3,15 m	3 (3 x 1 m)	0,70 m	2,46 m	300 kV	3,40 kg	H2P120H
PRE3450**	4,65 m	3 (3 x 1.5 m)	1,00 m	3,76 m	400kV	4,50 kg	H2P160H
PRE3600**	6,15 m	3 (3 x 2 m)	1,50 m	5,26 m	525kV	5,70 kg	H2P220H
PRE3750**	7,15 m	3 (3 x 2.5 m)	1,50 m	6,26 m	765kV	6,60 kg	H2P260H

*Add the code of the permanently mounted end fitting

Example: PFExxxHE = with end fitting HE

PFExxxAN = with AN end fitting

**Add code for S46 adapter type or end fitting at the end of the part number

Without code = stick delivered without adapter or end fitting

Example: PRExxxHE = with S46HE adapter

PRExxxHEC = with end fitting HE permanently mounted on the terminal element

PRExxxAN = with S46AN adapter

PRL

SPECIAL HEAVY DUTY EXTENDABLE INSULATING
POLES MADE OF Ø39MM HOLLOW TUBE

STANDARDS

IEC 61235-S / EN 50508

Strong and stiff

/ USE

For use in dry conditions only, from 15 kV to 900 kV.
Any work involving significant mechanical stress.

/ KEY FEATURES

Construction : Special heavy duty extendable insulating poles made of ø39 mm hollow tube.
Complies with IEC 61235-S standard.

- S46 light alloy screw connections with brake and protective sleeve.
- Elastomer hand guard marking the limit of the gripping area.
- Ribbed non-slip shaft.
- Lengths and part numbers to order: see table.

Dimensions & configuration : The multi-section PRL pole always consists of:

- a PFL base section.
- one or more PSL upper sections.
- a terminal element incorporating a fixed tip (AN, HE, CL, B, etc.) permanently mounted.

Reference	Length	Number of elements	Handle length	Insulating length	Max operating voltage dry condition	Weight	Soft cover
PRL100**	1,05 m	1	0,25 m	0,75 m	36 kV	1 kg	HIP100V
PRL150**	1,55 m	1	0,50 m	1,00 m	72 kV	1,3 kg	HIP160V
PRL1200**	2,05 m	1	0,80 m	1,10 m	110 kV	1,7 kg	HIP200V
PRL1250**	2,55 m	1	0,90 m	1,60 m	132 kV	2,07 kg	H2P250H
PRL2200**	2,10 m	2 (2 x 1 m)	0,80 m	1,10 m	110 kV	2,07 kg	H2P120H
PRL2300**	3,10 m	2 (2 x 1.5 m)	1,00 m	2,08 m	225 kV	2,7 kg	H2P160H
PRL2400**	4,10 m	2 (2 x 2 m)	1,50 m	2,88 m	300 kV	3,42 kg	H2P220H
PRL2500**	5,10 m	2 (2 x 2.5 m)	1,50 m	3,88 m	400 kV	4,23 kg	H2P260H
PRL3300**	3,15 m	3 (3 x 1 m)	0,70 m	2,46 m	300 kV	3,05 kg	H2P120H
PRL3450**	4,65 m	3 (3 x 1.5 m)	1,00 m	3,76 m	400kV	4,05 kg	H2P160H
PRL3600**	6,15 m	3 (3 x 2 m)	1,50 m	5,26 m	525kV	5,1 kg	H2P220H
PRL3750**	7,15 m	3 (3 x 2.5 m)	1,50 m	6,26 m	765kV	6 kg	H2P260H

/ Base section : PFL (handle)

Reference	Length	Handle length	Insulating length	Weight
PFL100	1,05 m	0,70 m	0,30 m	1 kg
PFL150	1,55 m	1,00 m	0,50 m	1,30 kg
PFL175	1,80 m	1,10 m	0,65 m	1,50 kg
PFL200	2,05 m	1,10 m	0,90 m	1,60 kg
PFL225	2,30 m	1,40 m	0,85 m	1,90 kg
PFL250	2,55 m	1,50 m	1,00 m	2,10 kg
PFL300	3,05 m	1,50 m	1,50 m	2,60 kg

/ Upper sections

Terminal element	Intermediate	Length	Insulating length	Weight
PSL100*	PSL100	1,10 m	0,88 m	1 kg
PSL150*	PSL150	1,60 m	1,38 m	1,30 kg
PSL175*	PSL175	1,75 m	1,63 m	1,50 kg
PSL200*	PSL200	2,00 m	1,88 m	1,60 kg
PSL225*	PSL225	2,25 m	2,13 m	1,90 kg
PSL250*	PSL250	2,50 m	2,38 m	2,10 kg
PSL300*	PSL300	3,00 m	2,88 m	2,60 kg




RTTE

INSULATING POLES

STANDARDS

EN 50508 / IEC 60855-1

Quick-connect insulated connectors : the poles can only be used once all three components have been assembled, ensuring that the user maintains a safe distance when checking for voltage. The quick-connect system provides the poles with high rigidity and allows them to be used for earthing.

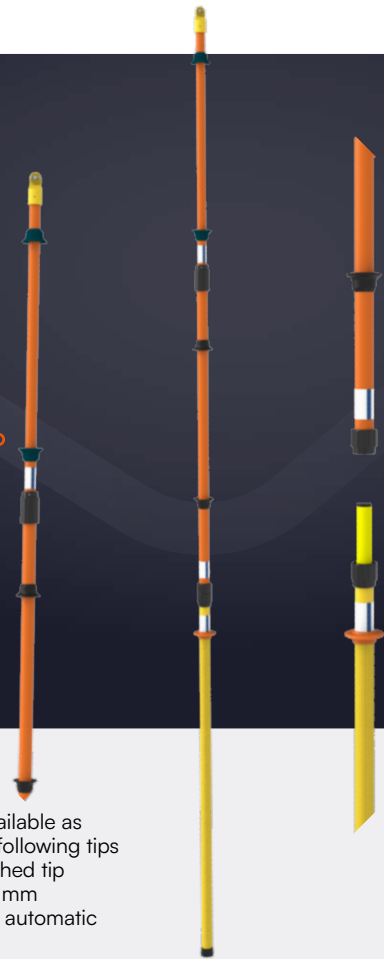

/ KEY FEATURES

Performance & Use : For checking the absence of voltage from 20 kV to 400 kV in all weather conditions, but also suitable for earthing and operating disconnectors.

Construction : Composite fibreglass tube on foam IEC 60855-1 ø39 and 32mm (terminal element). Dielectric strength 100 kV/30cm after wet conditioning. Neoprene protective sleeve. Rubber hand guard indicating the maximum distance to which hands should not be extended. Shaft covered with a non-slip sheath.

RTTE poles are available as standard with the following tips

- U: universal notched tip
- APV: versatile 12 mm hexagonal tip with automatic locking
- B: bayonet tip
- EAF: versatile 21 mm hexagonal tip

Reference	Designation	Length	Insulating length	Composition (Lh + L1 + L2)	Cover	Weight
RTTE25	Insulating pole 25 kV	1,60 m	0,95 m	Lh = 0,57	H10	1,30 Kg
RTTE36	Insulating pole 36 kV	2,10 m	1,45 m	Lh = 0,57	H11	1,60 Kg
RTTE90	Insulating pole 90 kV	3,20 m	2,10 m	PI302 = 1,36 PI477 = 1,10 PI478 = 1,10	H3P140	3.20Kg
RTTE150	Insulating pole 150 kV	3,60 m	2,60 m	PI302 = 1,36 PI307 = 1,10 PI308 = 1,60	H3P160	3,50 Kg
RTTE63	Insulating pole 63 kV	2,70 m	1,60 m	PI302 = 1,36 PI309 = 1,10 PI310 = 0,60	H3P140	3 Kg
RTTE225	Insulating pole 225 kV	4,10 m	3,10 m	PI302 = 1,36 PI305 = 1,10 PI306 = 2,10	H3P220	3,80 Kg
RTTE400	Insulating pole 400 kV	5,10 m	4,10 m	PI302 = 1,36 PI303 = 2,10 PI304 = 2,10	HP3220	4,60 Kg
RE115	Extension 1,15 m	1,15 m				1,20 Kg
RE165	Extension 1,65 m	1,65 m				1,65 Kg
RE215	Extension 2,15 m	2,15 m				2 Kg

PEC

TELESCOPIC ADJUSTABLE TRAIN AND LGV

The telescopic insulated pole (PEC) is equipment intended for railway maintenance. This tool enables the user to perform Rail Line Connection and safely install tension detectors

This adjustable and reinforced telescopic insulated pole is particularly suitable for use in a wide range of remote works on both continuous and alternating railway networks ranging from 500 to 25,000V

It allows for carrying out the VAT (Voltage Absence Test) and then rail installation of the catenary and/or OCS (Overhead Contact Line) using an appropriate pole head (clamp), as well as various other tasks in the vicinity (video inspection, pruning, cleaning, etc.)



/ KEY FEATURES

Construction : telescopic pole with 2 to 4 sections, Ø28mm foam-covered end tube followed by hollow tube. Designed to be strong and durable.

Design & Adjustment : Quick-release screw system when it completely unfolded. 1 to 2 m base extension available as an option. Anti-rotation system for precise torque control

Performance & Use : Designed for lifting heavy loads. Impact-resistant structure for demanding field applications.

Reference	Folded lenght	Unfolded lenght	Number of elements	External tube diameter	Cover	Weight
PEC3560	2,15 m	5,6 m	3 elements	28 / 37 / 45 mm	H2P220H	3,8 kg
PEC4650	2 m	6,5 m	4 elements	28 / 37 / 45 / 53 mm	H2P200H	5 kg
PEC4450	1,6 m	4,5 m			H1P160V	4,5 kg

* Adding the end fitting reference.
(Always extend the end section fully whatever the use).


/ Optional accessories

Reference	Description
RALIPEC	1 meter extension




PENTA Electrical Safety Products offers a wide range of end fitting depending on the area of use and the work to be done.

/ Distribution

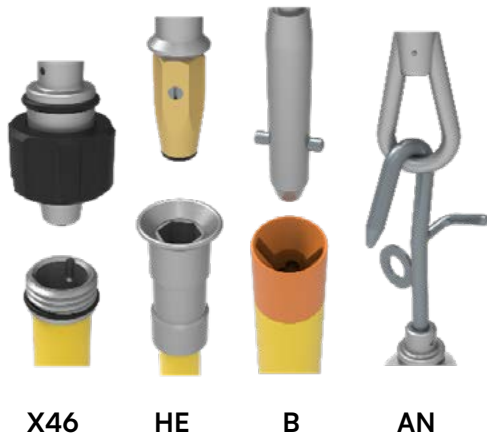


/ Transport

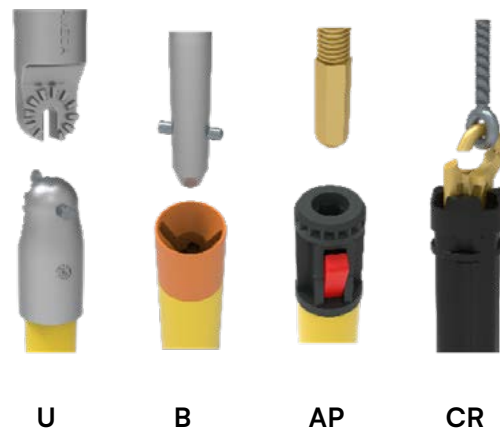

/ BCH NEW

Simplified bayonet fitting:
operates with direct pressure locking.

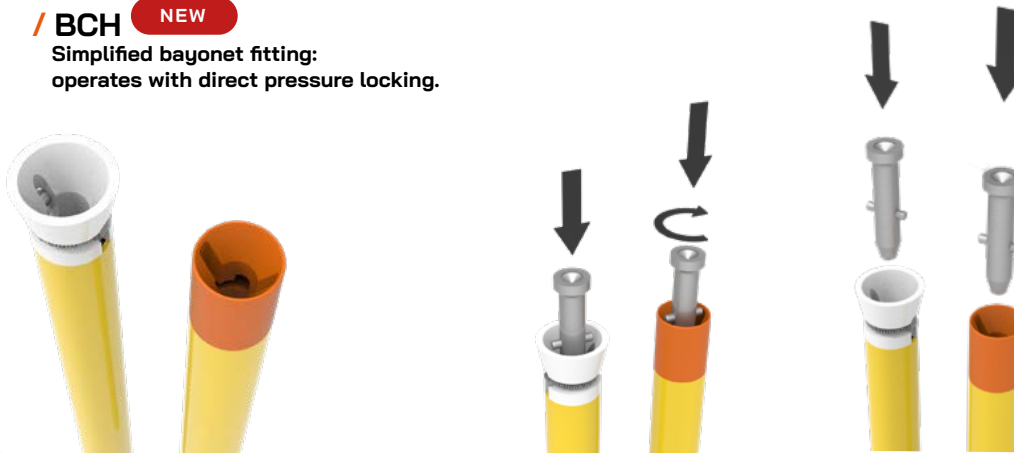

CONTEXT

When it is necessary to install, remove, or handle an earthing clamp, fuse, or accessory remotely, the clampstick is the ideal tool. Equipped with an internal or external operating rod, it ensures a secure grip and precise control of the accessory, without direct contact with the live part.


This section presents our straight, articulated, compact, and extendable models, designed to adapt to every field configuration – from MV substations to overhead networks.

All our clampsticks are ASTM and IEC compliant, and compatible with standard fittings across our range.

Can be combined with our earthing clamps, hooks, adapters, and rigid extensions to suit your specific needs.


POLES END FITTINGS AND ADAPTER CONNECTIONS

/ APV - U adapters 12 mm 6-sided to U end fitting

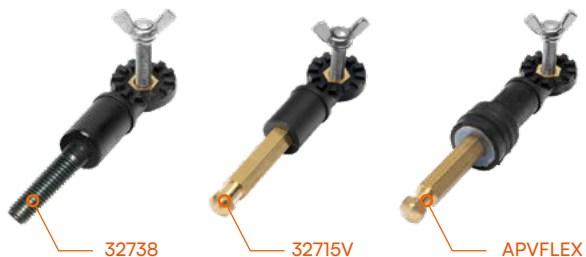


Reference	Description
32715V	Classic version
APVFLEX	Flexible version*
32738	M10 to U end fitting adapter compatible with an APV3

/ U adapters

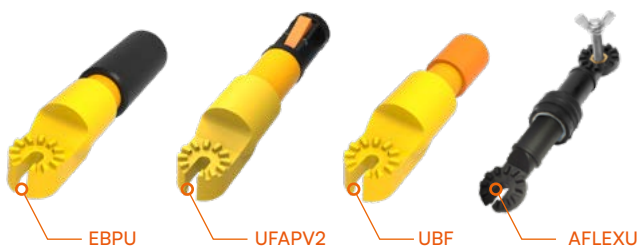

Reference	Description
EBPV	U — Polish bayonet adapter
UBF	U — Bayonet adapter
UFAPV2	U — APV adapter
AFLEXU	U — Flexible U version*

/ B - U adapters DIN bayonet to U end fitting

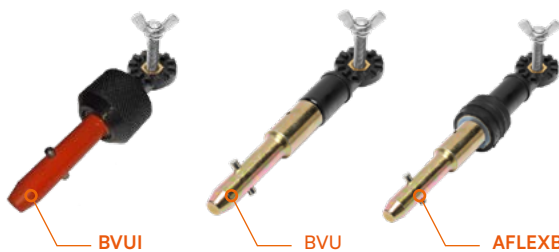

Reference	Description
BVUI	Version with locking system on the bayonet end fitting
BVU	Classic version
AFLEXB	Flexible version*

* The flexible adapters protect the detector from shocks during handling.
They also protect all the connection points.

LW03-01

CLAMPSTICK - EXTERNAL ROD
WITH OR WITHOUT UNIVERSAL ADAPTER



/ KEY FEATURES

Construction


Fiberglass insulating tube with foam core and insulated control rod for full operator protection.

Design & Components

High-performance plastic head with integrated, replaceable hook. Designed for durability and precision.

Performance & Applications

Compliant with ASTM F711, IEC 60832-1, and ASTM F1825 standards. Ideal for installing or removing grounding clamps, and plastic or rubber cover-up equipment.



Catalog No.	Total length	Insulated length*	Tube Ø	Control rod	Approx. weight
LW03-01-32-200	2 m	0,70 m	32 mm	10 mm	2,6 kg
LW03-01-32-260	2,60 m	1,15 m			3,2 kg
LW03-01-32-320	3,20 m	1,70 m			3,8 kg
LW03-01-32-380	3,80 m	2,35 m			4,4 kg

* part between the tool head and the hand positioning guard, ensuring operator insulation.

/ Accessories

Coated suspension hook and spare parts.

LW03-02

PENTAGONAL CLAMPSTICK - EXTERNAL ROD WITH
OR WITHOUT UNIVERSAL ADAPTER



/ KEY FEATURES

Construction : Pentagonal fiberglass insulating tube with foam core, Ø32 mm (1¼"). Insulated control rod for full operator protection.

Design & Components : High-performance plastic head with integrated and replaceable hook. Designed for strength and precision. Better grip thanks to the pentagonal shape.

Performance & Use : Compliant with ASTM F711, ASTM F1825, and IEC 60832-1. Ideal for installing or removing grounding clamps and protective cover-up equipment.

Catalog No.	Total length	Insulated length*	Tube Ø	Control rod	Approx. weight
ASTM F1825					
LW03-02-32P-200	2 m	0,70 m	32 mm	10 mm	2,6 kg
LW03-02-32P-260	2,60 m	1,15 m			3,2 kg
LW03-01-32-320	3,20 m	1,70 m			3,8 kg
LW03-01-32-380	3,80 m	2,35 m			4,4 kg

* part between the tool head and the hand positioning guard, ensuring operator insulation.

LW03-03

EXTENSION FOR CLAMPSTICK



/ USE

Attached to the head of a Clampstick 3,8m (12'5"). The Extension allows the length of a hook pole to be increased.

/ TECHNICAL SPECIFICATIONS

Hollow tube made of fiberglass and reinforced plastic.
Solid fiberglass control rod.
The operating rod is internal.

Catalog No.	Total length	Tube Ø	Control rod	Approx. weight
LW03-03-32-120	1,2 m	32 mm	10 mm	2 kg

LW03-04

HINGED CLAMPSTICK



/ KEY FEATURES

Construction : Fiberglass insulating tube with foam core and 10 mm insulated control rod.
Ø32 mm (1 ¼") fiberglass insulating tube with foam core and 10mm insulated control rod.

Design & Components : High-performance plastic head with integrated, replaceable hook.
Compact design, ideal for vehicles with limited storage space.

Performance & Use : Compliant with ASTM F711.
Perfect for installing or removing grounding clamps and protective cover-up equipment.

Catalog No.	Total length	Folded length	Insulated length	Tube Ø	Control rod	Approx. weight
ASTM F1825						
LW03-04-32-605	6,05 m	3,02	4,29 m	32 mm	10 mm	6,60
LW03-04-32-508	5,08 m	2,56	3,29 m			5,85
LW03-04-32-450	4,50 m	2,27	2,71 m			5,41
LW03-04-32-381	3,81 m	1,93	2,02 m			4,88
LW03-04-32-320	3,20 m	1,62	1,41 m			4,40
LW03-04-32-260	2,60 m	1,32	0,81 m			3,93

LW03-05

SECTIONAL CLAMPSTICK



/ KEY FEATURES

Construction : Fiberglass insulating tube with foam core and 10 mm insulated control rod.
Ø32 mm (1 ¼") fiberglass insulating tube with foam core and 10mm insulated control rod. Lightweight and robust interlocking design.

Design & Components : Corrosion-resistant metal hook and mechanism. High-performance plastic head with integrated, replaceable hook. Compact and easy to store, ideal for vehicles with limited space.

Performance & Use : Compliant with ASTM F711 and IEC 60855-1. Designed for grounding clamp installation/removal and cover-up equipment handling. Ergonomic handle ensures a secure grip.

Catalog No.	Total length	Insulated length	Tube Ø	Control rod	Approx. weight
ASTM F1825					
PRIMARY ELEMENTS					
LW03-05-32-HA-11	2 m	0,70 m	32 mm	10 mm	1,7 kg
LW03-05-32-HA-35	3,5 m	1,15 m			3,3 kg
EXTENSIONS ELEMENTS					
LW03-05-32-RA-12	1,2 m	1,1 m	32 mm	10 mm	1,2 kg
LW03-05-32-RA-18	1,8 m	1,7 m			1,7 kg
LW03-05-32-RA-24	2,4 m	2,3 m			2,1 kg
LW03-05-32-RA-30	3 m	2,9 m			2,6 kg
EXTENSIONS ELEMENTS					
LW03-05-32-ET-06	0,6 m	0,5 m	32 mm	10 mm	0,9 kg

LW03-06

INSULATING UNIVERSAL STICK



/ KEY FEATURES

Construction : Fiberglass insulated tube with foam core.

Design & Components : Universal end fittings with thumbscrews (M8 thread) made of corrosion-resistant metal.


Performance & Use : Compliant with ASTM F711 and IEC 60832-1. Designed for using with universal tools. Universal end-fitting at each end of the stick.

Catalog No.	Total length	Insulated length	Tube Ø	Approx. weight
LW03-06-32-180	1,80 m	1,70 m	32 mm	1,2 kg
LW03-06-32-255	2,55 m	2,35 m	32 mm	1,7 kg
LW03-06-32-315	3,15 m	2,95 m	32 mm	2,0 kg
LW03-06-32-315			39 mm	2,7 kg
LW03-06-32-375	3,75 m	3,55 m	32 mm	2,4 kg
LW03-06-39-375			39 mm	3,6 kg

* Other length available on request

LW03-07

PENTAGONAL INSULATING UNIVERSAL STICK

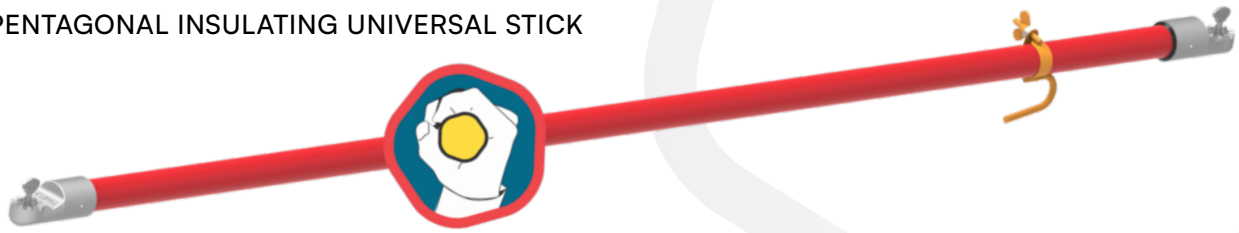

/ KEY FEATURES

Construction : Pentagonal fiberglass insulated tube with foam core.

Design & Components : Universal end fittings with thumbscrews (M8 thread) made of corrosion-resistant metal. Better grip thanks to the pentagonal shape.

Performance & Use : Compliant with ASTM F711 and IEC 60832-1. Designed for using with universal tools. Universal end-fitting at each end of the stick.

Reference	Total length	Insulated length	Tube Ø	Approx. weight
LW03-07-32P-180	1,80 m	1,70 m	32 mm	1,2 kg
LW03-07-32P-255	2,55 m	2,35 m	32 mm	1,7 kg
LW03-07-32P-315	3,15 m	2,95 m	32 mm	2,0 kg
LW03-07-39P-315			39 mm	2,7 kg
LW03-07-32P-375	3,75 m	3,55 m	32 mm	2,4 kg
LW03-07-39P-375			39 mm	3,6 kg


* Other lenght available on request

PDD

DISCHARGE POLES

STANDARDS

EN 50508 / IEC 62193

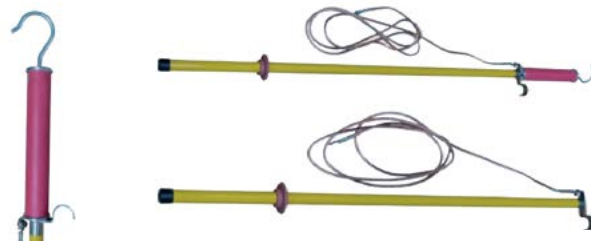

Reference	Type	Resistance value (Ω)	Max voltage	Unfolded length	Folded length	Cable cross-section	Cable length	Type of earth connection clamp	Specificity	
PDD001	TR225 (telescopic)	115	100 kV	2,15 m	3,6 m	16 mm²	10 m	PTS38	/	
PDD002	TR225 (telescopic)	6000	40 kV					PTS38	/	
PDD003	PXV1130 (1 element)	10000	33 kV	1,3 m	1,3 m			PTS38	/	
PDD004	PXV2400 (2 elements)	1500	150 kV	2,45 m	4,2 m	35 mm²		/	/	
PDD005	PXV2400 (2 elements)	15000						/	/	
PDD006	PXV1150 (1 element)	600	50	1,7 m	1,7 m	16 mm²	3,5 m	/	with hook Ø 60	
PDD007	PXV1200	2500	120	2,25 m	2,25 m	25 mm²	5 m	/	/	
PDDS001	TR225 (telescopic)	N/A	225	1,8 m	3,3 m	16 mm²	10 m	PTS38	/	
PDDS002	PXV1150 (1 element)		45 kV	1,62 m	1,62 m		3 m	/	/	
PDDS003	PXV1150 (1 element)						5 m	/	/	
PDDS004	PXV1200 (1 element)		66 kV	2,12 m	2,12 m		10 m	NB8	/	
PDDS005	PXV1150 (1 element)		45 kV	1,62 m	1,62 m		3,5 m	/	/	
PDDS006	PXV1130 (1 element)		66 kV	1,42 m	1,42 m		5 m	PTS38	Discharge tip in addition to the hook	
PDDS007	PXV1130 (1 element)		45 kV	2,12 m	2,12 m	25 mm²	3 m	NB8		
PDDS008	PXV1100 (1 element)		36 kV	1,12 m	1,12 m	35 mm²	15 m	NBCRTTS	/	
PDDS009	PXV1100 (1 element)		150 kV	3,12 m	3,12 m	16 mm²	5 m	NB8	/	
PDDS010	PXV1300 (1 element)		45 kV	1,42 m	1,42 m		15 m	NB8	/	
PDDS011	PXV1130 (1 element)		100 kV	1,2 m	2 m		6 m	NBD25M	Discharge tip in addition to the hook	
PDDS012	PPOL2L/O20 (telescopic)		45 kV	1,62 m	1,62 m		10 m	NB8	/	
PDDS013	PXV1150 (1element)						2,5 m	MAGPFAM	With touch tip Without hook Magnetic vice Cover H2P120H included	
PDDS014	PXV1110 (1element)				1,10 m	1,10 m				



MDD

DIRECT DISCHARGE MODULE

/ KEY FEATURES

Function : Enables direct discharge of residual charges from capacitive circuits when powered off.

Compatibility : To be used with U-terminal poles (e.g. PPOL, PXV) and suitable earth clamps.

Performance & Use : Ensures safe, unbuffered discharge. Custom versions available on request.

/ MDD Direct Discharge Module, without resistance

Reference	Number of resistor	Cable section	Cable length	Type of Ground Connection
MDD1605A	*	16 mm ²	5 m	PTS38
MDD1610A	*		10 m	
MDD1610B	*	25 mm ²	10 m	NB8
MDD2510B	*			

CUSTOMIZE

YOUR DISCHARGE MODULE

- MDD + Cable section + Cable length = none
- MDI + Number of resistor
 - + A = PTS38
 - + B = NB8



PTS38



NB8



MDI

INDIRECT DISCHARGE MODULE

/ KEY FEATURES

Function : Enables buffered discharge of residual charges from sensitive capacitive circuits through a built-in resistor.

Compatibility : To be used with U-terminal poles (e.g. PPOL, PXV) and suitable earthing clamps.

Performance & Use : Provides safe, controlled energy release. Custom configurations available on request.


/ MDI Indirect Discharge Module, with resistance

Reference	Number of resistor	Cable section	Cable length	Type of Ground Connection
MDIT1605A	1	16 mm ²	5 m	PTS38
MDI21610A	2		10 m	
MDI21610B			5 m	NB8
MDI32510B	3		10 m	

/ Technical specifications for MDI

Number of resistor	Network Voltage Phase/Phase	Discharge Voltage Phase/Ground	Maximum Discharge Energy
1	10 kV	5 kV	420 J
	36 kV	20 kV	5 400 J
	63 kV	36 kV	16 000 J
2	90 kV	52 kV	40 600 J
	150 kV	86 kV	
3	225 kV	130 kV	59 000 J

* For the MDD, the maximum voltage depends on the associated pole. The maximum energy is not defined; it corresponds to a short circuit to the ground.

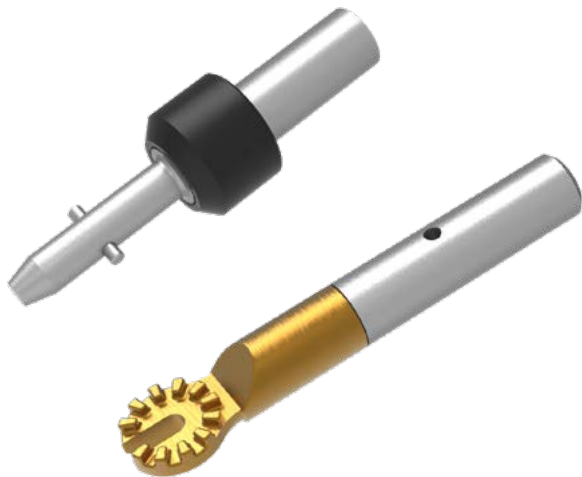

END FITTINGS FOR PRUNER


/ KEY FEATURES

Construction : BV end fitting made of stainless steel VDE bayonet pin with a knurled locking nut in synthetic material.

Design & Components : Available as U or BV adapter for connection to universal or bayonet sticks. Also available as fixed adapter (ECH) mounted directly on the pole.

Performance & Use : Designed for mounting and securing pruners onto insulating sticks. Ensures safe, stable, and quick attachment during operations.

Reference	Description	Dimensions	Weight
UECH	U adapter for branch pruner	166 x 33 x 23 mm	270 g
BVECH	Lockable B adapter for branch pruner	142 x 40 x 40 mm	360 g
ECH	Fixed adapter on stick (add reference to the end of the reference of the stick required)		

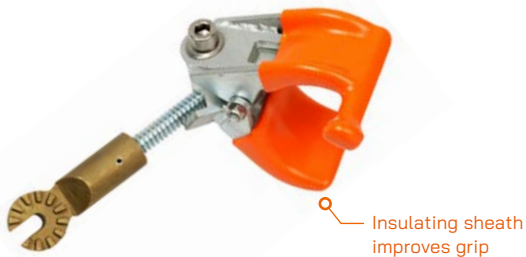

EFMT

FUSE EXTRACTOR

/ TECHNICAL SPECIFICATIONS

Min. clamping diameter: 35 mm
Max. diameter: 70 mm.
Available with all types of end fitting.

Reference	End fitting	Dimensions
EFMTB	B end fitting	230 x 80 mm
EFMTU	U end fitting	230 x 80 mm
EFMTBV	Lockable bayonet end fitting	230 x 80 mm
EFMTAPV	APV end fitting	230 x 80 mm



LP9054

STICK LIFTER

/ USE

Used to lift very long sticks resting on a metal structure.

/ TECHNICAL SPECIFICATIONS

Tightening clamp, capacity 33 mm.
For sticks with a bottom section with a diameter of up to 50 mm.

Reference	Length	Weight
LP9054	200 mm	1.3 kg



NE23

STICK LIFTER

/ USE

Used to lift very long sticks resting on the rod driven into the ground beforehand.

/ TECHNICAL SPECIFICATIONS

For sticks with a bottom section with a diameter of up to 50 mm.

Reference	Description	Weight
NE23	Stick lifter rod	3,62 kg



PPU

INNOVATION

UNIVERSAL POLE STAND



/ USE

The universal pole stand is an aid for the deployment of all types of telescopic insulating pole. It allows the base of the stick to be held on the ground by the user's own weight, so that the insulating pole can be extended with the strength of both arms. It is particularly useful for unfolding pole with heavy tools.

Simple and comfortable to use: unchanged working position, holding the pole by simply pressing with the foot.

Easy release of the pole once extended.

/ TECHNICAL SPECIFICATIONS

Pole on EPDM rubber surface.

Non-slip pedal.

Compatible pole : all shapes, from 40 to 75 mm diameter.

Reference	Dimensions	Weight
PPU	310 x 200 x 105 mm	700 g



TTR2 NEW

TTR2LW

HOT STICK TESTER

• Secured information:

- Full internal self-test which tests all active parts of the tester.
- Self test with external test tube.
- Light indication bar graph with crossing the green area to red in case of default.

• Oriented for mobility:

- Rechargeable battery operated device.
- Low battery indication and battery charge indication
- Compact and robust.
- 100% safe device → no danger for the user
- Less than 5 minutes to test your tools on the field



TTR2

HOT STICK TESTER

/ KEY FEATURES

⚙️ **Construction** : Compact tester (190 × 120 × 135 mm) weighing 1.55 kg. Rechargeable battery powered, with 100—240 V / 50—60 Hz adapter.

💡 **Function & Performance** : Detects internal and external insulation faults (e.g. moisture ingress) using a capacitive measurement principle. Green light = passed as per IEC 60855-1 (100 kV / 30 cm).

🔧 **Equipment & compatibility** : Calibrated for Ø28, Ø32 and Ø39 mm poles. Supplied in a robust carrying case with adapter and test tube. Compatible with foam tubes (custom calibers available for hollow poles).

TTR2LW

INSULATING TOOLS TESTER

/ KEY FEATURES

⚙️ **Construction** : Compact tester (190 × 120 × 135 mm) weighing 1.55 kg. Rechargeable battery powered with 100—240 V / 50—60 Hz adapter.

💡 **Function & Performance** : Detects internal and external insulation faults (including moisture ingress) via capacitive measurement. Green light = passed as per IEC 60855-1 (100 kV / 30 cm).

🔧 **Equipment & compatibility** : Calibrated for rods Ø10—15 mm, poles Ø28—77 mm, and ropes Ø8—19 mm. Supplied in a robust carrying case with adapter and test tube. Suitable for hot sticks, poles, rods, and ropes.



Reference	Description	User's manual*
TTR2F	Hot stick tester	Pack F
TTR2LWF		Pack G
TTR2LWF	Insulating tools tester	Pack F
TTR2LWG		Pack G

* Pack F : FR/GB/DE/ES/PT/PL *Pack G : GB/GR/NL/BG/IT/AR/TR



TC53

SILICONE-COATED CLOTH

/ USE

Helps protect the surface of insulating sticks, detectors or other items with dielectric properties

/ TECHNICAL SPECIFICATIONS

Supplied in individual plastic pouches

Reference	Dimensions	Weight
TC53	380 x 340 mm	30 g



SECTION	N. BRINS	Ø mm
ALMELEC		
34.40	7	7.50
54.60	7	9.45
75.50	19	9.25
17.00	19	14.00
148.10	19	15.75
ALU - ACIER		
37.75	9-3	8.30
58.90	9-3	10.40
80.00	8-7	11.70
116.20	30-7	14.00
147.10	30-7	15.75
228.00	30-7	19.60

LW11-36

GAUGE FOR DISTRIBUTION CONDUCTORS (GAUGE IN METRIC)

/ KEY FEATURES

Conductor gauge : Universal synthetic gauge with sliding cursor for direct reading of conductor diameters (3—16 mm), supplied with cross-section reference table.

Reference	Dimensions	Approximative weight
TW11-36	270 x 35 x 17 mm	300 g



LW11-37

GAUGE FOR TRANSMISSION CONDUCTORS (GAUGE IN METRIC)

/ KEY FEATURES

Conductor gauge : Universal metal tip and slider with graduated synthetic body for direct reading of conductor diameters (6—60 mm), featuring an engraved table showing diameter—cross-section correspondence.

Reference	Dimensions	Approximative weight
TW11-37	270 x 190 x 15 mm	500 g



LW11-38

BUSBAR GAUGE (GAUGE IN METRIC)

/ KEY FEATURES

Conductor gauge : Universal corrosion-protected metal tip with graduated synthetic body and slider for direct reading of tube and busbar diameters from 30 to 210 mm.

Reference	Dimensions	Approximative weight
TW11-38	400 x 280 x 15 mm	500 g



TB20 TB25

BRUSH FOR COPPER OR ALUMINIUM CONDUCTORS

/ KEY FEATURES

Conductor cleaning brush : C-shaped swivelling insulating body with internal metal “file card” brush for superficial cleaning of conductors, usable by hand or on a universal stick (TP30).

Reference	Description	Dimensions	Weight
TB20	Brush for copper conductors	90 x 75 x 60 mm	90 g
TB25	Brush for aluminium conductors		100 g




BVSI

INSULATING OPERATING HOOK

/ KEY FEATURES

Compatibility : Reinforced composite hook and finger with insulating locking nut for bayonet sticks (B fitting). Fully insulated and mechanically reinforced for operating disconnecting switches.

Reference	Dimensions	Weight
BVSI	130 x 69 x 40 mm	160 g

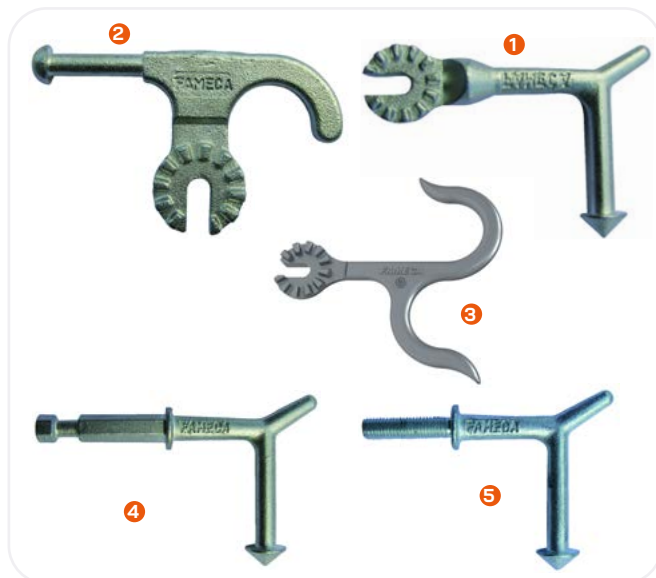


CM

OPERATING HOOK

/ KEY FEATURES

Compatibility : Zinc-plated steel hook for corrosion protection and extended service life. Shock- and stress-resistant with no deformation. Compatible with most end fittings for operating disconnecting switches in all environments.

N°	Reference	Description	Dimensions	Weight
1	CMU1	Operating hook for fitting onto a Universal connection	120 x 60 x 25 mm	160 g
2	CMU2	Double operating hook for fitting onto a Universal connection		200 g
3	CMU3	Removal bird's nest crochet for fitting onto a Universal connection		170 g
4	CMAPV	Operating hook for fixing onto APV type end fitting (12 mm, hexagonal)		145 g
5	CM10	Operating hook for fitting onto a M10 thread		

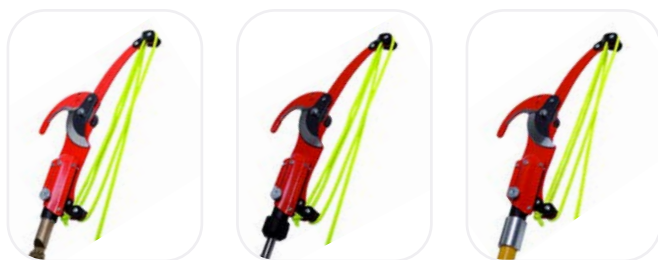

ERS3437

BRANCH PRUNER

/ KEY FEATURES

 **Bypass Pruner** : Hardened double-bevel blade with grooved counterblade and 10 m IEC 62192 insulating rope. Fits PENTA-POLE or PXV sticks for safe cutting of high branches from the ground.

Reference	End fitting	Dimensions	Weight
ERS3437CI	Without end fitting	260 x 220 x 60 mm	1,26 kg
ERS3437U	U end fitting	320 x 220 x 60 mm	1,53 kg
ERS3437B	B end fitting	330 x 220 x 60 mm	1,62 kg

/ Spare parts

Ref.	Description
CIO6CEI	IEC 62192 insulating rope (sold per metre)
R137E	Blade
R337E	Blade fasteners
R437E	Spring

/ Option

Ref.	Description
4400	Pruning saw blade



ERSO3908

BRANCH SAW

/ KEY FEATURES

 **Branch saw** : Steel blade saw designed to fit onto PENTA-POLE or PXV insulating sticks for safe cutting of high branches from the ground.

Reference	Description	Dimensions	Weight
ERSO3908	Branch saw without end fitting	470 x 110 x 2 mm	180 g
BVSCER	Branch saw with B end fitting	570 x 110 x 28 mm	440 g
ERSO3908U	Branch saw with U end fitting	550 x 110 x 25 mm	510 g



JBG100BV

LINE ICE BREAKER ROD

/ KEY FEATURES

 **De-icing Rod** : Epoxy fibreglass insulating rod with stainless steel VDE bayonet pin and synthetic locking nut. Fits PENTA-POLE or PXV sticks for safely breaking ice on overhead lines.


Reference	Dimensions	Weight
JBG100BV	1100 x 40 x 40 mm	690 g

UFH

NEW

UNIVERSAL FUSE HANDLE


Only 1 tool for the 3 different types of fuses

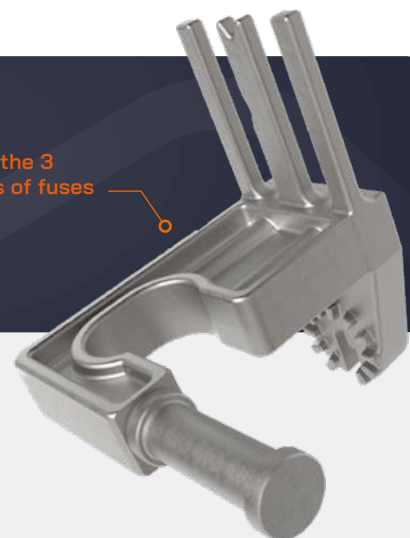

/ KEY FEATURES

Fuse Barrel Tool: aluminium tool designed to install, remove, and cut out fuse barrels. Features three gripping fingers, a shaped support hole, and a hook for secure handling. Universal fitting compatible with all sticks, ideal with PENTA-POLE hot sticks.

Reference	Dimensions	Weight
UFH	130 x 108 x 53 mm	360 g

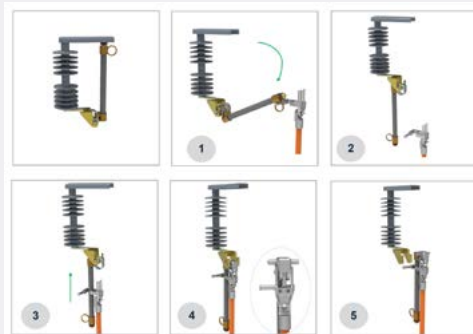

CRY02

INSULATED V-SHAPED LIFTING ANTENNA

/ KEY FEATURES

Conductor Lifting Hook : Stainless steel hook with 4 mm PVC insulation, 90° V-angle, 200 mm opening, and 140 mm height. Screws on with M8 thread and fits insulating sticks to lift conductors for oversized vehicle clearance.

Reference	Description
CRY02	Lifting antenna with M8 thread
CRY02APV	Lifting antenna with APV end fitting
CRY02U	Lifting antenna with U end fitting
CRY02EB	Lifting antenna with B end fitting



PBU

ADAPTER FOR REEL HOLDER WITH U END FITTING

/ USE

With an insulating stick equipped with a U end fitting, can be used to pass an insulating rope over a conductor using the reel ref. 68729846.

Reference	Dimensions	Weight
PBU	250 x 180 x 40 mm	570 g

DROPOVER

NEW

DEVICE FOR PASSING A ROPE
OVER A CONDUCTOR



/ KEY FEATURES

Dropover System : Device for passing a rope over a conductor by gravity using a weighted carabiner. Can be completed with an insulating rope, ballast, and cover. Optional cover: 39 × 18 × 9 cm, 0.6 kg.

Reference	Description
DROPOVERVAT	Dropover with antenna for fitting a voltage detector
DROPOVER	Dropover alone
DROPOVERHO	Dropover with cover
HDROPOVER	Dropover cover
LEST500	500 g ballast
LEST1KG	1 kg ballast



HOW TO MAINTAIN YOUR POLES :

Maintenance :

To ensure that the insulating pole plays its vital safety role, it is important to ensure that :

- EACH TIME IT IS USED: By the user

- Wipe the surface of the pole with a clean, lint-free white cloth.
- Examine the surface of the pole for traces of dust, creosote, grease or any other foreign material. If any of these contaminants are present, clean the tool with isopropanol and then with a silicon cloth (PENTA reference: TC53).

Warning: Only isopropanol or isopropyl alcohol may be used for cleaning.

ANNUALLY: By a trained and authorised user or at the manufacturer's premises:

- Clean each part of the boom with a clean, lint-free cloth soaked in soapy water or isopropyl alcohol (isopropanol), leave to dry for 5 minutes and then start the visual inspection.
- Examine the surface of the pole for deep nicks, scratches, chips, holes or dents. If any of these defects are present, remove the tool from service.
- Visually check the coupling, locking and securing components of the end fitting and any accessories:

Coupling and end fitting	Check that there are no breaks or cracks in any part of the component
Hand guard / rain skirt	check the state of wear due to ageing of the material
Lower end cap for pole	Check presence and condition

- As a minimum, the end section of telescopic poles and all sections of extendable poles (except the shaft section) must undergo an insulation test, i.e. :
 - On a 100kV/30cm test bench at the manufacturer's premises or at a test laboratory with testing facilities.
 - Using the TTR2 verifier (FAMECA reference) by the trained and authorised user
- Finally, wipe the entire pole with a silicon cloth (FAMECA reference: TC53) before storing in its protective cover.

Note: It is recommended that no pole, even those kept in storage, should be reused without a new trial within a maximum period of 2 years for telescopic poles and 6 years for single-element or extendable poles.

Transport : If possible, the insulating pole should be transported in a bag.

Avoid knocks and dragging the insulating pole along the ground when transporting it. Avoid stacking heavy equipment on the insulating pole.

Storage :

The insulating pole should preferably be stored in a protective cover :

- Away from light and moisture.
- In a dry, ventilated room
- Horizontally or vertically in such a way that it cannot be distorted.
- At temperatures between -55°C and +70°C







EARTHING AND SHORT-CIRCUITING


/ LOW VOLTAGE	187
/ MEDIUM VOLTAGE	200
/ HIGH VOLTAGE	224
/ EQUIPOTENTIAL BONDING	242
/ ACCESSORIES	246




PENTA
ELECTRICAL SAFETY PRODUCTS

**Your life,
Our work.**

FROM PROTOTYPE TO PRODUCTION

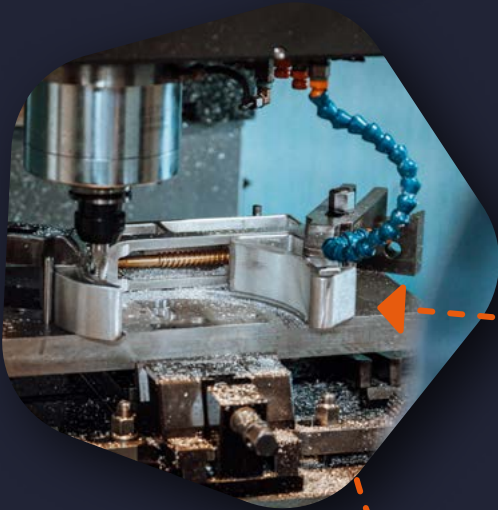


LOW VOLTAGE RANGE

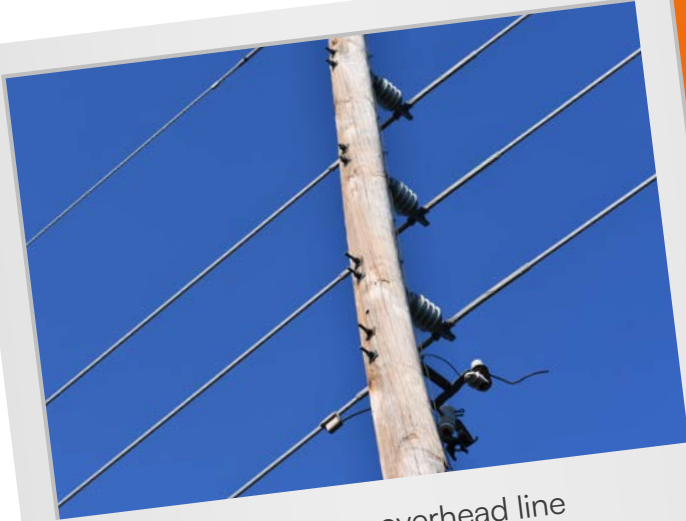

Low voltage overhead line



Low voltage switch

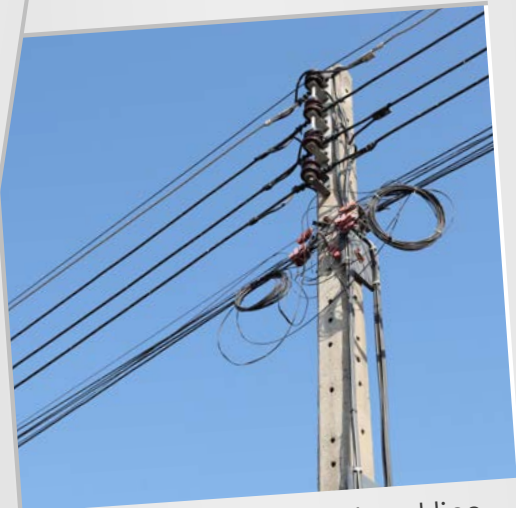

Low voltage overhead line



EARTHING AND SHORT-CIRCUITING LOW VOLTAGE SWITCHBOARDS AND CABINETS

2B3

EARTHING AND SHORT-CIRCUITING DEVICE
FOR LV SWITCHBOARDS OR CABINETS

STANDARDS


IEC 61230 / IEC 61138

The short-circuit is performed using clamps and not cables.

This new technology makes it possible to achieve very high short circuit current

Its design allows it to be used in confined spaces.

The clamp has a large clamping capacity thanks to the various jaws supplied.

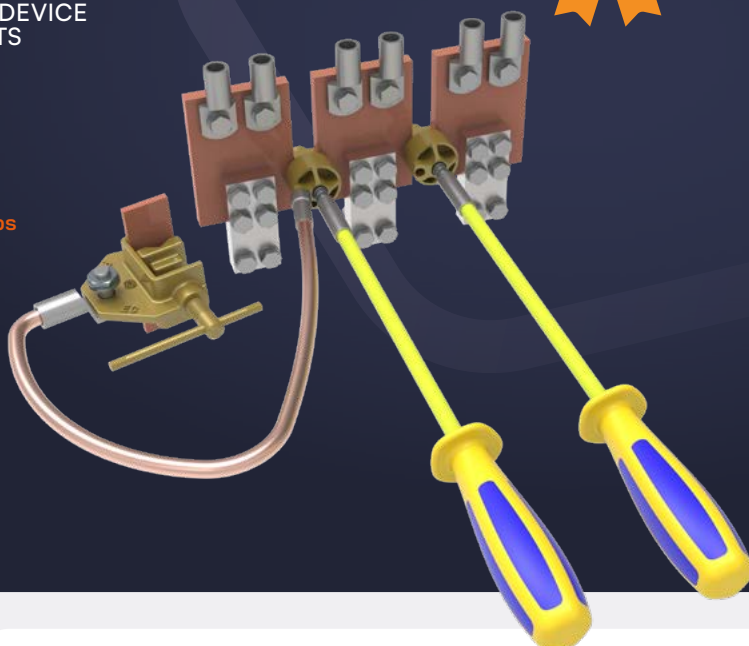

 **PATENTED**

/ USE

Device for earthing and short-circuiting a switchboard or cabinet in an LV network.



/ TECHNICAL SPECIFICATIONS

- 2 or 3 short-circuit bridging assemblies with 1000 V fixed insulated handle.
- 1 earthing cable, 35 or 50 mm² cross-section, 2 m length.
- 1 NB8 earth clamp.
- Maximum short-circuit current:
- With Ø35 mm disk clamp: 36 kA / 0.5 s
- With Ø50 mm disk clamp: 44.8 kA / 0.5 s — 36 kA / 1 s
- Storage and transport bag available on request.

2B3



2B3N



/ Example of clamp clamping capacity

Disk diameter (D)	Space between bars (E)
Ø35	10 mm
	15 mm
	20-25 mm
Ø50	25-30 mm
	30-35 mm

For any specific request, please contact us.

/ Earthing head clamping capacity

- Flat bar: 25 mm max

Other dimensions available on request.

Ref.	Number of short-circuit bridging assemblies	Disk clamp diameter	Earth cable cross-section	Handle	Packaging
2B3D35E1OPF	2	35 mm	35 mm ²	Fixed	N/A
2B3D50E1OPA		50 mm	50 mm ²		N/A
2B3ND35E1OPA	3	35 mm	35 mm ²	Removable	N/A
2B3ND50E1OPF		50 mm	50 mm ²		N/A
2B3D35E1OPFH	2	35 mm	35 mm	Fixed	HMAIT
2B3D35E1OPFC					TD386PM
2B3DxxMxxPxy	3	At choice	At choice	At choice	At choice
2B3NxxMxxPxy					

Other configurations available on request.



CONFIGURE YOUR EARTHING & SHORT-CIRCUITING SYSTEMS FOR LOW VOLTAGE

TRIFURCATION / QUADRIFURCATION CONFIGURATOR

SECTION PHASES AND EARTHING:

_____ mm²

L FOR EACH PHASES

Ø1, Ø2, Ø3 : _____ m

N (optional): YES/NO

_____ m

L EARTH :

_____ m

DEVICE CODING CONFIGURATOR

EBT EBTs UA CR OK MP 16 B T Q P 005 XX XXX - 020 XX XXX UA NB8 P H C

Length of earth leads:
Examples:
010 = 1 m
020 = 2 m
100 = 10 m

Length of phase leads:
Examples:
005 = 0.5 m
010 = 1 m
100 = 10 m

Configuration:

- B = bifurcation
- T = trifurcation
- Q = quadrifurcation
- P = penta-furcation

Phase cable cross-section:
mm²

Phase clamp code:
UA = PBTUA
CR = PBT-CROCO
OK = POK
MP = MPBT

Earth clamp code:
UA = BTUA
NB8 = NB8

Packaging:
P = plastic case
H = soft case
C = metal case

EBT = Low voltage set with PVC cable
EBTs = Low voltage set with silicone cable

LV CLAMP CONFIGURATOR

Phase and earth clamp LV

Reference	2P16F7	2P16F8	2P17F0-MCC	2P17F0-L-MCC	PBTCROCO	POK	MPBT	PBTUA
Code	2P7	2P8	2PA	2PF	CR	OK	MP	UA
Clamping capacity	Ø0 to 24 mm	Ø0 to 22 mm	Ø6 to 12 mm	Ø6 to 12 mm	Ø3 to 20 mm	Ø0 to 20 mm	Ø5 to 20 mm	
	0 to 24 mm	Ø0 to 22 mm	5 mm	5 mm	0 to 20 mm	up to 20 mm	up to 20 mm	3 to 35 mm
			10 mm	10 mm				
			Ø10 rod in this axis of the clamp	Ø10 rod in this axis of the clamp				
Isc max	6 kA/0,5s 4 kA/1s	6 kA/0,5s 4 kA/1s	6 kA/0,5s 4 kA/1s	6 kA/0,5s 4 kA/1s	6 kA/0,5s 4 kA/1s	6 kA/0,5s 4 kA/1s	11 kA/0,5s 8 kA/1s	6 kA/0,5s 4 kA/1s
Material	Brass	Brass	Brass	Brass	Cupro-alu	Cupro-alu	Brass	Aluminium
Closed clamp dimensions	165 x 60 x 30 mm	165 x 60 x 30 mm	90 x 85 x 35 mm	60 x 85 x 35 mm	100 x 78 x 25 mm	92 x 43 x 18 mm	95 x 60 x 20 mm	163 x 40 x 27 mm
Weight	0,28 kg	0,28 kg	0,25 kg	0,17 kg	0,3 kg	0,18 kg	0,5 kg	0,13 kg



DMCCTBTI

DMCCTBTI

EARTHING AND SHORT-CIRCUITING
DEVICE FOR LOW VOLTAGE
SWITCHBOARDS IN INDUSTRY

STANDARDS

IEC 61230 / IEC 61138

/ TECHNICAL SPECIFICATIONS

The set consists of:

5 2P17FO-MCC micro-clamps (2P17FO-L-MCC for ref. DMCCTBTIX):

Insulated clamp for connection to:

- Ø10 mm round bar at the end
- 5 mm thick flat bar
- 10 mm hexagon at the end
- Ø 6 mm and Ø 8 mm vertical

1 quadruple splitter consisting of 4 copper short-circuit cables, 16 mm² cross-section and 0.5 m long, as well as a copper earth cable, 16 mm² cross-section and 2.5 m long

OPTIONAL: adapters — smooth terminals

Smooth brass terminals for positioning shunts (live work) or earthing and short-circuiting equipment on LV panel terminal blocks.



DMCCTBTIX

Ref.	Version	Isc	Dimensions	Weight	Packaging
DMCCTBTI	IP2X	4,6 kA/1s	500 x 200 x 100 mm	4 kg	Soft case HTAGDC
DMCCTBTIX	NON IP2X	4,6 kA/1s	350 x 300 x 100 mm	3,5 kg	Plastic case CTS38
DMCCTBTI25	IP2X	6 kA/1s - 9 kA/0,5s	500 x 200 x 100 mm	4,5 kg	Soft case HTAGDC
DMCCTBTIX25	NON IP2X	6 kA/1s - 9 kA/0,5s	350 x 300 x 100 mm		Plastic case CTS38
DMCCTBTI35	IP2X	7 kA/1s - 13 kA/0,5s	500 x 200 x 100 mm	5 kg	Soft case HTAGDC
DMCCTBTIX35	NON IP2X	7 kA/1s - 13 kA/0,5s	350 x 300 x 100 mm		Plastic case CTS38

/ TAPPED OR THREADED INTERFACE

Ref.	Description
E4BLT6TW	Set of 4 M6 tapped interface
E4BLF6	Set of 4 M6 threaded interface
E4BLT8TW	Set of 4 M8 tapped interface
E4BLF8	Set of 4 M8 threaded interface
E4BLT10TW	Set of 4 M10 tapped interface
E4BLF10	Set of 4 M10 threaded interface
E4BLT12TW	Set of 4 M12 tapped interface
E4BLF12	Set of 4 M12 threaded interface



EBTPC NEW

EARTHING AND SHORT-CIRCUITING DEVICE
FOR LOW VOLTAGE SWITCHBOARDS

STANDARDS

IEC 61230 / IEC 61138

- The insulated clamp allows manual handling
- A compact footprint of only 100 × 78 × 25 mm, enabling access to restricted areas
- The clamp's spring mechanism provides immediate tightening
- The clamp offers a wide clamping capacity thanks to its design.



PBTCROCO



POK

/ USE

Device designed for earthing and short-circuiting a switchboard or cabinet in a low-voltage (LV) network.

/ TECHNICAL SPECIFICATIONS

Contents :

- 4 insulated spring clamps for earthing and short-circuiting, rated 1000 V.
- One 16 mm² four-lead set: phase leads 50 cm / earth lead 2 m.
- One storage and transport pouch.
- Short-time withstand current (Ik): 6 kA / 0.5 s — 4 kA / 1 s.

Clamping capacity of clamps and vice:

- Flat bar: max. 20 mm
- Round bar: min. Ø 3 mm — max. Ø 20 mm

Ref.	Nbr of phases clamps	Cross section	Phases cables length	Earth cable length	Weight
EBTPC16T005-020PC	3	16 mm ²	0,5 m	2 m	1,7 Kg
EBTPC16Q005-020PC	4				2,0 Kg



The insulated clamp allows manual handling

Clamping capacity suitable for all flat and round busbar configurations

Easy to use in restricted spaces thanks to the small size of the clamps.

EBTOK NEW

EARTHING DEVICE FOR SWITCHBOARDS, ENCLOSURES AND CABINETS

STANDARDS

IEC 61230

/ USE

Device used to perform earthing operations on low-voltage switchboards, enclosures and cabinets.

/ TECHNICAL SPECIFICATIONS

- 4 POK clamps for short-circuiting and earthing during a quadruple configuration, and 3 POK clamps for short-circuiting + 1 clamp for earthing during a triple configuration.
- Triple or quadruple configuration (with neutral present): cross-section 16 mm²; phase leads 0.5 m / earth lead 2 m.
- Storage and transport soft case.
- Maximum short-circuit current (Isc): 6 kA / 0.5 s or 4 kA / 1 s.

Clamping capacity of the clamps:

- Flat bar: max. 20 mm
- Round bar: min. Ø 0 mm — max. Ø 20 mm

Ref.	Nbr of phases clamps	Cross section	Phases cables length	Earth cable length	Weight
EBTOK16T005-020OK	3	16 mm ²	0,5 m	2 m	1,2 Kg
EBTOK16Q005-020OK	4				1,4 Kg



EARTHING AND SHORT-CIRCUITING LOW VOLTAGE SWITCHBOARDS AND CABINETS



Easy to use in restricted environments thanks to the small size of the clamps.

Clamping capacity suitable for flat busbar systems.

EBTMP

LOW-VOLTAGE EARTHING DEVICE FOR SWITCHBOARDS, ENCLOSURES AND CABINETS

STANDARDS

IEC 61230

/ USE

Device used to perform earthing operations on low-voltage busbar systems.

/ TECHNICAL SPECIFICATIONS

Product:

- 4 micro-clamps for short-circuiting and earthing in a quadruple configuration, and 3 micro-clamps for short-circuiting and earthing in a triple configuration.
- Triple or quadruple configuration (with neutral present): cross-section 16 mm²; phase leads 0.5 m / earth lead 2 m.
- Storage and transport soft case.
- Maximum short-circuit current (I_{sc}): 11 kA / 0.5 s or 8 kA / 1 s.

Clamping capacity of the clamps:

- Flat bar: max. 20 mm
- Round bar: min. Ø 5 mm — max. Ø 20 mm


Ref.	Cross section	Description
EBTMP16T005-020MP	16 mm ²	Complete LV earthing/short-circuiting device: 6 kA/0.5 s — 4 kA/1 s
EBTMP25Q005-020MP	25 mm ²	Complete LV earthing/short-circuiting device: 9.5 kA/0.5 s — 6.5 kA/1 s
EBTMP35Q005-020MP	35 mm ²	Complete LV earthing/short-circuiting device: 11 kA/0.5 s — 8 kA/1 s

Other configurations available: please contact us

Easy to use thanks to its small size

Full width and full thickness busbar clamping.

The earth is identified by a yellow and green sheath on the connection cable.



Flexible, removable operating handle.

Flat clamping capacity of up to 35mm, suitable for busbars



Clamp with 4 DC cable fixing positions to suit all configurations.

EBTUA

EARTHING AND SHORT-CIRCUITING CLAMP


STANDARDS

IEC 61230

/ USE

Device used to carry out earthing and short-circuiting operations for SCU (self-contained unit) low-voltage column busbars.

Ref.	Cable cross section	Max. I _{sc}	Cable L1	Cable L2	Cable L3	Cable Le	Cable sheath
EBTUA16T005-010UA	16 mm ²	3,5 kA/1s - 3,5 kA/0,5s	0,5 m	0,5 m	0,5 m	1 m	Extra soft PVC
EBTUA25T005-010UA	25 mm ²	4 kA/1s - 6 kA/0,5s	0,5 m	0,5 m	0,5 m	1 m	

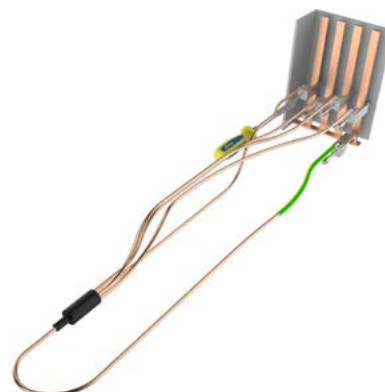



DMBTTR

LV SHORT-CIRCUITING
AND EARTHING DEVICE
FOR PANEL



PATENTED

STANDARDS

IEC 61230 | IEC 61138 | VDE 0105-100

- Easy to set up, in 2 operations: fixing the clamp and inserting the device.
- One-piece, robust and safe (visual coding).
- The fuses incorporate a keying system, which forces the device into the correct position, guaranteeing the user's safety.



/ USE

The insulated, portable and rigid device, equipped with false fuses, allows the earthing and short circuiting of an LV switchboard or cabinet in accordance with the IEC/EN 60947-3 standard.

/ DMTBTR16

Isc Max : 16 kA/1s
False fuses : 3 x NH123

Ref.	Earthing cable	Dimensions
DMBTTR16N	No	650 x 85 x 170 mm
DMBTTR163512	Yes : 35 mm ² length 1,2 m	

/ DMTBTR4

Isc Max : 4,6 kA/1s
False fuses : 3 x NH00

Ref.	Earthing cable	Dimensions
DMBTTR4N	No	650 x 85 x 170 mm
DMBTTR41612	Yes : 16 mm ² length 1,2 m	

/ DMTBTRTIPI

Isc Max : 16 kA/1s
False fuses : 4 x NH123

Ref.	Earth connection	Dimensions
DMBTBTRTIPI	No	800 x 85 x 170 mm
DMBTBTRTIPIxxyy	Yes, custom-made	

DMBTBTT

LOW-VOLTAGE SHORT-CIRCUIT AND EARTHING DEVICE
FOR SWITCHBOARDS AND CABINETS

STANDARDS

IEC 61230

/ USE

Portable device allowing short-circuiting and earthing of a low-voltage switchboard or cabinet equipped with a NH00, NH1, 2, 3 or NH4a type fuse base.

/ TECHNICAL SPECIFICATIONS

Three-branch assembly with central connector, sealed with a heat-shrink insulating sleeve.
3 phase cables L1, L2, L3 in 16 to 50 mm² cross-section and variable length (see product references or custom lengths) equipped at both ends with screw-type terminals.
1 earth cable in 16 to 50 mm² cross-section and variable length (see product references or custom lengths) equipped at each end with a 6 mm² eyelet lug.

Note: This three-branch assembly is made from extra-flexible translucent IEC 61138 PVC cable or silicone.
False fuses with M10 tapping: ref. SPH00.
False fuses with M10 tapping: ref. SPH123.
False fuse with M12 tapping : ref SPH00TW.
False fuse with M12 tapping : ref SPH123TW.
Insulated operating handle : ref. MIEBTMAY
Earth clamp : ref. ETEBTMAY
Storage case: ref. CETBTMAY (Optional)



PATENTED

Smart lock



Smart lock



Smart lock ref.	Standard ref	Cable cross-section	Isc max	Cable L1	Cable L2	Cable L3	Earth cable	Cable insulation
DMBTBTTSL01	DMBTBT01	25 mm ²	5.5 kA/1 s — 8 kA/0.5 s	370 mm	460 mm	550 mm	400 mm	Extra-flex PVC
DMBTBTTSL1601	DMBTBT1601	16 mm ²	3.5 kA/1 s — 5 kA/0.5 s	300 mm	500 mm	700 mm	300 mm	
DMBTBTTSL2501	DMBTBT2501	25 mm ²	5.5 kA/1 s — 8 kA/0.5 s					
DMBTBTTSL3501	DMBTBT3501	35 mm ²	7.2 kA/1 s — 10 kA/0.5 s					
DMBTBTTSL5001	DMBTBT5001	50 mm ²	10 kA/1 s — 14 kA/0.5 s					
DMBTBTTSL16xx	DMBTBT16xx	16 mm ²	3.5 kA/1 s — 5 kA/0.5 s	Custom	Custom	Custom	Custom	PVC or silicone
DMBTBTTSL25xx	DMBTBT25xx	25 mm ²	5.5 kA/1 s — 8 kA/0.5 s					
DMBTBTTSL35xx	DMBTBT35xx	35 mm ²	7.2 kA/1 s — 10 kA/0.5 s					
DMBTBTTSL50xx	DMBTBT50xx	50 mm ²	10 kA/1 s — 14 kA/0.5 s					



DMTBTMCTR

LV EARTHING AND SHORT-CIRCUITING DEVICE
FOR PANEL BOARDS AND CABINETS 4,3 KA/0,5S

STANDARDS


IEC 61230

TECHNICAL SPECIFICATIONS

Composition :

- Set of 4 pliers with black handle
 - (2P16F7) and a blue handle clip (2P16F7B) :
 - 3 phases, 1 neutral and 1 public lighting
- Set of 3 fuse with coder (SPH123DET)
- A QUADRIFURCATION: set of copper cables in an extra-flexible sheath fitted with watertight lugs 3 false-fuse with coded pins and connected by a junction block consisting of :
- 3 short-circuit cables with M8 screw connectors :
 - Length = 0,2m, Section = 16mm²
 - Length = 0,4m, Section = 16mm²
 - Length = 0,6m, Section = 16mm²
- 1 neutral cable (N) : Length = 0,8m, Section = 16mm².
- 1 earth cable : Length = 1m, Section = 16mm²
- 1000V insulated alligator clips with 2 cm opening
- An insulating handle : MIEBTMAY
- 4 cable collectors
- 3 fuse adaptors
- 1 earth vice : ETEBTMAY

Packaged in an IP67 plastic case.

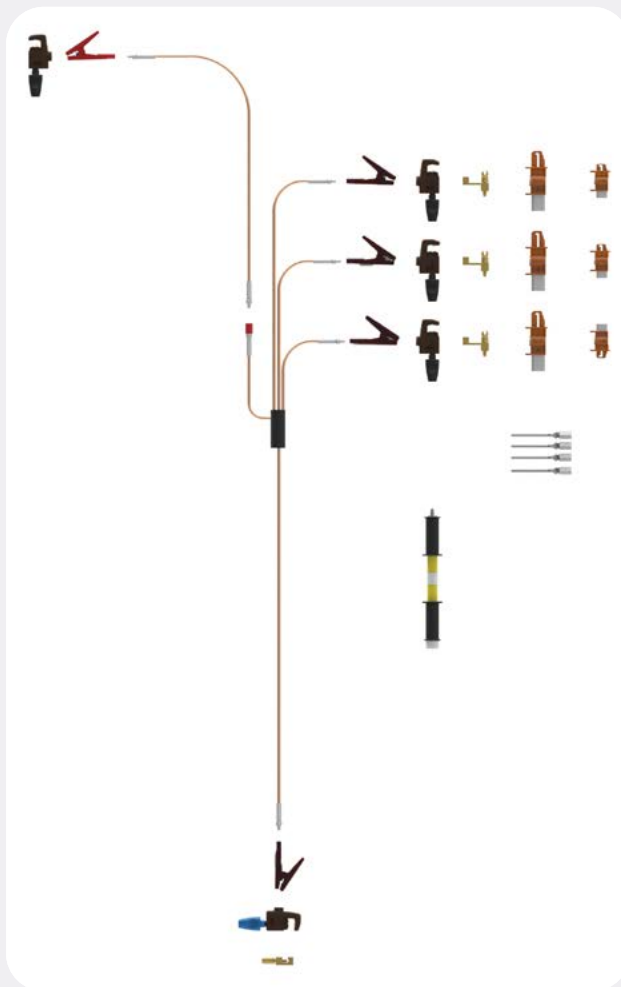

Reference	Description	Dimensions	Weight
DMTBTMCTR	Low-voltage earthing and short-circuiting device for switchboards and cabinets	475 x 415 x 150 mm	9 kg

Other compositions available; please contact us.



PERF

NEW

FUSE PULLER STICK (FUSE EXTRACTION STICK)

STANDARDS

IEC 60832

- Two positions, suitable for small and large fuses



/ USE

The fuse extraction stick is used to remove fuses and false fuses from a low-voltage (LV) switchboard or cabinet, in accordance with IEC/EN 60947-3.


/ TECHNICAL SPECIFICATIONS

Product:

- Pentagonal fibreglass tube
- Plastic parts
- Steel fasteners and connecting pin, corrosion-protected

Dimensions:

- Overall length: 700 mm
- Height: 110 mm
- Weight: 0.7 kg

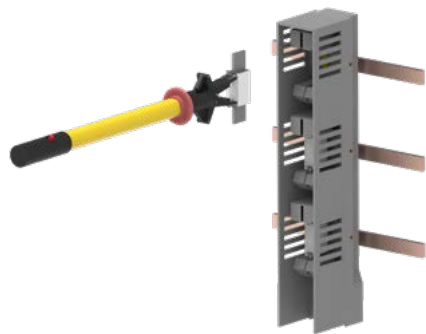

TC151P

REMOVABLE HANDLE FOR FUSES

STANDARDS

IEC 61230

/ USE

Removable handle with knob for fuses sizes 00 to 4.

Ref.	Field of use	Operating voltage	Station office	Measurement	Weight
TC151P	Station office	LV	Before electric meter	125x75x23mm	0,1 kg



TC151PM

FUSE PULLER HANDLE WITH SLEEVE

/ USE

Protection against flash arc risk

Ref.	Field of use	Operating voltage	Station office	Measurement	Weight
TC151PM	Station office	LV	Before electric meter	400x270x70mm	0,36 kg



EARTHING AND SHORT-CIRCUITING LOW VOLTAGE OVERHEAD LINES



scan to watch
the video !



SCAN ME




GFLAG

TEMPORARY SHORT-CIRCUITING AND EARTHING DEVICE FROM THE EARTH, FOR BARE LOW VOLTAGE OVERHEAD NETWORKS

STANDARDS

IEC 61230

- Quick installation from the ground by one person without climbing the support.
- Saves time in installation and removal of the device.
- Operator safety by working from the earth away from the network in an upright position.
- Safe no-voltage testing offset from the network with an insulated stick.
- Practical to use in all field configurations.
- Equipment to be used with the MTAGLV voltage detector (optional).



Conductive sticks



Insulating stick



ECBTGF

/ USE

- Designed to short-circuit bare LV overhead networks with 5 or 6 conductors (1 neutral, 3 phases, 1 or 2 public lighting).
- It is handled from the earth using a telescopic insulating stick.
- It is installed immediately after the no-voltage testing operation with the PICRABT device (see corresponding data sheet).
- The GFLAGFR device is composed of 2 conductive aluminium sticks, on which are mounted a U-shaped profile, equipped with 4 clamps.

/ TECHNICAL SPECIFICATIONS

The first stick short-circuits the neutral and the 3 phases, and the second stick short-circuits the public lighting, connecting to the phase conductors previously short-circuited to the neutral. This equipment can be earthed, using the optional earth lead. These two conductive sticks are mounted on the PentaPole type insulating stick (Fameca patent), specific to this kit, on a Tulip end cap. It allows the 6 conductors of the LV line to be short-circuited in two operations.

Reference	Description
GFLAGFR	Temporary short-circuiting and earthing device from the earth, for bare low voltage overhead networks

/ This product contains

Reference	Description
2 x PDMCCTBTARFR	2 identical short-circuiting conductive sticks: 1 for short-circuiting the LV network and 1 for short-circuiting the public lighting if necessary
PICRABT	Iso-conductive stick for carrying out no-voltage testing on the LV flag network
PPOLMALTBT	Insulating telescopic stick for manoeuvring from the earth — extended length 7.5 m
HDMCCTBTARFR	Storage bag containing the whole kit



BTA800-5

EARTHING AND SHORT-CIRCUITING DEVICE OF LV OVERHEAD LINES

STANDARDS

IEC 61230 / IEC 61138

/ USE

- Earthing and shorting of overhead lines in bare conductors spring clamps $\varnothing 3 \div 18$ mm
- No. 5 light alloy clamps with spring clamping $\varnothing 3 \div 18$ mm integral with fiberglass foils with handle
- No. 4 copper cables sect. 16 mm² L=0.8 m covered with silicone sheathing
- No. 1 copper ground cable sect. 16 mm² L=14 m covered with silicone sheathing
- No. 1 earth electrode
- No. 1 reach collector
- No. 1 sheet metal container for storing and transporting the device

Reference	Clamp tightening	Conductor type	Cable isolation type	Phase cable nber	Phases cable cross-section	Phases cable length	Cross-section	Floor cable length	Short-circuit intensity	Short-circuit intensity
BTA800-5	3/18 mm	Round	Silicone	4	16 mm ²	0.8 m	16 m ²	14 m	5.7 kA/0.5s	4.1 kA/1s



WBT537

EARTHING AND SHORT-CIRCUIT DEVICE AT FIXED POINTS EQUIPPED WITH MOBILE PERFORATING TERMINALS FOR LV CABLES


STANDARDS

IEC 61230 / IEC 61138


Reference	Clamp material	Conductor diameter	Cable material	Cable isolation type	Phase cable number	Cross-section	Floor cable length	In line (aerial)	Isc Max	Short-circuit intensity	Short-circuit intensity
WBT537	Steel	8mm	Copper	Silicone	2	16 mm ²	15m	Isolated	7.4 kA/0.3s	5.7 kA/0.5s	4.1 kA/1s



EARTHING AND SHORT-CIRCUITING LOW VOLTAGE OVERHEAD LINES

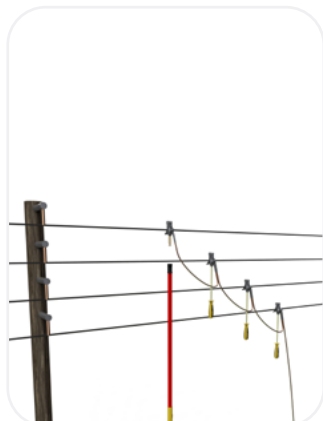

- Ergonomic handle with hand guard.
- Quick connection/disconnection.



BT318_N

EARTHING AND SHORT-CIRCUITING EQUIPMENT
FOR BARE LV OVERHEAD LINES

STANDARDS

IEC 61230

/ USE

Device for short-circuiting and if necessary earthing with additional set CMTBT or ECBT.

Reference	Composition	Weight
BT3184N	4 clamps and 3 sticks	3.32 kg
BT3185N	5 clamps and 4 sticks	3.74 kg
BT3186N	6 clamps and 5 sticks	4.16 kg
BT3187N	7 clamps and 6 sticks	4.58 kg

Available version without bayonet earth wire joint, direct connection.

/ This product contains

Reference	Description
BT318APV	Earthing and short-circuiting clamp for bare LV overhead lines
H318	Storage cover
PT318	BT318 clamp on 0,4 m stick with handle
TFK16007BB	16 mm ² short-circuiting cable 0,7 m
PPOL2/020APV	Insulating telescopic stick 2 m



BT324

EARTHING AND SHORT-CIRCUITING CLAMP FOR LV OVERHEAD LINES

/ TECHNICAL SPECIFICATIONS

- Tightening capacity: Ø 3 to 24 mm

- Automatic spring clamp, no manual tightening required
- Low weight constraints
- Fast and easy to use
- Ensures effective contact with the cable



Ref.	Handle type	Overall length	Insulating length	Weight
BT324	PENTA handle (M)	750 x 60 x 60 mm	490 mm	0,465 kg
BT324C		370 x 60 x 60 mm	115 mm	0,3 kg
BT324D		560 x 60 x 60 mm	300 mm	0,4 kg
BT324E		480 x 60 x 60 mm	222 mm	
BT324AP	Hexagonal (AP)	195 x 60 x 60 mm	N/A	0,355

DMTBT324

SHORT-CIRCUITING AND EARTHING DEVICE FOR BARE LV
OVERHEAD LINES

STANDARDS

IEC 61230

/ USE

Device allowing the short-circuiting of LV network and if necessary its earthing. Max. Isc: 8 kA/1s. Including insulating sticks and storage cover set.

Ref.	Nbr of clamps	Insulating length	Section cables	Short-circuiting cable length	Overall length	Weight
DMTBT3245	5	480 mm	35 mm ²	0,5 m	720 mm	3,16 kg

For other compositions, please contact us.



- Fast attachment/detachment
- High short-circuit current



DMTP69

EARTHING AND SHORT-CIRCUITING EQUIPMENT
FOR BARE LV OVERHEAD LINES

STANDARDS

IEC 61230


/ USE

Device allowing the short-circuiting of LV networks and if necessary its earthing.

/ TECHNICAL SPECIFICATIONS

- Isc: 8 kA/1s
- Tightening capacity: Ø3 to 22 mm
- Short-circuit cable: 35mm², lenght: 1m

Ref.	Description
DMTP69-4P	4 clamps on sticks
DMTP69-5P	5 clamps on sticks
DMTP69-6P	6 clamps on sticks
DMTP69-7P	7 clamps on sticks

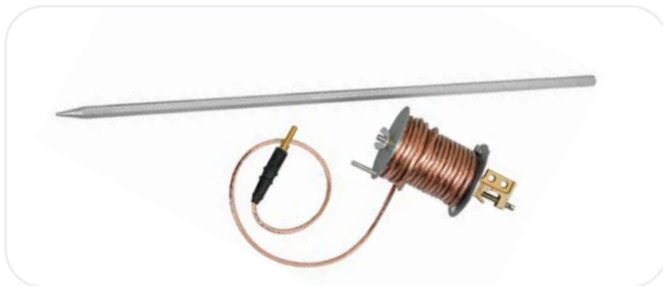

CMTBT

ADDITIONAL EARTHING EQUIPMENT

STANDARDS

IEC 61230

/ USE

Earthing cable to be connected to LV overhead line short-circuiting device.

/ TECHNICAL SPECIFICATIONS

- Isc: 4 kA/1s

Ref.	Description
CMTBT1N	Cable 16 mm ² - L 16 m
CMTBT2N	Cable 16 mm ² - L 10 m
CMTBT3N	Cable 10 mm ² - L 16 m
CMTBT4N	Cable 10 mm ² - L 10 m



ECBT

ADDITIONAL EARTHING EQUIPMENT

STANDARDS

IEC 61230

/ TECHNICAL SPECIFICATIONS

- Isc: 4 kA/1s
- Set content:
 - 1 earthing cable in extra-flexible copper, 16 mm², Length : 16 m,
 - 1 bronze earthing clamp, ref. NB8,
 - 1 bayonet plug.
- Supplied in CTS38S plastic carrying case, without earthing rod.

Reference	Cable length
ECBT320	16 m
ECBT321	10 m
ECBT325	3 m

Other compositions available on request.



GDDTORS

SHORT-CIRCUITING
EQUIPMENT

STANDARDS

IEC 61230

/ TECHNICAL SPECIFICATIONS

- Cable material : Copper
- Operating voltage : LV
- Phase(s) cable cross-section : 16 mm²
- Phase(s) cable length : 0,40 m
- Short-circuit intensity : 4 kA/1s
- Dimensions : 349x264x86mm

Reference	Phase cable number	Weight
GDDTORS 5	4	1,8 kg
GDDTORS 6	5	2 kg
GDDTORS 7	6	2,3 kg



CPITORS

INSULATION PIERCING
CONNECTORS FOR GDD-
TORS DEVICE

/ USE

- Insulation piercing connectors for measurements, earthing and short-circuiting LV aerial bundled connectors.
- Insulation piercing short-circuit and earthing connectors for overhead networks with twisted insulated conductors, rated voltage 0.6/1 kV.

Reference	Description
CPITORS	16 to 150 mm ²

MEDIUM VOLTAGE RANGE



Medium voltage overhead line



Medium voltage substation




Medium voltage substation



CONFIGURE YOUR EARTHING & SHORT-CIRCUITING SYSTEMS FOR MEDIUM VOLTAGE

TRIFURCATION/QUADRIFURCATION CONFIGURATOR

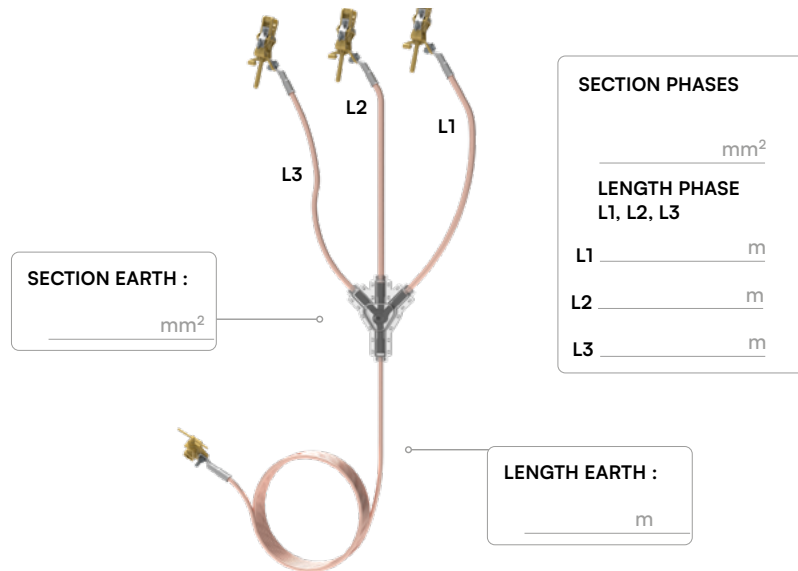

DEVICE CODING CONFIGURATOR

EMT EMTS	535 416 516	B AP X	16	B T Q P	005 XX XXX	-	16	020 XX XXX	NB8 N3B	H C
-------------	-------------------	--------------	----	------------------	------------------	---	----	------------------	------------	--------

Length of phase leads:
Examples:
005 = 0.5 m
010 = 1 m
100 = 10 m

Configuration:
• B = bifurcation
• T = trifurcation
• Q = quadrifurcation
• P = pentafurcation

Phase cable cross-section:
mm²

Terminations:
B = bayonet
AP = AP (hexagonal)
X = without termination

Phase clamp code
535 = MT535 525LR = MT525BLAR
416 = MT416 NBD = NBD25
516 = MT516 NB = NB2025
525 = MT525 PFB = PFB2025

Earth clamp code:
NB8 = NB
N3B = N3B8

Length of earth leads:
Examples:
010 = 1 m
020 = 2 m
100 = 10 m

Earth conductor cross-section: mm²:
Earth cable cross-section: mm²

Packaging
H = soft case
C = metal case

EMT = Medium-voltage set with PVC cable
EMTS = Medium-voltage set with silicone cable



SELECTION GUIDE

MV CLAMPS AND EARTH CLAMPS

	MV CLAMPS								
Code	535	416	516	525	525L and 525LR	MTD	550	W535	
									
	MT535	MT416	MT516	MT525	MT525BL MT525BLAR*	MTD3290	MT550	PC535	
Clamping capacity	 Ø 5-35 mm		 Ø 8-19 mm	 Ø 5-35 mm	 Ø 5-35 mm	Ø 32-90 mm	Ø 5-50 mm	Ø 5-35 mm	
	 16-40 and 5-40 mm	 40-16 mm	 0-19 mm		 5 - 15 mm		 Up to 50 mm	 Flat bar: 5x40mm Horizontal busbar: 16x40mm	
Isc max	31,5 kA/1s	18 kA/1s	20 kA/1s	14,5 kA/1s	MT525BL: 20 kA/1s MT525BLAR*: 25kA/1s	18 kA/1s	18 kA/1s	30 kA/1s	
Material	Alu	Alu	Alu	Cupro-alu	Cupro-alu	Laiton	Cupro-alu	Alu	
Connection hole	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 10 mm	
Closed clamp dimensions	44 x 100 x 180 mm	35 x 75 x 169 mm	35 x 79 x 143 mm	85 x 56 x 192 mm	85 x 56 x 210 mm	220 x 90 x 60 mm	85 x 56 x 210 mm	165x130x45 mm	
Weight	0,620 kg	0,320 kg	0,320 kg	0,650 kg	0,800 kg	1,200 kg	0,750 kg	0,520 kg	

*anti arrachement



MV CLAMPS & EARTHING CLAMPS						
	PCE	NBD	NB	PFB	NB8	N3B
						
	PCE	NBD25	NB2025	PFB25	NB8	N3B8
	Ø 0 - 22 mm	 Ø 7 - 37 mm	 Ø 5 - 32 mm		 Ø 6 - 25 mm	 Ø 6 - 30 mm
	 0-22mm	 37 mm	 32 mm		 0 - 25 mm	 30 mm
		 Ø 20 - 25mm	 Ø 20 - 25mm	 Ø 20-25mm	 Ø 6 - 25 mm	 Ø 6 - 33 mm
	20 kA/1s	31,5 kA/1s all conductor 40 kA/0,5s on Ø 25 mm ball 20 kA/1s on Ø 20 mm ball	23,5 kA/1s all conductors 20 kA/1s on Ø 20 mm ball	23 kA/1s on Ø 20 mm ball 31,5 kA/0,5s on Ø 25 mm ball	20 kA/1s	31,5 kA/1s
	Alu	Cupro-alu	Cupro-alu	Cupro-alu	Cupro-alu	Cupro-alu
	Ø 10 mm	M10	M10	M10	Ø 10 mm	Ø 10 mm
	142x60x34mm	35 x 75 x (160) mm	35 x 75 x (125) mm	35 x 75 x (125)	100 x 100 x 40 mm	40 x 72 x 130 mm
	0,300 kg	0,850 kg	0,750 kg	0,750 kg	0,5 kg	0,75 kg

/ CHOICE OF END FITTING FOR CLAMPS

(to be added at the end of the selected reference)

		
AP	B	M



TRIF

SET OF CABLES FOR SHORT-CIRCUITING
AND EARTHING DEVICES

STANDARDS

IEC 61230 / IEC 61138

- New central connection point and compression with sealing.



/ USE

Use to equip or replace substation short-circuiting and earthing cables.

/ TECHNICAL SPECIFICATIONS

A TRIFURCATION is a set of copper cables for a 3-phase earthing and short-circuiting device, consisting of:

- 3 short-circuiting cables,
- 1 earthing cable
- all connected to a junction block and fitted with TFK type sealed cable lugs.



/ Isc according to cable cross-section :

Temperature rise of the copper cable at the end of the short-circuit : 700°C

Isc Time	0,3 s	0,5 s	1 s	
Isc cable cross-section	Isc max. admissible			Min. earth cable cross-section
10 mm ²	4,8 ka	3,7 ka	2,5 ka	16 mm ²
16 mm ²	7,7 ka	6 ka	4 ka	
25 mm ²	12 ka	9,5 ka	6,5 ka	
35 mm ²	17 ka	13 ka	9 ka	25 mm ²
40 mm ²	19,3 ka	15 ka	10,5 ka	
50 mm ²	24 ka	18,5 ka	13 ka	
70 mm ²	34 ka	26 ka	18,5 ka	35 mm ²
75 mm ²	36 ka	28 ka	20 ka	
95 mm ²	46 ka	35,5 ka	25 ka	
120 mm ²	58 ka	45 ka	31,5 ka	50 mm ²
150 mm ²	72,5 ka	56 ka	40 ka	



/ Codification

T
T
T
T
T

...
S
PA
SA

... = Copper trifurcation with PVC sheath and swaged crimp lug connection (double crimping), -25°C to +55°C

S = Copper trifurcation with silicone sheath and swaged crimp lug connection (double crimping), -40°C to +70°C

PA = Aluminium trifurcation with PVC sheath and swaged crimp lug connection (double crimping), -25°C to +55°C

SA = Aluminium trifurcation with silicone sheath and swaged crimp lug connection (double crimping), -40°C to +70°C

T = Trifurcation

16
25
35
50
70
95
120
150

008
010
100
XXX

B
C
D

16
25
35
50
70
95
120
150

008
010
100
XXX

B
C
D

Ø of clamping of the earth side terminal :
B = Ø 8
C = Ø 10
D = Ø 12


Length of earth cable : XXX
Ex : 010 = 1m
025 = 2,5m (standard)
100 = 10m

Earth wire section:
16 à 150 mm²

Ø phase-side terminal clamping:
B = Ø 8
C = Ø 10
D = Ø 12

Length of phase cables : XXX
Ex : 008 = 0,8m (standard)
010 = 1m

Phase cable cross-section:
16 to 150 mm²



All other compositions available on request.

PIMT

EARTHING AND SHORT-CIRCUITING
SYSTEM FOR MV SUBSTATIONS

STANDARDS

IEC 61230

/ TECHNICAL SPECIFICATIONS

Standard composition :

- A set of 3 identical clamps with AP end fitting (other end fittings on request): MT535, MT525, MT516 or MT416.
- A TRIFURCATION kit : set of extra flexible sheathed copper jumper cables with sealed cable lugs, connected by a junction block.
- Short-circuit cable length : 0,8 m.
- Earth cable length : 2 m.
- An earth clamp : NB8
- A telescopic insulating stick : TR245APV



PIMT49S.SP

EARTHING AND SHORT-CIRCUITING
DEVICE FOR CELLS MC500, FLUAIR
24G AND 24F

/ TECHNICAL SPECIFICATIONS


Composition :

PIMT49S

- 3 clamps MT25AP1
- 1 earthing clamp NB8
- 1 trifurcation T70008C35020C
- 1 insulating stick TR245 APV
- 1 extracting hook CREXCO
- 1 case CM535

PIMT49SP

- 1 earthing clamp NB8
- 1 trifurcation T70008C35020C
- 1 insulating stick TR245 APV
- 1 case CM535



CORATRIF

COMPLETE EARTHING
AND SHORT-CIRCUITING DEVICE

STANDARDS

IEC 61230

/ USE

For fixed ball points, diameters 20 and 25 mm, flat and cylindrical bars. Suitable for fitting E240 lug barrels.

/ TECHNICAL SPECIFICATIONS

Composition :

- 1 TRIFURCATION as defined in the table
- 3 NBD25AP phase clamps (hexagonal end fittings, 12 mm)
- 1 NBD25M earthing clamp (with ergonomic handle)
- 1 insulating stick TR245APV
- 1 metal storage case CM535



ONBAL

EARTHING AND SHORT-CIRCUITING DEVICE FOR BALL
FIXPOINT

STANDARDS

IEC 61230

/ USE

Vise clamp specially designed for earthing fixed ball points.

/ TECHNICAL SPECIFICATIONS

Standard composition:

- One set of 3 identical pliers with tip: PFBD25
- Clamping capacity :
 - Ball fixed point: Ø 20 and 25 mm
 - Max. short-circuit current :
 - 23 kA/1s on ball Ø 20 mm
 - 31.5 kA/0.5s on ball Ø 25 mm
- 1 TRIFURCATION : extra-flexible sheathed copper cable assembly fitted with watertight lugs and connected by a terminal block
- 1 earth clamp
- 1 telescopic insulating pole
- 1 cover or metal storage box



PIMTRGB

EARTHING DEVICE FOR RGB ABB STATION, 25 KA/1S

STANDARDS

IEC 61230


/ TECHNICAL SPECIFICATIONS

Max Isc : 25kA/1s

Composition :

- 1 insulated 36kV switching pole ref: PIRGB consisting of a 1.15m IEC 61235-S insulating tube fitted with a bayonet connector
- 1 trifurcation made up of :
 - 3 phases in copper cable, cross-section 95mm², each 1m long
 - 1 copper earth cable, cross-section 50mm², length 0.5m, fitted with a terminal with a 12 mm diameter at the end for connecting the clamp of your choice.
- 3 RGB connectors to screw onto the RGB box.
- 1 carrying case for the pole ref : HIP120PA.
- 1 carrying case for earthing ref: HMAIT.

Other compositions and/or trifurcations on request.

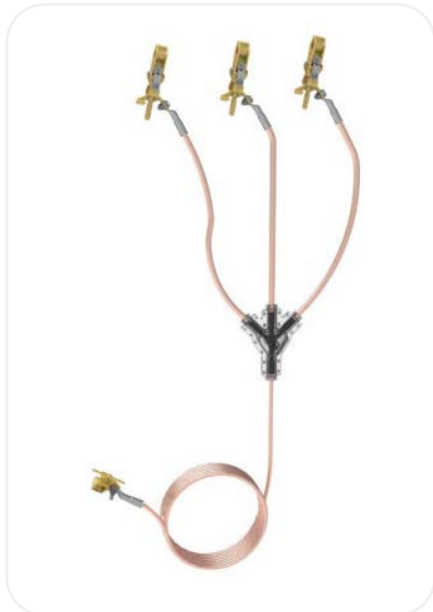

EMT550APT70005-020NB8C (DMT55APT70SF)

EARTHING AND SHORT-CIRCUITING DEVICE, 18 kA/1 s

/ USE

Device designed for short-circuiting and earthing distribution substations.

/ TECHNICAL SPECIFICATIONS

- Maximum short-circuit current (Isc max): 18 kA/1 s
- Composition:
 - 1 three-branch connection (T70008C35020C): copper cables with extra-flexible insulation, fitted with sealed lugs and connected through a junction block.
 - Short-circuit cable length: 0.8 m
 - Short-circuit cable cross-section: 70 mm²
 - Earth cable length: 2 m
 - Earth cable cross-section: 35 mm²
- 3 phase clamps MT550AP (AP terminal)
 - Clamping capacity: Round bar: Ø5 to 50 mm
 - Flat bar: 0 to 50 mm
- 1 earth clamp NBB:
 - Clamping capacity: Round bar: Ø6 to 30 mm
 - Flat bar: 0 to 25 mm
 - Hexagon: 19 mm
- 1 metal storage case: CM535PA
- Total weight: 12 kg
- Overall dimensions: 910×260×105 mm



SMACE

EARTHING AND SHORT-CIRCUITING (E&S) SYSTEM
 WITH PADLOCK INTERLOCK FOR EARTH CLAMP

/ USE

- Protection and securing of installations during the following operations:
 - Lockout / isolation: prevents installation of the earthing and short-circuiting device (E&S / MALT/CC) by locking the earth clamp, ensuring compliance with the disconnector opening requirement.
 - Lockout / isolation: imposes removal of the earthing and short-circuiting device (E&S / MALT/CC) before the disconnector can be re-closed.
- Impossible to issue a work permit / authorization before removal of the earth clamp and the earthing and short-circuiting device (E&S / MALT/CC).
- The SMACE solution by FAMECA is compatible with all low-voltage or medium-voltage earthing and short-circuiting devices (E&S / MALT/CC) already in service, by substituting the earth clamp.
- The earth clamp is then interlocked using a lockout padlock, with a single unique and proprietary key.

/ TECHNICAL SPECIFICATIONS

- Composition
 - Earth clamp SAHB202AM:
 - Max. short-circuit withstand current (Isc): 31.5 kA / 1 s
 - Suitable for low-voltage and high-voltage terminations
 - Maximum earth cable cross-section: 120 mm²
- Clamping capacity
 - On ball terminals: Ø 20 and 25 mm
 - On flat bar: up to 25 mm



AMT50

EARTHING AND SHORT-CIRCUIT DEVICE FOR MV SUBSTATIONS
 AND ELECTRICAL STATIONS WITH UNIVERSAL CONTACT CLAMPS

STANDARDS

IEC 61230 / IEC 61138

/ USE

- n°3 Aluminium universal contact clamp, tested for high currents. CH12 hexagonal shank, for insertion on EF-type shank, and steel clamping screw protected with antioxidant galvanic treatment.

Clamping capacity:

- cylindrical conductors diameter 5 - 40 mm;
- flat bars 40 x 60 mm;
- Board bars 12 x 60 mm;
- 45° inclined bars up to 28 mm.
- n°3 extra-flexible short-circuit cables made of electrolytic copper coated with a transparent sheath, for connection between the clamps and the central connector. Cross-section 70 mm², length 0.75 m, complete at the ends with tinned electrolytic copper cable lugs and additional transparent heat shrink tubing reinforcement.
- Three-pin connector.
- Earth cable, length 2 m.
- Earth clamp, clamping capacity up to 22 mm.
- Insulation strap made of glass-fibre reinforced vinylester resin tubing for operating contact clamps, length 1.35 m in two elements with quick-connect fitting.
- Sturdy canvas bag for containing and transporting the device and foil.



MT50-CAB

EARTHING AND SHORT-CIRCUIT DEVICE MV

STANDARDS

IEC 61230 / IEC 61138

/ USE

- Isc Max (short-circuit current) : 13,6 kA/0.3s
- Short-circuit intensity : 11,6 kA/0.5s
- Short-circuit intensities : 8,2 kA/1

Reference	Conductor type	Cable material	Cable isolation type	Phase cable nber	Vise clamping capacity	Phase(s) cable cross-section	Phase(s) cable length	Cross -section	Earthing Clamp
MT50-CAB	Ball, Round, Flat	Copper	Silicone	3	0÷35 mm	35 mm ²	0.8m	16 mm ²	MT40F



MT100-CAB

EARTHING AND SHORT-CIRCUIT DEVICE FOR MV SYSTEMS IN BARE CONDUCTORS OF SECONDARY SUBSTATIONS MV

STANDARDS

IEC 61230 / IEC 61138

/ USE

Earthing and short-circuit device for mt systems in bare conductors of secondary substations MV

Reference	Clamp tightening	Cable material	Cable isolation type	Phase cable nber	Phase(s) cable cross-section	Phase(s) cable length	Cross -section	Floor cable length	In line (aerial)
MT100-CAB	3÷18 mm	Copper	Silicone	3	35 mm ²	4 m	16 mm ²	2 m	Bare



DMTPC

SHORT-CIRCUITING AND EARTHING DEVICE FOR SUBSTATIONS WITH PLUG-IN TYPE BUSHINGS

STANDARDS

IEC 61230

/ USE

Earthing and short-circuiting device for 250 amp sockets ref. DMTPC250 and 400 amp consisting of:

- 1 trifurcation with 3 x 70 mm² short-circuiting cables, length 0,8 m and 1 earthing cable, length 2 m, ref. T70008C35020C

- 3 x 250A or 400A earth studs with their locking system (metal stirrup)
- 3 lockout-tagout padlocks
- an earth clamp ref. NB8


The kit is delivered in a carrying bag.

Set of 3 insulating rest studs and its padlock lockout system. Allows the cable disconnected from the transformer to be re-energised:

- for 250A - 24kV sockets ref. PRPC250
- for 400A - 24kV sockets ref. PRPC400
- 400A - 24kV lockout-tagout system with 3 insulating caps, and its padlock lockout system : ref. DCPC400

/ TECHNICAL SPECIFICATIONS

Isc Max : 12,5 kA/1s

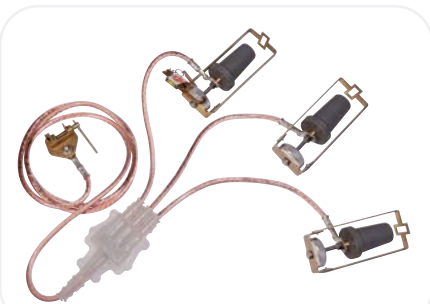

Reference	Description	Dimensions	Weight
DMTPC250	Short-circuiting and earthing for substations with plug-in type bushings 250A	600 x 250 x 200 mm	8 kg
PRPC250	Set of 3 insulating rest studs for MV substation connectors 250A	400 x 300 x 100 mm	3 kg
DMTPC400	Short-circuiting and earthing for substations with plug-in type bushings 400A	600 x 250 x 200 mm	10,5 kg
PRPC400	Set of 3 insulating rest studs for MV substation connectors 400A	400 x 300 x 100 mm	5 kg
DCPC400	Set of 3 lockout-tagout devices for MV transformer plug 400A		4,5 kg



EARTHING AND SHORT-CIRCUITING MEDIUM VOLTAGE DISTRIBUTION SUBSTATION



WIG250

DEVICE FOR EARTHING, SHORT-CIRCUITING AND EQUIPOTENTIALITY MV

STANDARDS

IEC 61230 / IEC 61138

/ USE

Mobile device for earthing, short-circuiting and equipotentiality of branch junctions for single-pole disconnectable external cone terminals, with 250 a contact plug (interface "a") for overhead mt lines ($8 \div 24$ kv) in cable.

/ TECHNICAL SPECIFICATIONS

- Short-circuit intensity : 14.4kA/0.3s

Reference	Clamp material	Cable isolation type	Phase cable nbr	Phase(s) cable cross-section	Phase(s) cable length	Cross -section	Floor cable lenght	In line (aerial)	Way of access	From the floor
WIG250	Copper	Silicone	3	35 mm ²	0,8 m	35 mm ²	14 m	Isolated	From the floor	Columns



WIT400

MOBILE DEVICE FOR EARTHING, SHORT-CIRCUITING AND EQUIPOTENTIALITY OF DISCONNECTABLE SINGLE-POLE "T" TERMINALS AND SHUNTS, WITH 400 / 630 A CONTACT PLUG OF OVERHEAD CABLE LINES MV

STANDARDS

IEC 61230 / IEC 61138

/ TECHNICAL SPECIFICATIONS

- Isc Max (short-circuit current) : 13.6 kA/0.3s
- Short-circuit intensity : 11.6 kA/0.5s
- Short-circuit intensity : 8.2 kA/1s



Reference	Clamp material	Cable isolation type	Phase cable nbr	Phase(s) cable cross-section	Phase(s) cable length	Cross -section	Floor cable lenght	In line (aerial)	Way of access	From the floor
WIT400	Copper	Silicone	6	35 mm ²	2 m	16 mm ²	14 m	Isolated	From the floor	Columns





CONFIGURE YOUR EARTHING & SHORT-CIRCUITING SYSTEMS FOR MEDIUM VOLTAGE

CONFIGURATION AND DEFINITION OF EARTHING CABLES

SUBSTATION

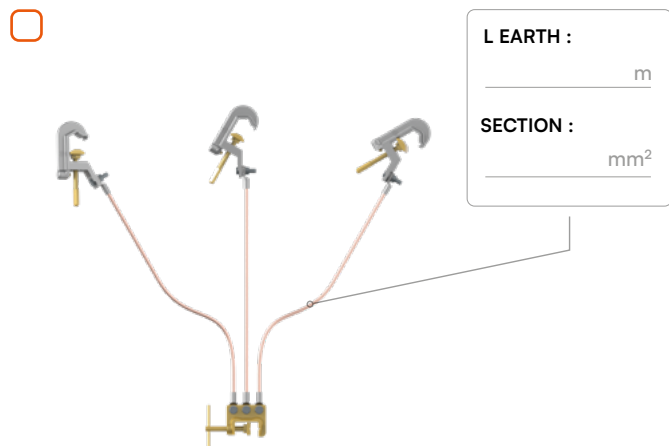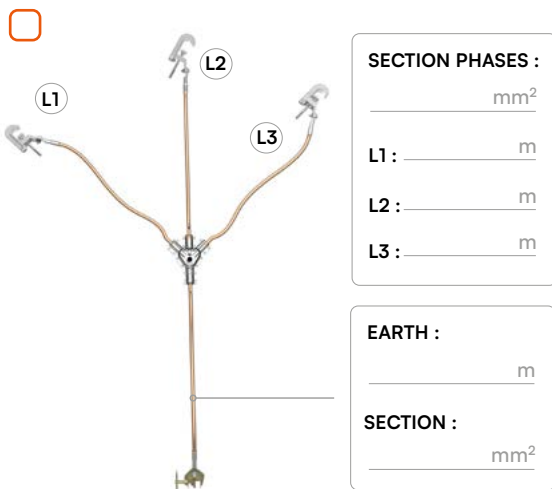

OVERHEAD LINES

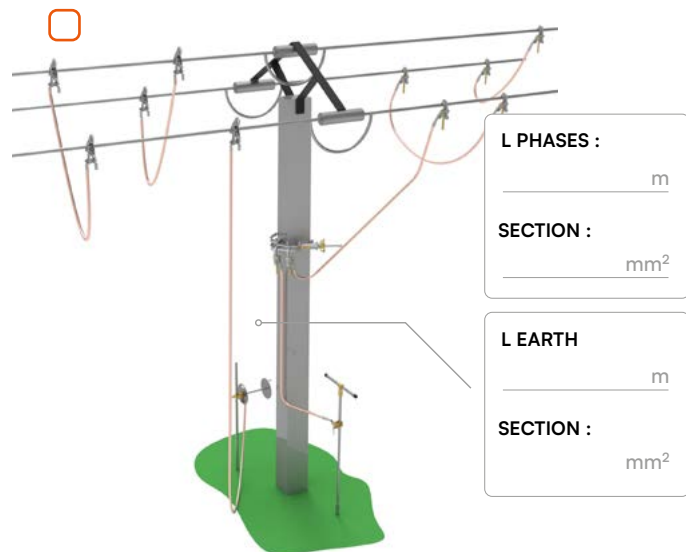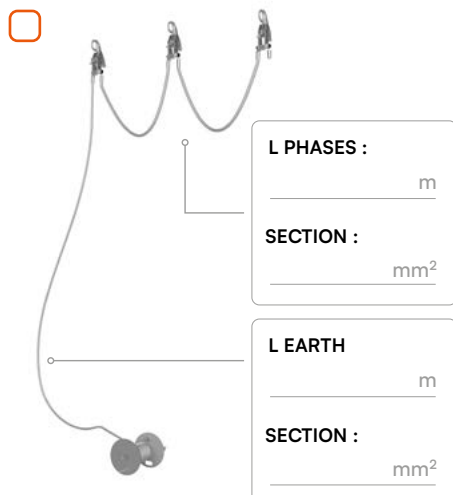



EARTHING AND SHORT-CIRCUITING MEDIUM VOLTAGE

TYPE OF CONDUCTOR

Diameter,
thickness,
section...

Phase




Earth




END FITTING TYPE CLAMP & POLE

/ TRANSPORT

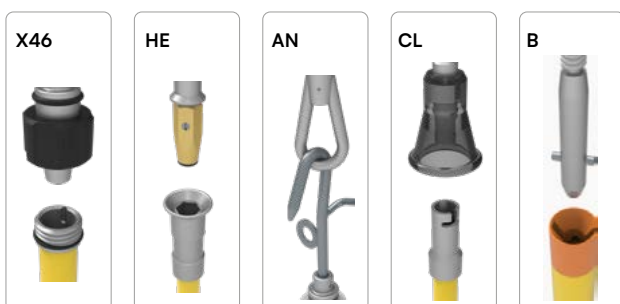

/ DISTRIBUTION

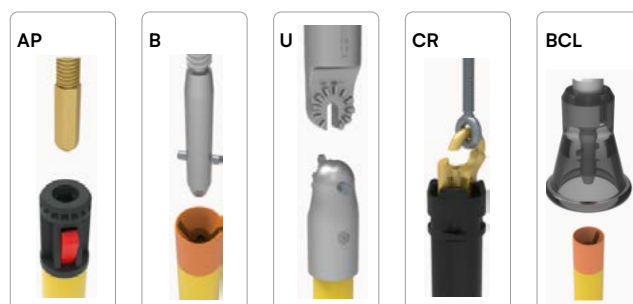

CABLE TYPE

/ MATERIAL

☐ COPPER



☐ ALUMINIUM



/ TYPE OF COVER

☐ PVC

(-25°C to + 55°C)

☐ SILICONE

(-40°C to + 70°C)

MAX ISC

This information must be known by the customer who operates the network. If not, it is necessary to know the S-C power (MVA) of the source and the voltage of the network (kV).

ISC :



QUANTITY

CUSTOMER'S NAME



CONFIGURE YOUR EARTHING & SHORT-CIRCUITING SYSTEMS FOR MEDIUM VOLTAGE

CHOICE OF CONFIGURATION

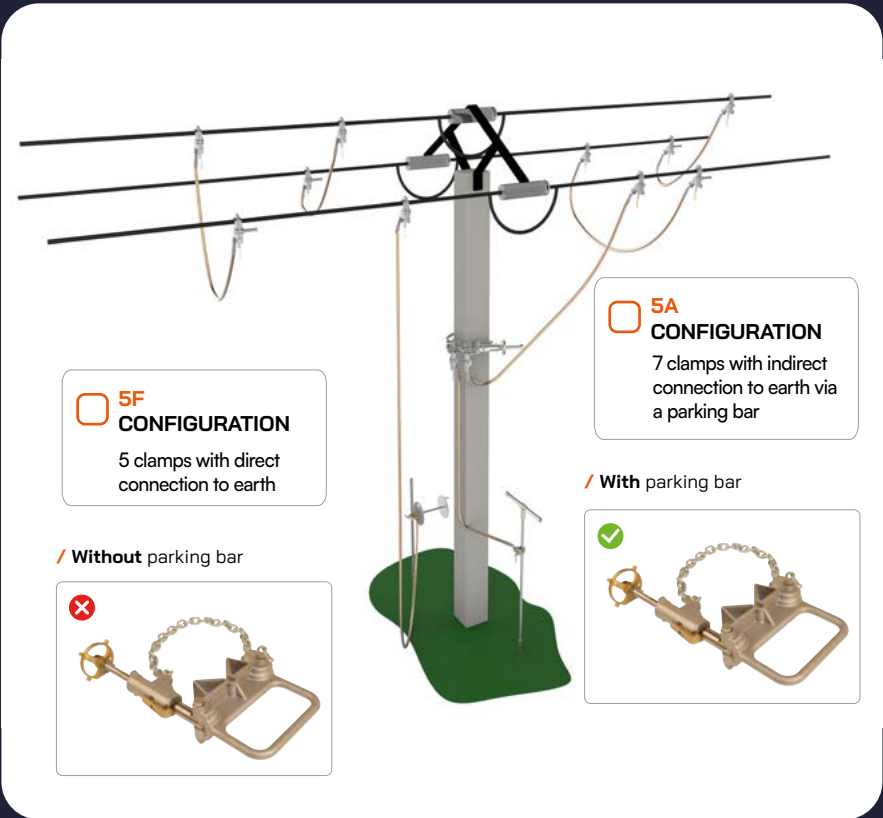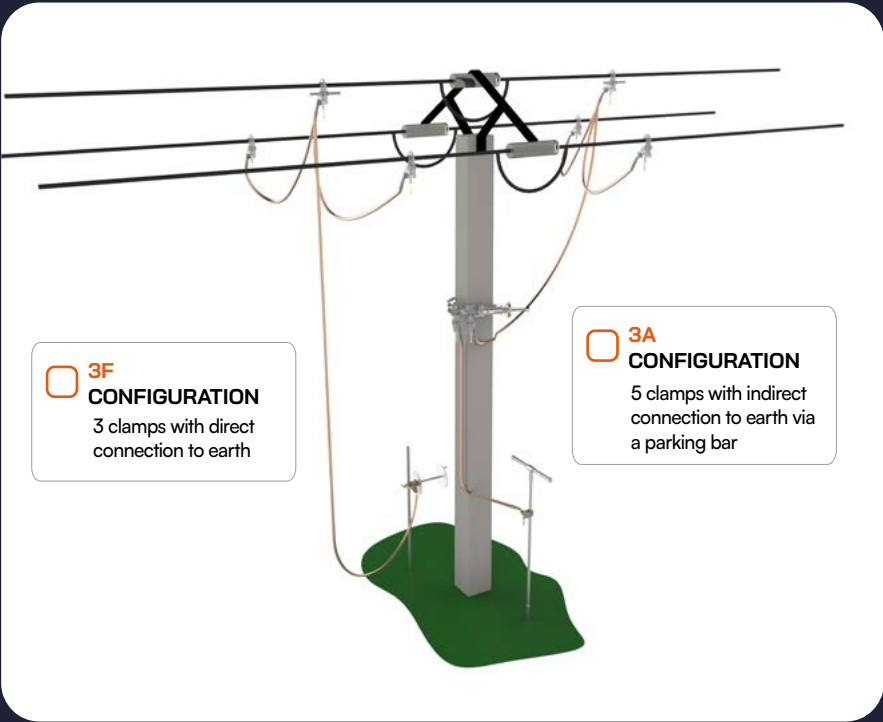

CLAMP

MT535URU



DBC332



CONNECTOR TYPE

AP



B



CR






EARTHING AND SHORT-CIRCUITING MEDIUM VOLTAGE


/ 3F OR 3A CONFIGURATION

SHORT-CIRCUIT CABLE LENGHT

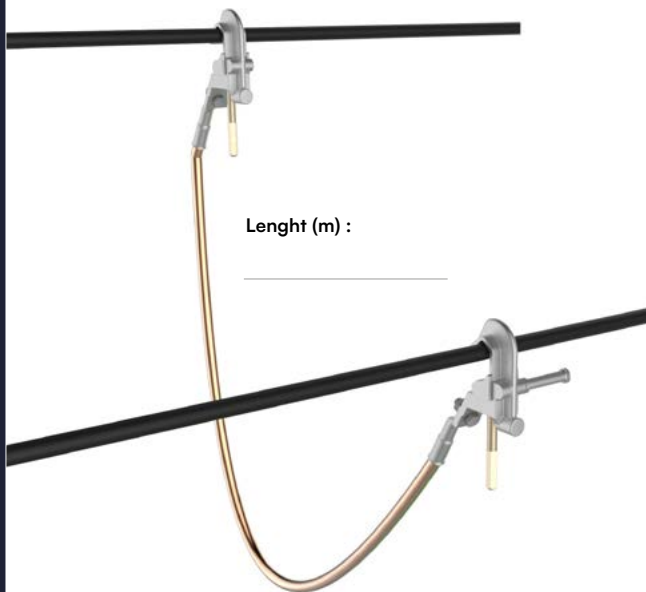


/ 5F OR 5A CONFIGURATION


CABLE LENGTH BETWEEN PHASE AND PARKING BAR

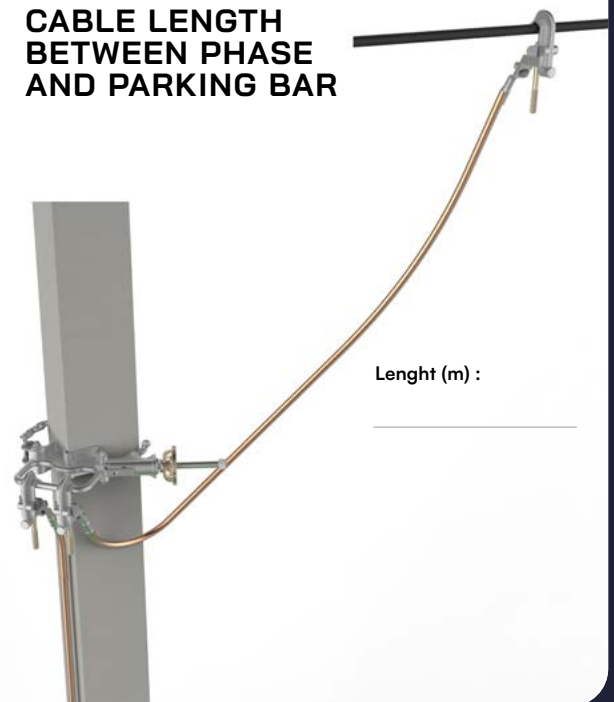

EARTH CABLE LENGHT

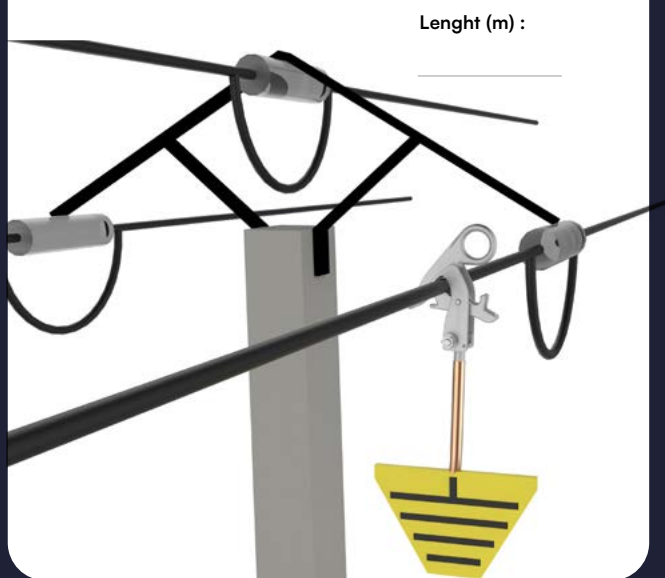

CABLE LENGTH BETWEEN PARKING BAR AND EARTH

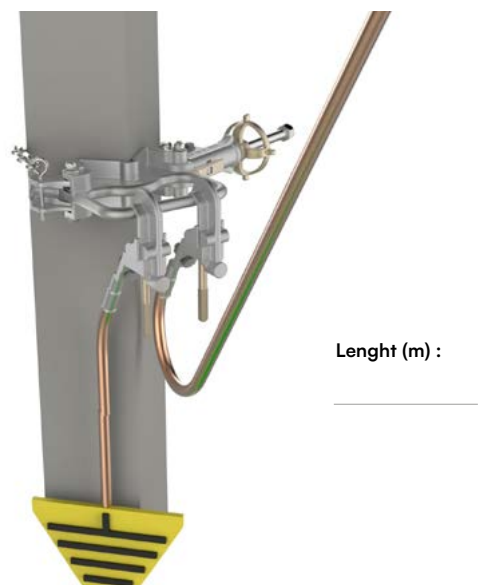

CABLE TYPE

☐ COPPER



☐ ALUMINIUM



TYPE OF COVER

☐ PVC extra flexible



☐ Silicone







ISC ACCORDING TO SECTION

Max. Isc	Copper cable	Aluminium cable
6,5 kA/1s 9,5 kA/0,5s	25 mm ²	50 mm ²
8 kA/1s 13 kA/0,5s	35 mm ²	70 mm ²
13 kA/1s 18,5 kA/0,5s	50 mm ²	95 mm ²
18,5 kA/1s 25 kA/0,5s	70 mm ²	120 mm ²
25 kA/1s	95 mm ²	165 mm ²

EARTH CLAMP TYPE



EARTHING ROD



INSULATING POLE (SEE PREVIOUS POLES CHAPTER)



Pole :

EXAMPLE OF COMPOSITION

/ 3F CONFIGURATION

Ref. with clamp MT535URU	Max. Isc	Clamps	Connector	S/C cables length	Type of S/C cable	Lg of earth wire	Earth lathe	Case	Earthing rod	Pole	Pole storage bag
DMT535URUB601	6,5 kA/1s - 9,5 kA/0,5s	1 x MT535URU2 2 x MT535URU	B	2,5 m	Copper	15 m	T702	SEG-OX20	701	PPOL2/020B	HTR1100
DMT535URUAP6AL01	8 kA/1s - 13 kA/0,5s		AP		Aluminium					PPOL2/020AP	
DMT535URUB1301	13 kA/1s - 18,5 kA/0,5s		B		Copper					PPOL2/020B	
DMT535URUAP18AL01	18,5 kA/1s - 25 kA/0,5s		AP		Aluminium					PPOL2/020APV	
DMT535URUCR2501	25 kA/1s		CR		Copper		T702GM			PCT200SJ	H2P200H

For other compositions, please contact us.

/ 5A CONFIGURATION

Ref. with clamp MT535URUDBC332 and parking bar	Max. Isc	Clamps	Connector	S/C cables length	Type of S/C cable	Lg of cables from par- king bar	Lg of earth cable	Earth clamp	Case	Earthing rod	Pole	Pole storage bag
DMT535URUB601	6,5 kA/1s - 9,5 kA/0,5s	2 x MT535URU1 2 x MT535URU	CR	2 m	Copper	4 m	12 m	3 x NB8	SEG-OX20	PTT130	PCT260SJ	H2P260H HPTT130
DMT535URUAP6AL01	8 kA/1s - 13 kA/0,5s	1 x MT535URU2 2 x MT535URU						3 x NB8	SEG-OX20	PTT130	PCT260SJ	H2P260H HPTT130
DMT535URUB1301	13 kA/1s - 18,5 kA/0,5s							3 x NB8	SEG-OX20	PTT130	PCT260SJ	H2P260H HPTT130
DMT535URUAP18AL01	18,5 kA/1s - 25 kA/0,5s							3 x NB8	SEG-OX20	PTT130	PCT260SJ	H2P260H HPTT130
DMT535URUCR2501	25 kA/1s							3 x NB8	SEG-OX20	PTT130	PCT260SJ	H2P260H HPTT130

For other compositions, please contact us.



LWA455PB

EQUIPOTENTIALITY PARKING BAR ON POST

STANDARDS

IEC 61230



/ USE

Earthing and short-circuiting of overhead lines with equipotential bonding of the work area.

/ TECHNICAL SPECIFICATIONS

The LWA455PB parking bar consists of :

- an SPPB aluminium post bracket for the connection of earthing clamps,
- a CTPB tensioning device (aluminium body and shaft treated steel) enabling the parking bar to be pre-positioned on the post, then tightened using the bronze VPB wheel.
- a steel fastening chain treated against corrosion and fixed onto the post bracket,
- an aluminium fastener fixed onto the post bracket to hold the fastening chain.

Spare parts	Description
SPPB	Post bracket with M8 screws
ECTPB	Tensioning device with screws for fastening the chain
CPB900	Fastening chain with safety pin
NPB	Fastener for mounting on the post bracket (with M8 screws)
VPB	Bronze wheel for arming bar
LAPB	Arming latch with spring and fastening pin

Reference	Dimensions	Weight
LWA455PB	460 x 170 x 80 mm	3,5 kg





NEVERS

EARTHING AND SHORT-CIRCUITING DEVICE
FROM THE EARTH FOR BARE MV OVERHEAD LINES

STANDARDS

IEC 61230

- For work from the ground to heights up to 11.5 m.



/ USE

The Nevers device enables a single lineman to :

- do no-voltage testing operations,
 - earth and short-circuit overhead lines at heights up to 11.50 m.
- On bare MV overhead lines from the earth.

/ TECHNICAL SPECIFICATIONS

- Max. allowable Isc : 8 kA/1s
- Clamping range on cylindrical conductors from 3 to 22 mm in diameter (7 to 380 mm²)
- Telescopic metal sticks fitted with collars for quick, calibrated clamping, with integrated cleaning rings, 3-section foam-cored fibreglass insulating sticks, type IEC 60855, with reinforced slot-in joints,
- Optional insulating extension to reach 11.5 m,
- Fit the no-voltage tester to the bottom of the metalstick before earthing,
- Equipment for use with TAG200 or TAG2000 no-voltage detectors (detector not supplied),
- Removable clamp and stick bottom

/ Options

Reference	Description
NE12	Prehension piece NE10
NE18ER	Complementary extension for insulating stick, to be placed between NE18 and NE19
NE38	Gripper fitting PA 4
NE14	Automatic clamp
NE22	Empty cable reel
NE25	1 set of 3 earth braids, 35 mm ² - length: 10 m
NE27	Metal sticks maintenance kit (TK 1)
NE28	Insulating sticks maintenance kit (TK 2)



NE21ALU



NE21

PA3GTI

/ 3 elements

Reference	Description
PA3GTI	Complete set of equipment with 3-section metal sticks

/ This product contains

Reference	Description
NE10	3-section telescopic metal sticks Lenght folded 2.20 m / Lenght unfolded 5.45 m
NE17E	Upper section of insulating stick
NE18E	Lower section of insulating stick
NE19E	Lower insulating stick extension, length 1,6 m
NE20	Guide socket
NE21	Cable reel with 3 x 10 m of copper braid, 35 mm ² and an earthing clamp
NE24	Soft plastic-coated canvas cover
701	Hexagonal earthing rod 1 m Ø 18 mm

PA4GTI

/ 4 elements

Reference	Description
PA4GTI	Complete set of equipment with 4-section metal sticks

/ This product contains

Reference	Description
NE11	4-section telescopic metal sticks Lenght folded 1.64 m / Lenght unfolded 4.85 m
NE17E	Upper section of insulating stick
NE18E	Lower section of insulating stick
NE19E	Lower insulating stick extension, length 1,6 m
NE20	Guide socket
NE21	Cable reel with 3 x 10 m of copper braid, 35 mm ² and an earthing clamp
701	Hexagonal earthing rod 1 m Ø 18 mm
NE24	Soft plastic-coated canvas cover
NE23	Stick lifter rod



GWIRE

SHORT-CIRCUITING AND EARTHING DEVICE
FROM THE GROUND WITH INSULATING CORD

STANDARDS

IEC 61230 / IEC 62192

- Easy to use on all types of terrain without climbing.
- Automatic spring clamp, no need for manual tightening.
- Earthing up to 12m high from the ground without weight strain for the user.



 PATENTED

/ USE


The clamp is placed and unhooked from the ground using an insulating rope passed over the conductor.
The clamp is positioned on the conductor by pulling on the 1st rope.
The clamp is unhooked by pulling on the 2nd rope.
The rope is passed over the conductor using atelescopic stick equipped with a smart hook.

/ TECHNICAL SPECIFICATIONS

Spring clamps for Ø3 to Ø32mm conductors

The device contains :

- 3 PAC332SC clamps
- 1 earth clamp N3B8
- 3 x 15 m of 50 mm² copper cable
- 3 x 25 m of insulating rope (DI06CEI25M),
- 1 tray to support the clamps after arming and before installation (this accessory allows not to touch any metal part during the installation of the 3 clamps)
- 1 hexagonal earth spike (701)
- 1 telescopic insulating stick (PPOL8/105USC) for GWIR8HP and GWIR13HP only
- 1 dropover hook for passing the rope over the conductor.

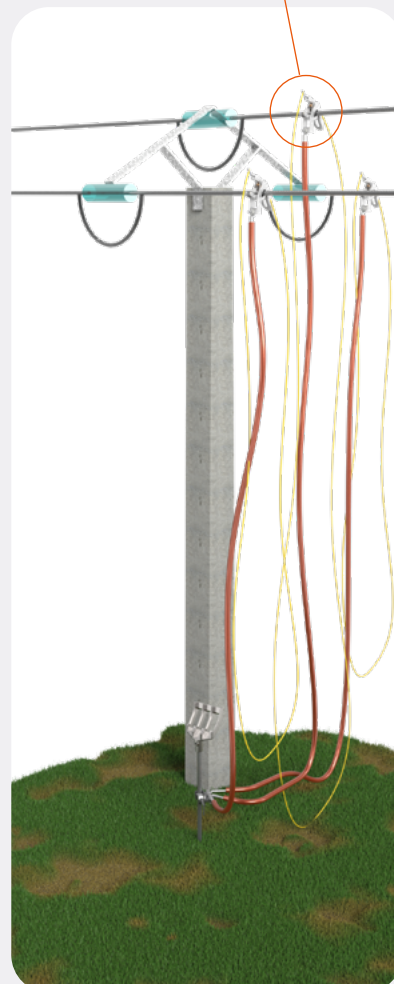

Reference	Max Isc	Version	Packaging
GWIR8HN	8 kA/1s	With insulating stick	Bag containing cables, clamps and accessories
GWIR8HP		Without insulating stick	Bag containing cables, clamps and accessories + 1 cover for the stick and the rod
GWIR13HN	13 kA/1s	Without insulating stick	Bag containing cables, clamps and accessories
GWIR13HP		With insulating stick	Bag containing cables, clamps and accessories + 1 cover for the stick and the rod
GWIRE18HN	18 kA/1s	With insulating stick	Bag containing cables, clamps and accessories + 1 cover for the stick and the rod
GWIRE18HP		Without insulating stick	Bag containing cables, clamps and accessories



- The stackable or “piggy-back” design of the GDC325 removes the need for bulky standard clamp holders and can accommodate 2, 3, 4 or 5 clamps. Weight of one line clamp: 0,560 kg
- Ergonomics: all the clamps are in line, making it easier to adjust the position of the device on the cable.
- Patented clamp locking system
- The upper surface of the clamp nose is lined up with the jaw of the clamp above it. Each clamp facilitates the installation of the next clamp up on the cable.
- The clamps are retrieved using the removal hook fixed onto the clamp holder adapter.



AUTOCLAM

EARTHING AND SHORT-CIRCUITING DEVICE
WITH SPRING CLAMPS FOR OVERHEAD LINES

STANDARDS

IEC 61230

/ USE

Three-phase (or more) device for short-circuiting and earthing bare overhead lines, with an allowable short-circuit current of 8 kA/1 s to 17.5kA/1s. Function : earthing for overhead lines with 2 to 5 conductors.

/ TECHNICAL SPECIFICATIONS

The device is composed of :

- 3 clamps GDC24
- 3 short-circuiting cables
- 1 earthing cable
- 1 earthing clamp

According to models, the device can also be equipped with an insulating stick with soft cover, an earthing rod and a transport case.

Clamp GDC325
Ø3- 32mm

Max Isc 18kA/1s
0,560 kg

GDC24
0.560kg

GDC21
0.600kg



• Standard models :

- Short-circuit cables : 35 mm², 2.75 m
- Earth cable : 16 mm², 16 m
- Clamp holder GDC24 equipped with a universal endfitting.
- This allows the angle to be adjusted, facilitating installation from the pole.
- Isc : 8 kA/1s.
- The short-circuit cable can be aluminium instead of copper (please enquire).

Reference	Short-circuit cable cross-section	Short-circuit cable length	Earthing cable length	Earth clamp	Storage case	Insulating pole	Pole cover	Earth rod
AUTOCLAM8T	35 mm ²	2.75	16 m	T702*		no		
AUTOCLAM8TC					TD386	PPOL2/020UE	HTR11100	701
AUTOCLAM8N				NB8		no		
AUTOCLAM8NC					TD386	PPOL2/020UE	HTR11100	701

* Reel with an earth clamp attached.
All compositions possible on request with Isc from 8 to 18 kA/1s with all components at choice.



T702

REEL EQUIPPED WITH AN EARTH CLAMP

STANDARDS

IEC 61230

/ USE

The reel is used to store the earthing cable. The earthing clamp permanently mounted on the reel makes the connection between the cable and the earthing rod (type 701 or PTT130).

This reel is mounted on complete earthing and short-circuiting devices EY322 and AUTOCLAM.

/ TECHNICAL SPECIFICATIONS

- Made of steel treated against corrosion.
- T702 : standard empty reel (without cable).
- Can store up to 16 m of 25 mm² cable.
- Weight : 1.8 kg
- T702G : large reel (without cable).
- Can store up to 25 m of 16 mm² cable or 16 m of 35 mm² cable.
- Weight : 2.5 kg

Reference	Description
T7021616	Reel ref T702 with 16 m of 16 mm ² cable
T7022516	Reel ref T702 with 16 m of 25 mm ² cable
T702G2516	Large reel, ref T702G, with 16 m of 25 mm ² cable
T702G3516	Large reel, ref T702G, with 16 m of 35 mm ² cable



EARTHING AND SHORT-CIRCUITING MEDIUM VOLTAGE OVERHEAD LINE

EY322 RANGE

EARTHING AND SHORT-CIRCUITING DEVICE
WITH SPRING CLAMPS FOR OVERHEAD LINES

STANDARDS

IEC 61230

- Lightweight: also available with aluminium short-circuiting cable.
- Robust.
- Fast and easy to use: smooth installation and large eyelet for easy removal.
- High clamping capacity: $\varnothing$ 3 to 32 mm.
- Max. Isc up to 18ka/1s.
- Adjustable to suit all field configurations.



/ USE

The EY322 short-circuiting and earthing device is intended for bare overhead distribution networks (MV). It can be installed from the support, from a platform or from the ground (in the tray 2 version).

An aluminium clamp-holder plate supports the 3 clamps.

A version with tray 4 and 2 clamps is also available.

The tray is equipped with a hook for the removal of the clamps.

Generally, it is equipped with an AP (12 mm hexagon) for adaptation to sticks equipped with an APV end fitting.

Also available with a U end fitting (Universal).

Other end fittings available on request.

/ TECHNICAL SPECIFICATIONS

The standard equipment consists of :

- 3 clamps connected by 2 short-circuit cables
- 2 x 2.75 m copper or aluminium short-circuit cables
- 1 reel T7021616 with integrated earth clamp and 16m of copper cable
- 1 tray or clamp holder equipped with an APV endfitting and a hook for extracting the installed clamps,
- 1 earth rod 701, length 1 m,
- 1 x 2-section telescopic insulating stick , unfolded length of 2m.

The set is packaged in :

- 1 metal box TD386
- 1 waterproof canvas case HTR11100 containing the pole and earth rod.

Model EY322NG

Basic version with MT330N clamps. Pre-arming of the clamp then placing on the plate of the armed clamp. Spring on the plate allowing the locking of the clamp on it. Automatic release of the plate and closing of the clamp when placed on the conductor.

Model EY322NFC

Version with MT330NFC clamps equipped with a locking latch. Pre-arming of the clamp directly on the plate with locking of the clamp on it. Automatic closing and releasing of the clamp from the plate when placed on the conductor by unlocking the latch.



EY322NG


STANDARDS

IEC 61230

/ USE

Basic version with MT330N clamps. Pre-arming of the clamp and then placing it on the plate of the armed clamp. Locking spring on the plate allowing the clamp to be locked on the plate. Release of the plate and automatic closing of the clamp when placed on the conductor.

Reference	Max. Isc	Short-circuit cable cross-section	Short-circuit cable length	Type of short-circuit cables	Earthing cable length	Earth clamp	Earthing storage	Insulating pole	Insulating pole storage	Earth rod
EY3222NG6	6.5kA/1s - 9.5kA/0,5s	25mm ²	2,75 m	Copper	16m	T702	TD386	PPOL2 /O20 APV	HTR11100	701
EY3222NG	8kA/1s - 13kA/0,5s	35mm ²								
EY3222NG13	13kA/1s - 18,5kA/0,5s	50mm ²								
EY3222NG18	18kA/1s	70mm ²								
EY3222NG6xx	6.5kA/1s - 9.5kA/0,5s	25mm ²	At choice	Copper or alu	At choice	T702 or NB8	At choice			
EY3222NG8xx	8kA/1s - 13kA/0,5s	35mm ²								
EY3222NG13xx	13kA/1s - 18,5kA/0,5s	50mm ²								
EY3222NG18xx	18kA/1s	70mm ²								

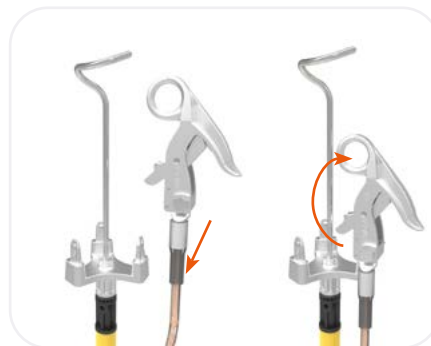

EY322NFC

STANDARDS

IEC 61230

/ USE

Lock-in version with MT330NFC clamps equipped with a locking latch. Pre-arming of the clamp directly on the plate with locking of the clamp on it. Automatic closing and releasing of the clamp from the plate when placed on the conductor by unlocking the latch.

Reference	Max. Isc	Short-circuit cable cross-section	Short-circuit cable length	Type of short-circuit cables	Earthing cable length	Earth clamp	Earthing storage	Insulating pole	Insulating pole storage	Earth rod
EY3222NFC6	6.5kA/1s - 9.5kA/0,5s	25mm ²	2.75 m	Copper	16 m	T702	TD386	PPOL2 /O20 APV	HTR111100	701
EY3222NFC	8kA/1s - 13kA/0,5s	35mm ²								
EY3222NFC13	13kA/1s - 18,5kA/0,5s	50mm ²								
EY3222NFC18	18kA/1s	70mm ²								
EY3222NFC6xx	6.5kA/1s - 9.5kA/0,5s	25mm ²	At choice	Copper or alu	At choice	T702 or NB8	At choice			
EY3222NFC8xx	8kA/1s - 13kA/0,5s	35mm ²								
EY3222NFC13xx	13kA/1s - 18,5kA/0,5s	50mm ²								
EY3222NFC18xx	18kA/1s	70mm ²								



EARTHING AND SHORT-CIRCUITING MEDIUM VOLTAGE



WI332

EARTHING AND SHORT-CIRCUITING DEVICES MV

STANDARDS

IEC 61230 / IEC 61138

/ TECHNICAL SPECIFICATIONS

- Isc Max (short-circuit current) : 13.6 kA/0.3s
- Short-circuit intensity : 11.6 kA/0.5s
- Short-circuit intensity : 8.2 kA/1s

Reference	Clamp tightening	Conductor type	Conductor diameter	Cable material	Cable isolation type	Phase cable nbr	Phase(s) cable cross-section	Phase(s) cable length	Cross-section	Floor cable length	Way of access
WI332	3÷32 mm	Round	3÷32	Copper	Silicone	2	35 mm ²	2.5 m	16 mm ²	16 m	From the floor



BMT100-LINE

EARTHING, SHORT-CIRCUIT AND EQUIPOTENTIALITY DEVICE MV

STANDARDS

IEC 61230 / IEC 61138

/ USE

Device for earthing and short-circuiting and equipotentiality of mt terminals in the transition from overhead MV lines in bare conductors to MV lines in cable

- No. 1 light alloy pliers with spring clamping $\varnothing$ 3÷20 mm
- No. 3 swivel light alloy pliers with DIN hexagonal shank screw clamping with socket:
- $\varnothing$ 3÷18 mm on cylindrical conductors
- Max thickness 60x12 mm on flat bars
- No. 1 DIN operating head
- No. 1 gripper holder plate
- No. 1 stainless steel recovery hook
- No. 2 copper cables sect. 16 mm² L=4 m covered in silicone sheathing
- No. 2 copper cables sect. 25 mm² L=2 m covered in silicone sheathing
- No. 1 insulating foil in 2 elements L= 1m + 0.6 m (total length 1.6 m) that can be assembled with simplex joint complete with nylon cloth bag
- no. 1 collet holder stafa

Reference	Clamp tightening	Conductor type	Cable isolation type	Phase cable number	Phases cable cross-section	Phases cable length	Cross-section	Floor cable length	Isc Max	Short-circuit intensity	Short-circuit intensity
BMT100-LINE	3/20 mm	Round, Flat	Silicone	2	25 mm ²	2 m	16 m ²	4 m	11.1 kA/0.3s	8.8 kA/0.5s	6.2 kA/1s



BMT18-CAB

EARTHING AND SHORT-CIRCUITING DEVICE

STANDARDS

IEC 61230 / IEC 61138

/ USE

Earthing and shorting device for mt systems in bare conductors of mt/bt secondary substations - cylindrical conductors

- No. 3 light alloy pliers with spring clamping $\varnothing$ 3÷20 mm
- No. 1 pliers holder head with recovery hook
- No. 2 copper cables sect. 35 mm² L=2 m covered in silicone sheathing
- No. 1 copper ground cable sect. 16 mm² L=6 m covered with silicone sheath
- No. 1 light alloy self-milling ground clamp with screw clamping thickness 0÷40 mm
- No. 1 insulating foil L=2.2 m in two joinable parts with carrying bag and female quick couple

Reference	Clamp tightening	Conductor type	Cable isolation type	Phase cable number	Vise clamping capacity	Phases cable cross-section	Phases cable length	Cross-section	Floor cable length	Isc Max	Short-circuit intensity	Short-circuit intensity
BMT18-CAB	3/20 mm	Round	Silicone	2	0/40	35 mm ²	2 m	16 m ²	6 m	13.6	11.6 kA/0.5s	8.2 kA/1s



BMT18-LINE

EARTHING AND SHORT-CIRCUITING DEVICE OVERHEAD LINES

STANDARDS

IEC 61230 / IEC 61138

/ USE

- Earthing and shorting device for overhead lines in bare conductors spring clamps $\varnothing$ 3÷20 mm
- No. 4 light alloy pliers with spring clamping $\varnothing$ 3÷20 mm
- No. 1 pliers holder head with recovery hook
- No. 2 copper cables sect. 35 mm² L=2 m covered in silicone sheathing
- No. 1 copper ground cable sect. 16 mm² L=14 m covered in silicone sheathing
- No. 1 winder
- No. 2 earth electrodes connected with copper cable sect. 16 mm² L=6 m covered in silicone sheathing
- No. 1 insulating foil L=3.4 m in 3 joinable parts with carrying bag
- No. 1 sheet metal container for storing and transporting the device

Reference	Clamp tightening	Conductor type	Cable isolation type	Phase cable number	Phases cable cross-section	Phases cable length	Cross-section	Floor cable length	Isc Max	Short-circuit intensity	Short-circuit intensity
BMT18-LINE	3/20 mm	Round	Silicone	2	35 mm ²	2 m	16 m ²	14 m	13.6 kA/0.3s	11.6 kA/0.5s	8.2 kA/1s



MOBY22

MOBILE UNINTERRUPTIBLE POWER SUPPLY DEVICE FOR MV OVERHEAD LINES IN BARE CONDUCTORS

/ USE

Mobile uninterruptible power supply device for MV overhead lines in bare conductors

Reference	Clamp tightening	Conductor type	Conductor diameter	Cable material	Cable isolation type	Phase cable nbr	Phase(s) cable cross-section	Phase(s) cable length	In line (aerial)	Weight
MOBY22	3÷20 mm	Round	3÷20	Copper	Silicone	2	16 mm ²	6 m	Bare	10 kg



ROLLER20

MOBILE GROUND DEVICE

/ USE

Mobile ground device for stringing and repairing MV overhead lines

Reference	Clamp material	Cable material	Cable isolation type	Cross-section	Floor cable length	In line (aerial)	Short-circuit intensity
ROLLER20	Aluminium	Copper	Silicone	16 mm ²	5m	Isolated	6



EARTHING AND SHORT-CIRCUITING

MEDIUM VOLTAGE

EARTH RODS

Better contact with the ground :
bigger surface and contact pressure
with the ground.



PTT130

SCREW-IN EARTH ROD

STANDARDS

IEC 61230

/ TECHNICAL SPECIFICATIONS

- Made of copper-plated steel, diameter 17 mm, with bronze screw and sliding operating lever.
- Designed to receive earthing device clamps (T702, T702G, NB8, N3B8, NBD25,...)

Reference	Dimensions	Weight	Optional case
PTT100	1 002 x 405 x 30 mm	3.00 kg	HPTT100
PTT130	1 302 x 405 x 30 mm	3.44 kg	HPTT130

For other dimensions, please contact us.



- Ref. 701AIL : A fin at the tip prevents the rod rotating once in the ground.
- Ref. 701M : a weight on top of the rod allows to easily remove the rod from the ground.

701

HEXAGONAL EARTH ROD

STANDARDS

IEC 61230

/ USE

Designed to receive earthing device clamps (T702, T702G, NB8, N3B8, NBD25 ...).

/ TECHNICAL SPECIFICATIONS

Manufactured in rust-proof galvanised steel.

Reference	Length	Weight	Diameter
701	106 cm	2,46 kg	22 mm
701AIL		2,50 kg	
701M		4 kg	



ISPI

1000V INSULATING HANDLE FOR EARTH RODS

/ USE

Product allowing the installation of marker posts or earth rods in complete safety, compatible with rods type 701.

/ TECHNICAL SPECIFICATIONS

Made of insulating material resistant to a voltage of 17 kV.
Opening diameter for rods up to 24 mm diameter.
Steel anvil Ø 40mm (on request anvil made of non conductive material).
Distance between the 2 protective guards : 130 mm.
Profile of the guards limiting the «rolling effect».
Hole of 6 mm diameter allowing the passage of a strap.

Reference	Dimensions	Weight
ISPI	Ø 130 x 160 mm	540 g



Lightweight

HMALT

CARRYING BAG FOR EARTHING DEVICE

/ TECHNICAL SPECIFICATIONS

Very sturdy, equipped with 4 handles, label holder on the outside and A4 document holder window on the inside.

Reference	Dimensions	Weight
HMALT	600 x 250 x 200 mm	980 g
PHMALT	350 x 260 x 140 mm	420 g



HMALTROUL

CARRYING BAG FOR EARTHING DEVICE

/ TECHNICAL SPECIFICATIONS

Very robust, equipped with 4 handles, an external label holder and an internal window for A4 documents.

Reference	Dimensions	Weight
HMALTROUL	500 x 450 x 250 mm	1 kg



CM535

CARRYING CASE FOR EARTHING DEVICE

Reference	Dimensions	Weight
CM535	910 x 240 x 105 mm	6.34 kg



TD386

CARRYING CASE FOR EARTHING DEVICE

Reference	Dimensions	Weight
TD386PM	590 x 300 x 145 mm	3,9 kg
TD386	640 x 240 x 160 mm	4,2 kg
TD386GM	800 x 300 x 200 mm	6,5 kg

HIGH VOLTAGE RANGE



High voltage substation





High voltage overhead lines



High voltage overhead lines



CONFIGURE YOUR EARTHING SYSTEMS FOR HIGH VOLTAGE

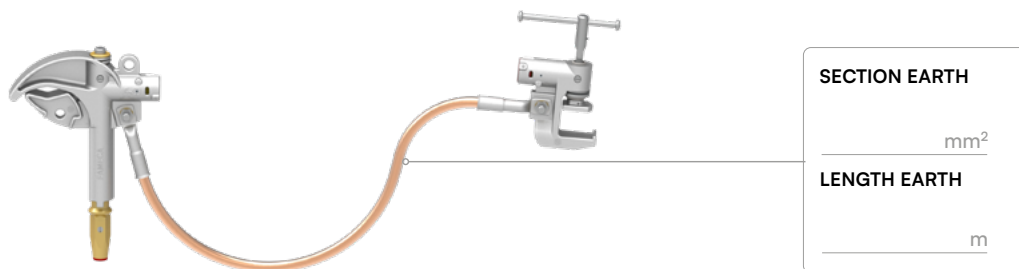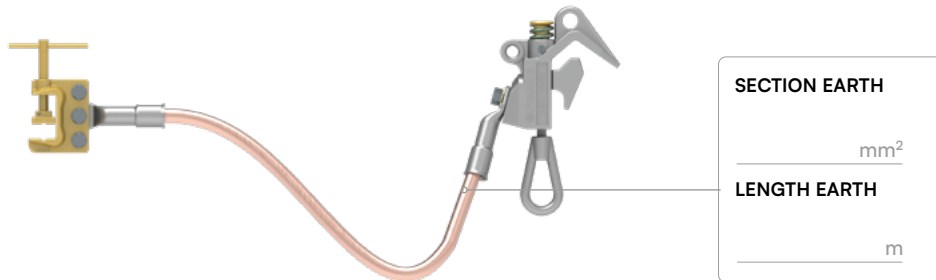

DEVICE CODING CONFIGURATOR

EHT
EHTS

SA3
540
S15

B
HE
X

95

020
XX
XXX

GTS
N3B

H
C

Packaging:
H = soft case
C = metal case

Earth clamp code:
GTS = GTE25COS
N3B = N3B8

Length of earth cables:
Example:
010 = 1 m
020 = 2 m
100 = 10 m

Earth cable cross-section: mm²

End fitting:
B = bayonet
HE = hexagonal
X = without termination

Phase clamp code
SA3 = SA342
540 = S540
S15 = S1560

EHT = High-voltage set with PVC cable
EHTS = High-voltage set with silicone cable



SELECTION GUIDE

REGULAR DEVICES

	CLAMPS							
	LINE			SUBSTATION				
Code	540	S15	HT1	S20	SF2	E20	ATL	
								
	 Ø 5-40 mm	 Ø 15-60 mm	 Ø 10-80 mm	 Ø 20-120 mm	 Ø 120-220 mm	 Ø 10-70 mm	 Ø 14-70 mm	
Clamping capacity (mm)						 • Flat bar: up to 100 mm • Vertical busbar: 30x100 mm • Horizontal busbar: 60x100mm	 • Flat bar: up to 20-110 mm • Inclined bar: 50x120 mm	
							 Sphere: Ø 25 mm	
Isc max	31,5 kA/1s	40 kA/1s	40 kA/1s	40 kA/1s	40 kA/1s	31,5 kA/1s	31,5 kA/0,5s	
Material	Alu	Alu	Alu	Alu	Alu	Alu	Alu	
Connection hole	Ø 12 mm	Ø 12 mm	M12	Ø 12 mm	Ø 12 mm	Ø 12 mm	Ø 12 mm	
Closed clamp dimensions	120 x 52 x 230 mm	150 x 52 x 280 mm	150 x 45 x 280 mm	220 x 170 x 40 mm	245 x 55 x 400 mm	250 x 210 x100 mm	260 x 290 x 90 mm	
Weight	1,4 kg	1,4 kg	1,3 kg	1,6 kg	3,7 kg	2,15 kg	1,35 kg	


/ CHOICE OF END FITTING FOR CLAMPS

(to be added at the end of the selected reference)

			
HE	AN	B	X46



EARTH CLAMPS				
LINE	SUBSTATION			
GTS	NBC	NB3	N3B	
				
GTE25COS	NBCRTTS	NB33S	N3B8	
				
0-25 mm	0-33mm	0-33mm	0-30mm	
			 Sphere: Ø 19 mm	
40 kA/1s	40 kA/1s	31,5 kA/1s	31,5 kA/1s	
Alu	Cupro - Alu	Cupro - Alu	Cupro - Alu	
M12	Ø 12 mm	Ø 12 mm	Ø 10 mm	
170 x 100 x 60 mm	120 x 110 x 35 mm	120 x 110 x 35 mm	40 x 72 x 130 mm	
1,6 kg	1,1 kg	1,1 kg	0,75 kg	

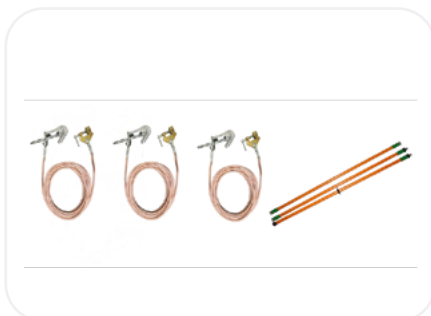

WI560SA-D-95

EARTHING AND SHORT-CIRCUITING DEVICE


STANDARDS

IEC 61230 / IEC 61138

/ TECHNICAL SPECIFICATIONS

- Isc Max (short-circuit current) : 40.4kA/0.3s
- Short-circuit intensity : 35.6 kA/0.5s
- Short-circuit intensity : 25.2 kA/1s

Reference	Clamp material	Clamp tightening	Conductor type	Cable material	Cable isolation type	Phase cable nbr	Vise clamping capacity	Phase(s) cable cross-section	Phase(s) cable length
WI560SA-D-95	Brass	5÷60 mm	Round	Copper	Silicone	3	Up to 40 mm	95 mm ²	9 m

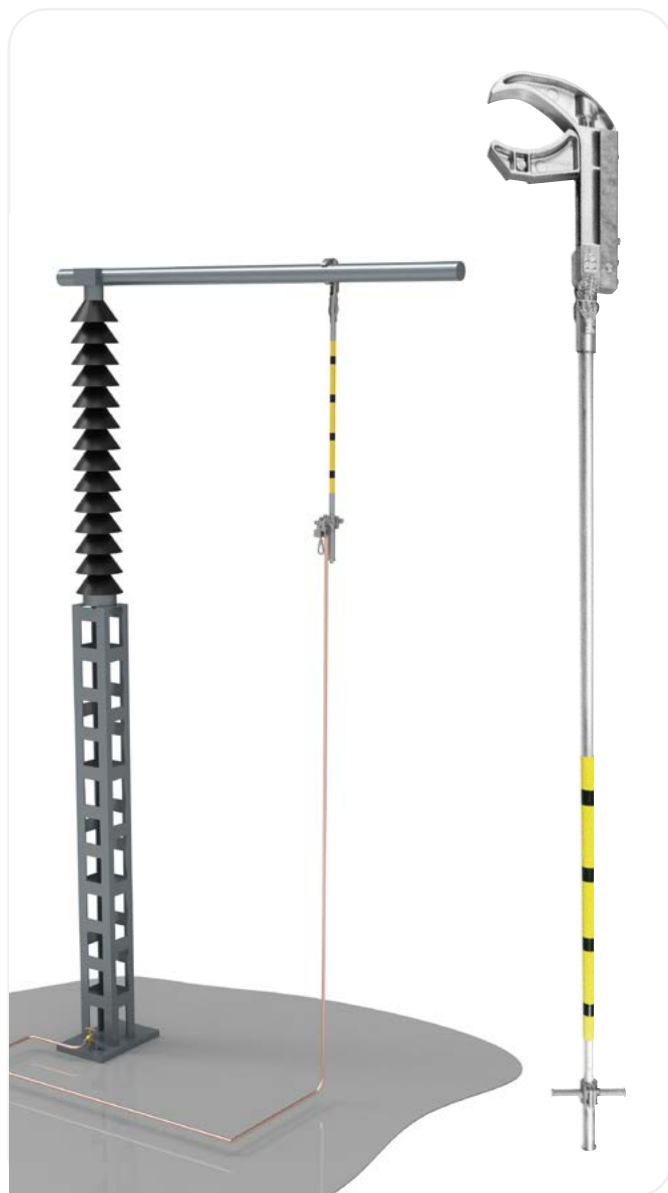

Clamp
CHC31_60



Clamp
CHC31_120



Clamp
CHC31_220



Clamp
CHC31_20120

CHC31

INTERMEDIATE EARTHING STICK FOR CONNECTIONS
AT GREAT HEIGHT, MAX I_{sc} 31,5 KA/1S

STANDARDS

IEC 61230

/ USE

Intermediate sticks for connections at heights are used to relieve the operator by bringing the earthing point 3 or 4 metres lower, which facilitates the various operations :

- checking for the absence of the nominal voltage,
 - placing and clamping the aluminium stick on the conductor using the insulating stick,
 - releasing the operating stick,
 - placing the flexible earthing device between the earthing point and the earth bar,
 - repeating the operation for each phase,
 - carrying out the same operation in reverse order for removal.
- The CHC31 conductor pole must be installed using :
- either specific CHI31 type dedicated insulating pole
 - or an RTTE type insulating stick equipped with an ERTTECH end fitting

These sticks are made of IEC 60855 type foam-filled tubes, colour orange. It is strongly recommended that they be checked regularly.

/ TECHNICAL SPECIFICATIONS

Aluminium tube Ø 31/35, cross-section 207 mm², with a special light alloy contact clamp with an elastic conductor clamping system fitted at the top.

- Clamping ranges Ø 10 to 60 mm, Ø 20 to 120 mm, Ø 70 to 120 mm or 120 to 220 mm (depending on head type).
 - The electrical contact between the line clamp and the conductor stick is made directly between the clamp and the aluminium tube as well as by 2 tin-plated copper flexible braids.
- The clamp is tightened on the conductor using the lower insulated section, with the male end fitting engaged in the female end fitting.
- The bottom of the Ø 35 tube includes two Ø 30 aluminium earth studs designed to take earth clamps, type S540, S1560 for example.

Reference	Tightening capacity	Length	Weight	Cover
CHC3120060	Ø 10-60 mm	2 m	5 kg	H2P33ORTE
CHC31200120	Ø 70-120 mm		5,2 kg	
CHC3120020120	Ø 20-120 mm		5,3 kg	
CHC3130060	Ø 10-60 mm	3 m	5,6 kg	
CHC31300120	Ø 70-120 mm		5,8 kg	
CHC3130020120	Ø 20-120 mm		5,9 kg	
CHC31300220	Ø 120-220 mm		10,8 kg	
CHC3140060	Ø 10-60 mm	4 m	6,2 kg	H2P45ORTE
CHC31400120	Ø 70-120 mm		6,4 kg	
CHC3140020120	Ø 20-120 mm		6,5 kg	
CHC31400220	Ø 120-220 mm		11 kg	
CHC31500120	Ø 70-120 mm	5 m	11,6 kg	/



To be used with an end fitted HE34 PRE pole.



SMAPE (SMart Portable Earth)

EARTHING SYSTEM WITH INTERLOCKING BETWEEN THE LINE CLAMP AND THE EARTH CLAMP

STANDARDS

IEC 61230

- 100% secure (PATENTED).
- Lightweight and compact device.
- Easy to handle, sturdy earth clamp.

/ USE

This unique concept is based on a mechanism that allows a choice between a conventional or magnetic key without power. In the magnetic version without key insertion, the opening is achieved a key with a magnetic code that activates the moving parts of the cylinder without any mechanical contact. The entire coded module located in the cylinder is coated and completely sealed. This new version is adapted to extreme situations, corrosion, sand, humidity, frost, vandalism...

 PATENTED




Classic key



Magnetic key

- Strong key that protects you.
- Automatic checking that the clamp is tight enough.
- Ergonomic design, easy to use.

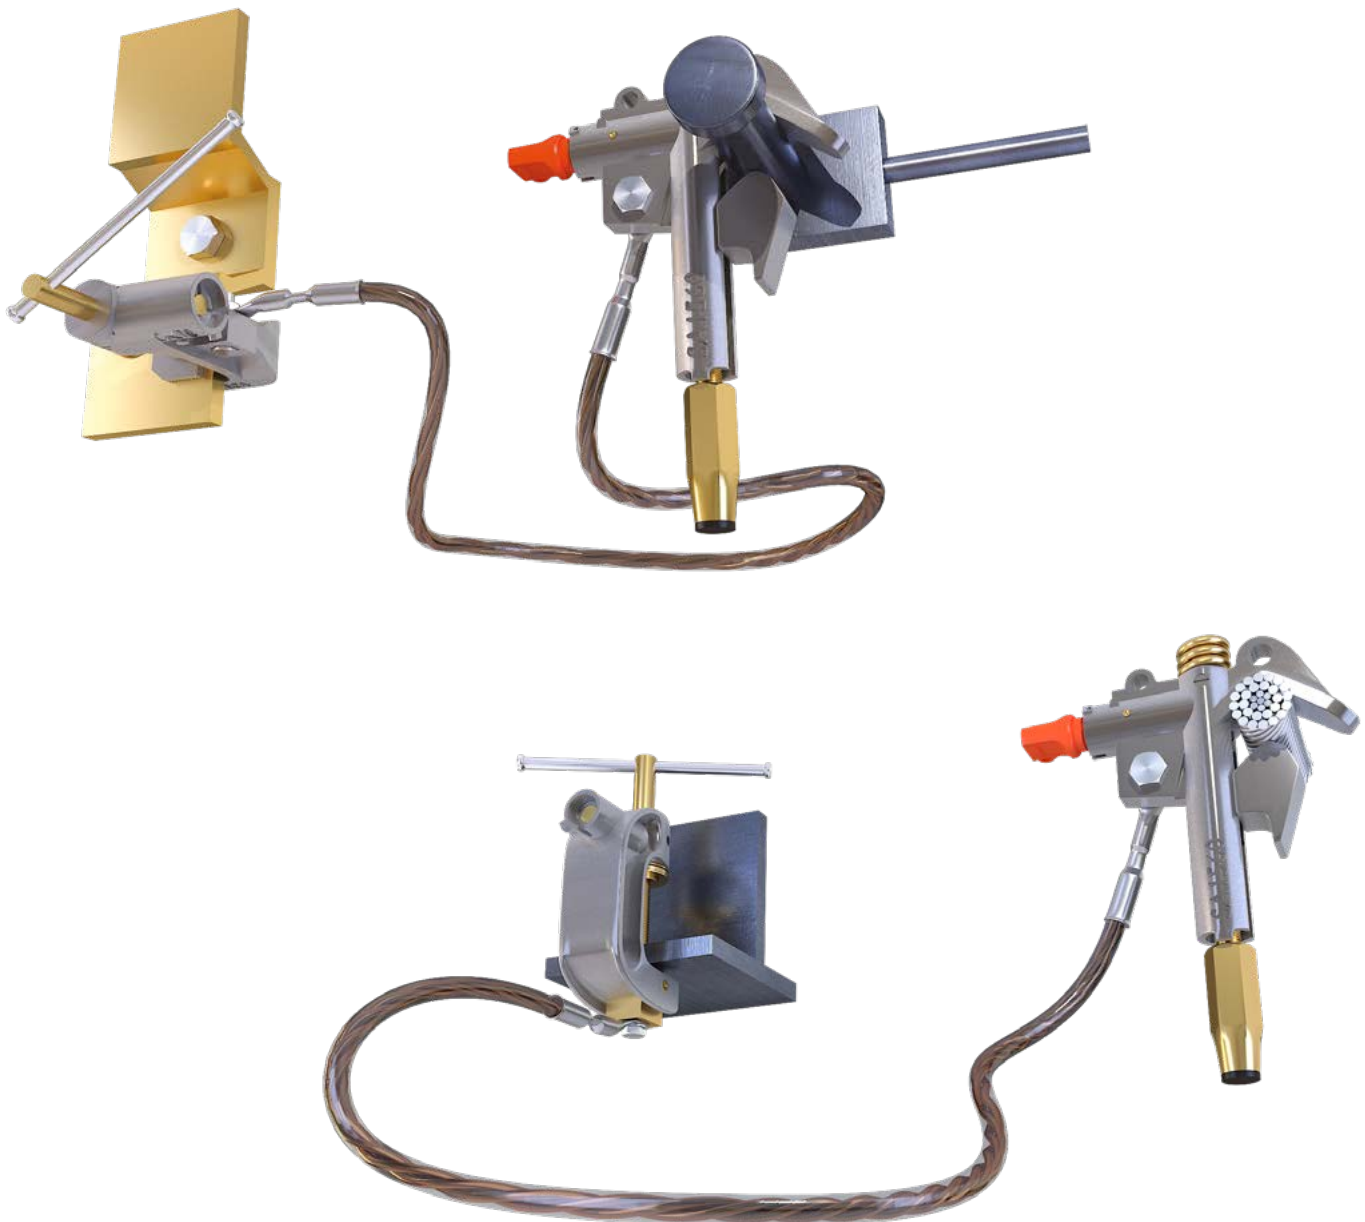



SELECTION GUIDE


INTERLOCK DEVICE (SMAPE)

Code	INTERLOCK PHASE CLAMPS						
	LINE				LINE + SUBSTA- TION	SUBSTATION	
	P0	P7	P3	P6	P1	P2	P4
							
	SA342	SMA342	SAP1060	SAE200	SA1560	SAP20120	SAF220
Clamping capacity (mm)	 Ø 3-42 mm	 Ø 3-42 mm	 Ø 10-60 mm	 Ø 10-70 mm	 Ø 5-60 mm	 Ø 20-120 mm	 Ø 120-200 mm
	 5 mm	 5 mm		 Flat bar: up to 100 mm Vertical busbar: 30x100 mm Horizontal busbar: 60x100mm			
Isc max	40 kA/1s	31,5 kA/1s	31,5 kA/1s	31,5 kA/1s	40 kA/1s	40 kA/1s	40 kA/1s
Material	Alu	Alu	Alu	Alu	Alu	Alu	Alu
Connection hole	Ø 12 mm	Ø 12 mm	Ø 12 mm	Ø 12 mm	Ø 12 mm	Ø 12 mm	Ø 12 mm
Closed clamp dimensions	215 x 180 x 60 mm	280 x 255 x 300 mm	225 x 150 x 50 mm	225 x 255 x 72 mm	200 x 225 x 80 mm	245 x 220 x 40 mm	360 x 280 x 55 mm
Weight	1,2 kg	2,2 kg	1,3 kg	2,2 kg	1,3 kg	1,6 kg	3,2 kg



EARTHING AND SHORT-CIRCUITING HIGH VOLTAGE SUBSTATION AND OVERHEAD LINES



INTERLOCK EARTH CLAMPS					
	LINE + SUBSTATION	LINE + SUBSTATION	LINE + SUBSTATION	LINE + SUBSTATION	LINE + SUBSTATION
P5	GT	N3	NC	NB	
					
SANB2025	SAGTE25	SANB33S	SANBCRTTS	SANBE2025	
 Ø 25mm				 Ø 30 mm	
	 40 mm	 35 mm	 30 mm		
 Sphere: Ø 25 mm				 Sphere: Ø 20-25 mm	
31,5 kA/1s	40 kA/1s	40 kA/1s	40 kA/1s and 63 kA/0,5s	40 kA/1s	
Alu	Alu	Alu	Alu	Alu	
M12	M12	Ø 12 mm	Ø 12 mm	Ø 12 mm	
175 x 135 x 40 mm	190 x 230 x 50 mm	165 x 180 x 40 mm	165 x 180 x 40 mm	165 x 180 x 40 mm	
0,75kg	1,8 kg	1,2 kg	1,2 kg	1,2 kg	

/ CHOICE OF TERMINATIONS FOR CLAMPS

(to be added at the end of the selected reference)

				
HE	AN	B	X46	AP



SMAPE (SMart Portable Earth)


REFERENCES: SETS – 1 CLAMP / EARTH CLAMP PAIR, WITHOUT CABLE, WITH ONE KEY PER PAIR

	Ref.		Clamp		Earth clamp	Clamp end fitting type
						
	Classic	Magnetic				
SUBSTATION	S1P1HNC	MA	SA1560			HE
	S1P1BNC	MA				B
	S1P1XNC	MA				X46
	S1P2HNC	MA	SAP20120			HE
	S1P2BNC	MA				B
	S1P2XNC	MA				X46
	S1P4HNC	MA	SAF220			HE
	S1P4BNC	MA				B
	S1P4XNC	MA				X46
	S1P1HN3	MA	SA1560			HE
	S1P2HN3	MA	SAP20120			
	S1P4HN3	MA	SAF220			
SUBSTATION PIC/PIGME	S1P5VNC	MA	SANB2025			AP
	S1P5HNC	MA				HE
	S1P5BNC	MA				B
	S1P5VNB	MA			AP	
	S1P5HNB	MA			HE	
	S1P5BNB	MA			B	
LINE	S1P0AGT	MA	SA342		AN	
	S1POXGT	MA			X46	
	S1P0BGT	MA			B	
	S1P0HGT	MA			HE	
	S1P1AGT	MA	SA1560		AN	
	S1P1XGT	MA			X46	
	S1P1BGT	MA			B	
	S1P1HGT	MA			HE	
	S1P3AGT	MA	SAP1060		AN	
	S1P3BGT	MA			B	
	S1P3HGT	MA			HE	
	S1P7AGT	MA	SMA342			AN / HE / B



REFERENCES: SETS – 3 CLAMP / EARTH CLAMP PAIRS, WITHOUT CABLE, WITH ONE KEY PER PAIR

	Ref.	Earth clamp	Clamp	Clamp end fitting type
	single item			
LINE	S1POAGTMA	SAGTE25 	SA342 	AN 
	S1POXGTMA			X46 
	S1POHGTMA			HE 
	S1P1AGTMA		SA1560 	AN 
	S1P1XGTMA			X46 
	S1P1HGTMA			HE 
	S1P3AGTMA		SAP1060 	AN 
	S1P3HGTMA			HE 
	S1P3XGTMA			X46 
SUBSTATION	S1P1HNCMA	SANBCRTTS 	SA1560 	HE 
	S1P2HNCMA		SAP20120 	HE 
	S1P2XNCMA			CL 
	S1P4HNCMA		SAF220 	HE 
	S1P4XNCMA			X46 
	S1P6HNCMA		SAE220 	HE 
SUBSTATION PIC/PIGME	S1P5VNCMA	SANBCRTTS 	SANB2025 	AP 
	S1P5HNCMA			HE 
	S1P5BNCMA			B 

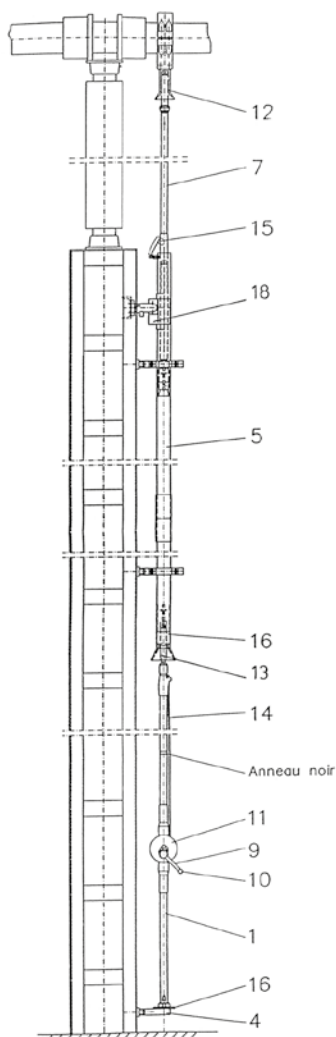

FIXED DEVICE

FIXED EARTHING ROD FOR HIGH BUSBAR SETS

STANDARDS

IEC 61230

/ USE

A proven solution for earthing high-voltage installations, which is also highly short-circuit resistant. Our earthing devices are widely used at EDF test facilities such as the high-power laboratory "Les Renardières". Offer subject to project study.

/ TECHNICAL SPECIFICATIONS

- Maximum admissible I_{sc}: 80 kA / 0.5 s (complete set)
- Complete set comprises:

1) Earthing pole (1), permanently installed

- Aluminium earthing pole, housed in a protective tube (5).
- The pole is equipped with a copper cable (3) for connection to the earthing network, with the cable end pressed against the inside wall of the pole and connected to the line conductor by means of the contact clamp (6).
- Length: approx. 4.25 m.

2) Contact clamp made of aluminium (18)

- Bolted onto a wall-mounted console; this assembly is intended to be permanently installed on the earthing network of the installation.

3) Protective tube (5)

- Aluminium tube with locking lug, used for guiding and fixing to the structure.
- Length: approx. 4.60 m.
- The tube houses the earthing pole as long as the installation is not earthed and short-circuited.
- Designed to remain permanently installed on the structure; fastened by two U-shaped fixings made of hot-dip galvanised steel.
- The indicated dimensions correspond to a 300 kV substation, for a height of approx. 12 m.

4) Base support in hot-dip galvanised steel (4)

- For a permanently installed operating pole intended to be mounted on the structure.
- This support is removable; it can be dismantled.
- Intended to facilitate the guidance of the operating pole.

5) Operating pole in fibreglass (1), in 3 telescopic sections with crank

- Used to raise and release the earthing pole.
- Overall length: approx. 7.60 m
- Transport length: approx. 3.80 m

6) Weight: 18 kg

7) Telescopic operating pole assembly includes:

- A safety handle with locking lug and removable handle (9–10).
- A simple planetary gear to facilitate operation of the handle (11).
- Synthetic traction straps with rollers to remove or reinstall the telescopic sections of the operating pole (14).
- Shock absorbers to prevent impacts between the different pole sections.
- A bayonet head made of steel with a torque limiter (13), entering into operation at the end of tightening and release of the earthing pole.
- An aluminium base comprising a tubular section with a bearing, used for centring on the base support and a crown ring (16) serving as an optional support point for retracting the pole.
- Reference marking and operating instructions, direction of operation and rotation of the operating pole, and a mark indicating the maximum extension limit of the telescopic pole in the form of a black ring.



SERPAT

AERIAL EARTHING LIFTING DEVICE

/ USE

The device helps the operator to lift the pole effortlessly, and makes it easier to install the earthing clamp on the phase for the operator. Its second function is to secure the operator, thanks to a carabiner that keeps the earthing clamp from falling if this one is not well installed.

/ TECHNICAL SPECIFICATIONS

It consist of:


- 1 Rotative clamp with 3 adapters for poles diameter 38 x 39 x 40mm
- 1 hook
- 1 Snatch block
- 1 Big size carabiner
- 2 Small size carabiner
- 1 Insulating rope of Ø8mm
- 1 Carrying bag (HSERPAT)



Snatch block



Hook

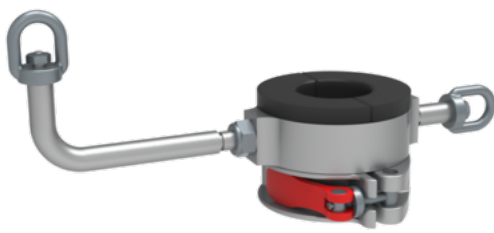

Rotative clamp



Insulating rope




Carabiner big size
for earthing cable



Carabiner small size
for lifting



Carrying bag

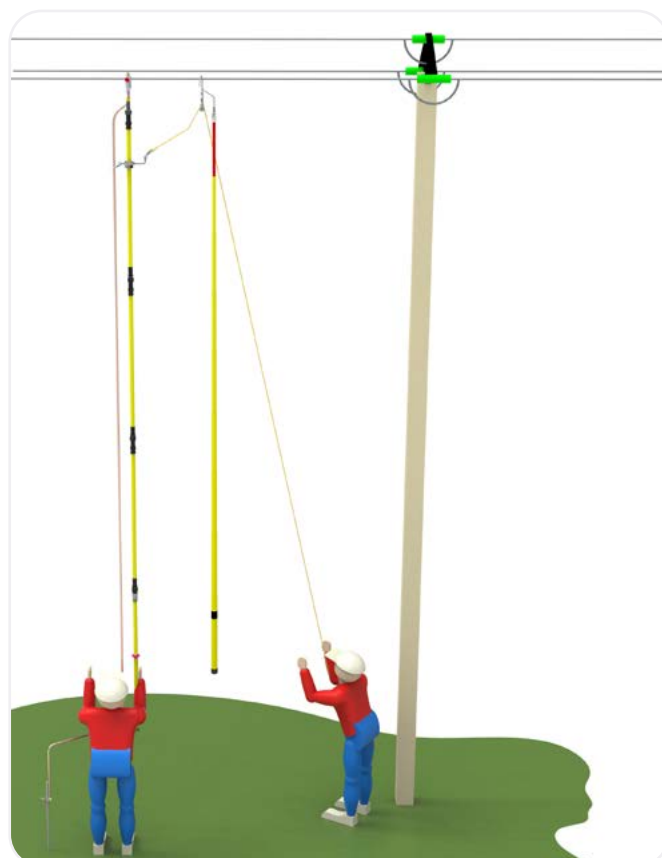



EARTHING AND SHORT-CIRCUITING HIGH VOLTAGE OVERHEAD LINES



S1P7AGTMA

EARTHING SYSTEM WITH CLAMP-TO-VICE
SERVO CONTROL FOR 69/90KV
AND 225KV TENSION TOWERS

STANDARDS

IEC 61230

- Allows the clamp to be positioned and clamped horizontally.

/ TECHNICAL SPECIFICATIONS

- Mechanical servo-control between clamp and vice.
- A locking system on the vice and the clamp, which ensures that the sequence of steps is respected.
- A mechanism that guarantees sufficient contact pressure for each clamping operation.

Set of 1 pair of pliers/vice delivered without cable and with a magnetic key:

SMA342A PLIERS :

- AN conductor,
- Isc max. : 31,5 kA/1s,
- roundly tightening capacity : Ø 3 to 42 mm,
- Weight : 2,2 kg



SAGTE25 CLAMP :

- Isc max. : 40 kA/1s,
- Weight : 1,8 kg
- Closing capacity flat : 40 mm



S1P8RGTMA

EARTHING SYSTEM WITH LOCKING
BETWEEN CLAMP AND JAW
ISC : 39 KA/0,3S

STANDARDS

IEC 61230

- A lightweight, space-saving device.
- A sturdy vice that's easy to operate.
- A strong magnetic key to protect you.
- Automatic control of vise tightening.
- Ergonomic design makes it easy to use.

/ TECHNICAL SPECIFICATIONS

A mechanical link between the clamp and the winch

- A locking system between the lathe and the clamp that guarantees that the sequence of steps is followed.

- A mechanism to ensure sufficient contact pressure for each tightening operation.

Set of 1 pair of pliers/tweezers delivered without cable and with magnetic key :

SAPAC1060AG PLIERS :

- Spring clamp
- Closing capacity Round Ø 10 a 60 mm
- Weight : 1,7 kg



SAGTE25 CLAMP :

- Weight : 1,8 kg
- Closing capacity flat : 40 mm



S1POACAMA

APE SET WITH EARTHING CLAMP (CDTA) WITH MAGNETIC LOCK

STANDARDS

IEC 61230

/ USE

The CDTA earthing clamp allows you to maintain the clamp-to-earth (APE) servo-control for the following earthing operations:

- Shunt earthing,
- Multiple MALTs on a multi-beam transmission network, especially when towers are painted, to avoid potential differences. The CDTA clamp, connected to the SA342AN clamp, cannot be removed thanks to the horizontal axis, which prevents loosening as long as a SMAPE SAGTE25 clamp from an S1POAGTMA assembly is still present on it. The operation of the clamp/vice interlock remains unchanged.

Ref.	Short-circuit intensity	Dimensions	Key type	Weight
S1POACAMA	31,5 kA/1s	310x210x70mm	Magnetic	3,8 kg



- Earthing at great height from the ground.



MALTAC1050

EARTHING FROM THE GROUND WITH INSULATING ROPE

STANDARDS

IEC 61230

/ USE

Attachment/detachment of this clamp is done from the ground using an insulating rope previously passed over the conductor.

The clamp is raised on the conductor by pulling the 1st rope.

The clamp is detached by pulling the 2nd rope.

Passing the rope over the conductor can be done by :

- Using an insulating stick equipped with the adapter for reel holder PBU with the insulating reel
- Using the MAGICROU fastening device

/ TECHNICAL SPECIFICATIONS

- Connection to TFK earthing cable with cable lugs with stud hole diameter of 12 mm.
- Clamping capacity : Ø 10 to 50 mm
- Insulating rope (IEC 62192).

Ref.	Description	Max. Isc	Dimensions	Weight
PAC1050SC	Clamp alone	31,5 kA/1s	220 x 220 x 80 mm	1 kg
PAC1050AC	Single clamp with 30 m of insulating rope			
ENSPAC1050B01	Set of 3 line clamps with earthing cables (95 mm ² length 14 m) and earthing clamps, 3 x 30 m insulating rope and 3 earthing rods, delivered in soft cases	25 kA/1s	600 x 250 x 200 mm	3 x 21



MR50

ROLLING EARTH DEVICE FOR CABLES UNREELING

STANDARDS

IEC 61230

/ USE

- This device is used for the unreeling of aerial electric line cables, for low, medium and high voltage.

/ TECHNICAL SPECIFICATIONS

- Tightening capacity on cylindrical conductor : from Ø 5 mm to Ø 50 mm
- Max Isc : 25 kA/1s

Ref.	Description	Dimensions	Weight
MR50	Rolling earth device for cables unreeling	500 x 450 x 250 mm	5 kg
MR50HE	Rolling earthing clamp for cable unwinding with HE end piece for installation with an insulating pole type PRE		

DLT8

VOLTAGE LIMITING DEVICE

/ USE

Under the new NFC 18-510 standard, working on disconnected network requires earthing on either side of the work area. The DLT8 is the only means authorised by the standard for creating the opening necessary in the earthing circuit to take certain measurements. The voltage limiting device is a single-phase device designed for use on HV lines. It is designed to be inserted in the earth circuit so as to be able to take measurements with a circuit breaker testing device for example.

/ TECHNICAL SPECIFICATIONS

The voltage limiting device has two positions:

- « OPEN » (position for taking measurements)
 - it protects users against accidental voltage feedback by re-forming the earthing circuit.
 - it limits the voltage at its terminals to under 50V.
- In the CLOSED position, it re-forms the earthing circuit.

Ref.	Description
DLT8ENT	Voltage limiting device
DLT50APE	Voltage limiting device equipped with SMAPE system



ALUMINIUM AND COPPER EARTHING AND SHORT CIRCUIT CABLES

STANDARDS

IEC 61138

/ USE


Cable for the construction of portable earthing and short-circuiting devices according to IEC 61230

/ TECHNICAL SPECIFICATIONS

Type TSC (Copper) - TAP (Aluminium) :
cable with extra flexible PVC sheath (ST11) for use from -25°C to +55°C.
Type SX (Copper) : cable with silicone sheath for use from -40°C to +70°C.

/ I_{sc} max. of PAT cables

The following table defines the maximum short-circuit currents in kA admitted for aluminium and copper cables according to their cross-sections, the temperature at the end of the short-circuit (700°C for copper and 500°C for aluminium) and the short-circuit time.

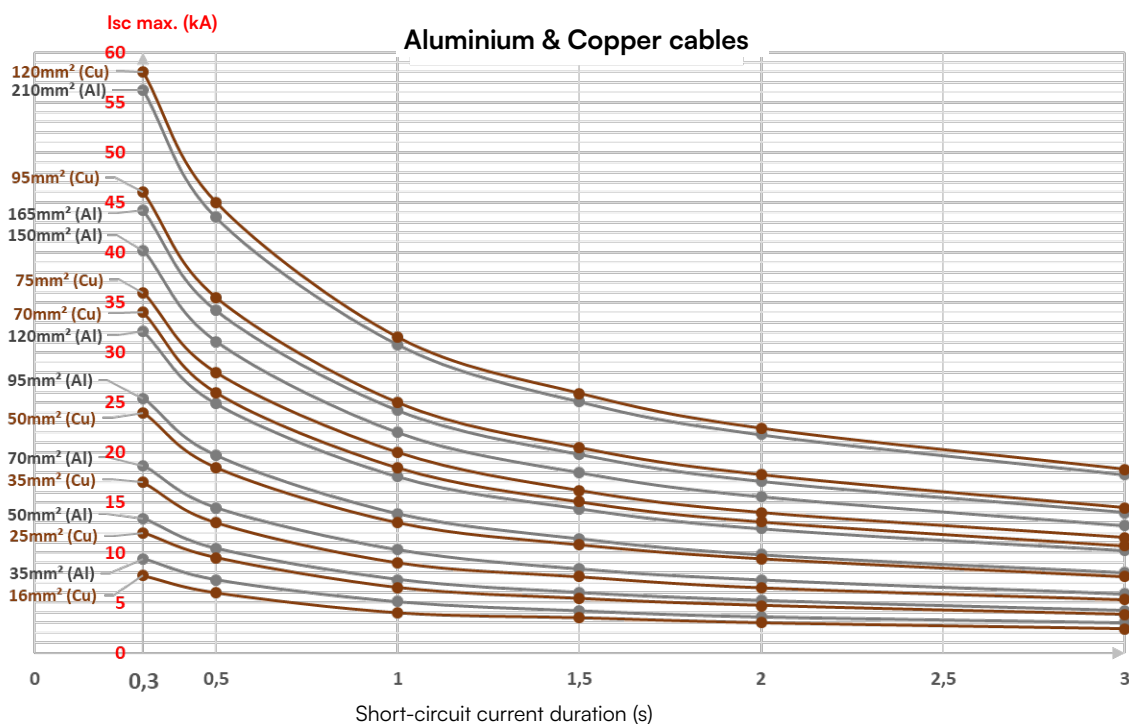



/ Max. Isc. admissible (kA)

			Increase in cable temperature at the end of a short circuit :						Weight/m
			Aluminium = 300°C Copper = 450°C			Aluminium = 500°C Copper = 700°C			
	Cable reference	Cable section	Duration of the Isc						
0,3 s			0,5 s	1 s	0,3 s	0,5 s	1 s		
Equivalent	TAP35	35mm² (Al)	8,5	6,5	4,5	9,5	7,5	5	0,1 kg
	TSC16 SX016	16mm² (Cu)	6,5	5	3,5	7,5	6	4	0,15 kg
Equivalent	TAP50	50mm² (Al)	12	9	6,5	13,5	10,5	7,5	0,17 kg
	TSC25 SX025	25mm² (Cu)	10,5	8	5,5	12	9,5	6,5	0,3 kg
Equivalent	TAP70	70mm² (Al)	16,5	13	9	18,5	14,5	10,5	0,25 kg
	TSC35 SX035	35mm² (Cu)	14,5	11,5	8	17	13	9	0,35 kg
	TSC40 SX040	40mm² (Cu)	16	13	9	19,5	15	10,5	0,45 kg
Equivalent	TAP95	95mm² (Al)	22,5	17,5	12,5	25,5	19,5	14	0,35 kg
	TSC50 SX050	50mm² (Cu)	21	16	11,5	24	18,5	13	0,5 kg
Equivalent	TAP120	120mm² (Al)	28,5	22	15,5	32	25	17,5	0,45 kg
	TSC70 SX070	70mm² (Cu)	29	22,5	16	34	26	18,5	0,7 kg
Equivalent	TAP150	150mm² (Al)	35,5	27,5	19,5	40	31	22	0,5 kg
	TSC75	75mm² (Cu)	31	24	17	36	28	20	0,75 kg
Equivalent	TAP165	165mm² (Al)	39,5	30,5	21,5	44	34	24	0,6 kg
	TSC95 SX095	95mm² (Cu)	39,5	30,5	21,5	46	35,5	25	1 kg
Equivalent	TAP210	210mm² (Al)	50	38,5	27,5	56	43,5	31	0,75 kg
	TSC120 SX120	120mm² (Cu)	50	38,5	27,5	58	45	31,5	1,3 kg



EARTHING LEADS WITH THEIR CONNECTIONS

EXTRA FLEXIBLE COPPER AND ALUMINIUM

STANDARDS

IEC 61230



/ USE

Ensures the copper connection between the clamps and lathes of portable earthing and short-circuiting devices.

/ TECHNICAL SPECIFICATIONS

Connection by a watertight crimped DIN terminal, or by a 2nd crimping on the insulator, or by a heat-shrinkable sleeve with adhesive.

/ CODING

Copper cables

TFK	16	005	BB
TSF	25	01	DD
	35	10	CD
	40	XX	
	50	XXX	
	70		
	75		
	95		
	120		
	150		



Terminal hole diameter
B = Ø8
C = Ø10
D = Ø12
No letter =
Ø10 at both ends

Length : XX/XXX

Ex : 005 = 0,5m

01 = 1m

10 = 10m

Section : mm²

TFK = extra flexible PVC sheath cable (STI), -25°C to +55°C
TSF = silicone sheathed cable, -40°C to +70°C

Aluminium cables

CAP	35	005	DD
	50	01	CD
	70	10	
	95	XX	
	120	XXX	
	150		
	165		
	210		



Terminal hole diameter
C = Ø10
D = Ø12
No letter =
Ø10 at both ends

Length : XX/XXX

Ex : 005 = 0,5m

01 = 1m

10 = 10m

Section : mm²

CAP = extra flexible PVC sheath cable, -25°C to +55°C



TFK/TSF CONNECTIONS

COPPER CABLE CONNECTIONS

STANDARDS

IEC 61230

/ USE

Provide the copper connection between the lineclamps and the earth clamps in portable earthing and short-circuiting devices.

/ TECHNICAL SPECIFICATIONS

Connection by crimped DIN cable lugs sealed by a 2nd crimping of the insulation;

TFK type : connection made with extra flexible PVC sheathed cable (STI1) for use from -25°C to +55°C.

TSF type : connection made with silicone sheathed cable for use from -40°C to +70°C.

Reference	Cross-section	Cable length	Stud hole diameters	Type of sheathing
TFK1616	16 mm ²	16 m	Ø 10 mm	PVC
TFK3510	35 mm ²	10 m		
TFK5005DD	50 mm ²	5 m	Ø 12 mm	
TFK7010	70 mm ²	10 m	Ø 10 mm	
TFK7008DD			Ø 12 mm	
TFK9508	95 mm ²	8 m	Ø 10 mm	
TFK9508DD				
TFK12010DD	120 mm ²	10 m	Ø 12 mm	
TFK15010DD	150 mm ²			



CAP CONNECTIONS

ALUMINIUM CABLE CONNECTIONS

STANDARDS

IEC 61230

/ USE

Provide the aluminium connection between the line clamps and the earth clamps in portable earthing and short-circuiting devices.

/ TECHNICAL SPECIFICATIONS

Connection by crimped DIN cable lugs sealed by a 2nd crimping of the insulation;

CAP type : connection made with extra flexible PVC sheathed cable (STI1) for use from -25°C to +55°C.

References examples	Cross-section	Cable length	Stud hole diameters	Type of sheathing
CAP7012DD	70 mm ²	12 m	Ø12 mm	PVC
CAP9502DD	95 mm ²	2 m		
CAP12015DD	120 mm ²	15 m		
CAP16506DD	165 mm ²	6 m		
CAP21010DD	210 mm ²	10 m		

EQUIPOTENTIAL BONDING RANGE



LEQ environment




LEQ

EQUIPOTENTIAL BONDING

STANDARDS

IEC 61230 / IEC 61138

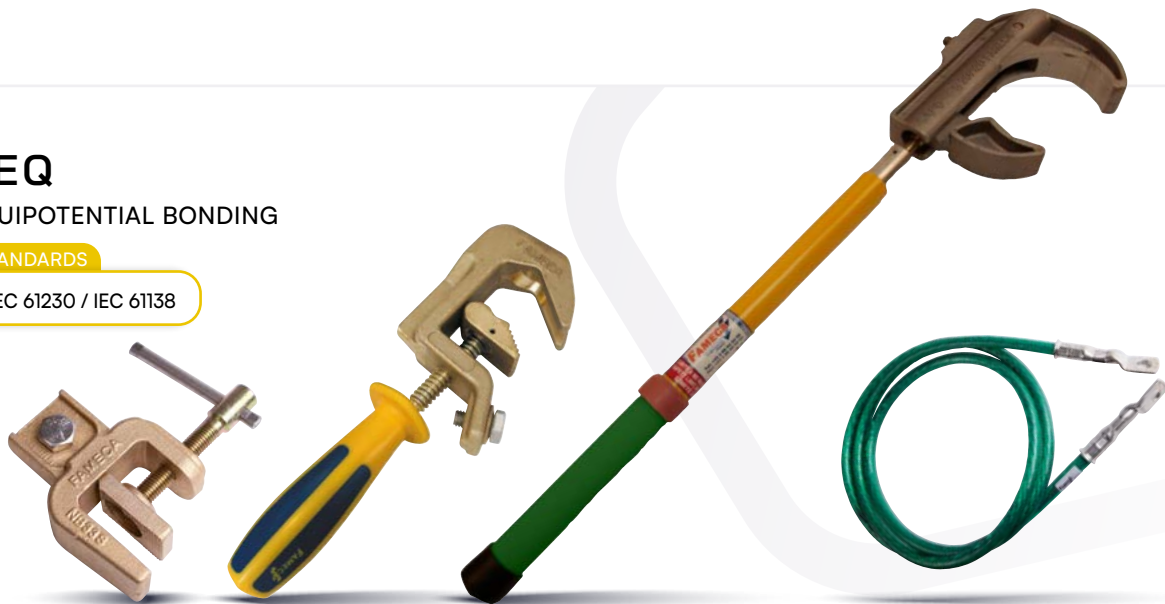

/ USE

To place all the metal parts in the work area at the same potential by bonding with LEQ.



/ TECHNICAL SPECIFICATIONS

- Green transparent PVC insulated extra flexible copper cable.
- Cable ends crimped with 2 cable lugs with 12 mm stud holes for connecting HV line clamps and earthclamps.



/ Clamp-on whips

Reference	Description
PO501560	S1560 clamp and 50 cm pole
PO5020120	S20120 clamp and 50 cm pole
PO50540	S540 clamp and 50 cm pole
PO50NBD25	NBD25 clamp and 50 cm pole
PO50MT525	MT525 clamp and 50 cm pole
PO50JAS19	JAS19 winch and 50 cm pole

/ Winch

Reference	Description
NBCRTTS	For earthing pads
NB33S	For flat bars
GTE25COS	For angle brackets
NB8 or N3B8	For round

/ Single hose

Reference	Description
PO50HE	Hose reel without clamp with funnel HE

Other pole lengths available on request.



/ Cable for connecting equipment

Reference	Description
TEQ3502DD	2 m
TEQ3503DD	3 m
TEQ3504DD	4 m
TEQ3505DD	5 m
TEQ3506DD	6 m
TEQ3507DD	7 m
TEQ3515DD	15 m

Other lengths available on request.



/ Lathe with handle

Reference	Description
NBD25M	For flat bar, round, earth spike, spherical fixed point
PLE432M	For flat bar, cylindrical, earth spike
NB8M	

/ Clamp

Reference	Description
S1560HE	Use with end fitting HE
S20120HE	Clamp S20120 only
MT516M	For flat bar, cylindrical, earth spike, earth spike



EARTHING AND SHORT-CIRCUITING EQUIPOTENTIAL BONDING



- Can be inserted in all equipotential bondings.
- Lightweight.
- Maintenance free.
- Secured after calibrated disconnection : the device can't be used again.

LEQ35DB

TEAR-OFF EQUIPOTENTIAL BONDING

STANDARDS

IEC 61230 / IEC 61138

/ USE

LEQ35DB allows an emergency disconnection of an equipotential bonding when used with mobile platform lifts. It allows to separate the platform from the driver without human intervention on the equipotential bonding.

/ TECHNICAL SPECIFICATIONS

- Minimal section : 35 mm².
- Permanent passage of 100 A.
- Compatible with line clamps and earth clamps.
- Breaking force : 50 daN.

Reference	Dimensions	Weight
LEQ35DB	710 x 30 x 30 mm	700 g



KLEQTP

EQUIPOTENTIAL BONDING SET FOR CONSTRUCTION COMPANIES

STANDARDS

IEC 61230 / IEC 61138

/ USE

The equipotential bonding set KLEPT is designed for construction companies using platforms or scaffolding in the 50 meters vicinity zone of a live bare conductor. The tear-off equipotential bonding LEQ35DB allows an emergency disconnection of this equipotential bonding without human intervention.

/ TECHNICAL SPECIFICATIONS

- The device is composed of :
- 1 insulating stick with APV end fitting
 - 1 clamp NBD25AP
 - 1 earthing clamp NB33S
 - 1 earthing copper cable 35 mm² length 15 m connecting the line clamp and the earthing clamp
 - 1 earthing copper cable 35 mm² length 25 m
 - 1 tear-off equipotential bonding LEQ35DB

The device is delivered in a transport bag HMALT.



- Ergonomic handle with hand guard.

FPFB--

BALL FIXING DEVICE FOR GAS SHUNT

/ USE

The device is an anchoring point for a gas conduit earthing system. It allows electrical discharge from a gas conduit. The device is fixed in a flange hole. When the ball anchor is tightened, the spacer expands to match the diameter of the flange hole. The system is therefore integral with the flange, and earthing is possible.

/ TECHNICAL SPECIFICATIONS

- Composition :
- 1 extensible spacer
 - 1 threaded ring
 - 1 straight (or angled) ball fixpoint
- The threaded ring cannot be removed from the extensible spacer for each device. Only the ball fixture can be unscrewed from the assembly.



Ergonomic handle
with hand guard.



TL11

CLAMPS ON INSULATING STICKS FOR EQUIPOTENTIAL BONDING

STANDARDS

IEC 61230 / IEC 61138

TECHNICAL SPECIFICATIONS

Epoxy resin insulating stick.
2 copper alloy clamps.
Clamps capacity: Ø 4 mm to Ø 32 mm.
40 mm wide flat bar.
Green transparent copper connection cable, length

1,2 m, cross-section 35 mm².
Isc: 8 kA/1 second.
Supplied in soft cover.
Other cross-sections and lengths available on request.

Reference	Dimensions	Weight
TL11	910 x 60 x 40 mm	1,25 kg

CESTEX

MOBILE EQUIPOTENTIALITY DEVICE SUPPORT-CARRIER
AND SUPPORT-BRIDGE

STANDARDS

IEC 61230 / IEC 61138

USE

- To carry out equipotentiality during the use of auto-baskets and scaffolding
- No. 2 brass ground clamps with clamping capacity up to 35 mm
 - No. 1 aluminum alloy ground clamp for connection to the basket with clamping capacity up to 80 mm
 - No. 2 copper cables sect. 16 mm² L=12 m covered with transparent silicone sheathing
 - No. 2 steel reach winders for 12-meter ground conductors
 - No. 1 hot-dip galvanized steel "T" earth electrode. Useful contact surface with the ground 0,075 m²
 - No. 1 nylon cloth bag, for containing the device

Reference	Clamp material	Clamp tightening	Cable material	Cable isolation type	Vise clamping capacity	Cross-section	Floor cable length	In line (aerial)	Way of access	Short-circuit intensity	Earthing Clamp
CESTEX	Brass	Up to 80 mm	Copper	Silicone	Up to 35 mm	16 mm ²	12 m	Isolated	From the floor	3 kA/0.5s	MT4

EQUI18

EQUIPOTENTIALITY DEVICE OF OVERHEAD LINES MV

USE

- Equipotentiality device of MV overhead lines in bare conductors
- No. 1 aluminum alloy contact clamp with quick spring clamping and gripping capacity on cylindrical conductors from Ø 3÷Ø 18 mm
 - No. 1 fiberglass insulating foil L= 800 mm equipped with rubber grip and integral with the contact clamp
 - No. 1 aluminum alloy self-milling vise with clamping capacity up to 40 mm No. 1 copper cable sect. 16 mm² L= 1.5 m covered with transparent silicone sheathing
 - No. 1 nylon cloth bag for containing the device

Reference	Clamp material	Conductor type	Conductor diameter	Cable material	Cable isolation type	Cross-section	Floor cable length	In line (aerial)	Roost number	Earthing Clamp
EQUI18	Aluminium	Round	3÷18	Copper	Silicone	16 mm ²	1.5 m	Bare	1	MT40F

HELIX

MOBILE CONTINUITY AND EQUIPOTENTIALITY DEVICE

USE

Mobile continuity and equipotentiality device for visible helix cables and three-core MV belted cables.

TECHNICAL SPECIFICATIONS


- Isc Max (short-circuit current) : 13,6 kA/0.3s
- Short-circuit intensity : 11,6 kA/0.5s
- Short-circuit intensity : 8,2 kA/1s

Reference	Clamp material	Conductor type	Conductor diameter	Cable material	Cable isolation type	Phase cable nber	Operating voltage	Phase(s) cable length	Cross-section	Floor cable length
HELIX	Bronze	Round	5÷70	Copper	Silicone	2	35 mm ²	2 m	35 mm ²	4 m

ACCESSORIES



Accessories



STRAIGHT FIXED BALL CONTACT POINT

STRAIGHT FIXED BALL CONTACT POINT

Male	Female	Ball diam.	Thread	Hexagon	Overall length (male type)	Overall length (female type)	Threaded stud length	Max. Isc
FD2010	P20FM10	20	M10	22 mm	90 mm	60 mm	30 mm	18,5 kA/1s
FD2012	P20FM12		M12					
FD2512	P25FM12	25	M12	27 mm	122 mm	82 mm	40 mm	31,5 kA/1s and 40 kA/0,5s
FD2516	P25FM16		M16					



ANGLED BALL FIXED CONTACT POINT

ANGLED BALL FIXED CONTACT POINT

/ USE

Can be used as a contact pick-up point on a conductor bar.

Male	Female	Ball diam.	Thread	Hexagon	Overall length (male type)	Overall length (female type)	Threaded stud length	Max. Isc
FC2012	PC20FM12	20	M12	22 mm	105 mm	75 mm	30 mm	18,5 kA/1s
FC2512	PC25FM12	25	M12	27 mm	135 mm	95 mm	40 mm	31,5 kA/1s and 40 kA/0,5s
FC2516	PC25FM16		M16					



CAX-CBX

ADJUSTABLE FIXED POINTS FOR VERTICAL OR OBLIQUE CONDUCTORS

STANDARDS

IEC 61230 / IEC 61138

/ USE

These bars are designed to create earthing points in electrical installations so that standard S1560 or S540 earth clamps can be used.

Reference	Min/Max diameter	Max. Isc	Material
CAX12120	12 - 120 mm	31,5 kA/1s	Aluminium
CBX12120			Bronze



SWING

FIXED POINT SYSTEM FOR EARTHING

STANDARDS

IEC 61230

/ USE

Device used to ensure contact between the conductor and the earthing device.

/ TECHNICAL SPECIFICATIONS

The fixed point system comprises :

- 1 Body consisting of a Ø30 mm x 130 mm cylinder to accommodate the earthing system.
- 1 cap to enclose the conductor.
- M10 H-head screws for tightening to the conductor.
- Isc: 60kA/0,5s.

Ref. SWING	Conductor type diam.	Diameter	Optimum section	Min. section	Max. section
SWING22	22 mm	Ø22 ±2	280 mm ²	230 mm ²	330 mm ²
SWING28	28 mm	Ø28,5 ±2	470 mm ²	400 mm ²	540 mm ²
SWING30	30 mm	Ø30 ±2	520 mm ²	440 mm ²	600 mm ²
SWING31	31 mm	Ø31 ±2	550 mm ²	470 mm ²	630 mm ²
SWING35	35 mm	Ø35,5 ±2	730 mm ²	650 mm ²	800 mm ²

Ref. DOUBLE SWING	Diameter	Optimum Section	Min. section	Max. section
DSWING35	Ø35,5 ±2	730 mm ²	646 mm ²	806 mm ²
DSWING59	Ø59 ±2	2026 mm ²	1884 mm ²	2167 mm ²

• Easy-to-install earthing system thanks to offset attachment point.

• SWING : Conductor clamping capacity up to Ø36 mm.

• DOUBLE SWING : Conductor clamping capacity up to Ø60 mm.



EARTHING AND SHORT-CIRCUITING ACCESSORIES MISCELLANEOUS



CD-BINARD CONSIGNMENT TROLLEY


/ USE

The consignment trolley, as it has been designed, is the tool that guarantees the chronological sequence of essential and regulated operations to ensure the safety of personnel and equipment before intervening in source substations as part of a consignment.

/ TECHNICAL SPECIFICATIONS

It can be fitted with (equipment not supplied) :

- Padlock
- Insulating gloves
- Insulating mat
- Voltage tester 20kV ; Voltage tester 63kV / 225kV
- Voltage tester poles
- Earthing poles
- Earthing devices
- Flags
- ...



S120LV

YELLOW TRIANGULAR FLAG WITH NO MARKING AND NO SHAFT

/ TECHNICAL SPECIFICATIONS

PVC-coated fabric. Triangular flags with tunnel hem to pass 120 mm² max. copper braid through.

Reference	Dimensions	Weight
S120LV	350 x 300 mm	30 g



S120L

TRIANGULAR EARTHING FLAG

/ TECHNICAL SPECIFICATIONS

- PVC-coated fabric, printed on both sides.
- Triangular earthing flag with black marking on a yellow background.
- With wooden shaft, Ø15 mm and length 750 mm.
- Dimensions : 350 x 300 mm

Reference	Description	Weight
S120L	Flag with shaft	100 g
S120LSH	Flag without shaft	300 g



7805

TURNING FLAG HOLDER

/ USE

Allows the flag to be fixed in any direction, on profiles of any cross-section and tubes.

/ TECHNICAL SPECIFICATIONS

Light alloy.
Ø 40 mm max.



HTSMALT

HIGH RESISTANCE BAG FOR EARTHING CABLE

/ USE

Cover for carrying, protection, visibility and signalling of earthing cables.

Reference	Dimensions (opened)
HTSMALT	87 x 58 cm
HTSMALT-GM	87 x 76 cm

/ TECHNICAL SPECIFICATIONS

Main material: high-strength PVC.
Colour: yellow.
Inside: fastening straps with metallic buckles, storage pocket for cable.
Outside: fastening straps with metallic buckles, velcro and snap fastener, carrying handle.



XE9109

WALL BRACKET FOR STORAGE

/ TECHNICAL SPECIFICATIONS

Wall bracket for storing earthing devices:

- 2 wall fixing screws,
- 1 pin for clamps, in painted sheet metal.

Reference	Weight
XE9109	1,5 kg



S120

PVC-COATED FLAG

/ USE


Flag to identify worksite earthing common to more than one work area.

/ TECHNICAL SPECIFICATIONS

- Opaque PVC-coated fabric, printed on both sides.
- Number height : 50 mm
- Letter height : 60 mm
- Supplied with 2 black fibreglass clips, max. opening 23 mm for clipping onto braids or other items.
- Each flag can be numbered from 1 to 999, identified by 1 to 3 letters for the grey, brown and purple models only (price on request).



Reference	Type	Colour	Marking	Dimensions	Weight	Identification
S120JV	With 2 Velcro fasteners	Yellow	Black	350 x 300 mm	50 g	Electrical control team
S120JP	With 2 black clips				170 g	
S120VV	With 2 Velcro fasteners	Violet	White		50 g	
S120VP	With 2 black clips				170 g	
S120MV	With 2 Velcro fasteners	Brown	White		50 g	
S120MP	With 2 black clips				170 g	
S120GV	With 2 Velcro fasteners	Grey	Black		50 g	
S120GP	With 2 black clips				170 g	
S120ORFV	With 2 Velcro fasteners	Fluorescent orange	Black		50 g	
S120ORFP	With 2 black clips				170 g	
S120BCEV	With 2 Velcro fasteners	Blue	White		50 g	
S120BCEP	With 2 black clips				170 g	
S120VFFV	With 2 Velcro fasteners	Fluorescent green	Black		50 g	
S120VFPP	With 2 black clips				170 g	
S120NTCMV	With 2 Velcro fasteners	Black	White		50 g	
S120NTCMP	With 2 black clips				170 g	
S120RGPV	With 2 Velcro fasteners	Red	Black		50 g	
S120RGPP	With 2 black clips				170 g	
S120BEPV	With 2 Velcro fasteners	White	Black		50 g	
S120BEPP	With 2 black clips				170 g	
S120VELV	With 2 Velcro fasteners	Green	Black		50 g	
S120VELP	With 2 black clips				170 g	

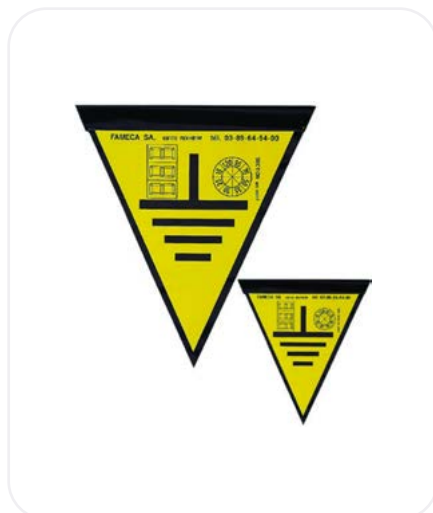

S120J2

SET OF 2 TRIANGULAR EARTHING FLAGS

/ TECHNICAL SPECIFICATIONS

PVC-coated fabric, printed on both sides.
Set of 2 flags with tunnel hem to pass the copper braid through.
Area with 3 pre-marked digits and 8 segments for the earth braid sections.
Colours : yellow background with black marking.

/ This product contains

Reference	Description
S120J	Flag for 120 mm ² max. copper braid
S120J240	Flag 240 x 200

Reference	Description	Weight
S120J2	Set of 2 triangular earthing flags	35 g

/ Option

Reference	Description
S120LT	Flag with 2 eyelets Ø 11.5 mm for passing rings through





CABLE IDENTIFICATION, PHASING AND LOAD TESTING

- / IDENTIFICATION OF CABLES AND PHASES 250
- / PHASES AND NETWORK MAPPING CONTROL 258
- / ON-LOAD CABLE CONTROLLER 269



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.



CABLE IDENTIFICATION PHASING AND LOAD TESTING

IDENTIFICATION OF CABLES AND PHASES

DISCONNECTED CABLE AND PHASE IDENTIFIER

FC ULTIMATE

NEW

DISCONNECTED CABLE AND PHASE IDENTIFIER

/ WORKING PRINCIPLE

FC ULTIMATE provides all necessary information at the job site for dead cable, phase and cable end identifications.

It combines :

- 2 transmitters with 3 induction clamps each
- A hand-held receiver displaying all information



/ SPECIFIC USES:

Faulty Cables: Cable identification can be available, provided that two phase conductors are still in good condition (continuity and insulation).

Network mapping: You can use the possibility of 8 different transmitter index for mapping up to 8 circuits during the same job.

/ TECHNICAL SPECIFICATIONS

Type of cables: PILC, XLPE, SWA, single core, three core cables / w/o neutral conductor...

Lengths: LV up to 1 x miles, HV distribution up to 12 miles, HV transmission up to 25 km

Cable configuration: parallel, layers, bundles and overhead lines.

Cable sections: specific advance mode can provide identification from LV 4 x AWG 7 to HV 220 kV 4500 mm².



/ MAGNETIC PROBE

Directional probe allows certain identification of the cable.

/ TWO CONTACT PROBE

Used on open circuit to confirm continuity and phasing


/ ROGOWSKI LOOP PROBE

Used for tracing and continuity testing on single-core cables only.

/ I-PROBE MAGNETIC PROBE



to indicate the presence of a 50/60 Hz current flow in all cable configurations: single-core, three-core with or without neutral, peripheral neutral.

Preliminary test



Unipolar and tripolar cables



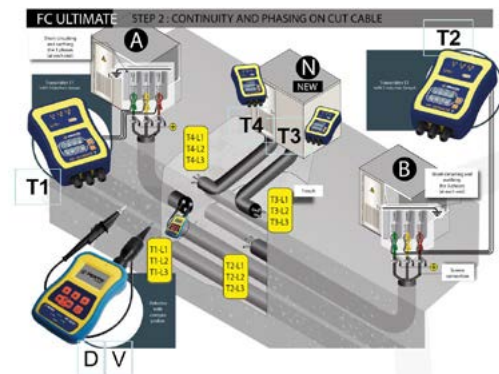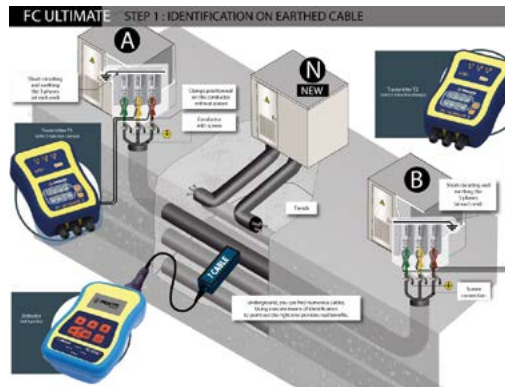

PRODUCT RANGE

/ PERFORMANCES LEVELS

Essential: Standard plug & play identification mode. Guaranteed identification accuracy on cables at less than 5 inches apart.

Superior: Standard + Advanced identification modes. Guaranteed identification accuracy on side-by-side cables.

Pro-Elite: Standard + Advanced + Expert identification modes. IPROBE function. Selection of loaded cables (Magnetic straight probe and Rogowski loop). Enhanced information for a better diagnostic in doubtful and risky cases (like faulty cables).

/ CABLE IDENTIFICATION SETTINGS

LV settings: straight probe can identify only LV cables, with LV thin insulation layer and conductors cross section up to 50 MCM.

MV setting: LV settings + MV settings: straight probe can identify HV cables with thicker insulation layers (<70kV) and conductors cross section up to 2000 MCM.

HV setting: LV + MV settings + HV settings: straight probe can identify HV cables with thicker insulation layers (<400kV) and conductors cross sections up to 3200 MCM.



	ESSENTIAL	SUPERIOR	PRO-ELITE
LV	LV cables Standard mode	LV cables Standard mode Advanced Mode	LV cables Standard Mode Advanced Mode Expert Mode IPROBE
MV	LV + MV cables Standard mode	LV + MV cables Standard mode Advanced mode	LV + MV cables Standard Mode Advanced Mode Expert Mode IPROBE
HV	LV+MV+HV cables Standard mode	LV+MV+HV cables Standard mode Advanced Mode	LV+MV+HV cables Standard Mode Advanced Mode Expert Mode IPROBE



CABLE IDENTIFICATION PHASING AND LOAD TESTING

IDENTIFICATION OF CABLES AND PHASES

EARTHING ARRESTERS



ENSTPBT

LOW VOLTAGE EARTHING
ARRESTER TPBT
AND PHASE INDICATOR VISUTPBT

Advantages

- IP65 protection.
- IP2X on connection.
- L1, L2, L3 and Neutral indications by big LEDs sectors.
- No switch.
- Ideal for long term jobs.

/ USE

The Earthing Arrester is a three phase protective device for LV de-energized network. Inserted in a earthing device set, it will allow measures on the network while being protected by this earthing devices.

The « visumetre » is a complementary device that will read phase L1, L2 L3 when the resistor box is connected on to the earthing arrester.

/ TECHNICAL SPECIFICATIONS

The LV earthing arrester TPBT feature three functions defined by the resistor box connection and position: PROTECTION, SHUNT and phase ID thanks to the resistor box different uses



/ This products contains :

Reference	Description
TPBT	Low voltage earthing arrester
VISUTPBT	Phase indicator for low voltage earthing arrester

Phase identification



For earthing arrester

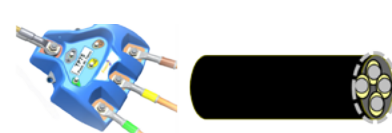

TP2300

EARTHING ARRESTER FOR ENERGY
CABLES

Advantages

- Can provide 3 different functions just by flipping or removing the « box ».
- isolated : 3 phases isolated from earth
- “short-circuit” : 3 phases short-circuited and isolated from earth
- Phase ID : connected to the earth through 3 different resistors.
- No switch.
- Ideal for long term job.
- Compatible with FC2310 for work requiring multiple earthing points.

/ USE

Provide same protection as an earthing while measuring a circuit insulated from earth.

Reference	Designation	Dimensions	Weight
TP2300*	MV Earthing Arrester Block	150 × 94 × 52 mm	850 g
VISUHTA	Visumetre for MV Earthing Arrester Block	150 × 94 × 52 mm	350 g

* Provided with a TP2300 box




PREMIUM

DLT8

OUR SELECTION

VOLTAGE LIMITING DEVICE

- When the DLT8 is inserted in the earthing system, it limits to 50Vrms the "touch voltage" and the voltage at the measuring device terminals.
- In the event of accidental voltage feedback, the protective earth circuit is instantly re-formed.
- When the circuit breaker is CLOSED, the whole system is at earth potential

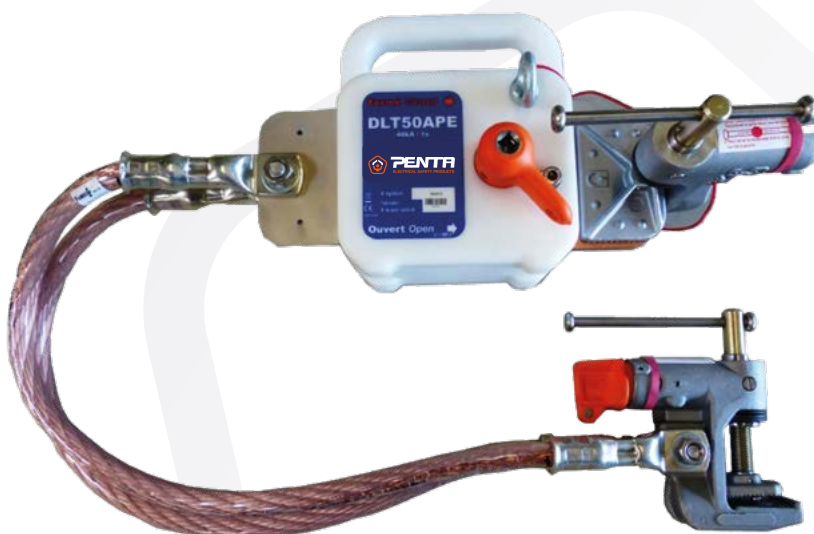

/ USE

The voltage limiting device is a single-phase device designed for use on HV lines. It is designed to be inserted in the earth circuit so as to be able to take measurements with a circuit breaker testing device, for example. The voltage limiting device has two positions: «OPEN» (position for taking measurements) - it protects users against accidental voltage feedback by re-forming the earthing circuit. - It limits the voltage at its terminals to under 50V. In the CLOSED position, it re-forms the earthing circuit



/ TECHNICAL SPECIFICATIONS

Allowable short-term current : 40 kA. NB: The max. allowable short-circuit current (I_{sc}) by an earthing and short-circuiting device will be given by the element subject to the weakest current in the device's chain. This value is clearly identified on the device on a short-circuit cable and the user will always need to check before use whether the device's I_{sc} is appropriate to the use and the relevant short circuit risk. Duration 1 second. Peak current 100 kA. Permanent current that can flow through the DLT8 in the CLOSED position : 400 A. Allowable nominal current (§5.2 of specification HM-21/97/057A) that can pass through the voltage-clipping device in the OPEN position: 40 A. Max. allowable current (§6.5.1.4 of specification HM-21/97/057A) that can pass through the voltage-clipping device in the ON position: 100 A. Max. voltage at the DLT8 terminals: 50Vrms. Max. tightening torque necessary: 20 Nm

EASYLOC

CABLE LOCATION SYSTEM

/ USE

The Easyloc system allows fast and reliable location of underground cables and pipes, reducing accident risks and optimizing excavation work. It is designed for civil engineering, road construction, municipal services, and landscaping companies to check and verify plans before starting excavation. By simplifying detection, it ensures safe projects from planning to completion.

/ TECHNICAL SPECIFICATIONS

- Quick and precise location of underground cables and conduits.
- Depth measurement at the push of a button, even without a transmitter.
- Powerful transmitters ensure stable and reliable signal transmission in difficult conditions.
- Compatible with other location systems for seamless integration into existing workflows.
- Large, easy-to-read display with intuitive menu navigation.
- Robust design adapted for construction sites and outdoor use.
- Designed for efficient verification of network maps before excavation.
- Ideal for civil engineering, road construction, public works, and landscaping applications.





CABLE IDENTIFICATION PHASING AND LOAD TESTING

IDENTIFICATION OF CABLES AND PHASES

LIVE LV CABLE IDENTIFIER

VALUE

FC5300

OUR SELECTION

LIVE LV CABLE IDENTIFIER

- **Simplicity** : the device is connected like any other on customer premises or to a connection terminal downstream of the point to be identified.
- **Effectiveness** : the current drainage principle enables,
 - the relevant indications to be confined to the cable sought,
 - the device to be used without further intervention, however long the job lasts and whatever the length of the cable.
- **Elimination of risks due to :**
 - confusion with other similar low or high voltage cables,
 - the detection of signals on adjacent cables.



/ USE

This device provides all the information necessary to identify a live LV cable among other cables without risk of error :

- Identification of cables in open trenches or tunnels.
- Identification of the three phase conductors (L1, L2 and L3) on single-pole three-phase cables.
- Identification or confirmation of the source.

Upstream and downstream cable discrimination at a given point of the network.

/ TECHNICAL SPECIFICATIONS

- The probe with display guides the user through the steps for each function.
- All the information is available in several languages : English, Spanish, German, Polish, Arabic, ...
- The ultra-sensitive directional probe improves resolution in cable harnesses.
- Reliable connectors: double-insulated, sheathed conductors, in accordance with new standards.
- Built-in self-test
- Works on all types of cables: oil-impregnated paper insulated cables, synthetic cables, cables with double metal reinforcement, even heavily loaded cables, insulated overhead cables; in any environment, in-ground in urban, peri-urban and rural areas for all types earthing systems.
- Comes in a sealed, unbreakable case specially designed for field work.
- The detector charges using a standard USB-type mains or vehicle charger.

Magnetic probe:

Directional probe allows certain identification of the cable.



Rogowski loop:

Can be used instead of the magnetic probe and in a similar way, but exclusively for phase conductor tracing, particularly at cable terminations and beneath LV switchboards.





PHILINK

NEW

PHASE DETECTOR FOR PLC G1/G3
SMART GRID METER (LINKY)



G3-PLC

/ USE

The PHILINK device allows to detect and display the LINKY phase of a point (meter or connection box) when they are located on a low-voltage distribution network under PLC "LINKY" communication.

- This information is required:
 - For a campaign of load balancing in order to improve:
 - The quality of the electricity supply : Warranty of an expected voltage level
 - the use of the electricity distribution installation(transformers and electrical circuits)
 - To reduce the electricity losses
 - For checking the phase when connecting of new LINKY smart meters

/ TECHNICAL SPECIFICATIONS

Detector CPL Linky G1 G3	PHILINK-G1 G3
Protection level	IP54 — IK08
Over voltage category	600 V — Cat.IV
Operating ambient temperature	- 20°C to + 50°C
Voltage range	206 V to 260 V rms
Voltage rating	440 V (permanent)
Frequency range	50 Hz and 60 Hz $\pm 3\%$
Display	LCD 16M. Colors — 3,5" (320 x 240 pixels)
Internal protection	Fuse: HPC 1.6 A / 1000 V / 30 kA — FF — $\varnothing 6.3 \times 32$ mm
Battery charging status	On screen
Autonomy	8 hours
Battery lifetime	about 500 cycles (Charge/discharge)
Connectivity	micro-USB
USB cable	Dedicated USB A male/ micro-USB B male V2.0 - L= 0.8 m
Battery charger	PSB05R input 100-240 V AC / 50-60 Hz — output USB 5 V DC — 1 A. Adapter « car power outlet» 12-24 V DC / USB 5 V DC — 1 A. PC/USB 5.0 V DC
Protective over moulded soft shell	
Ballistic nylon bag	
Measuring leads	Section 2.5 mm ² — 1000 V — Cat.IV — length 1.05 m Contact probes IP2X $\varnothing 4$ mm (fuse protected) Fuse 1.6 A / 1000 V / 30 kA — FF — $\varnothing 6.3 \times 32$ mm
Connection accessories	Alligator clips 600 V — Cat.IV opening $\varnothing 32$ mm, connection IP2X $\varnothing 4$ mm

Reference	Presentation	Dimensions	Weight
PHILINK G1-G3	Detection unit	L = 165 x l = 96 x H = 56 mm	0.50 kg
	In soft case	L = 270 x l = 200 x H = 100 mm	1.15 kg

/ EXAMPLES OF CONFIRMED MEASURES





CABLE IDENTIFICATION PHASING AND LOAD TESTING PHASES AND NETWORK MAPPING CONTROL TRUE PHASE IDENTIFICATION SYSTEM

PHANTOM NEW

TRUE PHASE IDENTIFICATION SYSTEM (GPS)

- True phasing for all applications at any voltage.
- Live true phasing.
- Phasing resolution of $\pm 1^\circ$.
- GPS satellite network synchronization.
- Fast setup, ready to operate in seconds.
- No network de-energisation required.
- All-day battery life.
- Encrypted and robust communication technology.
- 60 minutes underground time-delayed phase identification mode.
- Capability to phase without connection to server using the deferred mode.
- Cloud based deployment.



Scan the QR code
to discover PHANTOM
video on YouTube !

/ USE

PHANTOM displays the phase angle of any network point on Low Voltage, High Voltage, overhead lines, substations and cabinet. The network stays live, in its normal operating diagram. Measurement accuracy is ensured by GPS synchronization.

The device consist of:

- A reference unit connected to the operating area 'zero point', providing an absolute reference and enabling cross-checks with surrounding or remote areas.
- One or many "Fields Units" consisting in a Display Unit and Measurement Module.

Guarantee the definition of the true phase for following operations:

- Transformer replacement
- Transition between overhead lines and underground cables
- Closing loops or connecting isolated operating areas
- Phase Marking for speeding up network commissioning after disaster
- Geo located phase mapping
- Smart power meter
- Tele measure sensors

Benefits:

- Planning of distribution networks and control of their development
- Reduction or delay of investment (balancing HVE/LV transformers instead of replacement)
- Reduction of operational costs : operation programmed and carried out with full knowledge of the phase configuration (correct connection guaranteed)
- A reduction of customer power and better service
- Greater safety of installation and persons
- Bringing up to standard and setting up of visual identification on electric installations

The Field Unit identifies phases anywhere on overhead or underground networks, regardless of distance from the Reference Unit.

- **HANDS FREE** thanks to the PHANTOM wireless Display Unit. Acquired data saving is done at a touch of a button.
- **HIGH PERFORMANCE**: phase measurements are quickly taken in real time!
- **Underground phasing is possible even without GPS or cellular signal**; results are displayed once communication is restored.

/ TECHNICAL SPECIFICATIONS

• PHANTOM Reference Unit :

- Two reference inputs (CAT-III 600V, CAT-IV 300V)
- Automatic switching of the reference inputs
- Ethernet port
- Power input (85VAC to 264VAC)
- External GPS connection interface
- 50/60Hz

• PHANTOM Measurement Module :

- 4 AA Batteries
- Autonomy: 30 hours of continuous phasing
- CAT-III 1000V / CAT-IV 600V low voltage phasing direct contact
- Up to 72 kV medium voltage direct contact using hotstick
- Non-contact up to 800kV
- Connectible to all universal hotstick
- Capacitive test port input
- Switchgear half rectified voltage indicator port measurements
- IP-67 rating
- 50/60Hz

• PHANTOM Display Unit :

- Colour touch screen
- Local phase compensation
- Digital results (numbers & graphs)
- Saving and export capabilities
- IP-68 rugged device
- Connectivity to the server using WIFI, 4G or HotSpot
- Wireless connection (Bluetooth) to the Measurement Module up to 30 meters

Reference	Description
PHANTOM-MM-GB	PHANTOM Measurement Module and Display Unit
PHANTOM-MR-GB	PHANTOM Reference Unit



The **Phantom** solution provides unambiguous identification of electrical phases anywhere on your network.

By comparing a reference measurement taken on a known phase with a measurement in the field, the device makes it possible to display a phase shift, or, better, the hour index of the phases tested.


/ PRODUCT COMPOSITION



/ CALCULATION OF THE MEASURED PHASE AND DISPLAY OF THE RESULTS



APPLICATIONS



/ NETWORK LOOPS

A power distribution network loop allows customers to be supplied via two different paths, which significantly improves service continuity in the event of a failure. It also facilitates operational maneuvers (isolating a fault, performing maintenance work) without interruption and optimizes stability and load distribution across the network.

/ MAPPING

A clear network map facilitates maintenance and troubleshooting. It improves planning, enhances the safety of interventions, and optimizes operations. It also allows for the identification of meter connection phases to ensure proper load balancing and connection of loads.

/ BALANCING

Properly balancing an electrical grid allows for the even distribution of loads across the different phases before it needs to be resized to deliver more power. This reduces the risk of overload, improves grid stability, extends equipment lifespan, limits energy losses, and enhances the quality of service for users.

/ PERFORMING MEASUREMENTS IN THE FIELD

The device offers several measurement modes, regardless of the network voltage type. This versatility facilitates network monitoring, maintenance, and optimization.

/ LOW VOLTAGE


At the low-voltage switchboard :



In a network cabinet



Upstream of the meter



/ MEDIUM VOLTAGE (CONTACT OR REMOTE)

Online Contact



Online Remote



On a capacitive terminal



On VDS test point, VPIS



/ HIGH VOLTAGE (REMOTE)

Overhead line



Primary substation





MPHASE NEW

WIRELESS PHASE COMPARATOR

STANDARDS

IEC 61481-1

- Light and compact unit for safe indoor and outdoor use.
- Positive indication for “in phase” conditions
- Voltage presence indication
- Indication of active radio link between the 2 units

The wireless concept provides:

- Better safety by suppression of cable link hazard
- Better distance range between test points (more than 25m)
- Allows phasing through walls, such as between substation bus bars and overhead cable terminals.

Enhanced indication that can be clearly noticed in most working conditions:

- Clear visual indication in all working conditions, with wide and side visibility thanks to the optic ring.
- 100 dB (1 m) acoustic signal remains audible even in heavy traffic or strong wind.

Direct access to the battery and sealed electronics prevents issues during battery replacement.

- Accidental interchange of housing or circuitry,
- Damage to electronic circuits,
- Prevents moisture ingress during outdoor battery replacement.



Reference	Voltage range	Frequency	Stick adaptor**	Contact electrode***	User manual*	Packaging
MPHASE0104FCUA	1—4 kV	50/60Hz	Universal & APV	V56 (x2) AC60 (x2)	Pack F	Metal Case
MPHASE0336FCUA	3—36 kV					
MPHASE0536FCUA	5—36 kV					
MPHASE1133FCUA	11—33 kV					
MPHASE2069FCUA	20—69 kV					

* Pack F: FR/GB/DE/ES/PT/PL - Pack G: GB/GR/BG/IT/NL/AR/TR

** Other stick adaptor available on request

*** Other electrode extension length available : 400, 600 and 900 mm.



/ USE

MPHASE is designed to carry out phase comparison between two MV circuits of a Three Phase system before connection.


Each units of the set can be used for checking Voltage Presence.

Description	Visual	Ref
226mm electrode extension with V shape fixed mount		ANTM226V**
Electrode extension for Magnefix system		ANTMTAGMAGNEFIX
Underground bushing probe		ANTMURDIMC
Underground elbow probe		ANTMURDIF

** Other length available on request

/ TECHNICAL SPECIFICATIONS

- AC voltage range: 1 to 69 kV
- Network frequency: 50 and 60 Hz
- Permanent standby status with automatic wake-up function
- **Transmitter (T):** grey housing
- The presence of voltage is indicated by an intermittent **RED** light and a beeping sound then transmits phase information to the receiver.
- **Receiver (R):** blue housing
- The presence of voltage is indicated by intermittent **RED** lights (2LED) and a beeping sound, and the correct phase relationship is indicated by **solid RED** lights (4 LED) and a steady sound
- Indication of the radio link by a **BLUE** light indication
- HF radio transmission operating at 868 MHz
- Minimum distance range in open air: 25 m
- Self test checking all measuring circuits, phasing functions, radio link and battery level
- A low battery level is indicated by an **ORANGE** light
- Designed for outdoor and indoor use
- Operating temperature: -25 °C to +55 °C
- Humidity: 96 % max.
- Power supply voltage: 9 V alkaline IEC 6LR61 (1 by module)
- Accepts the use of rechargeable battery with identical supply voltage
- Polycarbonate housing
- Dimensions of each module: Ø 59 mm, L = 280 mm without the Y contact electrode
- Net weight of each module: 0.390 kg with stick adaptor
- Operating manual with a choice of languages, depending on the package.

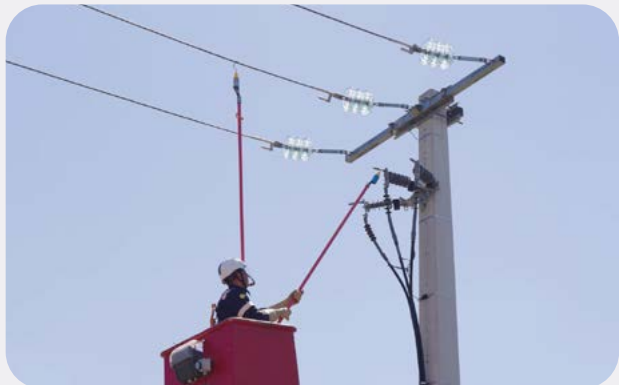



MEMPHASE

NEW

MEDIUM VOLTAGE SINGLE POLE PHASER

STANDARDS

IEC 61481-1

- A single light and compact unit that can be used safely for outdoor (overhead lines) and indoor (substations) operations.
- Positive indication for "in phase" conditions
- Voltage presence indication
- Indication of ready memorization
- The wireless concept provides :
 - Better safety, better distance range between test points and possibility of phasing through walls.
- Enhanced indication that can be clearly noticed in most working conditions.
- The battery replacement will prevent from accidental interchange of housing or circuitry, damage to electronic circuits, Humidity ingress into the device when the battery is replaced outdoors.



/ USE

MEMPHASE is designed to carry out phase comparison between two MV circuits of a Three Phase system before connection. It can also be used for checking Voltage Presence on the line.



/ Version with electrode extension

- Electrode extension for testing through access holes. Indoor and outdoor use.
- Allows access to live phases without opening the cubicle substation.
- Minimum insertion diameter of 40 mm.

/ TECHNICAL SPECIFICATIONS

AC voltage range: 1 to 36 kV

Network frequency: 50 and 60 Hz

- Class A: $\pm 10^\circ < \phi p \leq \pm 30^\circ$
- Permanent standby status with automatic wake-up function
- Single unit:
 - The presence of voltage is indicated by intermittent RED lights (2 LED) and beeping sound then memorization of the signal start.
 - Indication of the ready state of memorization made by an intermittent BLUE light, maintain of information in memory: 15s
 - Indicates phase concordance by solid RED lights (4 LED) and a steady sound
- Self test checking all measuring circuits and battery level.
- A low battery level is indicated by an ORANGE light.
- Designed for outdoor and indoor use
- Operating temperature: -25°C to $+55^\circ\text{C}$
- Humidity: 96 % max.
- Power supply voltage: 9 V alkaline cell — IEC 6LR61 (Accepts the use of rechargeable battery with identical supply voltage)
- White colour polycarbonate housing
- Dimensions: $\varnothing 59$ mm, L = 280 mm without the Y contact electrode nor electrode extension
- Net weight: 0.390 kg with stick adaptor
- Operating manual with a choice of languages, depending on the package

Reference	Voltage range	Frequency	Pole adaptator*	Contact electrode**	Manual user***	Packaging
MEMPHASE0136FHUA	1 - 36 kV	50 / 60 Hz	Universal & APV	V56	Pack F	Soft case with conductive lining for EMC protection
MEMPHASE0536ANT-226VFHUA	5-36 kV			V56 - Electrode extension 226mm		

* Other pole adaptors available on required.

** Other electrode extension length available 400, 600 and 900 mm.

*** Pack F : FR/GB/DE/ES/PT/PL -- Pack G : GB/GR/NL/BG/IT/AR/TR



- Simple use
- Reduces the influence of stray electric field



MV-PHASER-ELEC

PHASE COMPARATOR FOR MV PANELS 4÷36 kV OPTIC/ACOUSTIC SIGNAL

TECHNICAL SPECIFICATIONS

- Made of n° 2 insulating sticks L=1,2 m connected by high insulation cable L=1,5 m (other lengths upon requests)
- Removable extensions and adjustable electronic heads 0÷90° through universal head
- Voltage range: 4÷36 kV
- Frequency: 50÷60 Hz
- Signallings: optic and acoustic
- Automatic self check: cyclic every 3 seconds
- Shut-down: automatic timed or by subsequent press of the power button
- Power supply: n° 1 battery 9 V
- 900 x 180 x 120 mm
- Metal case

Reference

MV-PHASER-ELEC

Dimensions

900 x 180 x 120 mm

TAG5000 – 4-500 kV TAG5000 – 4-230 kV

WIRELESS PHASE COMPARATOR FOR OVERHEAD LINES

Advantages


- Light and compact units for overhead lines 4-230 kV.
- Specific High-Voltage probe extensions (white) for use on 110-500 kV over-head lines.
- Positive indication for "in phase" conditions.
- No hazard due to a cable link.
- Increase distance of operation (more than 25m).
- Possibility of phasing through walls (inside outside).

USE

- TAG5000 — 4-500 kV : wireless phase comparator for three phase network with nominal voltages from 4 kV up to 500 kV - 50 Hz or 60 Hz (to be specified).
- TAG5000 — 4-230 kV : wireless phase comparator for three phase network with nominal voltages from 4 kV up to 230 kV - 50 Hz or 60 Hz (to be specified).
- Shall be used with two insulating sticks (not included) complying with the nominal voltage and having universal adaptors.

TECHNICAL SPECIFICATIONS

- Transmitter (T) : grey housing 210 mm — Ø 90 mm — 0.630 kg.
- Indicates the voltage presence with both visual and acoustic indications, then start to send the phase information to the receiver.
- Receiver (R) : blue housing 210 mm — Ø 90 mm — 0.630 kg.
- Indicates the voltage presence, and indicates "in phase" relationship with both visual and acoustic indications.
- Built-in testing element simulating all the functions including "out-of-phase".
- HF radio transmission operating at 433.9 MHz.
- Minimum distance range in free air 25 m minimum.
- Out-door and All weather use.
- Powered by two 9 V alkaline batteries (1 per module).
- TAG5000 — 4-500 kV : Specific HV probe extensions (white) for 110-500 kV over-head lines : Approx. weight of each electrode extensions : 0.400 kg. Extension length Lu = 325 mm. Soft case with a set of contact electrodes (hooks and V-shaped) and silicon cloth.
- TAG5000 — 4-230 kV Metal case with a set of contact electrodes (hooks and V-shaped) and silicon cloth.

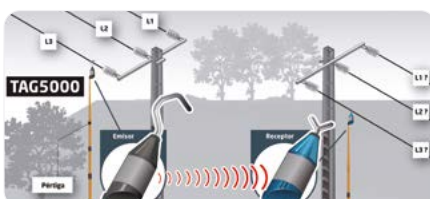

Reference	Voltage range	Frequency	Packaging	Dimensions	Weight
T5KGB004500H5	4 - 500 kV	50 Hz	Soft case	755 x 205 x 140 mm	3,85 kg
T5KGB004500H6		60 Hz			
T5KGB004230C5	4 - 230 kV	50 Hz	Metal case	337 x 105 x 235 mm	3,75 kg
T5KGB004230C6		60 Hz			



ESSENTIAL



PAAC CABLE CORE IDENTIFIER

CABLE TEST AND IDENTIFICATION — CORE IDENTIFIERS — PAAC
CABLE CORE IDENTIFIER

Advantages

- Indicates correctly matched cores & phase rotation sequences between ends
- Indicates individual faults such as –
- Two phases reversed
- Phases rotated forwards/backwards in sequence
- Earths in place on cable
- Equipment connected to cable (not properly isolated)
- Open-circuited or short-circuited cores
- Self-test
- For cables up to 33 kV, lengths up to 10 km

/ USE

Clearly identifies the cores and their sequence in a three-phase power cable. Indication of the action to be taken to correct the core sequence, or to remove a fault on any cable core(s). Uses a transmitter unit with LED indicators at the measuring end, and an array of colour-coded diodes with connecting clips to fix the diode leads to the remote end of the cable to be checked.

The CCI is for use on DE-ENERGISED CABLES ONLY. Therefore correct operating procedures must be employed to ensure the cable is de-energised and any voltage discharged before connection of the CCI or its diode array.

/ TECHNICAL SPECIFICATIONS

- Charging Circuit Voltage: 3.8–4.4 V DC
- Charging Resistance: 100 Ω
- Maximum cable core loop resistance: 28 Ω
- Maximum core voltage drop: 1.4 V DC
- Nominal charging current: 50 mA
- Charging time (to 2 V DC): 100 ms
- Battery: 9 V
- IP Rating: IP32
- Weight: 320 g



- Accurate Load Simulation
- Ensures consistent load conditions for accurate test results

PA12057

TMAC 5 A LOAD UNIT WITH LEADS AND BAG

/ USE

The TMAC Single Phase 5A Load Unit is a portable testing device designed to apply a controlled load to single-phase meters, ensuring accurate operation and performance verification under real load conditions. Includes all leads and probes ready for immediate use

/ TECHNICAL SPECIFICATIONS

- Part Number: PA12057
- Type: Single Phase 5A Load Unit
- Input Voltage: 240 V, 50 Hz
- Power Consumption: 1200 W
- Category Rating: CAT III 600 V
- Pollution Class: IP20
- Load Capacity: 5 A single-phase operation
- Test Leads: Double-insulated silicone leads
- Accessories Included: Leads and probes included in carry bag
- Carry Case: PVC-reinforced bag with detachable Velcro pocket



- Accurate Load Simulation
- Designed to meet the demands of meter technicians and utility field engineers

PA12055

TMAC 9 A LOAD UNIT WITH LEADS, PROBES AND BAG

/ USE

The TMAC Single Phase 9A Load Unit is a portable testing device designed to apply a temporary load to single-phase energy meters, allowing accurate verification of meter performance and functionality under real load conditions.

/ TECHNICAL SPECIFICATIONS

- Type: Single Phase 9 A Load Unit
- Input Voltage: 240 V, 50 Hz
- Power Consumption: 2400 W
- Load Capacity: 9 A single-phase operation
- Category Rating: CAT IV 300 V
- Pollution Class: IP20
- Test Leads: Double-insulated silicone leads
- Accessories Included: Leads, probes, and clips (all in carry bag)
- Carry Case: PVC-reinforced bag with detachable Velcro pocket



TL100

LV TEST LAMPS - FIXED CHISEL TIP WITH ROUND FLOATING PROBE

/ USE

The TMAC TL100 LV Test Lamps feature a fixed chisel tip and a round floating probe, offering safe and reliable testing for 240/415 V AC/DC circuits with CAT IV 300 V protection and AS 61010-certified performance.

/ TECHNICAL SPECIFICATIONS

- Voltage Rating: 240/415 V AC and DC
- Safety Rating: CAT IV 300 V
- Certification: AS 61010:2003 compliant
- Fuse: 2 A 500 V, breaking capacity
 - 50 kA @ 500 V AC
 - 20 kA @ 500 V DC
- Bulb Options: 15 W or 25 W
- Leads: 2 m insulated lead
- Probe Types:
 - Fixed 6.3 × 1.5 mm chisel-tip probe
 - Detachable 2 mm round floating probe
- Design Feature: Locking fitting to prevent accidental disconnection



TL102

LV TEST LAMPS - ROUND TIP WITH FLOATING LONG PROBE

/ USE

The TMAC TL102 LV Test Lamps feature a round-tip design with a floating long probe, providing safe and reliable verification of 240/415 V AC/DC circuits, rated CAT IV 300 V and certified to AS 61010.

/ TECHNICAL SPECIFICATIONS

- Voltage Rating: 240/415 V AC and DC
- Safety Rating: CAT IV 300 V
- Certification: AS 61010:2003
- Fuse: 2 A 500 V
- Breaking Capacity: 50 kA @ 500 V AC, 20 kA @ 500 V DC
- Bulb Options: 15 W (PA12686) or 25 W (PA00063)
- Leads: 2 m insulated lead
- Probe Types: 2 mm fixed long probe and 2 mm detachable long probe
- Design Feature: Special locking system to prevent accidental probe disconnection



TL200

LV TEST LAMPS - 2 FLOATING CHISEL POINT PROBES

/ USE

The TMAC LV Test Lamps with 2 Floating Chisel Point Probes provide reliable low-voltage testing up to 240/415 V AC/DC, featuring CAT IV 300 V safety rating, fused protection, and rugged 1 m leads with detachable chisel-tip probes.

/ TECHNICAL SPECIFICATIONS

- Voltage Rating: 240/415 V AC and DC
- Safety Rating: CAT IV 300 V
- Certification: Tested and certified to AS 61010:2003
- Fuse: 2 A 500 V, breaking capacity
 - 50 kA @ 500 V AC
 - 20 kA @ 500 V DC
- Bulb Options: 15 W (PA12690) or 25 W (PA12691)
- Probes: 6.3 × 1.5 mm detachable chisel-tip probes
- Leads: 2 × 1 m insulated leads
- Design Features: Locking fitting to prevent accidental disconnection



TL300

LV TEST LAMPS - FIXED ROUNDED TIP WITH FLOATING PEG PROBE

/ USE

The TMAC TL300 LV Test Lamps feature a fixed rounded tip and a floating peg probe, providing safe and reliable verification of 240/415 V AC/DC circuits with CAT IV 300 V protection and AS 61010-certified performance.

/ TECHNICAL SPECIFICATIONS

- Voltage Rating: 240/415 V AC and DC
- Safety Rating: CAT IV 300 V
- Certification: AS 61010:2003 compliant
- Fuse: 2 A 500 V, breaking capacity
 - 50 kA @ 500 V AC
 - 20 kA @ 500 V DC
- Bulb Options: 15 W (PA12694) or 25 W (PA12695)
- Leads: 3 m insulated lead
- Probe Types:
 - 6.5 × 1.5 mm fixed rounded flat probe
 - Detachable peg clip/chisel probe
- Design Feature: Special locking fitting to prevent accidental disconnection



TL500

LV TEST LAMPS - 2 ROUNDED POINT FLOATING PROBES

/ USE

The TMAC TL500 LV Test Lamps with 2 Rounded Point Floating Probes provide safe and reliable low-voltage testing up to 240/415 V AC/DC, featuring CAT IV 300 V protection, fused safety design, and 1 m leads with detachable rounded probes.

/ TECHNICAL SPECIFICATIONS

- Voltage Rating: 240/415 V AC and DC
- Safety Rating: CAT IV 300 V
- Certification: AS 61010:2003 compliant
- Fuse: 2 A 500 V, breaking capacity
 - 50 kA @ 500 V AC
 - 20 kA @ 500 V DC
- Bulb Options: 15 W (PA12694) or 25 W (PA12695)
- Leads: 3 m insulated lead
- Probe Types:
 - 6.5 × 1.5 mm fixed rounded flat probe
 - Detachable peg clip/chisel probe
- Design Feature: Special locking fitting to prevent accidental disconnection



PA12748 / PA12745

TEST LAMP SPARE PART - 15W / 25W BULB

/ USE

Genuine TMAC spare parts for 15W and 25W test lamps, including replacement globes, approved fuses, and probe caps to maintain safe and reliable voltage-testing performance.



PA12746

TEST LAMP SPARE PART - APPROVED FUSE
CERAMIC 2A

/ USE

Genuine TMAC spare parts for 15W and 25W test lamps, including replacement globes, approved fuses, and probe caps to maintain safe and reliable voltage-testing performance.



PA12755

TEST LAMP SPARE PART - PROBE CAP BANANA
PLUG

/ USE

Genuine TMAC spare parts for 15W and 25W test lamps, including replacement globes, approved fuses, and probe caps to maintain safe and reliable voltage-testing performance.



VALUE

C-PROBE LV / C-PROBE MV

OUR SELECTION

AMMETER FOR SINGLE CORE INSULATED CABLES
LOW VOLTAGE VERSION AND MEDIUM VOLTAGE VERSION

To improve the access to the cables:

- The sensor is semi-flexible to be inserted between cables without stressing them.
- Adaptors for insulating telescopic sticks (sunrise/hook pole or hexagonal APV).

To improve night use:

- Bright yellow coating of the sensor to be visible among black cables.
- Light on the top of the housing to light the sensor and the area of measurement.
- Back light of the LCD display and function « HOLD » to record the measure.
- Easy and secure access to the battery.



/ USE

This device is designed to provide operators with a safe means to measure current on insulated LV overhead lines up to 2000A. During trouble shooting operation the operators need to pin point the reason of the failure like blown fuses or overloaded circuit.
With the right insulating pole, the operator can reach overhead transformer or cables. The hook shaped sensor help to de separate the conductor to be measured from close by ones.

/ TECHNICAL SPECIFICATIONS

- Range : 2000 A
- Frequency : 50 et 60 Hz
- Sensor : 140mm; opening 45 mm
- Functions "Track" and « HOLD »
- Field of use LV insulated single core cables
- Battery: 2 x 1,5 V - CEI / IEC AA
- Protective soft carrying case



Reference	AC Voltage range	Frequency	Stick adaptors	User's manual*	Packaging
C-PROBE-LV-F	Up to 1000 V	50 / 60 Hz	Universal + Shotgun + APV	Pack F	Soft case
C-PROBE-LV-G	Up up 1000 V			Pack G	
C-PROBE-MV-F	Up to 36 kV			Pack F	
C-PROBE-MV-G	Up to 36 kV			Pack G	

* Pack F : FR/GB/DE/ES/PT/PL - Pack G : GB/GR/NL/BG/IT/AR/TR



BTC1000

METER TESTER

/ USE

This device is used to check the correct operation of electromechanical, electronic, single and three-phases subscribers by performing an increase of energy consumption with 2 different positions of the switch.

It is also used to check under consumptions (in KWh) and the frauds said "not technical losses".

/ TECHNICAL SPECIFICATIONS

- Power: No (self-powered by the network)
- Power consumption: 500 W or 1000 W
- Display: 1 red Led indication of operation
- Time of use: Unlimited usage time
- Thermal protection: Yes
- Test probes: IP2X — Ø 4 mm or European power plug (depend on version)
- PVC double insulated cable: 1 mm², L = 1,5 m
- Connections: Connecting per IEC 60320
- Case: PP orange shockproof



Reference	Version	Voltage range	User's manual	Frequency	Dimensions	Weight
BTC1000	Meter tester without test probes	230 V	FR / GB / ES	50 & 60 Hz	235 x 150 x 95 mm	1,5 Kg
BTC1000IP2X	Meter tester with IP2X test probes					
BTC1000PS	Meter tester with European power plug					



I-PROBE "GRUNTER"

NEW

CURRENT FLOW PROBE
FOR ENERGY DISTRIBUTION CABLES

- Enables to quickly scan a bundle of cables and select the loaded cables in a trench or conduit.
- Convenient to be used in LV distribution cabinets avoiding stress on cable heads.
- Provides an indication where Amp clamps and Rogowski probes do not give a reading (3 P, 3 P + N, 1 P + N cables).



/ USE

i-PROBE is a >0,5A 50/60 Hz current sensor with a compact magnetic probe, safe and easy to use, that avoids the limitations of regular measuring instruments.

i-PROBE will operate in contact with any type of insulated energy cables:

- XLPE Isolation or Paper lead cables, shielded or not, including armored cables.
- Any cable configuration: unipolar, tripolar with or without neutral, peripheral neutral.
- i-PROBE brings maximum benefits during the following situations:
- Check the presence of load in an unknown cable supposedly decommissioned, or unearthed during civil works, prior to cut it.

- Help to locate faulted cables by detecting and rejecting cables in charge.
- Allows a current measurement on unipolar cables with the use of the Rogowski probe.

This current flow probe must not be used in the circumstances hereunder:


- Instead of a live LV cable identifier (FC5300) during live line working,
- Instead of a cable identifier (FC2310) during a lockouttagout procedure,
- On bare (uninsulated) conductors.
- On GIS / OIS systems with sealed metal envelope,
- This device is a "load presence alert", by no means it can achieve a secured cable identification.
- This secured identification must be achieved by the use of a transmitter and receiver device and detection of a specific identification signal. Confirmation of the absence of voltage must be carried out by destructive means controlled with a remote device.
- Only these provisions guarantee the completion of the cable dead proof in accordance with relevant regulation.

/ TECHNICAL SPECIFICATIONS



- 3 sensitivity levels upon cable Types
- Minimum Indicated intensity : 0,5A
- Visual and audible indication of the current flow 50/60 Hz
- Available option: audio sound harmonics
- Can be used with a headset (not supplied)
- Network frequencies: 50/60 Hz
- Robust, waterproof storage and carry case (300 x 250 x 140 mm/2 kg).
- LC display for user interface
- Compatible with FC2310 probes
- Rechargeable Li-Pol battery (charger include)
- Expert mode displaying the following additional indications, from 0.3A. :
 - Harmonic currents
 - Distances of the current origins
- Display module compatible with FC2310 cable identifier probes.



- Two probes available :
 - **i-PROBE magnetic probe** : to indicate the presence of a 50 Hz current flow in all cable configurations: single-core, three-core with or without neutral, peripheral neutral.
 - **ROGOWSKI-probe** : to measure the current flowing in single-core cables.



Indications from 0,5A to 800A
by bar display.



Reference	Description
I-PROBEF*	Detector + Magnetic probe + Carrying case
I-PROBEBRF *	Detector + Magnetic probe + Rogowski probe + Carrying case
I-PROBEF-FC-READY*	i-PROBE magnetic probe alone for FC2300CP/FC2310 detectors produced since 12/2020
I-PROBEF-FC-UPGRADE*	i-PROBE magnetic probe for FC2300CP/ FC2310 detectors produced before 12/2020, with upgrade of the detector to accept i-PROBE function and a complete checking of the FC2300CP/FC2310 the manufacturer site.

* Pack F : FR/GB/DE/ES/PT/PL - Pack G : GB/GR/NL/BG/IT/AR/TR





1000 V INSULATED / INSULATING TOOLS

/ UNIVERSAL PLIERS	274
/ FLAT NOSE PLIERS	275
/ ADJUSTABLE PLIERS	279
/ CUTTING PLIERS	280
/ SCREWDRIVERS	288
/ SPANNERS AND WRENCHES	293
/ SOCKETS	294
/ INSULATED KNIFES	304
/ MULTIFUNCTION TOOLS	305
/ INSULATED KNIFES	306
/ INSULATED HACKSAW	307
/ INSULATING WEDGE	310
/ KITS	312
/ RATCHET CABLE CUTTERS	327
/ GAS TIGHTENING SPANNER	329
/ GAS SAW AND KNIFES	332
/ NON SPARKING TOOLS	333





1000 V INSULATED, HYBRID AND INSULATING HAND TOOLS FOR ELECTRICIANS

For over 60 years, PENTA Electrical Safety Products has been supplying electricians across the world with tools of the highest quality that are best suited to the specific needs of the electricity industry.

SIBILLE OUTILLAGE has ISO 9001 and ISO 14001 certification.

INSULATED-INSULATING TOOLS 1000 V COMPLYING WITH STANDARD NF EN 60900 REQUIREMENTS



/ IMPACT TEST AT AMBIENT AND LOW TEMPERATURE 23°C / -25°C

The energy created by the impact is equivalent to the energy of a tool falling from a height of 2 m and 0.60 m at low temperature onto a hard surface.

The test is satisfactory if the insulating layer of the tool shows no sign of a break, tear or crack.



/ FLAME RETARDANCY TEST

The tool is exposed to a flame for 10 seconds. Then, the propagation is observed for 20 seconds.

The flame should not propagate for the 20 seconds observation time.



/ SERIES INDIVIDUAL TEST

Each tool is checked individually at 10 KV for 10 seconds.

A 100 % sight check is also carried out.



/ DIELECTRIC TEST

After immersion in a tub of water at ambient temperature for 24 hours and then dried, a test at 10 KV is applied for 3 minutes between the conductive and insulated parts. The leakage current should be less than 1 mA per 200 mm of the coated tool.

During test : no electrical puncture, sparkover or flashover should be observed.



/ INDENTATION TEST

After conditioning for 2 hours at 70°C, a weight of 20 N being applied to the most vulnerable part of the tool, the assembly is submitted to a tension of 5 KV for 3 minutes.

No perforation, energizing or flashover should be observed during this test.



/ INSULATED COATING ADHERENCE TEST

After conditioning for 168 hours at 70° C, a weight of 500 N is applied for the plier for 3 minutes to test the steel insulated part adherence.

During the test, no detachment or tearing of the insulating material should be observed.

/ MECHANICAL TEST

Checking of the tools mechanical characteristics according to ISO standards or others standards specified by the manufacturer.

/ DURABILITY OF MARKING TEST

Tools should be wiped for 15 seconds with a water-soaked cloth and then for 15 seconds again with an ethyl alcohol-soaked cloth. After these procedures, the marking must remain legible.

/ VISUAL AND DIMENSIONAL CHECK

Make sure that the tool meets the dimensions specified by the standard or manufacturer.



DESCRIPTION OF 1000 V INSULATED PLIER

Reinforced handle ends

Several layers of PVC protect the tool from impacts. The drip effect at the end of handles is minimised, avoiding weak areas.

Large hand guards

Very strong, in insulating material to avoid slipping towards conductive parts.

Tool head with chrome or black finish

For optimum anti-corrosion resistance.

Orange external insulating layer

It is non-removable, impact-resistant and non-flammable, and offers a good grip, even while wearing insulating gloves.

Selection and use of special steel alloys

The selection of high-quality steels combined with chromium-vanadium treatment guarantees exceptional hardness and durability. Tools designed for withstanding high mechanical stresses.

- The two insulating layers are differentiated by their colour, to allow a visual inspection of tool integrity, so as to confirm that it may be used for electrical work as required by standards UTE18-510 and IEC 60900.

When the orange layer is damaged and the inner layer is visible, there is a hazard.

- The thickness of insulating layers is determined according to the weight of the tool for optimum strength.

- The tools are designed to withstand extreme temperatures from -20 to +70°C.
- Each tool is tested at 10 000 V AC and approved for 1 000 V AC, for use in low voltage networks.
- Several inspections at each stage of production, in addition to those required by standard IEC 60900.
- PENTA products are recyclable.

THE 3 TYPES OF HAND TOOLS FOR ELECTRICIANS ACCORDING TO THE CURRENT IEC 60900 STANDARD



INSULATED HAND TOOL
Hand tool made of conductive material(s) fully or partially covered by insulating material(s).



HYBRID HAND TOOL
Hand tool made from insulating material(s) with exposed conductive parts at the working head (e-g : cutting edges). Hybrid hand tool can be made of non exposed conductive parts used for reinforcement.



INSULATING HAND TOOL
Hand tool made essentially or totally from insulating material(s) except for inserts made from conductive materials used for reinforcement, but with no exposed conductive part.

Weight
Mechanical performance
Short-circuit protection
Handle size

★ ★ ★ ★	★ ★ ★ ★	★ ★ ★ ★
★ ★ ★ ★	★ ★ ★ ★	★ ★ ★ ★
★ ★ ★ ★	★ ★ ★ ★	★ ★ ★ ★
★ ★ ★ ★	★ ★ ★ ★	★ ★ ★ ★



MC4CE

INNOVATION

INSULATING UNIVERSAL PLIER
WITH CERAMIC CUTTERS


STANDARDS

EN 60900 / IEC 60900

Insulating tool = minimises the risk of short circuits, no conductive material is accessible

Ceramic cutters (compressed to over 200T giving them extreme hardness properties)

Head gripping surface with soft ribbing (to not damage the cables)

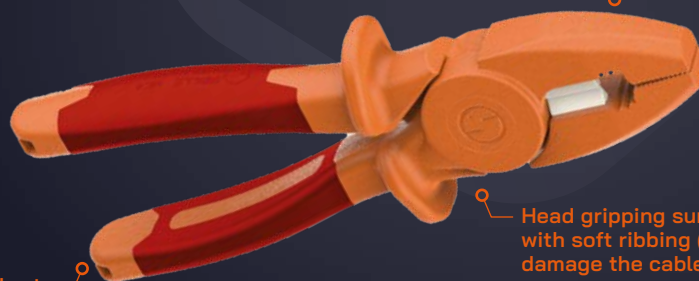**/ TECHNICAL SPECIFICATIONS**

Pliers made of glass-fibre reinforced thermoplastic, providing full electrical insulation. The 200T-compressed ceramic cutting edges deliver high hardness and clean cuts without damaging cables. With no accessible conductive parts, short-circuit risks are minimized.

Soft, glove-friendly handles are available in two sizes:


L (compact) and XL (+20 mm), offering around 10% better performance and improved comfort for more sensitive users.

The lightweight engineered design and ergonomic handle ensure optimal force transfer.

A D-ring is integrated for safe use at height.

Reference	Length (mm)	Weight (g)	Handle size
MC4CE-L	190	160	L
MC4CE-XL	210	170	XL

Head gripping surface with soft ribbing (to not damage the cables)

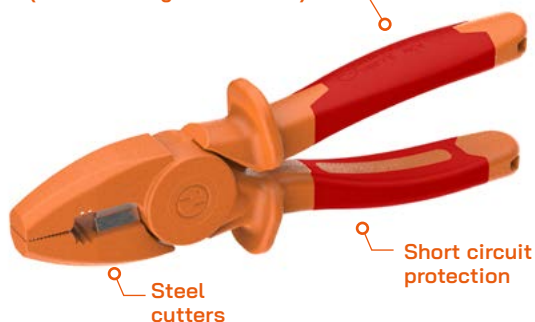

Steel cutters

Short circuit protection

MC4H

HYBRID UNIVERSAL PLIER WITH STEEL CUTTERS

STANDARDS

NF EN 60900 / IEC 60900

/ USE

These pliers are particularly suitable for low voltage live working in confined spaces where the risk of a short-circuit can have serious consequences for people and installations

/ TECHNICAL SPECIFICATIONS

Bi-material handle allowing a good grip and ease of handling, without risk of damage to the gloves. Arm profile allowing the transmission of important effort with ease = control of the gesture.

Hanging system, ideal for work at height.

Ergonomic use with insulating gloves.

Fiberglass reinforced composite material = light and robust.

Reference	Cutting capacity	Length	Weight	Handle size
MC4H-L	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	190 mm	160 g	L
MC4H-XL	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	210 mm	170 g	XL




MC13CE

INNOVATION

1000V INSULATING LONG BENT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900

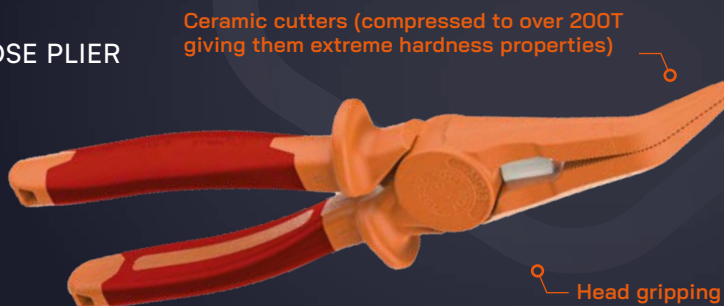

Ceramic cutters (compressed to over 200T giving them extreme hardness properties)

Head gripping surface with soft ribbing (to not damage the cables)

Insulating tool = minimises the risk of short circuits, no conductive material is accessible

/ TECHNICAL SPECIFICATIONS

Bi-material handle allowing a good grip and ease of handling, without risk of damage to the gloves.

Arm profile allowing the transmission of important effort with ease = control of the gesture. Hanging system, ideal for work at height.

Ergonomic use with insulating gloves.

Fiberglass reinforced composite material = light and robust.


Reference	Cutting capacity	Cutting capacity : Steel - Almelec	Length (mm)	Weight (g)	Handle size
MC13CE-L	16 mm ² Cu multi -stranded copper	No	215	170	L
MC13CE-XL			235	180	XL

MC13H

1000V HYBRID LONG BENT NOSE PLIER

STANDARDS

NF EN 60900 / IEC 60900

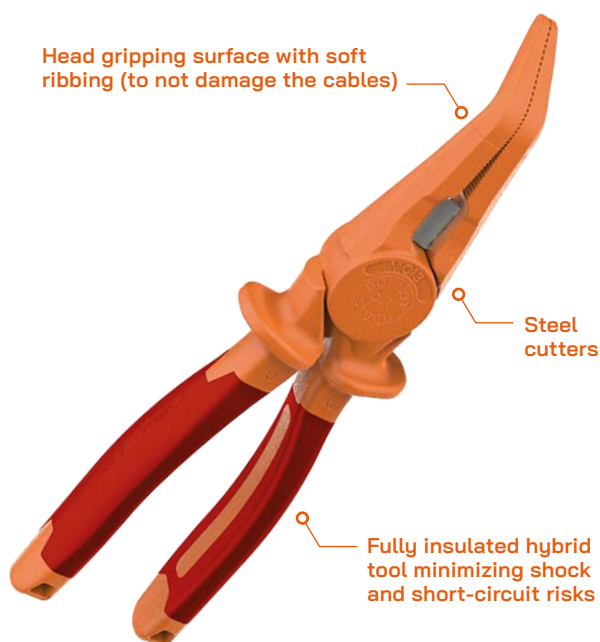

Head gripping surface with soft ribbing (to not damage the cables)

Steel cutters

Fully insulated hybrid tool minimizing shock and short-circuit risks

/ TECHNICAL SPECIFICATIONS

Pliers made of glass fiber-reinforced thermoplastic insulating material

Steel cutting part - The shape of the pliers designed to avoid damage of the cable
Hybrid tool = reduce the risks of short-circuits. The only conductive part is the cutting part.

2 handle sizes :

L : compact — standard size

XL : + 20 mm = allow better performance ~ +10% - suitable for the most fragile personnel

Designed to be used with gloves - engineering material = light

The shape of the handle is designed to transfer the efforts. D-ring for works-at-height.

Reference	Cutting capacity	Length	Weight	Handle size
MC13H-L	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	215 mm	170 g	L
MC13H-XL	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	235 mm	180 g	XL



1000V INSULATED AND INSULATING TOOLS

PLIERS

FLAT-NOSE PLIERS

MC11CE

INNOVATION

1000V INSULATING LONG FLAT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900

Insulating tool: no exposed conductive parts, reduced short-circuit risk.

Ceramic cutters (compressed to over 200T giving them extreme hardness properties)

Head gripping surface with soft ribbing (to not damage the cables)

/ TECHNICAL SPECIFICATIONS

Pliers made of glass fiber-reinforced thermoplastic insulating material

Ceramic cutting part are produced by pressure process (200T) to warranty hardness performances - The shape of the plier designed to avoid damage of the cable Insulating tool = reduce to the maximum the risks of short-circuits.

Neither conductive part

accessible. Ergonomic use with insulating gloves.

2 handle sizes : L : compact — standard size and XL : + 20 mm = allow better performance ~ +10% - suitable for the most fragile personnel

Designed to be used with gloves - engineering material = light.

The shape of the handle is designed to transfer the efforts. D-ring for works-at-height.

Reference	Cutting capacity	Cutting capacity : Steel - Almelec	Length (mm)	Weight (g)
MC11CE-L	16 mm ² Cu multi -stranded copper	No	200	160
MC11CE-XL			220	170

MC11H

1000V HYBRID LONG FLAT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Steel cutting edges. Arm profile allowing the transmission of important effort with ease = control of the gesture.

Hanging system, ideal for work at height.

Ergonomic use with insulating gloves.

Composite material = lightness.

Reference	Cutting capacity	Length	Weight	Handle size
MC11H-L	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	200 mm	160 g	L
MC11H-XL	Cu: 16 mm ² - Al: 25 mm ² - No Steel — No Almelec	220 mm	170 g	XL

Bi-material handle for secure grip without damaging gloves.

Only the conductive cutting edges are accessible.

Soft-ribbed head grip to protect cables.



MCPTI

INSULATING PLIER FOR ELECTRICAL PANELS

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Insulating product (no accessible metal parts) for maximum safety.
Fiberglass-reinforced thermoplastic insulating material.
Reinforced arm profile adapted to the constraints of the field.

Reference	Length (mm)	Weight (g)
MCPTI	196	115



MC70

1000V INSULATING NOTCHE PLIER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Compact design and very rigid when gripping. Fiberglass-reinforced thermoplastic insulating material. Reinforced arm profile adapted to the constraints of the field.

Reference	Length (mm)	Weight (g)	Handle size
MC70-L	200	160	L
MC70-XL	220	170	XL

MC45I

OUR SELECTION

1000V HYBRID CABLE CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900

Lightweight, glove-friendly design for easy handling.



/ TECHNICAL SPECIFICATIONS

Bi-material handle for a good grip and ease of handling, XL arm length for more comfort and easier transmission of force (+ 20 mm compared to a standard pliers) - Force transmission gain ~ +10%. Arm profile allowing the transmission of important effort with ease = control of the gesture. Hanging system, ideal for work at height. Fiberglass reinforced composite material = light and robust. Reinforced blade profile.

Reference	Length	Weight	Handle size	Cuttin capacity	Ø opening
MC45I-L	172 mm	230 g	L	Copper : 25 mm ² Aluminium : 70 mm ² Steel : no	16 mm
M45I-XL	187 mm	250 g	XL		



1000V INSULATED AND INSULATING TOOLS PLIERS



MC451R

1000V REINFORCED HYBRID CABLE
CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Almelec cutting capacity. Tapered nose for optimal accessibility.

Reference	Length (mm)	Cutting Capacity	Weight (g)
MC451R	190	54,6 mm ² Almelec	165



Mobile grip pads

IS53U

1000V INSULATED FUSE-PULLER PLIER
WITH ADJUSTABLE JAWS

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Plier with a 25–100 mm opening capacity and spring-loaded jaws.
Removable, replaceable grip pads with a reversible 180° design suitable for various fuse types (porcelain, knife, etc.).
Latch locking system, fully ambidextrous.
Front and rear handle stops for secure handling.

Reference	Length (mm)	Weight (g)
IS53U	215	160



MS27

1000V INSULATED DOUBLE SLIP-JOINT
ADJUSTABLE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 8976 / ISO 5744

/ TECHNICAL SPECIFICATIONS

Double rack. Browning steel finish for high anticorrosion protection thanks to a series of 5 baths. Inner jaws hardness : 60 HRC for better wear resistance.
Model MS27R / reinforced model.
One-handed adjustment possible.

Reference	Jaw opening	Position number	Length	Weight
MS27-250	28 mm	7	10"	440 g
MS27R-250				



MS27VM

1000V INSULATED DOUBLE RACK AND PINION PLIER WITH MECHANICAL LOCKING

STANDARDS

NF EN 60900 / IEC 60900 / NF ISO 8976

/ TECHNICAL SPECIFICATIONS

Quick, easy, one-hand adjustment. Push button to unlock/lock the setting = safety. 9 setting positions. Anti-finger-pinch device. Large capacity: 60 mm Thin jaws. Internal length of gripping handle: min. 70 mm.

Reference	Jaw opening	Position number	Length	Weight
MS27VM	60 mm	9	250 mm ^{+/-15*}	450 g



MS8

1000V INSULATED SLIP-JOINT ADJUSTABLE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 8976 / ISO 5744

/ TECHNICAL SPECIFICATIONS

Low thickness head working. Machined notch for better stability. Thin head for better accessibility.

Reference	Length	Weight	Minimum opening jaws
MS8-205	205 mm	230 g	22 mm
MS8-250	250 mm	400 g	28 mm
MS8-310	310 mm	670 g	35 mm



MS43

1000V INSULATED STRIPPING ADJUSTABLE PLIER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Suitable for stripping single-pole and multicore cables from 0.5 to 10 mm² (max Ø 5 mm), this tool features a 5-bath browned steel finish for strong anticorrosion protection. The adjustment screw with locking nut ensures precise diameter setting, while the return spring makes opening easier and more comfortable.

Reference	Length	Weight
MS43	175 mm	200 g



MS45

1000V INSULATED CABLE CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900

/ USE

For cutting electrical cables.

/ TECHNICAL SPECIFICATIONS

Automatic opening, invisible spring. Clamp with locking lever for extra safety. Cutting capacities indicated on the tool

Reference	Length	Weight	Aluminium	Copper	Opening
MS45-195	195 mm	430 g	Ø 14 mm	Ø 14 mm	20 mm
MS45-230	230 mm	500 g	Ø 20 mm	Ø 20 mm	24 mm



1000V INSULATED AND INSULATING TOOLS

CUTTING PLIERS

CUTTING AND STRIPPING PLIERS

Head coated with insulation, to minimise the risk of contact between different potentials and short circuits.



MS43E

1000V FULLY INSULATED STRIPPING PLIER

STANDARDS

EN 60900 / IEC 60900

/ USE

Stripping cables (single-pole and multiple conductor) from 0.5 to 10 mm² (max Ø: 5 mm).

/ TECHNICAL SPECIFICATIONS

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths. With adjustment screw and nut for locking on the required diameter. Return spring that makes opening easier.

Reference	Length	Weight
MS43E	180 mm	220 g

Special cutting profile for clean, non-flattening cuts with minimal effort.

High-performance chromium-vanadium steel



Double-edged blades for smoother cutting.

Insulated arm-ends for impact protection.

MS30S

1000V INSULATED CABLE CUTTING AND STRIPPING PLIER FOR REMOTE ENERGY METER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Protective pin to avoid pinching. Stripping function using a small notch made at the end of the jaw. Riveted jaws.

Reference	Length (mm)	Weight (g)	Opening (mm)
MS30S-165	165	200	12
MS30S-200	205	340	16
MS30S-250	250	430	18

PCC20-1000V

OUR SELECTION

1000V INSULATED CABLE SHEARS WITH TWIN CUTTING EDGE

STANDARDS

EN 60900 / IEC 60900

Guard prevents operators' fingers being pinched



Clean and smooth cut without crushing and deformation



/ TECHNICAL SPECIFICATIONS

Protective pin to avoid pinching. Stripping function using a small notch made at the end of the jaw. Riveted jaws.

Reference	Length	Weight	Opening	Capacity
PCC20-1000V	210 mm	350 g	Ø 20 mm	Copper & alu : 70 mm ² / No steel





C28-250

1000V INSULATED CABLE CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Arm profile allowing the transmission of important cutting effort with ease.
Hardened steel cutting edges : 45 HRC.

Reference	Length	Weight	Cutting capacity
C28-250	250 mm	470 g	Ø12 mm



Compact plier for better accessibility, handy and simple implementation

PCCR1000V

CUTTING PLIER FOR PLASTIC CABLE TIES

STANDARDS

IEC 60900 (ONLY FOR THE INSULATED VERSION)

/ USE

The plier's specially shaped nose cuts plastic clamp rings (Rilsan, Colson, etc.) without risking cable damage. Ideal for electrical networks, power stations, telecom, public lighting, firefighting, automotive, and infrastructure work.

Reference	Length	Weight	Cutting capacity
PCCR-1000V	150 mm	140 g	Ø10 mm



MS5S

1000V INSULATED FLUSH CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900

/ USE

Cutting the strip on the armoured telepoint cable.

Reference	Length	Weight
MS5S	130 mm	100 g



1000V INSULATED AND INSULATING TOOLS

PLIERS

UNIVERSAL PLIERS



Used in the phone field for multi wires

MS80

1000V INSULATED CONNECTOR PLIER

STANDARDS

EN 60900 / IEC 60900

/ USE

Pliers used in the telephony field for multipair cable. For crimping telecommunication and signal cables.

Reference	Length	Weight
MS80	150 mm	150 g

MS4

OUR SELECTION

1000V INSULATED UNIVERSAL PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5746

Serrated tips with "soft" profile to avoid damaging cables

High performance chrome vanadium steel

Bevelled head for better accessibility in tight spaces

Insulating reinforcements at the ends of the arms to protect against impact



/ USE

Multi-purpose pliers (clamping, bending, cutting).

Reference	Length	Weight
MS4-145	145 mm	190 g
MS4-165	165 mm	255 g
MS4-185	185 mm	320 g
MS4-210	210 mm	390 g
MS4-220	220 mm	450 g

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 60 HRC.

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

No play in the axis for a perfect alignment of the cutting edges guaranteeing an optimal cutting quality. This also prevents unintentional opening of the tool during transport, which could damage other tools.

MS4E

1000V FULLY INSULATED UNIVERSAL PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5746

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life.

Edge hardness: 40 HRC min.

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

The working head insulation is chamfered to avoid damaging it while grasping.



Reference	Length	Weight
MS4E-185	185 mm	330 g
MS4E-210	210 mm	400 g

Overall length tolerance : ± 15 mm of the nominal value



MS4-250

1000V INSULATED LINEMAN PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5746

/ TECHNICAL SPECIFICATIONS

For LINEMAN

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 60 HRC.

Chrome finish for high anticorrosion protection thanks to a series of 5 baths.

Lug crimping point under the axis of the tool.

Reference	Length	Weight
MS4-250	250 mm	450 g



MS13

1000V INSULATED HALF-ROUND 45° BENT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 44 HRC min. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Axial cut edges. Jaws with ribbing on the inside for a good hold.

Reference	Length	Weight
MS13-165	165 mm	180 g
MS13-185	185 mm	190 g
MS13-205	205 mm	200 g



MS13E

1000V FULLY INSULATED HALF-ROUND 45° BENT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ USE

This plier make it easy to bend electrical wire. Suitable for work requiring a good grip and precision cutting.

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 44 HRC min. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Axial cut edges. Jaws with ribbing on the inside for a good hold.

Reference	Length	Weight
MS13E 185	185 mm	210 g
MS13E 205	205 mm	250 g



1000V INSULATED AND INSULATING TOOLS

PLIERS

FLAT-NOSE PLIERS



MS10

1000V INSULATED HALF-ROUND LONG NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ USE

This plier make it easy to bend electrical wire. Suitable for work requiring a good grip and precision cutting.

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a longlife. Edge hardness: 44 HRC min. Browned steel finish for high anticorrosion protection thanks to a seriesof 5 baths. Axial cut edges. Jaws with ribbing on the inside for a good hold.

Reference	Length	Weight
MS10-170	170 mm	175 g
MS10-205	205 mm	240 g



MS10E

1000V FULLY INSULATED HALF-ROUND LONG NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ USE


This plier make it easy to bend electrical wire. Suitable for work requiring a good grip and precision cutting. Complete insulation of the working head reduces the risk of short-circuits.

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 44 HRC. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths. Axial cutting edges. Nose length designed to reach hard-to-reach parts.

Reference	Length	Weight
MS10E-170	170 mm	185 g
MS10E-205	205 mm	250 g

Insulating reinforcements at the ends for protection from impacts

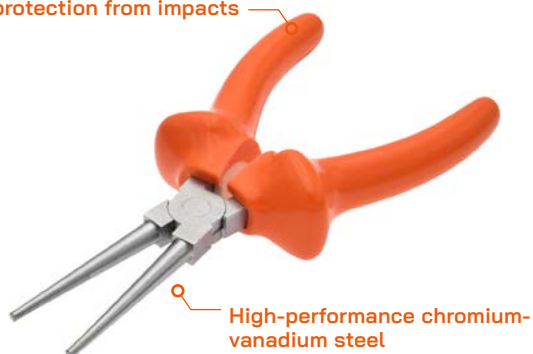

MS15

1000V INSULATED ROUND NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ TECHNICAL SPECIFICATIONS

Chrome finish for high anticorrosion protection thanks to a series of 5 baths. Jaws with ribbing on the inside for a good hold. Nose length designed to reach hard-to-reach parts.

Reference	Length	Weight
MS15-170	170 mm	170 g



MS11

1000V INSULATED FLAT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745


/ USE

They make it easy to bend electrical wire.

/ TECHNICAL SPECIFICATIONS

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.
Jaws with ribbing on the inside for a good hold.

Reference	Type	Length	Weight
MS11-150BC	Short flat nose	150 mm	175 g
MS11-170BC		170 mm	180 g
MS11-170BL	Long flat nose		185 g

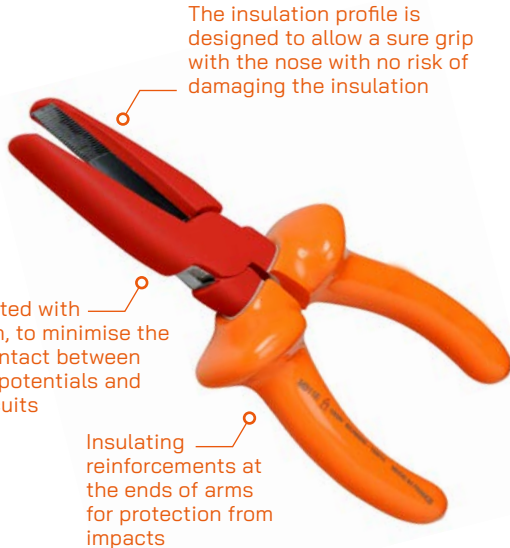

MS11E

1000V FULLY INSULATED LONG FLAT NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5745

/ USE

They make it easy to bend electrical wire. Complete insulation of the work head reduces the risk of short-circuits.

/ TECHNICAL SPECIFICATIONS

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.
Jaws with ribbing on the inside for a good hold.

Reference	Length	Weight
MS11E-170	170 mm	210 g



MS60

1000V INSULATED DIAGONAL CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5749

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 44 HRC min.

Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Reference	Length	Weight
MS60-145	145 mm	200 g
MS60-165	165 mm	260 g
MS60-185	185 mm	350 g



1000V INSULATED AND INSULATING TOOLS

PLIERS

CUTTING PLIERS



MS60E

1000V FULLY INSULATED HALF-ROUND LONG NOSE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5749

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Edge hardness: 44 HRC. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Reference	Length	Weight
MS60E-170	170 mm	260 g
MS60E-185	185 mm	350 g



MS5

1000V INSULATED SIDE PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5749

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Cutting edges hardness: 62 HRC. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Reference	Length	Weight
MS5-150	150 mm	220 g
MS5-175	175 mm	280 g
MS5-190	195 mm	370 g
MS5-200	210 mm	400 g



MS5E

1000V FULLY INSULATED SIDE CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5749

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life. Cutting edges hardness: 62 HRC. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.

Reference	Length	Weight
MS5E-190	195 mm	370 g



MS6

1000V INSULATED END CUTTING PLIER

STANDARDS

EN 60900 / IEC 60900 / ISO 5743 / ISO 5744 / ISO 5748

/ TECHNICAL SPECIFICATIONS

Induction forge treatment of the cutting edges, giving jaws a long life.
Cutting edges hardness: 62 HRC. Browned steel finish for high anticorrosion protection thanks to a series of 5 baths.
Riveted joint that can withstand high loads.

Reference	Length	Weight	Cutting capacity
MS6-135	135 mm	210 g	Medium-hard steel wire 160 kg/mm ² : Ø 1,4 mm
MS6-170	170 mm	290 g	Medium-hard steel wire 160 kg/mm ² : Ø 1,6 mm
MS6-210	210 mm	410 g	Hard steel wire 200 kg/mm ² : Ø 2 mm

HTLC4 HTLC5

1000V INSULATED TORQUE

STANDARDS

EN 60900 / IEC 60900 / EN ISO 6789

Rough finish for
a secure hold

Interchangeable
blade



/ USE

In order to guarantee the optimum tightening torque and to facilitate the work of technicians, we offers a torque limiting screwdriver preset at 4.5 Nm or 5 Nm. When the torque is reached, the dynamometric device is triggered, thus ensuring optimal screwing. Automatic reset.

/ TECHNICAL SPECIFICATIONS

- Fixed torque factory preset to 4.5Nm or 5Nm depending on model.
- Delivered with a calibration certificate.
- Each tool is marked with a serial number for traceability

The screwdriver is supplied with a set of 3 removable blades:

- Short insulated hexagonal blade for 4 mm hexagonal socket screws.
 - Long insulated hexagonal blade for 4 mm hexagon socket screws.
 - Long insulated blade for 6.5 mm slotted head screws.
- Complete set delivered in a canvas bag.

Reference	Description
HTLC4	1000V insulated torque limiting screwdriver 4,5 Nm (with 3 blades)
HTLC5	1000V insulated torque limiting screwdriver 5 Nm (with 3 blades)

Spare parts	Description
IS18AI-6.5	Long, insulated bit for 6,5 mm slotted head screws
IS64AI-4	Short, insulated bit for 4 mm hex key screws
IS64ALI-4	Long, insulated bit for 4 mm hex key screws
TLC4	4 Nm - 2,95 lbf.ft - 35,4 lbf.in torque limiting screwdriver without bit
TLC5	5 Nm - 3,7 lbf.ft in torque limiting screwdriver without bit

Options	Description
IS64ALI-3	Insulated long blade 6-sided 3 mm
IT18AI-25	Insulated Torx blade T25



ROTOLINE

PATENTED

1000V INSULATED SCREWDRIVERS

STANDARDS

EN 60900 / IEC 60900 / ISO 2380-1 / ISO 8764 / ISO 10664

/ After an in-depth study to find the best compromise between comfort and efficiency, we have developed its newest innovation, the Rotoline range.

The screwdrivers of the Rotoline range have a perfectly rounded handle end, making them perfect in terms of grasp and user comfort.

That round end allows the user to turn the screwdriver in the palm of his hand very easily during heavy-duty work, particularly with electrician's gloves.

The ROTOLINE range is available with three handle ends :

- **ROTOLINE CLASSIC** : this is the classic version of the screwdriver, with a perfectly round handle end that makes it very comfortable in use.
- **ROTOLINE TURN** : the round handle end rotates, making initial tightening and loosening much easier. The handle ball sits snugly in the palm, and the user can rotate the body of the screwdriver with their fingers.
- **ROTOLINE TURN & BLOCK** : the end of the handle rotates, and can also be locked by just applying pressure to it. The rotating function helps in initial tightening, while the lock is used for final tightening.

"SMART DIAMETER" BLADE

The blades are turned to offer no excess thickness of the insulating material at the top of the blade in order to reach screws set in narrow recesses.



BLADE

High strength tempered and burnished steel for more precision.

INSULATED BLADE

The insulating sleeve is integral with the handle, injected directly around the blade. 1000 V insulation in accordance with electrical standard IEC 60900:2012 and mechanical standards ISO2380-1 and ISO8764-1. VDE certified.




HANDLE

Ergonomic handle with high-quality soft coating for comfort and grip. The handle is designed for powerful and comfortable tightening. Four different handle dimensions are available, depending on the blade diameter. Markings are applied showing standard information and product number.

INITIAL TIGHTENING POSITION

The rotating ball of the handle is held in the palm and the fingers control the rotation of the screwdriver.

NB : According to regulations, wearing insulating gloves is mandatory.



IDENTIFICATION RING

Each screwdriver has a coloured ring on the handle. The ring colour corresponds to the type of screwdriver blade, allowing a quick identification.



Slot-head blade



Pozidriv blade



Phillips blade




Torx® blade

ROUND END

The round end is absolutely smooth and shaped to suit the hollow of the palm for quick and precise rotation.

The round end of the handle is marked with the symbol of the blade type, and the pictogram associated with the type of Rotoline model : Classic, Turn or Turn & Block.

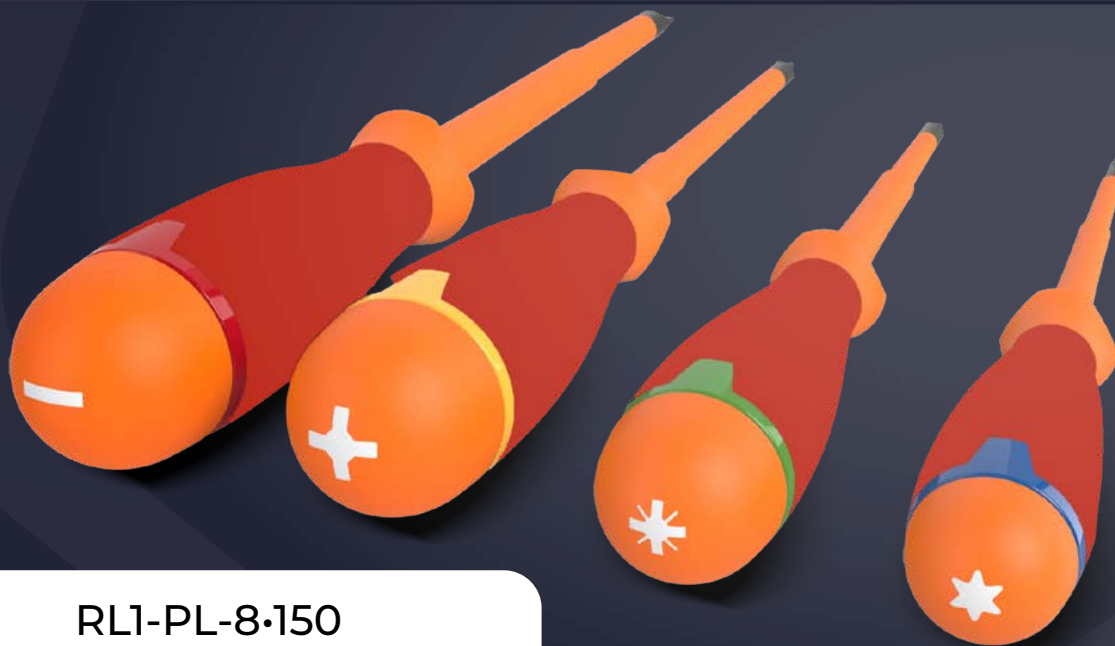

RL1-PL-8.150

Rotoline model

RL1 for Rotoline Classic
 RL2 for Rotoline Turn
 RL3 for Rotoline Turn & Block

Blade Type

PL : slot-head
 PH : Phillips
 PZ : Pozidriv
 TX : Torx®

Shank dimensions
 Diameter x length

Advantage

• The most complete range
 of screwdrivers : 70 models.

				OUR SELECTION			
Type of blade	Dimensions (shank Ø x shank lenght)	ROTOLINE CLASSIC item number		ROTOLINE TURN item number		ROTOLINE TURN & BLOCK item number	
SLOT-HEAD	2 x 70		RL1-PL-2•70*		RL2-PL-2x70*		-
	3 x 100		RL1-PL-3•100*		RL2-PL-3x100*		-
	3,5 x 120		RL1-PL-35•120		RL2-PL-35x120		-
	4 x 120		RL1-PL-4x120		RL2-PL-4x120		-
	5,5 x 100		RL1-PL-55x100		RL2-PL-55x100		-
	5,5 x 150		RL1-PL-55x150		RL2-PL-55x150		-
	6,5 x 150		RL1-PL-65x150		RL2-PL-65x150		-
	8 x 150		RL1-PL-8x150		RL2-PL-8x150		RL3-PL-8x150
	8 x 200		RL1-PL-8x200		RL2-PL-8x200		RL3-PL-8x200
	10 x 150		RL1-PL-10x150		RL2-PL-10x150		RL3-PL-10x150
	10 x 250		RL1-PL-10x250		RL2-PL-10x250		RL3-PL-10x250
	12 x 200		RL1-PL-12x200		RL2-PL-12x200		RL3-PL-12x200
PHILLIPS	N°0 - 4 x 75		RL1-PH-4x75		RL2-PH-4x75		-
	N°0 - 4 x 150		RL1-PH-4x150		RL2-PH-4x150		-
	N°1 - 5 x 100		RL1-PH-5x100		RL2-PH-5x100		-
	N°2 - 6 x 125		RL1-PH-6x125		RL2-PH-6x125		-
	N°3 - 8 x 150		RL1-PH-8x150		RL2-PH-8x150		RL3-PH-8x150
	N°4 - 10 x 200		RL1-PH-10x200		RL2-PH-10x200		RL3-PH-10x200
POZIDRIV	N°0 - 4 x 75		RL1-PZ-4x75		RL2-PZ-4x75		-
	N°0 - 4 x 150		RL1-PZ-4x150		RL2-PZ-4x150		-
	N°1 - 5 x 100		RL1-PZ-5x100		RL2-PZ-5x100		-
	N°2 - 6 x 125		RL1-PZ-6x125		RL2-PZ-6x125		-
	N°3 - 8 x 150		RL1-PZ-8x150		RL2-PZ-8x150		RL3-PZ-8x150
	N°4 - 10 x 200		RL1-PZ-10x200		RL2-PZ-10x200		RL3-PZ-10x200
TORX®	T10		RL1-TX-T10*		RL2-TX-T10*		-
	T20		RL1-TX-T20		RL2-TX-T20		-
	T27		RL1-TX-T27		RL2-TX-T27		-
	T30		RL1-TX-T30		RL2-TX-T30		-
	T45		RL1-TX-T45		RL2-TX-T45		RL3-TX-T45

* These models do not use « smart diameter ».



1000V INSULATED AND INSULATING TOOLS SCREWDRIVERS

"Smart diameter blade" : no extra insulation thickness on head of tool to reach narrow recesses



IS18DB

1000V INSULATED SLOTTED SCREWDRIVER
WITH SMART DIAMETER BLADE

STANDARDS

EN 60900 / IEC 60900 / ISO 2380-1

/ USE

For tightening slotted screws.

/ TECHNICAL SPECIFICATIONS

Ergonomically designed bi-material handle for good support (especially with insulating gloves) and comfortable torque transmission.

Hanging hole (anti-fall).

Screwdriver tip : slotted.

Additional (non-standard) blade bending test.

Reference	Blade Ø	Blade length	Handle Ø	Handle length	Weight
IS18DB4X120	4 mm	120 mm	27 mm	91 mm	45 g
IS18DB55X150	5,5 mm	150 mm	32 mm	109 mm	65 g
IS18DB65X150	6,5 mm				95 g
IS18DB65x40	6,5 mm	40 mm	31 mm	55 mm	35 g
IS18DB8X150	8 mm	150 mm	35 mm	123 mm	140 g
IS18DB10X150	10 mm	150 mm	35 mm	123 mm	180 g

"Smart diameter blade" : no extra insulation thickness on head of tool to reach narrow recesses



IC18DB

1000V INSULATED PHILLIPS SCREWDRIVER
WITH SMART DIAMETER BLADE

STANDARDS

EN 60900 / IEC 60900 / ISO 8764-1

/ USE

For tightening Phillips screws.

/ TECHNICAL SPECIFICATIONS

Ergonomically designed bi-material handle for good support (especially with insulating gloves) and comfortable torque transmission.

Hanging hole (anti-fall).

Screwdriver tip : Phillips.

Additional (non-standard) blade bending test.

Reference	N°	Blade Ø	Blade length	Handle Ø	Handle length	Weight
IC-18DB4X75	0	4 mm	75 mm	27 mm	91 mm	40 g
IC18DB5X100	1	5 mm	100 mm			50 g
IC18DB6X125	2	6 mm	125 mm			80 g
IC18DB8X150	3	8 mm	150 mm			140 g



IP18DB

1000V INSULATED POZIDRIV SCREWDRIVER
WITH SMART DIAMETER BLADE

STANDARDS

EN 60900 / IEC 60900 / ISO 8764-1

/ USE

For tightening Pozidriv screws.

/ TECHNICAL SPECIFICATIONS

Ergonomically designed bi-material handle for good support (especially with insulating gloves) and comfortable torque transmission.

Hanging hole (anti-fall).

Screwdriver tip : Pozidriv.

Additional (non-standard) blade bending test.

Reference	N°	Blade Ø	Blade length	Handle Ø	Handle length	Weight
IP18DB4x75	0	4 mm	75 mm	27 mm	91 mm	40 g
IP18DB5X100	1	5 mm	100 mm			50 g
IP18DB6X125	2	6 mm	125 mm	32 mm	109 mm	80 g
IP18DB8X150	3	8 mm	150 mm	32 mm	123 mm	140 g



IT18DB

1000V INSULATED TORX® SCREWDRIVER
WITH SMART DIAMETER BLADE

STANDARDS

EN 60900 / IEC 60900 / ISO 10664

/ USE

For tightening Torx® screws.

/ TECHNICAL SPECIFICATIONS

Ergonomically designed bi-material handle for good support (especially with insulating gloves) and comfortable torque transmission.

Hanging hole (anti-fall).

Screwdriver tip : Torx®

Additional (non-standard) blade bending test.

Reference	N°	Blade Ø	Blade length	Handle Ø	Handle length	Weight
IT18ND-T10	T10	3 mm	100 mm	22 mm	74 mm	25 g
IT18ND-T15	T15	3,5 mm	100 mm	22 mm	74 mm	30 g
IT18DB-T20	T20	4 mm	120 mm	27 mm	91 mm	45 g
IT18DB-T25	T25	5 mm	100 mm	27 mm	91 mm	50 g
IT18DB-T27	T27	5 mm	100 mm	27 mm	91 mm	50 g
IT18DB-T30	T30	5,5 mm	150 mm	32 mm	109 mm	65 g
IT18DB-T40	T40	6,5 mm	150 mm	32 mm	109 mm	95 g
IT18DB-T45	T45	8 mm	150 mm	35 mm	123 mm	140 g



1000V INSULATED AND INSULATING TOOLS SCREWDRIVERS



TC4

1000V INSULATED SCREWDRIVER FOR ROUND HEADED OR CONICAL SQUARE COUNTERSUNK SCREWS

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

The ergonomic shape of the handle ensures a good grip, especially when using gloves, and a high torque with limited effort.

Reference	Length	Square	Screw diameter
TC4N1	215 mm	2,35 mm	3-3,5 mm
TC4N2	225 mm	2,9 mm	4-5 mm
TC4N3		3,4 mm	6 mm



TFA

1000V INSULATED HANDLE WITH FLEXIBLE SHAFT AND MAGNETIC TIP

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

This tool consists of a handle and a flexible rod with a magnet at its tip.
Maximum load/lift force: 120 g

Reference	Length overall	Length wand	Magnetic diameter	Weight
TFA	560 mm	440 mm	5mm	130 g



TLF8

LEVER SCREWDRIVER WITH FLAT BLADE Ø 8 MM

/ USE

This tool facilitates the leverage operations required in different configurations (e.g. removing wood panels and meters).

/ TECHNICAL SPECIFICATIONS

Large cross-section blade limits the effect of elasticity when levering.
Flat blade with a 15° angle.
This tool is not an insulated tool.

Reference	Length	Weight
TLF8	305 mm	150 g



MS220

INSULATED ANGLED BOX-END WRENCH

STANDARDS

IEC 60900 / ISO 691 / ISO 1711-1

/ TECHNICAL SPECIFICATIONS

Hardness : 39 HRC mini.

Reference	Size	Length	Weight
MS220-13	13 mm	150 mm	440 g
MSHU220-14	14 mm		450 g
MSHU220-17	17 mm		670 g
MSHU220-19	19 mm		675 g



MS51

1000V INSULATED SINGLE HEAD BENT SOCKET SPANNER 6-SIDED

STANDARDS

EN 60900 / IEC 60900 / ISO 691 / ISO 1711-1

/ USE

Socket wrench specially designed for TRS (Reduced size Urban Low Voltage Switchboard).

/ TECHNICAL SPECIFICATIONS

End stop on the handle for a good grip.

Reference	Lenght	Diameter	Weight
MS51 16	325 mm	16 mm	680 g
MS51 17		17 mm	



MS51T

1000V INSULATED BENT TORX® KEY T50

STANDARDS

EN 60900 / IEC 60900

/ USE

Designed to be used on IP2X Low Voltage switchboards - TIPI (Power and Information Interface Switchboard).

/ TECHNICAL SPECIFICATIONS

Large handle for easy torque transmission.

Reference	Lenght	Diameter	Weight
MS51T	375 mm	TORX® T50	300 g



1000V INSULATED AND INSULATING TOOLS SOCKETS

Optimal access to installations
thanks to the long, thin head



IS87S



IS87XL

IS67 - IS87

1000 V INSULATED SOCKET
TO BE USED WITH EXTERNAL HEXAGON
SCREWS

STANDARDS

CEI EN IEC 60900 / CATEGORIE C / ISO 1774-1/ ISO 1711-1 / ISO 2936 / ISO 691

/ USE

Manual sockets to be used with standard ratchet
wrenches or with locking devices.

/ TECHNICAL SPECIFICATIONS

Sockets made of burnished steel alloy.

Codice	Square connection	Measurement	Lenght	Weight
IS87S-5	3/8"	5 mm	55 mm	30 g
IS87S-6		6 mm		
IS87S-8		8 mm		35 g
IS87S-10		10 mm		45 g
IS87XL-4		4 mm	128 mm	
IS87XL-5		5 mm		50 g
IS87XL-6		6 mm		55 g
IS87XL-8		8 mm		60 g

Codice	Square connection	Measurement	Lenght	Weight	
IS67M-5	1/2"	5 mm	78 mm	60 g	
IS67M-6		6 mm		65 g	
IS67M-8		8 mm			
IS67M-10		10 mm		70 g	
IS67XL-4		4 mm	133 mm		
IS67XL-5		5 mm			75 g
IS67XL-6		6 mm			80 g
IS67XL-8		8 mm		95 g	



MS45SP

1000 V INSULATED CABLE CUTTER

STANDARDS

CEI EN IEC 60900

/ USE

Cutting electrical cables.

Ref	Opening capacity	Cutting capacity	Length	Weight
MS45SP	Ø 15 mm	Cu: 35 mm ² Al: 50 mm ²	170 mm	300 g



Insulating reinforcements
at the ends of the handles
to protect against impact

Presence of protection
to prevent the hand
from slipping towards
the conductive parts of
the tool



Sharp edge on the first blade
with micro-serration to prevent
the conductor being cut from
slipping, and on the second
blade with flush cut

MS2P

1000 V INSULATED SCISSORS

STANDARDS

CEI EN IEC 60900

/ TECHNICAL SPECIFICATIONS

High-performance steel with burnishing treatment.
Adjustable hinge with nickel-plated screw and lock nut.
Flexible joint without friction.

Ref	Lenght	Length of exposed head	Width	Weight
MS2P	185 mm	70 mm	50 mm	180 g

MS241

1000V INSULATED DOUBLE HEAD 12-SIDED RATCHET SPANNER

STANDARDS

CEI EN IEC 60900

/ USE

For right and left hand pitch tightening.

/ TECHNICAL SPECIFICATIONS

Spanner with 2 working heads of different sizes.
12-sided
Reversible tightening direction by means of a latch.

Ref	Length	Weight
MS241-13x17	23,5 mm	300 g
MS241-17x19	27 mm	530 g
MS241-24x30	36 mm	1,350 kg





/ WRENCHES, T-WRENCHES, ADJUSTABLE SPANNERS, RING SPANNERS

	OPEN END WRENCHES		T-WRENCHES	
				
	MS16	MS16Q	MS19	MS34
Description	15° inclined head	« quick » clamping	long version (305 mm)	small size (135 mm)
Opening	5 to 36 mm 3/16" to 1,5/8"	8 - 10 - 13 - 14 - 16 -17 -19 mm	6 sides Ø 10 to 22 mm 12 sides Ø 18 to 22 mm	6 sides Ø 6 to 21 mm

*Other size on request

/ SOCKET WRENCH, CROSS SPANNER, NUT DRIVER, BENT MALE HEX KEY, T-HANDLE HEX KEYS, HEX KEY DRIVER WITH HANDLE, SINGLE HEAD CRANKED RING SPANNER

	SOCKET WRENCHES	CROSS SPANNER	NUT DRIVER	
				
	MS20	IS39	RL-36	
Description				
Opening	12 sides Ø 10 to 36 mm	6 sides 6 x 8 x 10 x 12 mm 7 x 9x 11 x 13 mm 8 x 10x 12 x 14 mm 8x 10 x 13 x17 mm 14 x 17 x 19 x 21 mm	6 sides Ø 6 to 20 mm	

*Other size on request



ADJUSTABLE SPANNERS		RING SPANNERS			
					
MS7	MS7S	MS41	MS38	MS41-12P	
		ratchet	15° inclined head	ratchet	
until 43 mm	until 34 mm	6 sides 10-13-16-17-18-19-22 mm	12 sides Ø 5 to 26 mm 1/4" to 15/16"	12 sides 8-10-12-13-14-16-17-18-19 mm	

BENT MALE HEX KEY	T-HANDLE HEX KEYS	HEX KEY DRIVER WITH HANDLE	RING SPANNER
			
MS23	IS23TPC-IS23TPL	IS64	MS21
90° angled head	T-handle — short and long version		Counter-angled head
6 sides Ø 3 to 12 mm	6 sides Ø 3 to 8 mm	6 sides Ø 2,5 to 8 mm	12 sides Ø 6 to 32 mm 1/4" to 15/16"



/ RATCHETS, T-WRENCHES, EXTENSIONS

	Radio 1/4" (6,35 mm)			Junior 3/8" (9,53 mm)						
										
	MS55	MS54	MS54L	MS85	MS85P	MS85PC	MS84	MS84P	MS84L	MS84LP
Type	Reversible ratchet spanner	Short extension bar	Long extension bar	Reversible ratchet spanner		Reversible compact ratchet spanners	Short extension bar		Long extension bar	
Locking system					•	•		•		•
Interchangeability					•	•		•		•

/ SOCKETS

	Radio 1/4" (6,35 mm)		Junior 3/8" (9,53 mm)					
								
	MS56	MS57	MS77	MS77L	MS77MAG	MS86	MS86L	MS87
Type	Female	Male	Female	Female long serie	Magnetic female	Female	Female long serie	Male
Opening	6 sides	6 sides	6 sides	6 sides	6 sides	12 sides	12 sides	6 sides
Diameter	4 to 14 mm 3/16" to 9/16"	3 to 7 mm 1/8" to 5/16"	6 to 26 mm 3/8" to 13/16"	8 to 24 mm	13 - 14 -17 -19 - 21	8 to 24 mm 5/16" to 7/8"	8 to 24 mm 1/4" to 7/8"	3 to 10 mm 1/8" to 3/8"

*Other size on request

/ TORQUE WRENCHES

	Junior 3/8" (9,53 mm)			Standard 1/2" (12,7 mm)		
						
	MS100NO	MS100NOP	MS100N1-3/8	MS100N1-1/2	MS100N15-1/2	MS100N2-1/2
Specificity		Locking system				
Torque range	4 - 20 Nm 40 - 418 Lbf.in		10-50 Nm 8 - 35 Lbf.ft	10-50 Nm 8 - 35 Lbf.ft	20-100 Nm 15-75 Lbf.ft	40-200 Nm 30 - 150 Lbf.ft
Resolution / increment	1 Nm		2 Nm	2 Nm	1 Nm	2 NM



Standard 1/2" (12,7 mm)											
MS72J	MS72JP	MS72JLC4	MS65	MS65P	MS71	MS71P	MS71L	MS71LP	MS72S	MS72SP	
T-wrench		Torque T-wrench 4Nm	Reversible ratchet spanner		Short extension bar		Long extension bar		T-wrench		
	•			•		•		•		•	
	•			•		•		•		•	

Standard 1/2" (12,7 mm)									
MS87MAG	MS77E	MS87T	MS84LC	MS66 6P	MS66L 6P	MS66 12P	MS66L 12P	MS67	
Magnetic male	Female	Male	Socket with torque limiter	Female	Female long serie	Female	Female long serie	Male	
6 sides	Torx®	Torx®		6 sides	6 sides	6 sides	6 sides	6 sides	
8 - 10 mm	E08 to E20	T15 to T50	4 - 8 -18 Nm	8 to 31 mm	10 to 24 mm	8 to 32 mm 3/8" to 1.1/4"	12 to 32 mm 5/16" to 1.1/4"	4 to 19 mm 1/4" to 5/8"	

/ ADAPTERS

	MS95	MS96	MS91	MS70	MS90
Type	Augmenter	Reducer	Augmenter	Reducer	Reducer
Diameter	1/4" > 3/8"	3/8" > 1/4"	3/8" > 1/2"	1/2" > 1/4"	1/2" > 3/8"



1000V INSULATED AND INSULATING TOOLS KIT 3/8"

/ COMPOSITION 3/8"

Reference	Descripción			
				
		MS89	MS89V01	MS89V02
MS84	Short extension 3/8" 140 mm	•		
MS85	Insulated reversible ratchet spanner 3/8" 185 mm	•		
MS85P	Reversible insulated ratchet wrench 3/8" with mechanical locking		•	•
MS85PC	Compact reversible insulated ratchet spanner 3/8" with mechanical locking		•	
MS84P	Short extension 3/8" with mechanical locking		•	•
MS77 08	6 sides insulated female hexagonal socket 3/8" 8 mm	•	•	•
MS77 10	6 sides insulated female hexagonal socket 3/8" 10 mm	•	•	•
MS77 12	6 sides insulated female hexagonal socket 3/8" 12 mm			
MS77 13	6 sides insulated female hexagonal socket 3/8" 13 mm	•	•	•
MS77 14	6 sides insulated female hexagonal socket 3/8" 14 mm		•	•
MS77 16	6 sides insulated female hexagonal socket 3/8" 16 mm		•	•
MS77 17	6 sides insulated female hexagonal socket 3/8" 17 mm		•	•
MS77 18	6 sides insulated female hexagonal socket 3/8" 18 mm		•	•
MS77 19	6 sides insulated female hexagonal socket 3/8" 19 mm		•	•
MS77 21	6 sides insulated female hexagonal socket 3/8" 21 mm		•	•
MS77 22	6 sides insulated female hexagonal socket 3/8" 22 mm		•	•
MS77 23	6 sides insulated female hexagonal socket 3/8" 23 mm		•	•
MS77L 16	6 sides insulated female hexagonal socket 3/8" long series - 16 mm			
MS77L 17	6 sides insulated female hexagonal socket 3/8" long series - 17 mm			
MS77L 18	6 sides insulated female hexagonal socket 3/8" long series - 18 mm			
MS77L 19	6 sides insulated female hexagonal socket 3/8" long series - 19 mm			
MS77L 21	6 sides insulated female hexagonal socket 3/8" long series - 21 mm			
MS77L 22	6 sides insulated female hexagonal socket 3/8" long series - 22 mm			
MS87 04	6 sides insulated male hexagonal socket 3/8" - 4 mm		•	•
MS87 05	6 sides insulated male hexagonal socket 3/8" - 5 mm	•	•	•
MS87 06	6 sides insulated male hexagonal socket 3/8" - 6 mm		•	•
MS87 08	6 sides insulated male hexagonal socket 3/8" - 8 mm		•	•



MS89V04



MS89V05



MS89V06



MS89V07



MS89V08

	.	.	.	.	.
		.		.	
	.	.	.		.
	.	.	.	.	.
	.	.	.	.	.
		.	.		
	.	.	.	.	.
	.	.	.	.	.
	.	.	.	.	.
	.	.	.	.	.
	.	.	.	.	.
		.	.		
		.	.		
		.	.		
		.	.		
		.	.		
		.	.		
		.	.		
	.	.	.	.	.
	.	.	.	.	.
	.	.	.	.	.
	.	.	.	.	.



1000V INSULATED AND INSULATING TOOLS KIT 1/4"

/ COMPOSITION 1/4"

Reference	Descripción		
			
		MS59S	MS59
MS55	Reversible insulated ratchet spanner 1/4"	•	•
MS54L 166	Long extension bar 1/4"		
MS54 116	Long extension bar 1/4"		
MS56 04	6 sides insulated female hexagonal socket 1/4" 4 mm		
MS56 05	6 sides insulated female hexagonal socket 1/4" 5 mm		
MS56 06	6 sides insulated female hexagonal socket 1/4" 6 mm		
MS56 07	6 sides insulated female hexagonal socket 1/4" 7 mm		
MS56 08	6 sides insulated female hexagonal socket 1/4" 8 mm	•	•
MS56 09	6 sides insulated female hexagonal socket 1/4" 9 mm		
MS56 10	6 sides insulated female hexagonal socket 1/4" 10 mm	•	•
MS56 11	6 sides insulated female hexagonal socket 1/4" 11 mm		
MS56 12	6 sides insulated female hexagonal socket 1/4" 12 mm	•	
MS56 13	6 sides insulated female hexagonal socket 1/4" 13 mm		•
MS56 14	6 sides insulated female hexagonal socket 1/4" 14 mm		
MS57 03	6 sides insulated male hexagonal socket 1/4" 3 mm		
MS57 04	6 sides insulated male hexagonal socket 1/4" 4 mm		
MS57 05	6 sides insulated male hexagonal socket 1/4" 5 mm	•	•
MS57 06	6 sides insulated male hexagonal socket 1/4" 6 mm		
MS57 07	6 sides insulated male hexagonal socket 1/4" 7 mm		
MS58	1/4" square screwdriver		



				
	MS59A	MS59V01	MS59M	MS59T
	•	•	•	•
		•		
	•			
		•		
		•		
		•		
	•	•		
		•		
		•	•	•
		•		•
	•	•		•
	•	•		
		•		
		•	•	•
		•		
		•		
		•		



IS82R NEW

1000V INSULATED KNIFE WITH RETRACTABLE BLADE
FOR TPC CABLE PROTECTION TUBES

STANDARDS

IEC 60900

Protective guard at the front and back of the handle to prevent slipping of the hand out of use the blade may be fully retracted in the handle to avoid any risk

/ USE

Knife designed for cutting and opening :

- TPC sheaths (protective tubes for pipes or energy cables)
- Sheaths (telecom - gas - water - optical fibre) up to 200 mm diameter

/ TECHNICAL SPECIFICATIONS

- Triangular double-edged blade with non-cutting tip. With this shape, there is no more risk of damaging cables (electric arc) or cable sheaths inside the protection tubes.
- Blade locking in working position by pressure and turning 1/4 of the button.
- 2 output positions for the blade : 10 mm and 18 mm.
- The front plate of the knife can be removed to allow the blade block to be changed.

Reference	Dimensions	Weight
IS82R	185 x 58 x 38 mm	160 g

Spare parts	Description
BLOC-LAME-IS82R	Spare blade block



Transversal
section



Longitudinal
section



Spare blade block

Retractable blade with push button at the end of the handle



**OMF**

INNOVATION

1000V HYBRID MULTIFUNCTION TOOL**STANDARDS**

IEC 60900 / IEC 60900

Ergonomic, compact handle for a secure gloved grip and efficient force transfer.

Multifunction tool 4 in 1

/ USE

Hybrid tool for cutting, stripping of small cables and opening/closing of various electrical boxes and cabinets.

The different functions:

- 1 - A straight knife blade (with scraper on the back of the blade).
- 2 - A 11 mm female triangle wrench (for opening electrical boxes and cabinets).
- 3 - A 4,5 x 9 mm rectangular key (for duct doors, S 300, gas valves)
- 4 - A trapezoidal key with a conical end of 7 to 5 mm on 2 cm (for old closing).

Each of the functions folds into the handle of the tool.

/ TECHNICAL SPECIFICATIONS

Insulated tool made up of different working heads without electrical continuity between them (because of the insulating material loaded with fibreglass for an optimal mechanical resistance).

Hanging system at the handle = anti-drop.

Knife blade with electrolytic polishing = increased life span.

NOTE: Possibility to customize the working heads (e.g.: 14 mm female square wrench for gas valves, 14 mm female triangle wrench,...)

Reference	Dimensions	Weight
OMF	145 x 40 x 23 mm	160 g

Spare parts	Description
LAME-OMF	Overmoulded knife blade + pin
CLE-TR11-OMF	Triangular key 11 mm + pin
CLE-TR14-OMF	Triangular key 14 mm + pin
CLE-RECT-OMF	Rectangular key + pin
CLE-TRAP-OMF	Trapezoidal key + pin
CLE-CA14-OMF	Square key 14 mm + pin

**MS36T****1000V INSULATED SCREWDRIVER WITH TRIANGULAR SOCKET SPANNER 11 MM****STANDARDS**

NF EN 60900 / IEC 60900

/ USE

To be used on triangular socket screws of electrical boxes and cabinets.

/ TECHNICAL SPECIFICATIONS

Blades in treated steel. Insulated body, except for the tip to ease the penetration into screw holes. Burnished tip

Reference	Blade length	Length	Weight
MS36T	180 mm	300 mm	180 g



1000V INSULATED AND INSULATING TOOLS

INSULATED KNIFE



IS77

1000V INSULATED KNIFE WITH LONG BLADE

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Hardened stainless steel blade. Stainless steel blade, injection-moulded insulation. Electrolytic polish finish for durability of the cutting edge. Insulation is attached to the blade at 6 points to ensure it stays in place when stripping. Weighted handle for good balance and to prevent the tool from falling onto the blade. The guide carved into the blade guard allows guidance during longitudinal stripping of a conductor. Supplied in a soft case.

Reference	Blade type	Blade length	Length	Weight
IS77	Thick	62 mm	180 mm	100 g



IS79

1000V INSULATED KNIFE WITH SHORT BLADE

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Hardened stainless steel blade. Electrolytic polish finish ensures durability of the cutting edge. Insulation is attached to the blade at 6 points to ensure it stays in place when stripping. Weighted handle for good balance and to prevent the tool from falling onto the blade. The guide carved into the blade guard allows guidance during longitudinal stripping of a conductor. Supplied in a soft case.

Reference	Blade length	Length	Weight
IS79	40 mm	160 mm	100 g

IS80C

OUR SELECTION

1000V INSULATING KNIFE WITH CERAMIC BLADE

STANDARDS

NF EN 60900 / IEC 60900



Remains efficient over time: ceramic blade therefore stainless, no wear, no sharpening

Reduced weight compared to a conventional knife

- Removable protective cap in the handle by rotation:
- Allows the blade to be protected when stored in a toolbox.
- Protects the user from accidental cuts.

/ USE

This tool doesn't cut metal strip.

Reference	Blade length	Length	Weight
IS80C	65 mm	200 mm	60 g

/ TECHNICAL SPECIFICATIONS

High cutting performance: precise cutting, control of the gesture. Notched handle to optimise the grip. Hand guard to prevent the hand from sliding towards the blade. Large handle for a better grip and more comfort.



IS22

1000V INSULATED HACKSAW

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Forged steel frame, injection insulated, guaranteeing high rigidity and mechanical resistance. One-piece, adjustable. Blade tension adjustment by 2 knobs. Frame delivered with 1 blade 24 TPI (10 teeth/cm).

Reference	Blade	Length	Weight
IS22	297 to 304 mm	450 mm	740 g

/ Accessories

Reference	Description
L10 08D	Steel hacksaw spare blade 300 mm 8 teeth/cm
L10 10D	Steel hacksaw spare blade 300 mm 10 teeth/cm
L10 12D	Steel hacksaw spare blade 300 mm 12 teeth/cm
L15 8D	Steel hacksaw spare blade 300 mm 8 teeth/cm
L15 12D	Steel hacksaw spare blade 300 mm 12 teeth/cm



MS22J

INSULATED JUNIOR HACKSAW

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Fully insulated steel frame with a 130 mm blade.

Reference	Blade	Length	Weight
MS22J	130 mm	265 mm	160 g


MS2-XL MS2E-XL

OUR SELECTION

1000V INSULATED
ELECTRICIAN SCISSORS

STANDARDS

NF EN 60900 / IEC 60900

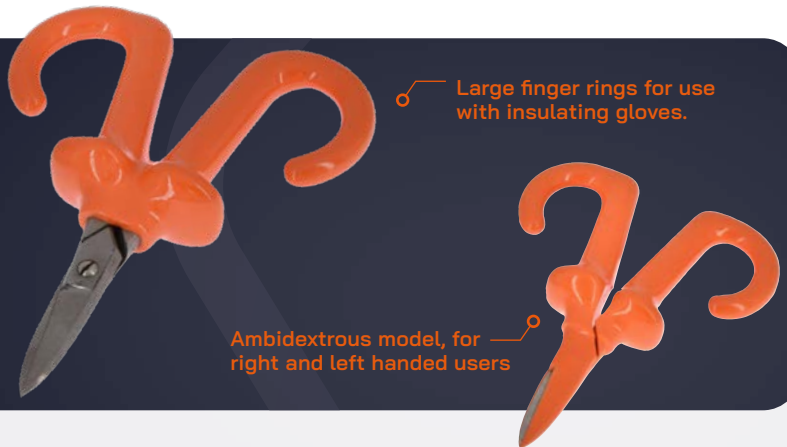

Large finger rings for use with insulating gloves.

Ambidextrous model, for right and left handed users

/ USE

For cutting cable strands, cable straps, E4R heat shrink sleeves. 2 versions available: insulated and fully insulated.


Reference	Version	Blade length	Length	Weight
MS2-XL	Insulated	35 mm	155 mm	160 g
MS2E-XL	Fully insulated			175 g

/ Accessories

Reference	Description
ETC170	Protective case 145 x 77 mm

/ TECHNICAL SPECIFICATIONS

XC40 steel blades. Straight cutting shear type. Screw hinge. Pointed tip.

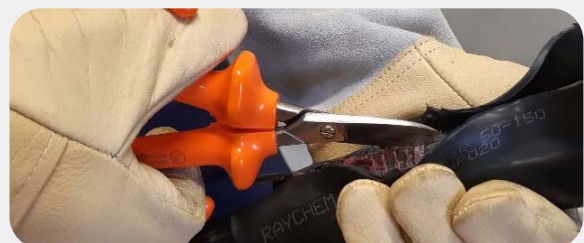



ISPI

1000V INSULATING HANDLE FOR EARTH RODS

/ USE

Product allowing the installation of marker posts or earth rods in complete safety, compatible with rods type 701.

/ TECHNICAL SPECIFICATIONS

CMade of insulating material resistant to a voltage of 17 kV
Opening diameter for rods up to 24 mm diameter.
Steel anvil Ø 40mm (on request anvil made of nonconductive material)
Distance between the 2 protective guards: 130 mm
Profile of the guards limiting the "rolling effect".
Hole of 6 mm diameter allowing the passage of a strap

Reference	Dimension	Weight
ISPI	Ø 130 x 160 mm	540 g

MSPC

NEW

1000V INSULATING BENT BRUSH

STANDARDS

NF EN 60900 / IEC 60900



/ TECHNICAL SPECIFICATIONS

Tool with no visible conductive parts.
For cleaning and dusting connectors,...
Interchangeable tool head, fixed to the handle with an insulating screw (slotted head) (with M3 thread).
Angled head for good visibility during use.
Cleaning: with a soft, dry cloth.

Reference	Lenght	Brush head width	Weight
MSPC	410 ^{+/-10} mm	35 mm	180 g



TFM

INSULATED FUSE EXTRACTOR SCREWDRIVER


STANDARDS

NF EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Tool for extracting specific fuses with M8 or M10 threads.
Handle profile for good torque transmission.

Reference	Thread	Blade length	Handle	Handle length	Weight
TFM8	M8	150 mm	25 mm	105 mm	205 g
TFM10	M10				

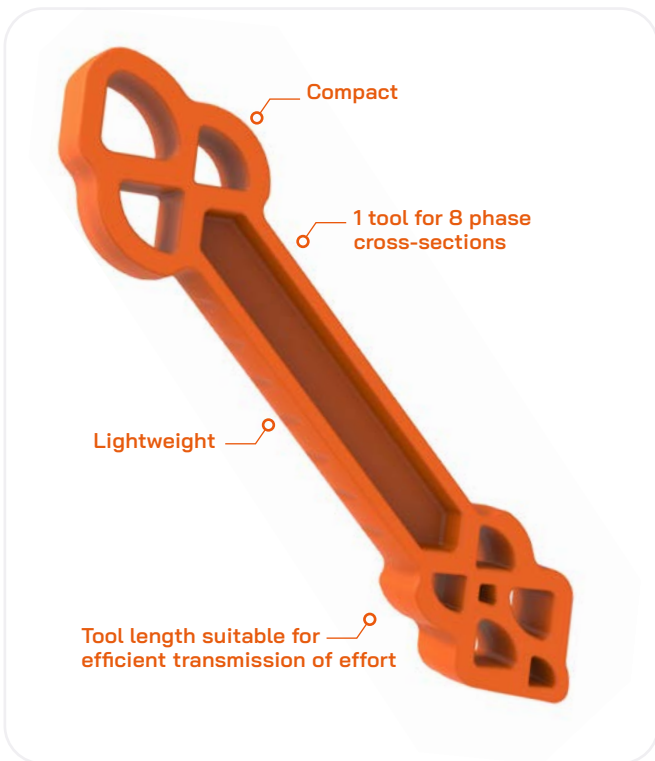

TWISTER90

INSULATING BENDING TOOL FOR 50 TO 300 MM² SOLID ALUMINIUM CONDUCTOR UNDERGROUND CABLES

STANDARDS

EN 60900 / IEC 60900

/ TECHNICAL SPECIFICATIONS

Insulating tool : fully non-metallic
Cross sections : 50 mm² - 70 mm²
- 95 mm² - 120 mm² - 150 mm² -
185 mm² - 240 mm² - 300 mm²

Reference	Lenght	Weight
TWISTER90	250 mm	200 g



5544E

INSULATING SEPARATOR WITH GROOVE

/ USE

Designed for moving apart and protecting the cable during the use of a cable cutter.

Reference	Length	Weight
5544E	225 mm	240 g



TC120

INSULATING WEDGE

/ USE

Both wedge sides have 4 half-rounded grooves to separate the conductors of aerial bundled cables.

/ TECHNICAL SPECIFICATIONS

Made of polyamide 6.

Reference	Dimensions	Weight
TC120	160 x 55 x 35 mm	110 g



TE04

INSULATING WEDGE SEPARATOR

/ USE

This insulating wedge separator is used for separating a conductor in ABC overhead cable or an underground cable in order to enable a localized operation on this conductor.

/ TECHNICAL SPECIFICATIONS

The insulating wedge separator is composed of 2 wedges linked with a 1 meter long cord. Each orange wedge is made of strong synthetic material, resisting to UV rays, bumps and freeze.

4 spaces are possible:

A hole at the extremity enables insertion of a tool to make the rotation through 90° easier, permitting the separation from 2 to 4 cm. Very smooth ribs and a slight penetration angle make wedge insertion in the cable easier.

Reference	Dimensions	Weight
TE04	230 x 45 x 25 mm	260 g



OUR NEW RANGE OF PREMIUM TOOLS WITH A LIFETIME WARRANTY

A LIFETIME WARRANTY AGAINST DEFECTS IN MATERIALS
AND WORKMANSHIP.

MORE THAN 120 REFERENCES AVAILABLE



TRANSITIONING TOWARDS A CIRCULAR ECONOMY

A NEW LIFE FOR YOUR TOOLS


/ Aware of our environmental impact, we have
developed a recycling and reprocessing
industry for its insulated tools.

REUSED FORGES

The forges, isolated from their
PVC, are cleaned and checked.
When the forges are in good
condition and reusable, Sibille
Outillage offers a quotation for
the repair (new insulation) thus
reducing the cost of acquiring
new tools for its customers.



1



DETECTED NON-
CONFORMING TOOL

2

CRYOGENIC TREATMENT

We have choosen the
cryogenic treatment to
treat the non-conforming
tools. This technique
makes the PVC easily
brittle to separate the PVC
from the forging of the
tools without the use of
solvents or other chemical
products.

3

RECOVERED PVC

The recovered PVC
material is "clean"
and can thus be
redirected to an external
reprocessing subsidiary
which will ensure its
transformation into new
products (shoe soles,
children's games, etc.).



4



1000V INSULATED AND INSULATING TOOLS KIT



Reference	Dimensions	Weight
KITSO-01	Set of 5 insulated tools in transport case	340 x 300 x 80 mm

KITSO-01

SET OF 5 INSULATED TOOLS IN TRANSPORT CASE

/ TECHNICAL SPECIFICATIONS

Case holds up to 10 tools (5 pliers + 5 screwdrivers)
Wide elastic band to hold products in place
Internal pocket for documents and protection between tools
Sturdy carrying handle
Zipped closure
Dimensions: 340x300x80mm Empty weight: 600 g.

/ This product contains

Reference	Description
V100I-SO	Carrying case
MS4 185	1000V Insulated universal plier 185 mm
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS43 175	1000V Insulated stripping plier
MS13 165	1000V Insulated half-round 45° bent nose plier 185 mm
MS30S 165	1000V Insulated cable cutting and stripping plier 165 mm

Other compositions available on request.



Reference	Dimensions	Weight
KITSO-02	Set of 8 insulated tools in transport case	340 x 300 x 80 mm

KITSO-02

SET OF TOOLS IN TRANSPORT CASE

/ USE

Kit for electrical work.

/ TECHNICAL SPECIFICATIONS

Case holds up to 10 tools (5 pliers + 5 screwdrivers)
Wide elastic band to hold products in place
Internal pocket for documents and protection between tools
Sturdy carrying handle
Zipped closure
Dimensions: 340x300x80mm Empty weight: 600 g.

/ This product contains

Reference	Description
V100I-SO	Carrying case
RL1-PZ-5X100	1000V Insulated Pozidriv screwdriver - 5 x 100 mm
RL1-PZ-6X125	1000V Insulated Pozidriv screwdriver 6 x 125 mm
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm
RL1-PL-8X200	1000V Insulated slotted screwdriver 8 x 200 mm
MS43 175	1000V Insulated stripping plier
MS13 165	1000V Insulated half-round 45° bent nose plier
MS30S 165	1000V Insulated cable cutting and stripping plier

Other compositions available on request.



Reference	Dimensions	Weight
KITSO-03	Set of 10 insulated tools in transport case	340 x 300 x 80 mm

KITSO-03

SET OF 10 INSULATED TOOLS IN TRANSPORT CASE

/ TECHNICAL SPECIFICATIONS

Case holds up to 10 tools (5 pliers + 5 screwdrivers)
Wide elastic band to hold products in place
Internal pocket for documents and protection between tools
Sturdy carrying handle
Zipped closure
Dimensions: 340x300x80mm Empty weight: 600 g.

/ This product contains

Reference	Description
V100I-SO	Carrying case
RL1-PZ-5X100	1000V Insulated Pozidriv screwdriver 5 x 100 mm
RL1-PZ-6X125	1000V Insulated Pozidriv screwdriver 6 x 125 mm
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm
RL1-PL-8X200	1000V Insulated slotted screwdriver 8 x 200 mm
MS4 185	1000V Insulated universal plier 185 mm
MS27 250	1000V Insulated double slip-joint adjustable plier
MS43 175	1000V Insulated stripping plier
MS13 165	1000V Insulated half-round 45° bent nose plier
MS30S 165	1000V Insulated cable cutting and stripping plier

Other compositions available on request.



Reference	Dimensions	Weight
KITSO-04	Set of 8 insulated tools in transport case with insulating gloves and overgloves	340 x 300 x 80 mm

KITSO-04

SET OF 8 INSULATED TOOLS IN TRANSPORT CASE WITH INSULATING GLOVES AND OVERGLOVES

/ TECHNICAL SPECIFICATIONS

Case holds up to 8 tools
Wide elastic band to hold products in place
Internal pocket for documents and protection between tools
Sturdy carrying handle
Zipped closure
Dimensions: 340x300x80mm Empty weight: 600 g.

/ This product contains

Reference	Description
V100I-SO	Carrying case
MS15	1000V Insulated round nose plier 170 mm
MS43	1000V Insulated stripping plier
MS60 165	Insulated diagonal cutting plier 165 mm
IS78	1000V Insulated knife with long slim blade
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm
RL1-PH-5X100	1000V Insulated Phillips screwdriver 5 x 100 mm
MS4 185	1000V Insulated universal plier 185 mm

Other compositions available on request.



KITSO-05

ELECTRICAL METER REPLACEMENT TOOL SET - ESSENTIAL KIT 17 TOOLS



/ USE

Kit for electrical work.

/ TECHNICAL SPECIFICATIONS

Backpack with trolley system and telescopic handle
Dedicated compartments for each tool
(up to 60 products)
Equipment arranged to follow work procedures
Robust carrying handle
Dimensions: 56 x 44 x 27 cm Empty weight: 3.5 Kg



/ This product contains

Reference	Description
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X100	1000V Insulated slotted screwdriver 5,5 x 100 mm Rotoline Classic
RL1-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Classic
RL1-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
MS4 185	1000V Insulated universal plier 185 mm
MS43 175	1000V Insulated stripping plier
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS45 230	1000V Insulated cable cutting plier Ø 24 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
IS78	1000V Insulated knife with long slim blade
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MC11CE-XL	1000V Insulating long flat nose plier - handle size XL
SADT-25	Trolley backpack for PPE and tools

Reference	Description
KITSO-05	Set of 18 insulated tools with toolbag

Other compositions available on request.



KITSO-06

ELECTRICAL METER REPLACEMENT TOOL SET - PRO KIT



/ USE

Kit for electrical work.

/ TECHNICAL SPECIFICATIONS

Backpack with trolley system and telescopic handle
Dedicated compartments for each tool (up to 60 products)
Equipment arranged to follow work procedures
Robust carrying handle
Dimensions: 56 x 44 x 27 cm Empty weight: 3.5 Kg



/ This product contains

Reference	Description
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Classic
RL1-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
MS4 185	1000V Insulated universal plier 185 mm
MS43 175	1000V Insulated stripping plier
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS45 230	1000V Insulated cable cutting plier Ø 24 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
IS78	1000V Insulated knife with long slim blade
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MCTICE-XL	1000V Insulating long flat nose plier - handle size XL
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS85P	1000V Insulated reversible ratchet spanner 3/8" with mechanical locking, standard version
MS84P	1000V Insulated short socket extension 3/8" with mechanical locking
MS77 SET5	Set of 10 insulated female hexagonal sockets - 3/8" (9,53 mm) square drive - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
SADT-25	Trolley backpack for PPE and tools

Other compositions available on request.

Reference	Description	Dimensions
KITSO-06	Electrical meter replacement tool set - Pro kit	400 x 550 x 350 mm



KITSO-07

ELECTRICAL METER REPLACEMENT TOOL SET - EXCELLIUM KIT 42 TOOLS



/ USE

Kit for electrical work.

/ TECHNICAL SPECIFICATIONS

Backpack with trolley system and telescopic handle
Dedicated compartments for each tool (up to 60 products)
Equipment arranged to follow work procedures
Robust carrying handle
Dimensions: 56 x 44 x 27 cm Empty weight: 3.5 Kg

/ This product contains

Reference	Description
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
MS4 185	1000V Insulated universal plier 185 mm
MS43 175	1000V Insulated stripping plier
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS45 230	1000V Insulated cable cutting plier Ø 24 mm
MS34 SET1	Set of 3 insulated T-handled hexagonal box spanners - 8 / 10 / 13 mm
MC45I	1000V Insulating composite cutting plier
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
IS78	1000V Insulated knife with long slim blade
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MC1ICE	1000V Electrical meter replacement tool set - Excellium kit, 42 tools Insulating composite flat nose plier with ceramic blades
MS79ALG	1000V Insulated ratchet cable cutter Ø 45 mm
MS85P	1000V Insulated reversible ratchet spanner 3/8" with mechanical locking, standard version
MS84P	1000V Insulated short socket extension 3/8" with mechanical locking
MS77 SET5	Set of 10 insulated female hexagonal sockets - 3/8" (9,53 mm) square drive - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
IS22	1000V Insulated flush and straight cut saw mount
MS35	Set of 8 single open ended spanners for calibration
SADT-25	Trolley backpack for PPE and tools

Other compositions available on request.



Reference	Description
KITSO-07	Electrical meter replacement tool set Excellium kit, 42 tools



KITSO-180I

SET OF 18 INSULATED TOOLS



/ USE

Kit for electrical work.

Reference	Description	Dimension
KITSO-180I	Set of 18 insulated tools	voir TS33N

/ This product contains

Reference	Description
RL2-PL-035X120	1000V Insulated slotted screwdriver 3.5 x 120 mm Rotoline Turn
RL2-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Turn
RL2-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Turn
RL2-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Turn
RL2-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Turn
RL2-PH-4X75	1000V Insulated Phillips screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Turn
RL2-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Turn
MC1ICE-XL	1000V Insulating long flat nose plier - handle size XL
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS13 205	1000V Insulated half-round 45° bent nose plier 205 mm
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS4 185	1000V Insulated universal plier 185 mm
MS43 175	1000V Insulated stripping plier
MS45 195	1000V Insulated cable cutting plier Ø 20 mm
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS6 210	1000V Insulated end cable cutter 210 mm
MS76GM	1000V Insulated ratchet cable cutter Ø 52 mm
TS33N	Black leather tool bag

Other compositions available on request.



1000V INSULATED AND INSULATING TOOLS KIT

KITSO-220I

SET OF 22 BASIC TOOLS WITH TOOL BAG FOR CONNECTIONS OR PUBLIC LIGHTING



/ USE

Kit for electrical work.

Reference	Description
KITSO-220I	Set of 22 basic tools with tool bag for connections or public lighting

/ This product contains

Reference	Description
RL2-PL-035X120	1000V Insulated slotted screwdriver 3.5 x 120 mm Rotoline Turn
RL2-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Turn
RL2-PL-55X150	1000V Insulated slotted screwdriver 5.5 x 150 mm Rotoline Turn
RL2-PL-65X150	1000V Insulated slotted screwdriver 6.5 x 150 mm Rotoline Turn
RL2-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Turn
RL2-PH-4X75	1000V Insulated Phillips screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Turn
RL2-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Turn
MS13 205	1000V Insulated half-round 45° bent nose plier 205 mm
MS4 185	1000V Insulated universal plier 185 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MC11CE-XL	1000V Insulating long flat nose plier - handle size XL
MS43 175	1000V Insulated stripping plier
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS23 04	1000V Insulated 90° bent male hex key 4 mm
MS45 195	1000V Insulated cable cutting plier Ø 20 mm
MS23 05	1000V Insulated 90° bent male hex key 5 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
MS76GM	1000V Insulated ratchet cable cutter Ø 52 mm
MS23 06	1000V Insulated 90° bent male hex key 6 mm
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS6 210	1000V Insulated end cable cutter 210 mm
TS33N	Black leather tool bag

Other compositions available on request.



KITSO-350I

SET OF 35 TOOLS WITH TOOL BAG FOR CONNECTIONS



/ USE

Kit for electrical work.

Reference	Description
KITSO-350I	Set of 35 tools with tool bag for connections


/ This product contains

Reference	Description
RL2-PL-035X120	1000V Insulated slotted screwdriver 3.5 x 120 mm Rotoline Turn
RL2-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Turn
RL2-PL-55X150	1000V Insulated slotted screwdriver 5.5 x 150 mm Rotoline Turn
RL2-PL-65X150	1000V Insulated slotted screwdriver 6.5 x 150 mm Rotoline Turn
RL2-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Turn
RL2-PH-4X75	1000V Insulated Phillips screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Turn
RL2-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Turn
MS4 185	1000V Insulated universal plier 185 mm
MS13 205	1000V Insulated half-round 45° bent nose plier 205 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS43 175	1000V Insulated stripping plier
MC1ICE-XL	1000V Insulating long flat nose plier - handle size XL
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS6 210	1000V Insulated end cable cutter 210 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
IS79	1000V Insulated knife with short blade
MS76GM	1000V Insulated ratchet cable cutter Ø 52 mm
MS45 195	1000V Insulated cable cutting plier Ø 20 mm
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS84P	1000V Insulated short socket extension 3/8" with mechanical locking
MS85P	1000V Insulated reversible ratchet spanner 3/8" with mechanical locking, standard version
MS77 SET5	Set of 10 insulated female hexagonal sockets - 3/8" (9,53 mm) square drive - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
MS89VCV1	Black plastic case 350 x 250 x 80 mm with foam
TS33N	Black leather tool bag

Other compositions available on request.



1000V INSULATED AND INSULATING TOOLS KIT

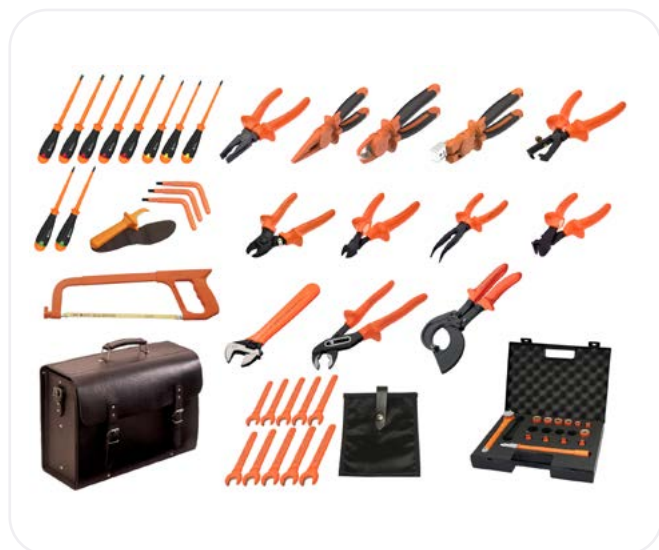

KITSO-490I


SET OF 49 BASIC TOOLS WITH TOOL BAG
FOR UNDERGROUND CONNECTIONS

Reference	Description
KITSO-490I	Set of 49 basic tools with tool bag for underground connections

/ This product contains

Reference	Description
RL2-PL-035X120	1000V Insulated slotted screwdriver 3,5 x 120 mm Rotoline Turn
RL2-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Turn
RL2-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Turn
RL2-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Turn
L2-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Turn
RL2-PH-4X75	1000V Insulated Phillips screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Turn
RL2-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Turn
RL2-PZ-4X75	1000V Insulated Pozidriv screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PZ-6X125	1000V Insulated Pozidriv screwdriver n°2 - 6 x 125 mm Rotoline Turn
MS4 185	1000V Insulated universal plier 185 mm
MS13 205	1000V Insulated half-round 45° bent nose plier 205 mm
MC1ICE-XL	1000V Insulating long flat nose plier - handle size XL
MS43 175	1000V Insulated stripping plier
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS6 210	1000V Insulated end cable cutter 210 mm
MS45 195	1000V Insulated cable cutting plier Ø 20 mm
MS76GM	1000V Insulated ratchet cable cutter Ø 52 mm
MCF	1000V Hybrid cutting plier for steel strip
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
IS79	1000V Insulated knife with short blade
IS22	1000V Insulated flush and straight cut saw mount
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS16 SET2	Set of 10 insulated single head spanners - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
MS35V2	Textile case for 7 spanners
MS85P	1000V Insulated reversible ratchet spanner 3/8" with mechanical locking, standard version
MS77 SET5	Set of 10 insulated female hexagonal sockets - 3/8" (9,53 mm) square drive - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
MS84P	1000V Insulated short socket extension 3/8" with mechanical locking
MS89VCV1	Black plastic case 350 x 250 x 80 mm with foam
TS33N	Black leather tool bag

Other compositions available on request.

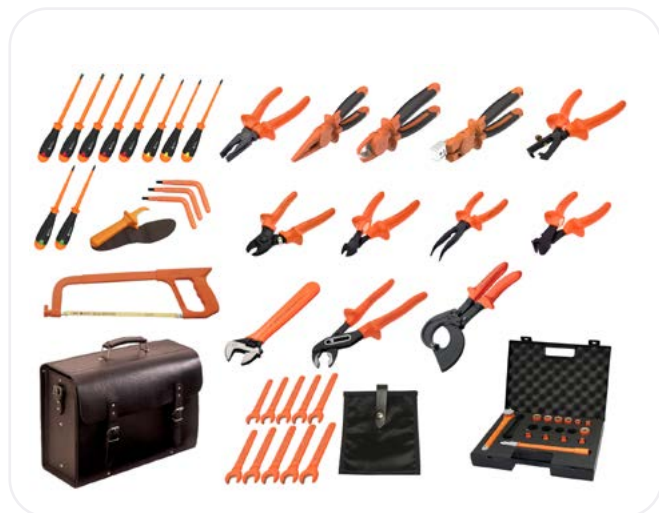

KITSO-520I

COMPLETE TOOL SET FOR UNDERGROUND CONNECTIONS (52 TOOLS) WITH TOOL BAG

Reference	Description
KITSO-520I	Complete tool set for underground connections (52 tools) with tool bag

/ This product contains

Reference	Description
RL2-PL-035X120	1000V Insulated slotted screwdriver 3,5 x 120 mm Rotoline Turn
RL2-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Turn
RL2-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Turn
RL2-PL-65X150	1000V Insulated slotted screwdriver 6,5 x 150 mm Rotoline Turn
RL2-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Turn
RL2-PH-4X75	1000V Insulated Phillips screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Turn
RL2-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Turn
RL2-PZ-4X75	1000V Insulated Pozidriv screwdriver n°0 - 4 x 75 mm Rotoline Turn
RL2-PZ-6X125	1000V Insulated Pozidriv screwdriver n°2 - 6 x 125 mm Rotoline Turn
MS4 185	1000V Insulated universal plier 185 mm
MS13 205	1000V Insulated half-round 45° bent nose plier 205 mm
MC11CE-XL	1000V Insulating long flat nose plier - handle size XL
PEF-1000V	1000V Hybrid cutting plier for steel strip
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS6 210	1000V Insulated end cable cutter 210 mm
MS45 195	1000V Insulated cable cutting plier Ø 20 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS76GM	1000V Insulated ratchet cable cutter Ø 52 mm
IS22	1000V Insulated flush and straight cut saw mount
IS79	1000V Insulated knife with short blade
MS43 175	1000V Insulated stripping plier
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS7 260	1000V Insulated adjustable spanner 260 mm
MS23 SET1	Set of 3 insulated male hex keys 90° bent - 4 / 5 / 6 mm
MS16 SET2	Set of 10 insulated single head spanners - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
MS85P	1000V Insulated reversible ratchet spanner 3/8" with mechanical locking, standard version
MS84P	1000V Insulated short socket extension 3/8" with mechanical locking
MS35V2	Textile case for 7 spanners
MS77 SET5	Set of 10 insulated female hexagonal sockets - 3/8" (9,53 mm) square drive - 8 / 10 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 mm
MS89VCV1	Black plastic case 350 x 250 x 80 mm with foam
MS100N1VM-3/8	1000V Insulated torque wrench 10-50 Nm with mechanical locking
PG3EC/2020	1000V Insulating composite plier for network cables CC 2.0 LC 2.0
TS33N	Black leather tool bag



1000V INSULATED AND INSULATING TOOLS KIT



TS270

LOW VOLTAGE TOOL SET

Reference	Description
TS270	Low Voltage tool set

/ This product contains

Reference	Description
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PL-10X150	1000V Insulated slotted screwdriver 10 x 150 mm Rotoline Classic
RL1-PH-4X150	1000V Insulated Phillips screwdriver n°0 - 4 x 150 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
RL1-PH-8X150	1000V Insulated Phillips screwdriver n°3 - 8 x 150 mm Rotoline Classic
MS4 185	1000V Insulated universal plier 185 mm
MC45I XL	1000V Hybrid cable cutting plier Ø 16 mm
MS76S	1000V Insulated ratchet cable cutter Ø 32 mm
MC11CE-XL	1000V Insulating long flat nose plier - handle size XL
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS43 175	1000V Insulated stripping plier
MS27 250	1000V Insulated double slip-joint adjustable plier 250 mm
MS53 J46	1000V Insulated fuse extractor plier 210 mm
IS79	1000V Insulated knife with short blade
IS36 SET1	Set of 3 insulated hexagonal nut drivers - 8 / 9 / 10 mm
M115 160G	Electrician's hammer with Hickory shaft 160 g
C214	Cabinet key
TC25 X5	Set of 5 LV insulating caps for conductor ends from 3 to 10 mm ²
TC30 X5	Set of 5 LV insulating caps for conductor ends from 6 to 35 mm ²
TP71	Support rods for current meter panels
D60	Insulating plastic folding rules
TP60P x6	Set of 6 plastic clips for insulating sheets and bands
TC151P	Removable handle for fuses
GLB0-36-09	Insulating latex gloves class O size O9
TS10T	Powder flask
TS10	Canvas storage bag for insulating gloves
SGB	Leather overgloves size B
TS27V	Split leather bag



TS338RV

LOW VOLTAGE TOOL SET



Reference	Description
TS338RV	Low Voltage tool set

/ This product contains

Reference	Description
RL1-PL-3X100	1000V Insulated slotted screwdriver 3 x 100 mm Rotoline Classic
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PL-8X150	Insulated slotted screwdriver 8 x 150 mm Rotoline Classic
RL1-PZ-5X100	1000V Insulated Pozidriv screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PZ-6X125	1000V Insulated Pozidriv screwdriver n°2 - 6 x 125 mm Rotoline Classic
IS79	1000V Insulated knife with short blade
MC4CE	1000V Insulating composite universal plier with ceramic blades
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS43 175	1000V Insulated stripping plier
MS89V02	1000V Insulated socket set 3/8" - 17 tools with ratchet spanner and extension
TAG780RIFE	LV voltage detector IP2X with phase rotation indication
E24	Electrician face shield with headband and brow-guard
GLB00-36-09	Insulating latex gloves 36 cm class 00 size 09
TS33N	Black leather tool bag
SGB	Leather overgloves size B
TS10	Canvas storage bag for insulating gloves
TC25 X5	Set of 5 LV insulating caps for conductor ends from 3 to 10 mm ²
TN17 0,66M	Insulating sheet with velcro strips 0,66 x 0,36 m
TP60P x5	Set of 6 plastic clips for insulating sheets and bands
TTCL3 0,6X1	TTCL3 0,6X1



1000V INSULATED AND INSULATING TOOLS KIT

S318RV

SET OF 12 TOOLS




/ USE

Kit for electrical work.

Reference	Description
S318RV	Set of 12 tools

/ This product contains

Reference	Description
RL1-PL-3X100	1000V Insulated slotted screwdriver 3 x 100 mm Rotoline Classic
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PL-8X150	1000V Insulated slotted screwdriver 8 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
RL1-PH-8X150	1000V Insulated Phillips screwdriver n°3 - 8 x 150 mm Rotoline Classic
IS79	1000V Insulated knife with short blade
MS4 185	1000V Insulated universal plier 185 mm
MC11CE-XL	1000V Insulating long flat nose plier - handle size XL
MS43 175	1000V Insulated stripping plier
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS26 250	1000V Insulated slip-joint plier 250 mm
S31N	Canvas fanny pack

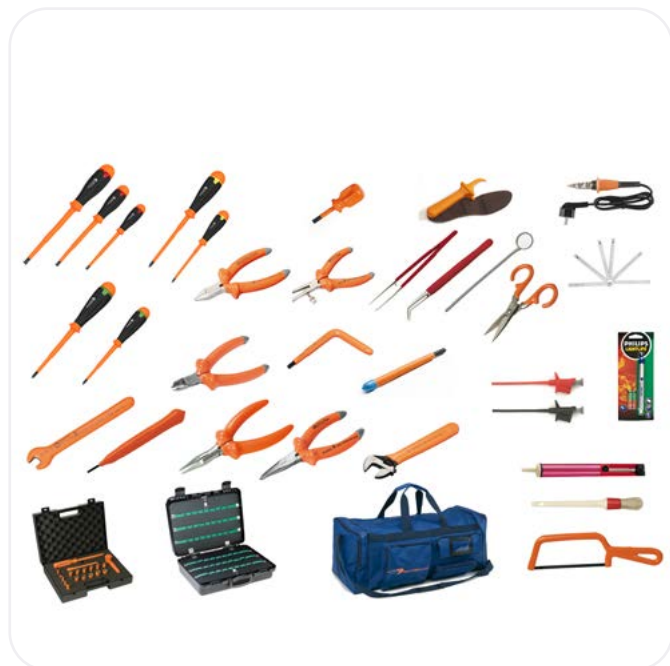

V148

ELECTRONICS TOOL SET

Reference	Description
V148	Electronics tool set

/ This product contains

Reference	Description
RL1-PL-3X100	1000V Insulated slotted screwdriver 3 x 100 mm Rotoline Classic
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PH-6X125	1000V Insulated Phillips screwdriver n°2 - 6 x 125 mm Rotoline Classic
RL1-PZ-5X100	1000V Insulated Pozidriv screwdriver n°1 - 5 x 100 mm Rotoline Classic
RL1-PZ-6X125	1000V Insulated Pozidriv screwdriver n°2 - 6 x 125 mm Rotoline Classic
IS18B 06,5X40	1000V Insulated slotted stubby screwdrivers
MS23 SET2	Set of 5 insulated male hex keys 90° bent - 3 / 4 / 6 / 7 / 8 mm
IS79	1000V Insulated knife with short blade
ML112	40° Bent needle nosed plier
ML16 SET1	Set of 10 insulated single open ended spanners - 3 / 3,5 / 4 / 4,5 / 5 / 5,5 / 6 / 7 / 8 / 9 mm
ML281 140	1000V Insulated long flat nose plier
ML283 BIS	Insulated half-round bent long nose plier 135 mm
ML288 110	1000V Insulated diagonal beveled cutting plier
ML292 135	1000V Insulating stripping plier
ML289 110	1000V Insulated diagonal flush cutting plier
MS2 132	Electrician scissors
MS7 160	Insulated adjustable spanner 160 mm
MS22J	1000V Insulated junior hacksaw
ML64 SET1	Set of 3 insulated male hex keys - 1,5 / 2 / 2,5 mm
MU18L 248	Insulated screw starters with magnetic head (for slotted screws) 10 x 248 mm
P135 P23	Round paintbrush Ø 23 mm
F30 45 W	Soldering iron 45 W
M189	Inspection mirror
P192	Desoldering pump
6005-IEC-N	4 mm Wire grip, black
6005-IEC-R	4 mm Wire grip, red
S142	Penlight
D60	Insulating plastic folding rules
ART17048H	Maintenance case 482 x 375 x 184 mm
ML108	Straight needle nosed plier
S509NM	PPE transport soft bag, 80L



V658

SET OF 7 TOOLS



/ USE

Kit for electrical work.

Reference	Description
S318RV	Set of 12 tools

/ This product contains

Reference	Description
RL1-PL-3X100	1000V Insulated slotted screwdriver 3 x 100 mm Rotoline Classic
RL1-PL-4X120	1000V Insulated slotted screwdriver 4 x 120 mm Rotoline Classic
RL1-PL-55X150	1000V Insulated slotted screwdriver 5,5 x 150 mm Rotoline Classic
RL1-PH-5X100	1000V Insulated Phillips screwdriver n°1 - 5 x 100 mm Rotoline Classic
MS4 185	1000V Insulated universal plier 185 mm
MS5 175	1000V Insulated diagonal cutting plier 175 mm
MS10 170	1000V Insulated half-round long nose plier 170 mm
S31N	Canvas fanny pack



RATCHET CABLE CUTTERS

Reference	Opening (mm)	Copper	Aluminium	Almelec	Steel	Cable types
MS76S	Ø 32	240 mm ²	300 mm ²	No	No	LV cables : 3 x 50 mm ² + 50 mm ² MV cables : 1 x 50 mm ²
MS76SR2	Ø 40	320 mm ²	370 mm ²	70 mm ²	No	LV cables : 3 x 70 mm ² + 70 mm ² LV cables : 3 x 150 mm ² + 70 mm ² U-1000(A) R2V: 1 x 630 mm ²
MS792	Ø 45	300 mm ²	400 mm ²	No	No	LV cables : 3 x 150 mm ² + 70 mm ² LV cables : 3 x 150 mm ² + 150 mm ²
MS79A2	Ø 45	300 mm ²	400 mm ²	70 mm ²	No	MV cables : 1 x 240 mm ²
MS79ALG	Ø 45	300 mm ²	400 mm ²	70 mm ²	No	LV cables : 3 x 150 mm ² + 70 mm ² LV cables : 3 x 150 mm ² + 150 mm ² MV cables : 1 x 240 mm ²
MS76GM	Ø 52	400 mm ²	400 mm ²	No	No	LV cables : 3 x 150 mm ² + 70 mm ² LV cables : 3 x 240 mm ² + 95 mm ² MV cables : 1 x 240 mm ²
MS76GMR	Ø 52	400 mm ²	400 mm ²	70 mm ²	No	LV cables : 3 x 150 mm ² + 70 mm ² LV cables : 3 x 240 mm ² + 95 mm ² MV cables : 1 x 240 mm ²
MS790	Ø 50	300 mm ²	300 mm ² (ACSR Ø 17 mm)	Yes	Ø 11 mm	Overhead twisted cable (distribution) : 3 x 150 mm ² + 70 mm ² H1 XDV-A underground network cable (distribution) 3 x 150 mm ² + 150 mm ²
MS99SR	Ø 52	Yes	Yes	Yes	Yes	Stranded cable (7 strands Ø3 mm with hardness 35-39 HRC) Ø 12 mm guy rope Aster™ support cable Ø 10 mm LV cable: 3 x 240 mm ² + 95 mm ² LV cable: 3 x 150 mm ² + 70 mm ² MV cable: 1 x 240 mm ²
MS755	Ø 55	400 mm ²	450 mm ²	70 mm ²	No	LV overhead cables : 3 x 150 mm ² + 70 mm ² Almelec Underground cables: 3 x 240 mm ² + 95 mm ² MV cables : 1 x 240 mm ²
MS755R	Ø 55	470 mm ²	520 mm ²	70 mm ²	No	Overhead LV cables : 3 x 150 mm ² + 70 mm ² Almelec Underground LV cables : 3 x 240 mm ² + 95 mm ² MV cables : 1 x 240 mm ²
MS79GM	Ø 60	750 mm ²	750 mm ²	70 mm ²	No	LV cables : 3 x 240 mm ² + 95 mm ²
MS79GM2	Ø 60	750 mm ²	750 mm ²	70 mm ²	No	MV cables : 1 x 630 mm ²
MS780	Ø 80	840 mm ²	1000 mm ²	70 mm ²	No	Flexible copper cables: 630 mm ² Copper / aluminium multi-strand cables: 840 mm ² Multi-strand copper power cables: 3 x 240 mm ² Aluminium sector cables multi-strand: 4 x 240 mm ²




1000V INSULATED AND INSULATING TOOLS RATCHET CABLE CUTTERS



RATCHET CABLE CUTTERS END CUTTING

Reference	Opening (mm)	Copper	Aluminium	Almelec	Steel	Cable types
MS46C	Ø 34	240 mm ²	320 mm ²	No	No	HN33S33BR : 4 x 35 ² HN33S32 : 3 x 50 ² + 502 HN33S23 : 1 x 50 ² HN33S22 : 1 x 95 ² HN33S33BR : 4 x 50 ²
MS46S2	Ø 35	240 mm ²	320 mm ²	70 mm ²	No	BT NF C 33-210 : 3 x 95 ² + 50 ² HTA NF C 33-223, C 33-226 : 1 x 240 ²

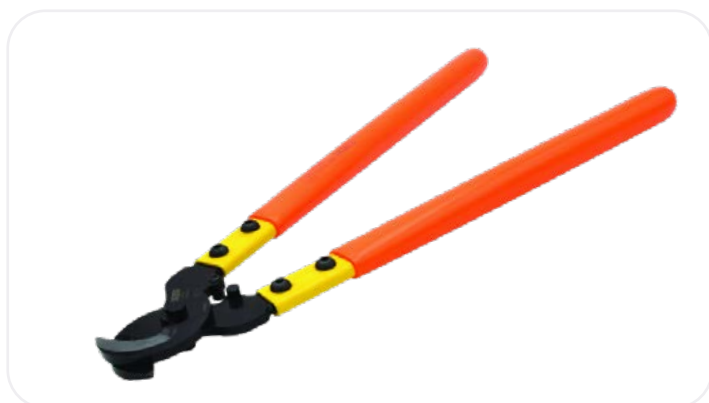

SHEAR TYPE CABLE CUTTERS

Reference	Opening (mm)	Copper	Aluminium	Almelec	Steel	Cable types
MS61	Ø 16	Ø 14 mm	Ø 14 mm	Ø 14 mm	Ø 14 mm	Copper/mild steel : Ø 16 mm Hard steel : Ø 10 mm
MS78	Ø 20	No	Ø 12 mm	Ø 12 mm	Ø 8 mm	-
MS25NM	Ø 30	185 mm ²	185 mm ²	No	No	185 mm ² max.
MSE2	Ø 31	250 mm ²	250 mm ²	No	No	Telecom 56x2 9/10e U-1000(A)R2V : 1x 300mm ²



BOLT CUTTERS

Reference	Opening (mm)	Copper	Aluminium	Almelec	Steel	Type de cables
MS29D	Ø 10	Ø 10 mm	Ø 10 mm	Ø 10 mm	Ø 9 mm	Steel 60 kg/mm ² = Ø 9 mm Steel 80 kg/mm ² = Ø 8 mm



GS1080

ADJUSTABLE HOOK SPANNER

STANDARDS

ISO 5744 / ISO 8976

/ TECHNICAL SPECIFICATIONS

"Bronze" tool for explosive area.
Aluminum bronze.

Reference	Lenght	For nuts of	Weight
GS1080 115	310 mm	115/170 mm	500 g
GS1080 32	200 mm	32/75 mm	230 g
GS1080 50	290 mm	50/120 mm	450 g

Simply designed, the torque spanner is particularly reliable and strong, even in difficult conditions of use



C182

RATCHET TORQUE WRENCH KIT WITH GRADUATED SECTOR FOR GAS WORKER - 5 TOOLS

STANDARDS

EN ISO 6789

Reference	Description
C182	Ratchet torque wrench kit with graduated sector for gas worker - 5 tools



GS1110

SINGLE OPEN ENDED SPANNER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
Other dimensions available on request.
These products are also available in beryllium copper.

Reference	Opening	Length	Weight
GS1110 10 to 36	10 to 26 mm	115 to 310 mm	40 to 710 g



GS1120

OPEN ENDED SPANNER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
Other dimensions available on request.
These products are also available in beryllium copper.

Reference	Opening	Length	Weight
GS1120 06x07 to 46x50	06x07 to 46x50 mm	100 to 420 mm	25 to 1900 g



GS1150

COMBINATION SPANNER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
Other dimensions available on request.
These products are also available in beryllium copper .

Reference	Diameter	Length	Weight
GS1150 08 to 32	8 to 32 mm	135 to 430 mm	40 to 1000 g



GS1180

HEX KEY

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze. Other dimensions available on request.
These products are also available in beryllium copper.

Reference	Diameter on flats	Weight
GS1180-03	3 mm	5 g
GS1180-04	4 mm	11 g
GS1180-05	5 mm	20 g
GS1180-06	6 mm	30 g
GS1180-08	8 mm	70 g
GS1180-10	10 mm	105 g



GS1160

OFFSET RING SPANNER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze. Other dimensions available on request.
These products are also available in beryllium copper.

Reference	Diameter	Weight
GS1160 06x7 to 46x50	06x07 to 46x50 mm	60 to 2 160 g



GS1170

HEX SOCKET WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze. These products are available in beryllium copper. Dimensions 8 to 50 mm on request.

Reference	6 pan	Length	Weight
GS1170-14	14 mm	250 mm	280 g
GS1170-17	17 mm	270 mm	320 g
GS1170-19	19 mm	300 mm	530 g
GS1170-23	23 mm	340 mm	830 g
GS1170-24	24 mm		



GS1100

PIPE WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
"Bronze" tools for explosive atmosphere.

Reference	Capacity	Length	Weight
GS1100-0200	3 to 19 mm	215 mm	0,60 kg
GS1100-0250	3 to 25 mm	280 mm	1 kg
GS1100-0360	6 to 38 mm	350 mm	1,50 kg
GS1100-0460	6 to 50 mm	420 mm	2,20 kg
GS1100-0610	6 to 63 mm	565 mm	3,80 kg
GS1100-0915	12 to 90 mm	770 mm	7,20 kg
GS1100-1220	25 to 130 mm	1100 mm	10,50 kg



GS1070

COUPLING WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
These products are also available in beryllium copper.

Reference	Capacity	Length	Weight
GS1070			



GS1075

HOOK WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.

Reference	Capacity	Length	Weight
GS1075 012 to 155	12/14 to 155/165 mm	110 to 390 mm	30 to 1200 g



GS95

MULTI-HEAD BUNG WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
These products also exist in beryllium copper .

Reference	Diameter	Weight
CS95		



1000V INSULATED AND INSULATING TOOLS GAS SAW AND KNIVES



GS1250

SLOTTED SCREWDRIVER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.

These products are also available in beryllium copper.

Reference	Blade width	Blade length	Length	Weight
GS1250 03x60	03 mm	60 mm	150 mm	45 g
GS1250 04x70	04 mm	70 mm	160 mm	55 g
GS1250 05x80	05 mm	80 mm	170 mm	60 g
GS1250 08x80	08 mm		180 mm	70 g
GS1250 10x200	10 mm	200 mm	320 mm	230 g
GS1250 10x300		300 mm	420 mm	300 g
GS1250 11x150	11 mm	150 mm	260 mm	140 g



GS1260

PHILLIPS SCREWDRIVER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.

These products are also available in beryllium copper.

Reference	Blade length	Length	Weight
GS1260-N1	80 mm	170 mm	55 g
GS1260-N2	100 mm	200 mm	75 g
GS1260-N3	150 mm	260 mm	140 g
GS1260-N4	200 mm	320 mm	230 g



GS160

METAL SAW FRAME FOR 300 MM BLADES

/ TECHNICAL SPECIFICATIONS

Excellent grip, even with handling gloves.

Delivered with steel blade.



GS1050

KNIFE

/ TECHNICAL SPECIFICATIONS

Beryllium copper hand tool.

Blade length : 150 mm. Wooden handle.



GS172

SAW BLADE

/ TECHNICAL SPECIFICATIONS

Hand tool in beryllium bronze. Blade designed to fit blue gas saw ref. GS160. This product is also available in beryllium copper.



GS153

PAINT SCRAPER

/ TECHNICAL SPECIFICATIONS

Silicon nickel cupro bronze hand tool.
This product is also available in beryllium copper.

Reference	Description	Weight
GS153F	Flexible blade scraper	115 g
GS153R	Rigid blade scraper	165 g



GS155

SCRAPER WITHOUT HANDLE

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze (delivered without handle).
These products are also available in beryllium copper.

Reference	Opening diameter	Blade	Weight
GS155 125	25 mm	125 x 65 mm	540 g
GS155 150	27 mm	150 x 65 mm	900 g



GS166

PINCHING BAR

/ TECHNICAL SPECIFICATIONS

Hand tool in bronze aluminium Ø 22 mm.
Bronze tools for explosive atmosphere.
This product is also available in beryllium copper.

Reference	Diameter	Weight
GS166		



GS1060

WRECKING BAR

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze, hexagonal shape, Ø 16 mm.
Other dimensions available on request.

Reference	Diameter	Weight
GS1060		



GS86B

BRUSH WITH HANDLE

/ TECHNICAL SPECIFICATIONS

Hand tool in phosphor bronze. Bristle size: 30 mm.
This product is also available in beryllium copper.

Reference	Diameter	Weight
GS86B		



1000V INSULATED AND INSULATING TOOLS NON SPARKING TOOLS



GS1190

SLUGGING AND FORK WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.



GS1200

SLUGGING BOX WRENCH

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.



GS88

CHISEL

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
These products are also available in beryllium copper.

Reference	Diameter	Weight
GS88 17	17 x 230 mm	380 g
GS88 19	22 x 200 mm	400 g
GS88 20	20 x 225 mm	475 g
GS88 21	22 x 305 mm	655 g



GS80

CAPE CHISEL

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
These products are also available in beryllium copper.

Reference	Diameter	Weight
GS80 205	205 x 13 mm	400 g
GS80 235	235 x 17 mm	610 g



GS164

PEAK SCRAPER

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.



GS152

SCRAPER WITH ANGLED BLADE

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.



GS157 4

SQUARE MALLET

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.



GS158

SQUARE MALLET

/ TECHNICAL SPECIFICATIONS

Hand tool in aluminium bronze.
This product is also available in beryllium copper.

Reference	Total lenght	Helved weight	Not helved weight	Head section
GS158 1	355 mm	1,04 kg	0,8 kg	36 mm
GS158 3		1,18 kg	1,02 kg	40 mm
GS158 4	380 mm	1,53 kg	1,25 kg	42 mm
GS158 5		1,68 kg	1,36 kg	44 mm



GS3100240

SHOVEL WITH HANDLE

/ TECHNICAL SPECIFICATIONS

Made in beryllium copper.



GS3100470

PICKAXE

/ TECHNICAL SPECIFICATIONS

Made in beryllium copper.



GS100-2-20

/ USE

Working protective tent

/ TECHNICAL SPECIFICATIONS

Fiberglass frame.
Canvas : translucent white polyester 350 g/m², yellow PVC base 670 g/m².
Fire classification: M2.
Delivered with carrying bag, tent poles, retaining ropes.

Reference	Dimensions
T31GM	2,50 x 2,00 x 1,90 m
T31PM	1,80 x 1,70 x 1,65 m



T270

WELDING TENT

/ TECHNICAL SPECIFICATIONS

Canvas in white polyester.
Option : Customisation available on request (color and/or logo).

Reference	Folded dimensions	Set up dimensions	Weight
T270GM	1,80 x 0,35 x 0,35 m	2,50 x 2,50 x 2 m	20 kg
T270PM	1,80 x 0,25 x 0,25 m	1,80 x 1,80 x 1,95 m	13 kg





TRANSPORT AND STORAGE SOLUTIONS

- / FOR PERSONAL PROTECTIVE EQUIPMENT **342**
- / FOR TOOLS **346**
- / TOOLS BOXES AND CASES **350**



SELECTION GUIDE

/ FOR PERSONNAL PROTECTIVE EQUIPMENT

	ST-80	ST-100	STT-80	
				
VOLUME	80 L	100 L	80 L	
DIMENSIONS	75 x 35 x 33 cm	80 x 42 x 33 cm	75 x 36 x 33 cm	
WEIGHT	2 kg	2,6 kg	3,7 kg	
BACK CARRYING				
TROLLEY			✓	
STRAP	✓	✓	✓	
HANDLE	✓	✓	✓	
LABEL-HOLDER	✓	✓	✓	
COMPARTIMENTS				
POCKETS	✓	✓	✓	
HOLDALL				
EQUIPMENTS	Helmet, shoes, glasses, mask, vest, gloves, insulating mat, clothing, harness		Helmet, shoes, glasses, mask, vest, gloves, insulating mat, clothing, harness	



	STT-100N	S509NM	SDP-40	TS75	S520SF
					
	100 L	80 L	40 L	42 L	42 L
	85 x 32 x 40 cm	75 x 42 x 33 cm	xxx cm	30 x 60 cm	55 x 32 x 24 cm
	4,7 kg	1,5 kg	1,2 kg	780 g	540 g
			✓	✓	
	✓				
		✓			
	✓	✓	✓	✓	✓
	✓	✓	✓	✓	
	✓				
	✓	✓	✓		
				✓	✓
	Helmet, shoes, glasses, mask, vest, gloves, insulating mat, clothing, harness	Helmet, shoes, glasses, mask, vest, gloves, insulating mat, clothing, harness	Helmet, shoes, glasses, mask, vest, gloves, insulating mat, clothing, harness	Fall arrester equipment (harness, rope, energy absorber)	Helmet, shoes, glasses, mask, vest, gloves, clothing, harness



SELECTION GUIDE

/ TOOLS TRANSPORT BAGS

	SAD-20	COT-PM	SADT-25
			
MATERIAL	Textil		
VOLUME	20 L	30 L	25 L
DIMENSIONS	37x44x21 cm	45x33x25 cm	40x55x35 cm
WEIGHT	3,1 kg	2,7 kg	5,3 kg
BACK CARRYING	✓		✓
TROLLEY			✓
STRAP		✓	
HANDLE	✓	✓	✓
LABEL-HOLDER	✓	✓	✓
INTERNAL TOOLS-HOLDER	✓	removable	removable
COMPARTIMENTS	✓	✓	✓
POCKETS	✓	✓	✓
HOLDALL			
EQUIPMENTS	PC or tablet computer, small tools (screwdrivers, pliers, wrenches, ...), measuring devices, some clothes and small PPE	LV live working insulated tools (screwdrivers, pliers, wrenches, ...), metal saw, measuring devices, protection mats	



STHCF-15	STHO-25	STH-29	S20TGMR	TS33N
Temporary transport				
				
Textil			Leather	
17 L	25 L	29 L	8 L	20 L
32x28 cm	28x42 cm	30x42 cm	24x16x31 cm	42x30x16 cm
1,2 kg	0,68 kg	1,1 kg	0,53 kg	2,4 kg
				✓
	rope	rope + metal hook	karabiners	✓
				✓
				✓
				✓
	✓	✓	✓	

Small tools



TRANSPORT AND STORAGE SOLUTIONS FOR PERSONAL PROTECTIVE EQUIPMENT

ESSENTIAL

Practical and easy
to carry backpack

Organised with 1 main
compartment, 3 outer zip
pockets, 1 aerated shoe pocket



SAD409

OUR SELECTION

PPE BACKPACK - 40 L

/ TECHNICAL SPECIFICATIONS

- 600D polyester bag with drawstring and flap closure, adjustable waist strap, inner pocket and document window.

Reference	Capacity	Dimensions	Weight
SAD409	35 L	35 x 23 x 50cm	1,5 kg

SUPERIOR



TS75

EQUIPMENT CARRIER BAG - 42 L

/ TECHNICAL SPECIFICATIONS

- PVC-coated canvas bag with drawstring closure, inner hanging ring, label holder, reinforced base, handle and shoulder straps.

Reference	Capacity	Dimensions	Weight
TS75	42 L	30 x 60 cm	800 g

ESSENTIAL

Carrying by straps
with handles.

Large zipper opening
and two sliders



S520SF

EQUIPMENT CARRIER BAG - 42 L

/ KEY FEATURES & APPLICATIONS

- Coated canvas bag suitable for transporting equipment, compliant with cabin luggage dimensions.

- Protects against UV rays and humidity.

Reference	Capacity	Dimensions
S520SF	42 L	55 x 24 x 32 cm

ESSENTIAL

Multiple pockets
for optimal storage



S509NM

PPE TRANSPORT SOFT BAG - 80 L

/ KEY FEATURES & APPLICATIONS

- Main compartment with U-zip and double sliders, three zipped front pockets with label holder, and two side pockets including a kangaroo-style pocket.

- Flexible PVC-coated canvas bag
Protects against : humidity and UV.

Reference	Capacity	Dimensions	Weight
S509NM	80 L	70 x 38 x 30 cm	1,5 kg



ESSENTIAL

Strong canvas structure



ST-80

PPE TRANSPORT BAG - 80 L

/ KEY FEATURES & APPLICATIONS

- Includes multiple external pockets, a mesh top opening with double sliders, a reinforced bottom with studs, and a full-length inner pocket.
- Protects** equipment and documents from moisture and UV thanks to high-strength canvas.

Reference	Capacity	Dimensions	Weight
ST-80	80 L	75 x 35 x 33 cm	2 kg

ESSENTIAL

Strong fabric structure



ST-100

PPE TRANSPORT BAG - 100 L

/ KEY FEATURES & APPLICATIONS

- Features multiple zipped and mesh pockets, a wide top opening with tightening straps, and a removable self-grip inner divider for organised storage.
- High-resistance semi-rigid fabric bag designed to store and transport items while protecting them from dirt, moisture and UV light.

Reference	Capacity	Dimensions	Weight
ST-100	100 L	80 x 42 x 33 cm	2,6 kg

ESSENTIAL



Integrated trolley system

STT-80

PPE TROLLEY BAG - 80 L

/ KEY FEATURES & APPLICATIONS

- Includes two zipped back pockets, a right-side sock pocket with name tag, a wide mesh top opening with double sliders, and a full-length inner pocket.
- This semi-rigid, high-strength canvas bag is designed to carry contents **protected** from moisture and UV light.

Reference	Capacity	Dimensions	Weight
STT-80	80 L	75 x 36 x 33 cm	3,7 kg

SUPERIOR



Carried by strap handles

PVC-coated polyester bag with zip closure

H125D

LARGE TRANSPORT BAG FOR INSULATING MATS

Reference	Dimensions
H125D	125 x 30 x 20 cm



TRANSPORT AND STORAGE SOLUTIONS FOR PERSONAL PROTECTIVE EQUIPMENT

SUPERIOR



Heavy duty PVC canvas bag, long length

H195

TEXTILE BAG FOR TRANSPORT OF EQUIPMENT

/ TECHNICAL SPECIFICATIONS

- Zipper closure and two sliders.
- Cylindrical sides.
- Carried by two straps with handles.
- Label holder on one side.

Reference	Dimensions
H125D	125 x 30 x 20 cm

SUPERIOR



TS28H

HOLDALL BAG

/ TECHNICAL SPECIFICATIONS

- Holdall bag, made of polyamide/polyester canvas and PVC coating.
- Drawstring closure.
- Inner bottom reinforced with plastic.

Reference	Capacity	Base diameter	Height	Weight
TS28H	40 L	31 cm	70 cm	670 g

SUPERIOR



TS10GL

LONG INSULATING GLOVE CASE

/ KEY FEATURES & APPLICATIONS

- Ventilated glove bag with dual carry handles and compartments for care kit and instructions.
- Protects against mechanical and light UV exposure.

Reference	Dimensions	Weight
TS10GL	30 x 90 x 20 cm	700 g

ESSENTIAL

Sturdy tool box with rigid base, metal handle and removable trays.



COT-PM

NEW

SMALL CAPACITY TOOLBOX

/ TECHNICAL SPECIFICATION

- 8 internal compartments + 2 removable partitions with hook.
- Side pockets with tape holder, label slot and flap closure.
- Removable semi-rigid hacksaw pocket with strap support.
- Elastic straps and cartridge belt for tool storage.

Reference	Dimensions	Weight
COT-PM	45 x 33 x 25 cm	2,7 kg



PRO-ELITE

SADT-25

TROLLEY BACKPACK FOR PPE AND TOOLS

Front tote pocket for quick-access storage

Trolley backpack with tool access, side storage and helmet cover.



/ TECHNICAL SPECIFICATIONS

- Main compartment with clip sleeves and removable tray
- Side and front pockets for tools, gloves, saw and detector
- Reflective elements and secure buckle closure

Reference	Capacity	Dimensions	Weight
SADT-25	25 L	40 x 55 x 35 cm	5,3 kg

SUPERIOR

Case in PVC-coated polyester mesh



MS35V2

TEXTILE CASE FOR 7 SINGLE OPEN ENDED SPANNERS

/ TECHNICAL SPECIFICATIONS

- 7-pocket mesh case for insulated spanners until the number 19.
- PVC mesh case with snap fastener and tool storage.

Reference	Dimensions	Weight
MS35V2	18 x 14 x 1 cm (closed)	62 g

SUPERIOR



T104

ROLL-UP SOFT CASE

Reference	Capacity	Dimensions	Weight
T104	15 tool slots	66 x 33 x 0,8 cm	270 g

SUPERIOR



TR20

ROLL-UP KIT FOR STORING AND TRANSPORTING TOOLS

/ TECHNICAL SPECIFICATIONS

- Compartmented pouch for insulated tools.
- Roll-up design with quick-release buckles and handle.


Reference	Dimensions	Weight
TR20	45 x 45 x 22 cm	4,44 Kg

Delivered empty.



TRANSPORT AND STORAGE SOLUTIONS FOR TOOLS TEXTILE

SUPERIOR

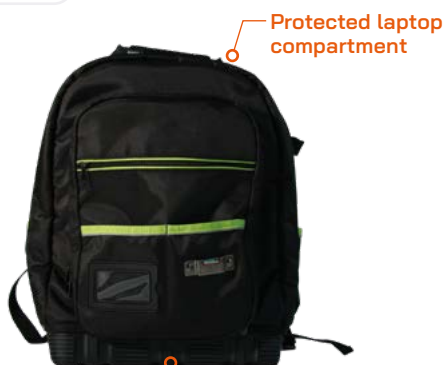

Comfort backpack with
moulded protective base

SAD-20

BACKPACK 20L

/ TECHNICAL SPECIFICATIONS

- Main zippered compartment fits 13" laptop, tools and accessories (clip pockets, holders, carabiner, name tag, pen slots)
- Two side pockets, including one with hook-and-loop fastener
- Front zippered compartment with mesh + exterior patch pocket
- Two open front pockets with webbing and metal loops

Reference	Capacity	Dimensions	Weight
SAD-20	20 L	38 x 22 x 50 cm	3,085 kg

SUPERIOR



S32

CANVAS BAG

/ KEY FEATURES & APPLICATIONS

- Canvas bag with central compartment, front tool holder, back pocket and reinforced bottom.

Reference	Dimensions	Weight
S32	44 x 33 x 16 cm	630 g

SUPERIOR



S33PM S33GM

CANVAS SOFT CASE

Reference	Dimensions	Weight
S33PM	20 x 6 x 4 cm	150 g
S33GM	26 x 6 x 6 cm	170 g

SUPERIOR



S31N

CANVAS FUNNY PACK

/ KEY FEATURES & APPLICATIONS

- Canvas cover with central and side pockets, tool cord, and adjustable belt system.

Reference	Dimensions	Weight
S31N	30 x 16 x 10 cm	280 g

SUPERIOR



S20T

HARD CANVAS TOOL BAG FOR WORKING AT HEIGHT

Reference	Dimensions	Weight
S20TPM	25 x 23 x 10 cm	300 g
S20TGM	30 x 24,5 x 15 cm	350 g



SUPERIOR



S20TGMR

NEW

REINFORCED PVC-COATED CANVAS TOOL BAG FOR WORKING AT HEIGHT

/ TECHNICAL SPECIFICATION

INTERNAL: Main compartment with side reinforcements, drainage holes, and flap closure with strap and self-gripping fastener.

EXTERNAL: Two metallic hooks on the back part to fix to the harness.

Reference	Dimensions	Weight
S20TGMR	24 x 16 x 31 cm	0,53 kg

SUPERIOR



STHCF-15

NEW

TEXTILE BUCKET WITH INTERNAL TOOL HOLDERS FOR WORK AT HEIGHT


/ TECHNICAL SPECIFICATION

INTERNAL: Main compartment with lateral reinforcement, individual tool sheaths, and a reinforced bottom with drainage.

EXTERNAL: Metallic reinforcement ring, high-strength rope with sewn end, and fabric-and-cord top closure with removable hook-and-loop tab.

Reference	Dimensions	Weight
STHCF-15	32 x 28 cm (~17L)	1,3 kg

SUPERIOR

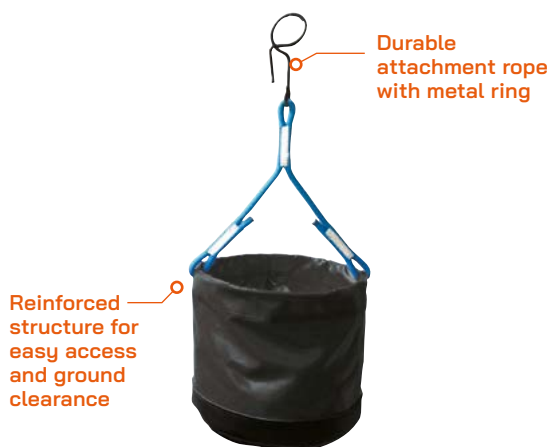

STH-13 STH-29

BUCKET BAG FOR TEMPORARY CARRYING

/ TECHNICAL SPECIFICATION

Cylindrical PVC canvas bucket with reinforced stitching, steel hook and rope, metal hoop, and leather base with drainage eyelet.

Reference	Capacity	Dimensions	Weight
STH-13	13 L	26 x 24 cm	0.8 kg
STH-29	29 L	30 x 42 cm	1.1 kg



TRANSPORT AND STORAGE SOLUTIONS FOR TOOLS LEATHER



OUR EXPERTISE, YOUR STANDARDS

Built to last, designed for you !

At **PENTA**, bags are more than accessories — they are essential work tools, engineered to withstand the toughest environments.

We **design and manufacture** a wide range of durable, functional bags tailored to the realities of the field.

Most of our bags are **proudly made in France**, in our CSA workshop located in Villeneuve-de-Berg, in the heart of Ardèche.

It's here that we **cultivate local craftsmanship**, blending industrial precision, refined finishing and responsible production.

Our **expertise** also extends to elegant leather goods, where performance meets style.

SUPERIOR



S10

ELECTRICIAN LEATHER TOOL BAG

/ KEY FEATURES & APPLICATIONS

■ Canvas bag with central compartment, front tool holder, back pocket and reinforced bottom.

Reference	Dimensions	Weight
S10	37 x 26 x 10,5 cm	1,35 kg

SUPERIOR



S15PM

PLUMBER LEATHER BAG WITH CARRYING HANDLE

Reference	Dimensions	Weight
S15PM	35 x 12 x 12 cm	550 g

SUPERIOR



S15MM

SPLIT LEATHER TOOL BAG WITH SHOULDER STRAP

Reference	Dimensions	Weight
S15MM	45 x 18 x 16 cm	1,25 kg

SUPERIOR



TS33N

BLACK LEATHER TOOL BAG


/ KEY FEATURES & APPLICATIONS

■ Bag with handle, tool divider and flap tray with bungee cord.

Reference	Dimensions	Weight
TS33N	42 x 30 x 16 cm	2,40 kg



PRO-ELITE

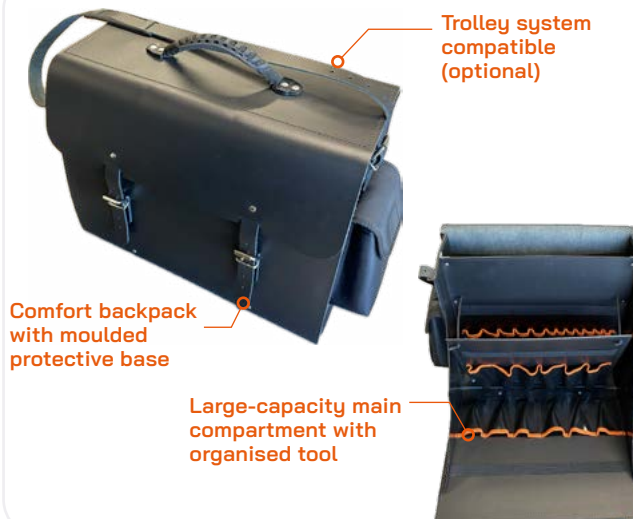

TS33GM

NEW

LEATHER/TEXTILE FABRIC BAG FOR
ELECTRICIAN TOOLS LARGE MODEL

/ TECHNICAL SPECIFICATION

INTERNAL: Main compartment with fixed and pivoting dividers, multiple tool holders, mesh pockets, and polypropylene reinforcements for added structure and durability.

EXTERNAL: Features an ergonomic handle on the flap, leather strap closure, a removable shoulder strap, and plastic base feet for upright stability.

Reference	Dimensions	Weight
TS33GM	45 x 45 x 22 cm	4,44 kg

PRO-ELITE



TS28V

ELECTRICIAN LEATHER BAG

/ KEY FEATURES & APPLICATIONS

Shoulder strap with felt reinforcement for comfort, front opening with removable tray.

Reference	Dimensions	Weight
TS28V	45 x 16 x 37 cm	4,30 kg

PRO-ELITE



STH-VRP

SOFT LEATHER TOOL BAG FOR WORKING AT
HEIGHT

/ TECHNICAL SPECIFICATIONS

Interior :

- Rigid open compartment with drainage eyelet and metal snap hooks

Exterior :

- An open pocket on the front.

Reference	Dimensions	Weight
STH-VRP	24 x 33 x 10 cm	630 g

PRO-ELITE



S20

SOFT LEATHER TOOL BAG FOR WORKING AT
HEIGHT

Reference	Dimensions	Weight
S20PM	27 x 26 x 13 cm	900 g
S20GM	30 x 24,5 x 15 cm	1060 g



TRANSPORT AND STORAGE SOLUTIONS TOOLS BOXES AND CASES



ART161V

TOOLBOX

Reference	Dimensions	Weight
ART161V	406 x 252 x 244 mm	0,92 kg



S505

POLYPROPYLENE TOOLBOX

/ TECHNICAL SPECIFICATIONS

Polypropylene case with 5 to 26 compartments, large handle, and transparent stackable lid.

Reference	Dimensions	Weight
S505	460 x 330 x 80 mm	1 kg



B102P-V64V

POLYPROPYLENE TOOLBOX

/ KEY FEATURES & APPLICATIONS

■ Polypropylene case with continuous handle, lockable lid, removable tray and shelf for tools and small parts. Model V64V includes rear straps for carrying insulating mats or sheets (not included).

Reference	Dimensions	Weight
B102P	475 x 257 x 255 mm	2,20 kg
V64V	475 x 257 x 255 mm	2,20 kg



ART162N

FULLY INSULATED TOOLBOX

Reference	Dimensions	Weight
ART162N	515 x 287 x 388 mm	2,21 kg



C259NM

POLYPROPYLENE TOOL CHEST

/ TECHNICAL SPECIFICATIONS

Equipped with two removable trays, two small-parts shelves, two fasteners, side handles and a padlock locking device.

Reference	Dimensions	Weight
C259NM	635 x 450 x 420 mm	7,55 kg



ART17048H

MAINTENANCE CASE

/ TECHNICAL SPECIFICATIONS

Dust-tight, waterproof and particle-sealed case equipped with a document holder, internal fittings, two tool holders with straps, and a padlock locking device.



B96M

CANTILEVER TOLL BOX 5-TRAY

/ TECHNICAL SPECIFICATIONS

Sheet metal case with 5 compartments, double handle, and padlock locking device.

C274

TEXTILE BUCKET WITH INDIVIDUAL INSIDE TOOL POSITIONING FOR WORKING AT HEIGHT

Reference	Bag's type	Weight	Dimensions
C274	Toolbox	0,7 kg	375 x 308 x 75 mm
C274B	Suitcase	1 kg	435 x 308 x 90 mm
C274GM		1,5 kg	510 x 360 x 120 mm







SMART INSULATING SOLUTIONS

/ INSULATING MATS	354
/ INSULATING SHEETS & BLANKETS	356
/ LINE PROTECTORS (FORMELY SLEEVES)	359
/ INSULATING CAPS & END COVERS	361
/ INSULATING TAPES & STRIPS	362
/ INSULATING SCREENS & BARRIERS	363



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.



TEMPORARY INSULATION INSULATING MATS

RBCL


EXCLUSIVE

INSULATING MATS

STANDARDS

IEC 61111:2009

The insulating mat isolates the operator from the ground to prevent electric current flow in case of contact or step voltage.

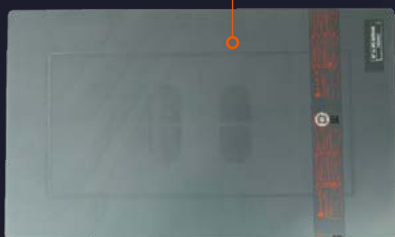

Permanent safety zone boundaries marking



Elastomer

Terms of use printed on the carpet



DID YOU KNOW?

Each insulating mat can be equipped with an built-in NFC tag, allowing complete product traceability throughout its service life.

This tag enables you to store and access key information such as the user's name, date of the next periodic inspection, and other product-related data — ensuring easier monitoring and maintenance.



Color	Class	Max. operating voltage A.C. (alternatif current)	Max. operating voltage D.C. (direct current)
Red	0	1000V	1500V
Yellow	2	17000V	25500V
Green	3	26500V	39750V
Orange	4	36000V	54000V

/ RBCL0

INSULATING MAT — CLASS 0

- Maximum operating voltage: 1 000V AC.
- Grey elastomer.

Advantages

- Ultra-light carpet that facilitates daily interventions.

Reference	Dimensions	Shape	Weight	Marking
RBCL0 0,6 X 0,6	0,6 x 0,6 m	Mat	1,8 kg	Red
RBCL0 0,6 X 1	0,6 x 1 m		1,84 kg	Red
RBCL0 1 X 1	1 x 1 m		3 kg	Red
RBCL0 1X10	1 x 10 m	Roll	30 kg	Red

/ RBCL2

INSULATING MAT — CLASS 2

Maximum operating voltage: 17 000V AC.
Grey elastomer.

Reference	Dimensions	Shape	Weight	Marking
RBCL2 0,6 X 1	0,6 x 1 m	Mat	2,4 kg	Yellow
RBCL2 1 X 1	1 x 1 m		3,9 kg	Yellow
RBCL2 1 X 10	1 x 10 m	Roll	39,8 kg	Yellow

/ RBCL3

INSULATING MAT — CLASS 3

Maximum operating voltage: 26 500V AC.
Grey elastomer.

Reference	Dimensions	Shape	Weight	Marking
RBCL3 0,6 X 1	0,6 x 1 m	Mat	2,9 kg	Green
RBCL3 1 X 1	1 x 1 m		4,8 kg	Green
RBCL3 1X10	1 x 10 m	Roll	48 kg	Green

/ RBCL4

INSULATING MAT — CLASS 4

Maximum operating voltage: 36 000 V AC
Grey elastomer

Reference	Dimensions	Shape	Weight	Marking
RBCL4 1 X 1	1 x 1 m	Mat	7,5 kg	Orange
RBCL4 1X10	1 x 10 m	Roll	75 kg	Orange



I-MAT RANGE

INSULATING MATS

STANDARDS

IEC 61111:2009

The thinnest and
lightest on the market



Continuous
dielectric testing
during production

/ TECHNICAL SPECIFICATIONS

Non-slip on both sides.
Material: Elastomer.



DID YOU KNOW?

I-MAT range also available with optionnal NFC tag upon request
and minimum quantities.



I-MATO

CLASS 0 INSULATING MAT

Reference	Dimensions	Max. operating voltage	Test voltage	Resistance voltage	Thickness	Weight
I-MAT006X1	1 × 0,6 m	1 000 V	5 000 V	10 000 V	3 mm	3,3 kg/m ²
I-MAT001X10	1 × 10 m					
I-MAT001X1	1 × 1 m					



I-MAT2

CLASS 2 INSULATING MAT

Reference	Dimensions	Max. operating voltage	Test voltage	Resistance voltage	Thickness	Weight
I-MAT206X1	1 × 0,6 m	17 000 V	20 000 V	30 000 V	3 mm	3,4 kg/m ²
I-MAT201X10	1 × 10 m					
I-MAT201X1	1 × 1 m					



I-MAT3

CLASS 3 INSULATING MAT

Reference	Dimensions	Max. operating voltage	Test voltage	Resistance voltage	Thickness	Weight
I-MAT306X1	1 × 0,6 m	26 500 V	30 000 V	40 000 V	3 mm	4,6 kg/m ²
I-MAT301X10	1 × 10 m					
I-MAT301X1	1 × 1 m					



I-MAT4

CLASS 4 INSULATING MAT

Reference	Dimensions	Max. operating voltage	Test voltage	Resistance voltage	Thickness	Weight
I-MAT406X1	1 × 0,6 m	36 000 V	40 000 V	50 000 V	4 mm	6,1 kg/m ²
I-MAT401X10	1 × 10 m					
I-MAT401X1	1 × 1 m					





TEMPORARY INSULATION INSULATING SHEETS & BLANKETS



TN08

INSULATING SHEET 8/10MM

STANDARDS

CEI 61112 CLASSE 0 (1000V)

Reference	Max operating voltage	Thickness	Length	Width	Weight
TN08	1000V AC	8/10e mm	25 m	1,3 m	30 kg



TN15R

INSULATING TAPE

STANDARDS

CEI 61112 CLASSE 0 (1000V)

Reference	Max operating voltage	Thickness	Length	Width	Weight
TN08	1000V AC	3/10e mm	25 m	90 m	900 g

TN05R


NEW

TN10R


INSULATING SHEET 3/10 MM

STANDARDS

CEI 61112 CLASSE 0 (1000V)

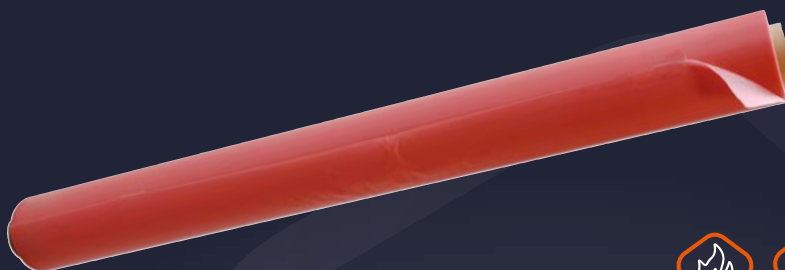

Reference	Max operating volatage	Thickness	Length	Width	Weight
TN05R	1000V AC	3/10e	12,5 m	1,3 m	0,70 kg
TN10R			25 m		1,39 kg

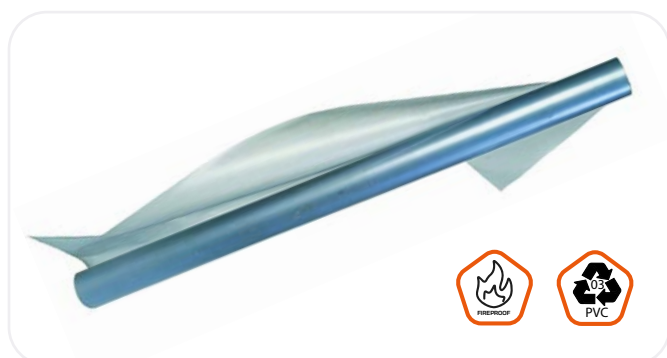

TN02R

INSULATING SHEET 3/10MM

STANDARDS

CEI 61112 CLASSE 0 (1000V)

Reference	Max operating voltage	Thickness	Length	Width	Weight
TN02R	1000V AC	3/10 mm	25 m	0,65 m	0,70 kg




TN15AD

NEW

INSULATING ADHESIVE TAPE

STANDARDS

ST BT 410 / IEC 61112 CLASSE 0 (1000V)



/ TECHNICAL SPECIFICATIONS

Material: One adhesive side.

Reference	Max operating voltage	Thickness	Length	Width
TN08	1000V AC	3/10e mm	25 m	90 m m



Max
8 Kg



ISMAG

INSULATING MAGNET

/ KEY FEATURES & APPLICATIONS

Secures insulating blankets (TN10R, TN10, TN05) to metal surfaces in panels, cabinets, or battery packs.

Fully coated with insulating synthetic material to avoid short circuits.

Easy to handle with overgloves or insulating gloves, and stackable for efficient storage.

Reference	Max operating voltage	Diameter	Height	Weight
ISMAG	500 V	48 mm	30 mm	110 g

TN17

INSULATING SHEET WITH VELCRO STRIPS


STANDARDS

ST TST BT 410

/ KEY FEATURES & APPLICATIONS

Designed to insulate bare conductors or those with faulty or insufficient insulation by simple covering. Several sheets can be combined for extended coverage. Suitable for LV networks and reusable.

Reference	Length	Width	Weight
TN17 0,66M	0,66 m	0,36 m	60 g
TN17 0,90M	0,9 m	0,5 m	120 g
TN17 1,20M	1,2 m	0,8 m	250 g

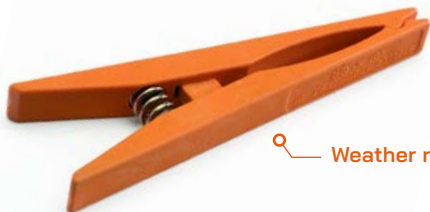

Weather resistant



Weather resistant

TP60P

PLASTIC CLIP FOR INSULATING SHEETS AND BANDS

Reference	Length	Width	Weight
TP60P	165 mm	18 mm	82 g

TP60PS

SMALL PLASTIC CLIP FOR INSULATING SHEETS AND BANDS (3MM)

Reference	Dimensions	Weight
TP60PS	67 x 27 x 22 mm	10 g



TEMPORARY INSULATION INSULATING SHEETS & BLANKETS



I-COVER-010 I-COVER-012

ELECTRICAL INSULATING BLANKETS CLASS 0

STANDARDS

IEC 61112:2009 CLASSE 0 (1000V)

/ KEY FEATURES & APPLICATIONS

✓ The I-COVER is a high-quality EPDM insulation blanket designed to protect against live or dead electrical parts. It is suitable for indoor and outdoor use and certified to IEC 61112:2009, Class 0 (up to 1000V). The material offers excellent resistance to ozone and acids (AZ category). Both sides are smooth, with edge markings ensuring clear and safe use.

Reference	Environment	Thickness	Class	Width	Length	Weight	Hardness	Tensile strenght
I-COVER-010	Exterior	1 mm	0	1 m	10 m	1.4 kg/m²	60+/-5 Sha	16 MPa
I-COVER-012				1.2 m				



DID YOU KNOW?

An **insulating blanket** is not just an accessory — it's a true piece of the worker protection. Used during de-energized work in low-voltage environments, it protects operators from direct or indirect contact with potentially live parts. To be effective, the blanket must be **properly positioned, tensioned and secured**, without folds or loose areas.

- Use dedicated clips or fasteners to ensure stability throughout the operation.
- Compliance: Insulating blankets should follow the national requirements or International standards like IEC 61112
- Any alteration to the blanket (such as cutting, piercing, or marking) will immediately void its insulating properties.
- For cleaning: recommendation to refer to the manufacturer recommendation

TMAC LV TEMPORARY CROSSARM ADJUSTABLE 4 OR 5 WIRE

/ USE

Designed to temporarily support energised low voltage conductors at their points of attachment while a damaged permanent crossarm is replaced. The working load limit of the TMAC LV Temporary Crossarm depends on the length of the arm and the number of conductor attachment points.

/ KEY FEATURES



- All insulator positions are adjustable — 4 or 5 wire (Improved design)
- Used on Live LV and De-energised HV Lines
- Damaged parts can be replaced
- Easy to maintain
- Can be used on wood and round poles
- Versatile insulated crossarm pole bracket to suit intermediate or strain structures

CROSSARM - 4 POSITION (dimensions)

Part No.	A	B	C
TM01345	2100mm	1000mm	450mm
TM01347	2400mm		600mm
TM01349	2700mm		750mm

CROSSARM - 5 POSITION (dimensions)

Part No.	A	B	C	D	E	F
TM01346	2100mm	350mm	350mm	250mm	475mm	475mm
TM01348	2400mm	450mm	400mm	250mm	550mm	550mm
TM01350	2700mm	455mm	455mm	340mm	625mm	625mm

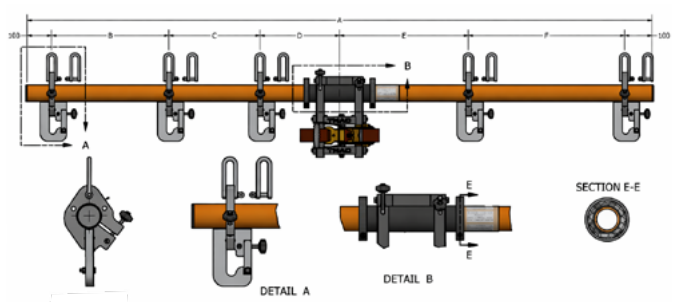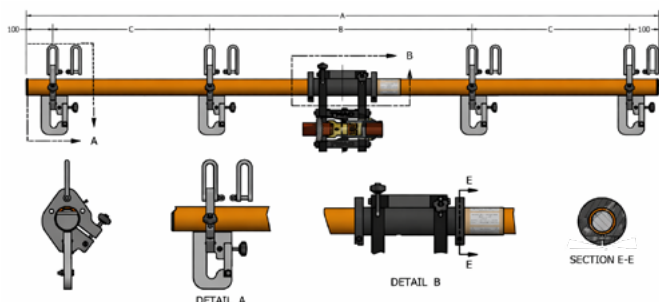



TP105

INSULATING LINEHOSE FOR LV CONDUCTOR WIRE

/ KEY FEATURES & APPLICATIONS

Insulates live conductors up to Ø15 mm on overhead networks; compatible with TP60 plastic clips.

Reference	Max operating voltage	Length	Weight
TP105S1M	1000 V AC	1 m	380 g
TP10515M		1,5 m	520 g
TP1053M		3 m	1400 g

TP115R

NEW

LONG LENGTH LV NOTCHED
INSULATING LINEHOSE



/ KEY FEATURES & APPLICATIONS

Protects against accidental contact near live LV overhead lines; easy-to-fit sleeves with notched assembly.

Reference	Length
TP115R 2,5M	2,5 m
TP115R-5M	5 m

MGPI

NEW

LONG LENGTH LV NOTCHED
INSULATING LINEHOSE



/ KEY FEATURES & APPLICATIONS

Polycarbonate guide for aligning insulation on bare aerial cables up to 75 mm², ensuring quick and easy installation.

Reference	Dimensions	Insulation	Weight
MGPI	100 x 90 x 55 mm	Ø40 max	52 g



G80

SHEATHING GUIDE

/ KEY FEATURES & APPLICATIONS

11 mm groove guides TP115 sleeves. Composite material.

Reference	Dimensions	Weight
G80	195 x 100 x 30 mm	160 g



P85

NOTCHING PLIERS

/ KEY FEATURES & APPLICATIONS

Pliers specially designed to make a T notch in TP115 insulating sleeves.

Reference	Length	Weight
P85	180 mm	280 g



TEMPORARY INSULATION LINE PROTECTORS (FORMELY SLEEVES)



TC135

CONTAINER FOR INSULATING SLEEVES

Reference	Diameter	Weight	Length
TC135	125 mm	5 kg	1,60 m
TC135 3,10M		10 kg	3,10 m
TC135 5,10M		17,4 kg	5,10 m
TC135 A			5,10 m with female cap
TC135 D	200 mm	18 kg	3,50 m
TC135 L	125 mm	11 kg	4 m



TS30

CONTAINER FOR INSULATING SLEEVES

/ KEY FEATURES & APPLICATIONS

✓ Reinforced polyamide bag with rope handles and suspension hook, holds up to 45 profiles with drainage eyelets.

Reference	Length	Diameter	Dimensions	Weight
TS30	1,20 m	18 cm	1 270 x 210 mm	720 g



DID YOU KNOW?

At PENTA Electrical Safety Products, we don't just supply insulating line protector – we also design the full range of **installation, storage and transport accessories** to ensure fast, safe and reliable use in the field. All our tools are engineered to support the correct use of temporary protections **in accordance with most national and international standards**, especially during operations near or on exposed low-voltage conductors. From sheathing guides to rigid or soft containers, every detail is designed to **optimize your work in complete safety**.



TC15 - TC20

INSULATING CAP FOR LV INSULATOR

Reference	Use	Diameter	Height	Weight
TC15	For alignment insulator	110 mm	150 mm	0,5 kg
TC20	For backstay insulator (yoke)	162 mm	200 mm	1,3 kg



TS05

BAG FOR INSULATING CAPS

/ TECHNICAL SPECIFICATIONS

Polyamide bag with drainage eyelets, holds 20 TC15 or 10 TC20 sleeves.

Reference	Diameter	Height	Weight
TS05	30 cm	40 cm	700 g



TS26

BUCKET FOR WORKING AT HEIGHT

Reference	Diameter	Height	Weight
TS26	26 cm	37 cm	600 g



TS20 - TS21

LV INSULATING BAG FOR CONNECTORS

/ KEY FEATURES & APPLICATIONS

Transparent insulating bag with elastic/Velcro closure, for safe use on overhead lines.

Reference	Width	Length
TS20	130 mm	210 mm



TC43

LV INSULATING CAP FOR CONDUCTOR ENDS

STANDARDS

NFC 18425

Reference	N°	Outer diameter	Capacity section	Ø on conductor sheath	Length	Sold by
TC43P	-	9 mm	-	Min 3 - Max 4 mm	50 mm	1
TC43 N1	1	12 mm	6 to 16 mm ²	Min 5 - Max 9 mm	45 mm	10
TC43 N2	2	14 mm	25 to 35 mm ²	Min 8 - Max 11 mm	48 mm	
TC43 N3	3	20 mm	35 to 70 mm ²	Min 10 - Max 16 mm	68 mm	
TC43 N4	4	24 mm	95 to 120 mm ²	Min 15 - Max 20 mm	90 mm	



TC25 - TC30 - TC35 - TC40 - TC41

LV INSULATING CAP FOR CONDUCTOR ENDS

STANDARDS

NFC 18425


/ KEY FEATURES & APPLICATIONS

Soft insulating cap with cross opening for stripped LV conductors.

Reference	Capacity section	Capacity on insulation	Outer diameter	Length
TC25	4 to 10 mm ²	Ø 4 to 6,5 mm	14 mm	60 mm
TC30	10 to 35 mm ²	Ø 5 to 11 mm	19 mm	100 mm
TC35	16 to 70 mm ²	Ø 7,5 to 15 mm	24 mm	120 mm
TC40	25 to 100 mm ²	Ø 10 to 20 mm	30 mm	
TC41	120 to 240 mm ²	Ø 18 to 30 mm	35 mm	



TEMPORARY INSULATION INSULATING TAPES & STRIPS

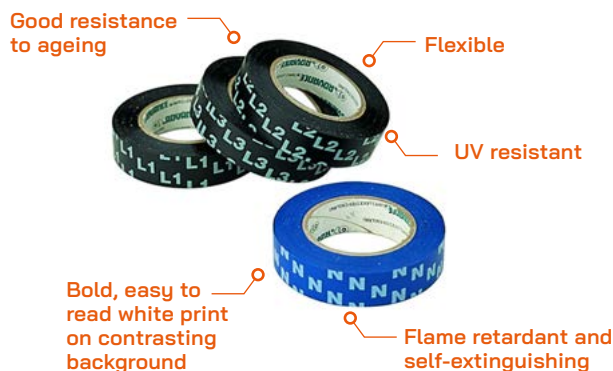

S182

PVC PHASE MARKING TAPES


STANDARDS

EN 60454 / TYPE 6

/ TECHNICAL SPECIFICATIONS

Thickness: 0,18 mm. Breaking load: 40 N/cm. Elongation: 250%.
Service temperature: -5°C to +70°C. Breakdown voltage: 10 kV.

Reference	Color	Width	Length	Weight
S182L1	Black L1	15 mm	10 m	37 g
S182L2	Black L2			
S182L3	Black L3			
S182N	Blue N			

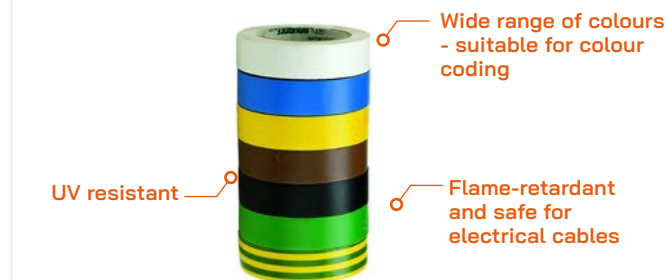

TR055

INSULATED ADHESIVE TAPES

STANDARDS

EN 60454 TYPE 2

/ TECHNICAL SPECIFICATIONS

Thickness: 0.13 mm — Breaking load: 26 N/cm — Elongation: 180% —
Adhesion (steel/self): 2.4 / 2.1 N/cm — Service temp.: -5 °C to +70 °C —
Breakdown voltage: 8 kV — Sold per unit (min. 4 per LV conductor).

Reference	Application	Colour	Width	Length	Weight
TR055B	-	White	15 mm	10 m	30 g
TR055BE	neutral	Blue			
TR055J	phase 2	Yellow			
TR055M	phase 3	Brown			
TR055N	-	Black			
TR055V	phase 1	Green			
TR055VJ	Earth	Green/Yellow			

TN200

LV PROTECTION COVER FOR ELECTRICAL CABINETS S22

/ TECHNICAL SPECIFICATIONS

60 mm red elastic headband with "Danger" marking.

Reference	Diameter	Version	Dimensions	Weight
TN200PM	90 cm	Small version	340 x 390 x 710 mm	580 g
TN200GM	90 cm	Big version	660 x 290 x 710 mm	900 g



TE08

INSULATING SCREEN 20 KV FOR SUBSTATION

/ KEY FEATURES & APPLICATIONS

Self-extinguishing (M3 / UL94 V-0), dielectric tested (IEC 60243-1),
mechanically compliant (ISO 178/527/604/179/180), with insulating
corners (TC144C) and bolts (TC144B).

Reference	Version	Width	Weight
TE08PM	Small version	1000 x 1000 x 3 mm	5,9 kg
TE08GM	Big version	2000 x 1000 x 3 mm	11,8 kg



ELISOL

MARKING OF THE MINIMUM APPROACH DISTANCE

Reference	Minimum Approach Distance
ELISOL	0,50 U (kV) +0,50m



EPROLLOWN

LV INSULATING PROTECTIVE SCREEN FOR OUT-OF-REACH PROTECTION


STANDARDS

FT BT 410 FOR ADHESIVE STRIP INSULATING BLANKET
IEC 61235 FOR INSULATING TUBES

/ KEY FEATURES

- Dielectric helmet and a light grey face shield with anti-fog, anti-scratch, chin and side protection.
- Provides safe working conditions near live LV components by isolating exposed parts.
- Fixed side handles make the screen easy to move and position on site.

Reference	Screen width	Base width	Screen height	Screen weight
EPROLLOWN	800 mm	500 mm	1900 mm	5 kg

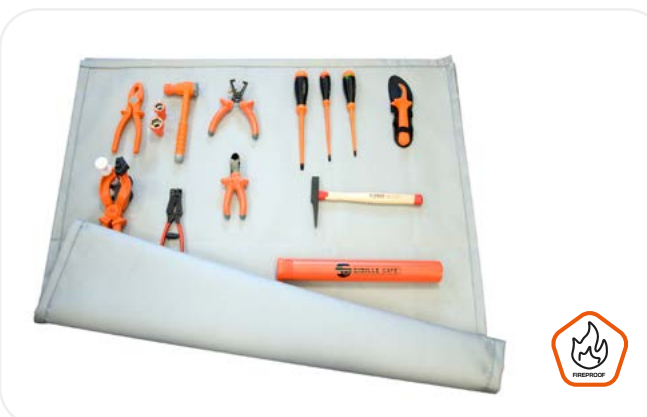

TB05 - TB10

INSULATING SCREEN 20 KV FOR SUBSTATION

/ KEY FEATURES & APPLICATIONS

Fireproof M2-rated linen cloth cover designed for protecting linemen's tools during daily operations.

Reference	Width	Weight
TB05	2 x 1 m	1,6 kg
TB10	3 x 1 m	2,6 kg





SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

/ BRITISH STANDARDS	368
Earthling kits	368
Earth tape kits	370
Earthling clamps	372
Overhead lines clamps	376
Operating poles	380
Operating heads & sockets	383
Fuse heads	385
Pole adaptor head	386
Flexible cables and accessories	387
Flexible leads and accessories	388
Earth rods and nests	390
Cluster bar & terminal plates	391
Earthling spigots	393
Dress earth and sparrow plates	395



CONFIGURATOR FOR PORTABLE EARTHING SYSTEM

1) NETWORK & INSTALLATION CHARACTERISTICS

Equipment conforming to Standards: _____ UK ☐ / Export ☐

Network nom. voltage: ____ kV Max. short-circuit current: ____ kA / ____ s (time)

Nature of the conductive materials: Aluminium _____ Copper _____ Other _____

Conductor line configuration: _____ DLE: ☐ Rail: ☐ Underground: ☐ Substation: ☐ TLE: ☐

- Line End Conductor Dia. mm : min. _____ max. _____

Single ☐ Twin ☐ Triple ☐ Quad ☐

- Earth End Clamp Dia. mm : min. _____ max. _____

Length. _____


- Flat bars: width. _____ Breadth. _____ Fitting: Side ☐ / Edgewise ☐

2) PENTA P&B PORTABLE EARTHING TYPES

CONFIGURATION
TYPE A




CONFIGURATION
TYPE B

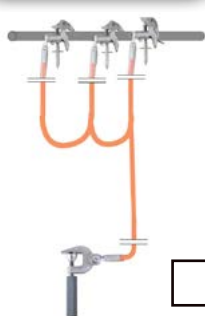


CONFIGURATION
TYPE C



CONFIGURATION
TYPE D

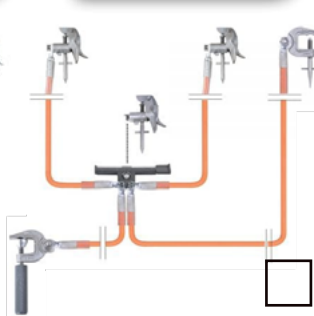


CONFIGURATION
TYPE E

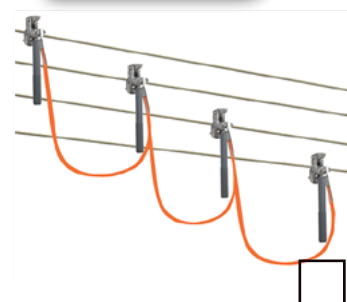


CONFIGURATION
TYPE F




CONFIGURATION
TYPE G

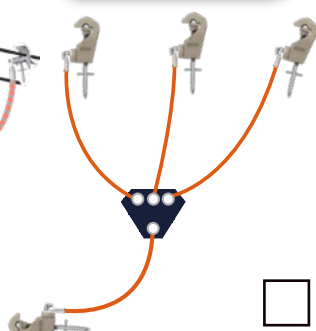

CONFIGURATION
TYPE H

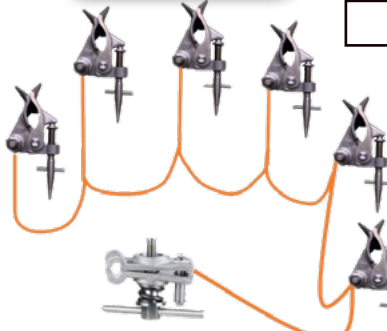

CONFIGURATION
TYPE J

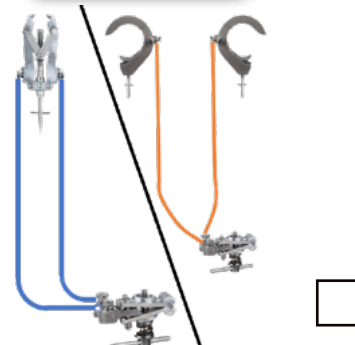



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.



CONFIGURATOR FOR PORTABLE EARTHING SYSTEM

3) CHARACTERISTICS OF THE EARTHING SYSTEM

- How many kits/ leads required : _____
- Distance between Line conductors (m): _____, distance between Line conductors and Earthing point (m) _____
- To place the clamps in position, the operator will stand
 - i. above the conductors ☐
 - ii. below the conductors ☐
 - iii. at the conductors level ☐
 - iv. Upon a pole ☐
 - v. Upon a platform ☐
 - vi. In a MEWP ☐

4) EARTHING CONNECTION POINT

- Sparrow Plate : ☐
- Steelwork : ☐
- Earth Rod: ☐
- Earth Nest: ☐
- Number of Rods: _____

5) INSULATED OPERATING POLE

- Overall length: _____ Sectional: ☐ Telescopic: ☐ Hand Grip: ☐ End Fitting: _____
- Pole Quantity: Top _____ Intermediate _____ Bottom _____ End Plug: ☐ Socket/ Head: ☐
- Telescopic _____

6) ACCESSORIES

- Carrying bag for Pole : ☐
- Carrying bag for equipment : ☐
- Do you require a bag ? Yes ☐ No ☐

7) EARTHING SOLUTION

- | | |
|---|---|
| - Line End Clamp: _____ | - Earth End Clamp _____ |
| - Phase Leads: Length (m) _____ | - Earth Lead: Length (m) _____ |
| Cross sectional area (mm ²) _____ | Cross sectional area (mm ²) _____ |
| Insulation Colour: _____ | Insulation Colour: _____ |
| - Busbar/ parking bar type: _____ | - Insulating pole, type: _____ |
| - Earth rods/ nest: _____ | |



SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS EARTHING KITS



Below are range of Earthing Kits suitable for Distribution Earthing.

/ This range offers solutions that are :

- Fully customisable depending upon requirements
- Approved for use on Distribution Lines
- Equipment used worldwide
- Lightweight and Solid construction



MISC-00006

11kA SNAP-ON
EARTHING KIT

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

3 x CE62 Line End Clamps
3 x 3m 120sqmm Orange Aluflex Leads
1 x Type-A Terminal Plate
1 x 15m 50sqmm Orange Aluflex Lead
1 x S9A Short Handle Earth End Clamp

Reference	Short Circuit Rating
MISC-00006	12.5kA/ 1s (Phase to Phase)



MISC-00060

DLE KIT WITH CROSS
ARM CLAMP


STANDARDS

ENA TS 41-21

/ KIT COMPRISING

3 x S9B Short Taper Line End Clamps
3 x 3m 120sqmm Orange Aluflex Leads
1 x Cluster Bar Type DLE/ CAC
1 x 15m 50sqmm Orange Aluflex Lead
1 x S9A Short Handle Earth End Clamp
1 x S9A Pointed Tip Cross Arm Clamp
1 x 3m 50sqmm Orange Aluflex Lead

Reference	Short Circuit Rating
MISC-00060	20kA/1s (phase to phase)



MISC-00066

DLE2/A EARTHING KIT


STANDARDS

ENA TS 41-21

/ KIT COMPRISING

3 x S9B Short Taper Line End Clamps
3 x 3m 50sqmm Clear Aluflex Leads
1 x Type C Terminal Plate
1 x 11m 50sqmm Clear Aluflex Lead
1 x Split Connector
1 x 4ft P&B Top Pole
1 x 4ft P&B Bottom Pole
1 x S9D Socket
1 x Rain Shield
1 x Heavy Duty PVC Carrying Bag

Reference	Short Circuit Rating
MISC-00066	20kA/ 1s (Phase to Phase)



MISC-00103

33kV KIT WITH S9A
RING TYPE
LINE END CLAMPS

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

3 x S9B Ring Type Line End Clamps
2 x 3m 120sqmm Arctic Orange Aluflex Leads
1 x Cluster Bar
1 x 15m 50sqmm Arctic Orange Aluflex Leads
2 x S9A Short Handle Earth End Clamps with Rocker Block
1 x S9A Short Handle Clamp with Pointed Tip

Reference	Short Circuit Rating
MISC-00103	20kA/ 1s (Phase to Phase)





MISC-00022

DLE KIT S9B/RT &
NEW CLUSTER

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

- 3 x S9B Ring Type Line End Clamps
- 3 x 3m 120sqmm Arctic Orange Aluflex Leads
- 1 x Cluster Bar
- 1 x 15m 50sqmm Arctic Orange Aluflex Lead
- 1 x S9A Short Handle Earth End Clamp
- 1 x pvc Carrying Bag

Reference	Short Circuit Rating
MISC-00022	20kA/1s (phase to phase)



MISC-00018

33kV DLE KIT

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

- 3 x S9B Short taper Line End Clamps
- 3 x 3m 120sqmm Arctic Orange Aluflex Leads
- 1 x Type C Terminal Plate
- 1 x 15m 50sqmm Arctic Orange Aluflex Lead
- 1 x S9A Short Handle Earth End Clamp
- 1 x CE10 Cross Arm Clamp
- 1 x 3m 50sqmm Arctic Orange Aluflex Lead

Reference	Short Circuit Rating
MISC-00018	20kA/1s (phase to phase)



MISC-00169

DLE2/B EARTHING KIT

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

- 3 x S9B Short Taper Line End Clamps
- 3 x 3m 120sqmm Arctic Orange Aluflex Leads
- 1 x Type-A Terminal Plate
- 1 x 7m 50sqmm Arctic Orange Aluflex Lead
- 1 x S9A Short Handle Earth End Clamp
- 1 x PVC Carrying Bag
- 1 x 4ft Top Section Pole
- 1 x 4ft Bottom Section Pole
- 1 x P331 Socket
- 1 x Earth Rod

Reference	Short Circuit Rating
MISC-00169	20kA/1s (phase to phase)



MISC-00029

LV EARTHING KITS

STANDARDS

ENA TS 41-21

/ USE

LV Earthing Kits can be applied by hand using the S9B Long Handle clamps. Kits can be provided for up to 5 cables (three Phase, Neutral and Earth Line End clamps), and are supplied including a heavy duty pvc carry bag for protection of the equipment. The length of the 50sqmm leads is usually 1.5m, although these can be made to any length/colour depending upon requirements.

/ KIT COMPRISING

- 1 x PVC Bag for Shorting Kit
- 4 x 50sqmm 1.5m Arctic Orange Leads
- 5 x S9BS/A/LH/105 Clamp Assembly

Reference	Short Circuit Rating
MISC-00029	20kA/1s (phase to phase)





SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

EARTH TAPE KITS



Below are range of Earth Tape Kits suitable for Substation Earthing.

These portable earthing kits have been developed to provide safe and secure high voltage connections to dirty or heavy oxidized copper/aluminium earth tapes. The CE57 Earth Tape clamp provides a drain earth before fitting a bridging earth suitable for fault protection, conductor sizes ranging from 25x3mm to 100x6mm are accommodated.

Earth tape defects range from deterioration of welded underground jointed interfaces on an earthing grid, high resistance connections between a tape and the primary plant or unauthorised removal leaving breaks in the system. PENTA P&B supply kits to aid safe repairs of Earth Tapes.

/ This range offers solutions that are :

• Suitable for conductor range 66kV to 400kV

• In accordance with National Grid NSI 24



MISC-00021

NSI24 TEMPORARY
EARTH BOND KIT

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

1 x CE57 Earth Tape Clamp
2 x 8m 50sqmm Blue Aluflex Leads
1 x CE20/2 Clamp
1 x 2ft Bottom Pole
1 x 2ft Upper Pole c/w Socket
1 x PVC Carry Bag

This kit can be used as an NSI26 Earth.

Reference	Short Circuit Rating	Continuous Current Rating
MISC-00021	16kA/1s	300A



MISC-00100

NSI24 EARTH TAPE
REPAIR KIT WITH
CLEAR LEADS


STANDARDS

ENA TS 41-21

/ KIT COMPRISING

1 x CE57 Earth Tape Clamp
1 x CE20/2 Clamp
2 x 8m Clear 50sq mm Leads
1 x 2ft Upper Pole Assembly c/w Socket
1 x 2ft Lower Pole Assembly
1 x PVC Carrying Bag

Reference	Short Circuit Rating	Continuous Current Rating
MISC-00100	16kA/1s	300A



MISC-00137

EARTH TAPE REPAIR
KITS FOR NIE

STANDARDS

ENA TS 41-21

/ KIT COMPRISING

2 x S9A/A/LT/PT/135H Clamp
1 x CE57 Drain Earth Clamp
4 x CE20/2 Clamp
4 x 150sqmm Clear Lead 8.00m
2 x 50sqmm Artic Blue Lead

Reference	MISC-00137
-----------	------------



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.

PORTABLE EARTHING EQUIPMENT



FIND OUT
MORE



pentaesp.com





SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS EARTHING CLAMPS

/ This range of earthing and overhead line clamps complies with the ENA 41-21 standard and is also suitable for export markets. Designed for durability, these clamps feature a robust construction, lightweight design, and exceptional resistance to corrosion.



Below are range of Earthing Clamps suitable for Distribution Earthing.

Hardened steel tip :

ideal for non-conductive surfaces

Insulated handle for easy application



SK081008-0/1

S9A SHORT HANDLE CLAMP WITH HARDENED TIP

STANDARDS

ENA TS 41-21

/ USE

Used as part of a earthing kit and connects to a designated earthing point either to aluminium or copper flat bar, round conductor or earth rods or steelwork, with knurled insulated handle for ease of application and a **hardened steel tip** for penetrating non-conductive surfaces.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
SK081008-0/1	6.4 - 20mm diameter Up to 20mm thick bar	17.5kA/ 2s	Insulated handle	0.46kg

Rocker contact block:
Provides strong low resistance connection

Insulated handle for easy application



FA1076-F

S9A SHORT HANDLE CLAMP WITH ROCKER BLOCK

STANDARDS


ENA TS 41-21

/ USE

Used as part of a earthing kit and connects to a designated earthing point either to aluminium or copper flat bar, round conductor or earth rods or steelwork, with knurled insulated handle for ease of application and a **rocker block** for strong low-resistance connection.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA1076-F	6.4 — 17mm dia.	24.75kA/ 1s	Insulated handle	0.46kg

Hardened steel tip :
ideal for non-conductive surfaces



FA3726-A

S9A LONG TAPER STEELWORK EARTH END CLAMP

STANDARDS

ENA TS 41-21

/ USE

Hardened Steel Tip penetrates non-conductive surfaces for a strong, low resistance connection.
Used as part of a earthing kit and connects to a designated earthing point or steelworks.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA3726-A	Up to 20mm thick bar 6.4 to 20mm diameter round conductors	17.5kA/ 2s	Long Taper	0.40kg

Rocker contact block:
Provides strong low resistance connection

Tommy bar for easy hand application



FA1076-A

S9A CLAMP WITH ROCKER BLOCK AND TOMMY BAR

STANDARDS

ENA TS 41-21

/ USE

Fitted with rocker block and tommy bar op-screw for hand operation.
Used as part of a earthing kit and connects to a designated earthing point.

Reference	Clamping diameter	Short circuit rating	Weight
FA1076-A	12.7mm thick bars 6.4 to 20mm diameter round conductors	17.5kA/ 2s	0.38kg

Hardened steel tip:
ideal for steelwork

Connects to OL1 & P331 Operating Sockets



EFD-11764/2

CE10 CROSS ARM/ STEELWORK CLAMP

STANDARDS

ENA TS 41-21

/ USE

With hardened Steel Tip penetrates non-conductive surfaces for a strong, low resistance connection.

Reference	Clamping diameter	Weight
EFD-11764/2	0 - 13mm	0.45kg





Below are range of Earthing Clamps suitable for Transmission Earthing.

/ This range offers solutions that are :

- Solid construction to give extended service
- Proven service record used by the electricity supply industry for more than 40 years

- Lightweight and excellent resistance to corrosion

Hardened steel tip :
ideal for non-conductive
surfaces

Tommy bar
for aasy
hand
application



EFP-11173/1 CE10/A2 EARTH END CLAMP

STANDARDS

ENA TS 41-21

/ USE

The CE10/A2 clamp is for direct application by hand to steelwork. The large thumbscrew of the device has a captive hardened steel tip which penetrates through painted, weathered or non-conductive surfaces and indents into the steelwork, ensuring a strong connection to earth potential.

Reference	Short Circuit Rating	Cont. Circuit Rating	Weight
EFP-11173/1	8.9kA/ 1s	150A	0.40kg

Enables cable
to run freely
whilst providing
a positive
contact to
earth.



FA2127 CE23/A RUNNING EARTH CLAMP

STANDARDS

ENA TS 41-21

/ USE

The CE23/A Running Earth clamp is designed specifically for earthing line conductors during "stringing" operations. The CE23/A Running Earth enables the cable to run freely between contact roller faces whilst providing a positive contact to earth.

The earth is anchored to a convenient position using the lanyard locating hole. The maximum size of a conductor that can be accommodated is 42mm. The CE23/A has a short circuit rating of 18kA/1s and a continuous current rating of 300A.

Improved cable fixing location offers improved strength, suitable for PB50 and PB120 palm terminations.

Reference	Clamping Diameter	Short Circuit Rating	Cont. Circuit Rating	Weight
FA2127	Up to 42mm	20kA/ 1s	300A	4.76kg



FA2043-C CE18/A BRIDGING CLAMP

STANDARDS

ENA TS 41-21

/ USE

The CE18/A clamp is for earthing the conductor over the tension set insulators to the tower arm coupling during maintenance. It bolts to the coupling through the clearance hole for the arcing horn bolt, which is removed before earthing.

Reference	Short Circuit Rating	Cont. Circuit Rating	Weight
FA2043-C	8.9kA/ 1s	150A	0.33kg





SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS EARTHING CLAMPS



Below are range of Earthing Clamps suitable for Substation Earthing.

/ This range offers solutions that are :

- Solid construction to give extended service
- Proven service record used by the electricity supply industry for more than 40 years

- Lightweight and excellent resistance to corrosion



FA2120-B
CE20 ESI-E1 EARTH
END CLAMP

STANDARDS

ENA TS 41-21

/ USE

The CE20 is an Earth End clamp suitable to provide a connection to Substation Earth Tape. This is ideally suited for connection to tapes fitted with panhandles. Compatible with PB150T terminated leads and can be applied to clean or dirty copper and aluminium earth tape.

- Earth Tape Thickness : 3.2-6.5mm
- Earth Tape Width : 38-50mm

Reference	Short Circuit Rating	Max Cable Connection	Weight
FA2120-B	25kA/ 1s & 17.5kA/2s	1	0.62kg



FA2173-B
CE20/2 38-50 EARTH
END CLAMP

STANDARDS

ENA TS 41-21

/ USE

CE20 Earth End clamp with adapter to permit fitting of twin cables and increase short circuit capacity.

- Earth Tape Thickness : 3.2-6.5mm
- Earth Tape Width : 38-50mm

Reference	Short Circuit Rating	Max Cable Connection	Weight
FA2173-B	53.7kA/ 1s & 38kA/2s	2	0.94kg



EFP-13727
CE20/2 50-60 EARTH
END CLAMP

STANDARDS


ENA TS 41-21

/ USE

Special CE20/2 50-60 Earth End Clamp suitable for fitting to wide aluminium earth tapes 50mm to 60mm wide. Rating same as CE20/2 38/50.

- Earth Tape Thickness : 3.2-6.5mm
- Earth Tape Width : 38-50mm

Reference	Short Circuit Rating	Max Cable Connection	Weight
EFP-13727	53.7kA/ 1s & 38kA/2s	2	1.16kg

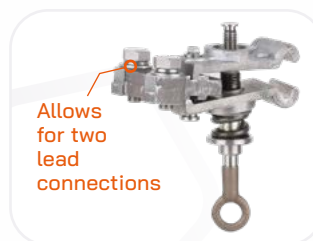

EFP-16705
CE20/2/A/S/RT EARTH
CLAMP

STANDARDS

ENA TS 41-21

/ USE

Earth clamp to allow temporary earthing of earth tapes.

Reference	Short Circuit Rating	Weight
EFP-16705	25kA/ 1s & 17.5kA/2s	0.94kg



FA2121-B
CE21 EARTH END
CLAMP

STANDARDS

ENA TS 41-21

/ USE

Can be applied to clean or dirty Copper or Aluminium tape.

- Earth Tape Thickness : 3.2-13mm
- Earth Tape Width : 25-50mm

Reference	Short Circuit Rating	Weight
FA2121-B	25kA/ 1s & 17.5kA/2s	0.64kg



EFP-16708
CE57 DRAIN EARTH
CLAMP

STANDARDS

ENA TS 41-21

/ USE

Aluminium Drain Earth clamp for use in Earth Tape Bridging Kit.

Reference	Conductor Range	Short Circuit Rating	Continuous Current Rating
EFP-16708	25mm — 3mm (Min) / 100mm — 6mm (Max)	16kA/ 1s	300A



FA3129-A
CE35 EARTH CLAMP

STANDARDS


ENA TS 41-21

/ USE

Suitable for application to T bar stubs, ball stubs, flat bar and round bar.
For use with ball stubs and T bar stub.

- For Flat Bars : Max Thickness: 12mm / Min Width: 31mm
- For Round Bars : Max Diameter: 25mm / Min Diameter: 12mm

Reference	Short Circuit Rating	Weight
FA3129-A	25kA/1s & 17.5kA/2s	1.16kg

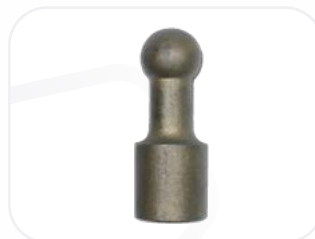

4814-01
BOLTED TYPE BALL STUB

STANDARDS

ENA TS 41-21

/ USE

Bronze bolted ball stud to provide a designated Earth point upon an Earth tape or within an electrical cabinet.
Connects to CE35 Earth Clamp.

Reference	4814-01
-----------	----------------



4814-02
STUD TYPE BALL STUB

STANDARDS

ENA TS 41-21

/ USE

Bronze bolted ball stud to provide a designated Earth point upon an Earth tape or within an electrical cabinet.
Connects to CE35 Earth Clamp.

Reference	4814-02
-----------	----------------



4815-03
STUD TYPE T BAR STUB

STANDARDS

ENA TS 41-21

/ USE

Bronze bolted ball stud to provide a designated Earth point upon an Earth tape or within an electrical cabinet.
Connects to CE35 Earth Clamp.

Reference	4815-03
-----------	----------------



EMP-20066/1
LARGE PANHANDLE

STANDARDS

ENA TS 41-21

/ USE

Large Aluminium Pan Handle suitable for fitting to access platforms.

Reference	Length	Material
EMP-20066/1	422.4mm	Aluminium



EMP-20066
MEDIUM PANHANDLE

STANDARDS

ENA TS 41-21

/ USE

Medium Aluminium Pan Handle suitable for fitting to access platforms.

Reference	Length	Material
EMP-20066	310mm	Aluminium



EMP-20066/2
SMALL PANHANDLE

STANDARDS

ENA TS 41-21

/ USE

Small Aluminium Pan Handle suitable for fitting to access platforms.

Reference	Length	Material
EMP-20066/2	220mm	Aluminium





SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS OVERHEAD LINES CLAMPS




Below are range Overhead Line Clamps suitable for Distribution Earthing.

/ This range offers solutions that are :

- Short Circuit tested to 17.5kA for 2 seconds (25kA/1s)
- Proven service record used by ESI for over 50 years
- Robust construction for extended service life
- Lightweight and excellent corrosion resistance

Restricting collar to limit jaws opening suitable for conductors up to 27mm

Tested to 17.5kA for 2 seconds



FA3218-A

S9BS SHORT TAPER LINE END CLAMP (WITH COLLAR)

STANDARDS

ENA TS 41-21

Suitable for conductors up to 38mm

Tested to 17.5kA for 2 seconds



FA3218-B

S9BS SHORT TAPER LINE END CLAMP (NO COLLAR)

STANDARDS

ENA TS 41-21

/ USE

Hooks over conductor, with spring-loaded jaw for ease of installation.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA3218-A	3 - 27mm	17.5kA/2s	Short Taper	0.58kg

/ USE

Hooks over conductor, with spring-loaded jaw for ease of installation.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA3218-B	3 - 38mm	17.5kA/2s	Short Taper	0.55kg

Tested to 17.5kA for 2 seconds

Compatible with RT/TL Socket Assembly, RT Operating Socket and Hook Type Socket



FA3213-A

S9B RING TYPE LINE END CLAMP

STANDARDS

ENA TS 41-21

Tested to 17.5kA for 2 seconds

Insulated handle for easy application



FA3344-A

S9B LONG HANDLE LINE END CLAMP

STANDARDS

ENA TS 41-21

/ USE

Ring Type operating screw allows application to conductor whilst holding the Operating Pole at an angle to the Line End clamp.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA3213-A	3 - 27mm	17.5kA/2s	Ring Type	0.52kg

/ USE

Insulated Handle to allow hand application upon LV Distribution Lines.

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
FA3344-A	3 - 27mm	17.5kA/2s	Insulated handle	0.58kg

Tested to 17.5kA for 2 seconds

With short taper op-screw compatible with PB331, P331, CEA/ ESI-S2 and S9D/ ESI-S1 Operating Sockets.



EFD-13218/3

S9B DLE CEB ASSEMBLY

STANDARDS

ENA TS 41-21

/ USE

Serrated jaw profile to provide better contact upon weathered conductor

Reference	Clamping diameter	Short circuit rating	Operating screw	Weight
EFD-13218/3	3 - 27mm	17.5kA/2s	Short taper	0.56kg



EFD-16733

Removal plate

EFD-16733/1

Special Removal plate

EFD-16733/2

CE62 SNAP-ON LINE END CLAMP

STANDARDS

ENA TS 41-21

- > Lightweight
- > Rapid fitting and removal
- > Tested to 12.5kA for 1 seconds

/ USE

Spring loaded jaw snaps onto conductor for easy connection. The CE62 Snap-on clamp is made from lightweight robust aluminium casting with stainless steel fittings.

Reference	Clamping diameter	Short circuit rating	Applied with	Weight
EFD-16733	4 - 20mm	12.5kA/ 1s	DH1A or Applicator Head	0.44kg
EFD-16733/1				0.52kg
EFD-16733/2				0.62kg




Below are Overhead Line Clamps suitable for Transmission Earthing.

/ This range offers solutions that are :

- Solid construction to give extended service
- Proven service record used by the electricity supply industry for more than 40 years

- Lightweight and excellent resistance to corrosion



EFP-16743

CE69 LINE END CLAMP


STANDARDS

ENA TS 41-21

/ USE

The CE69 clamp is to be applied in either an upward or downward direction utilising an OL1 operating socket attached to an insulated operating pole. The spring-loaded jaws enable the clamp to be slipped easily over the line conductor and retain the clamp in position whilst the operating screw is being tightened or loosened. The clamp is suitable for application to conductors ranging from 13mm to 46mm.

Reference	Clamping Diameter	Short Circuit Rating	Cont. Current Rating	Weight
EFP-16743	13 - 46mm	20kA/ 1s	300A	0.63kg



EFP-11868

CE13 LINE END CLAMP

STANDARDS

ENA TS 41-21

/ USE

The CE13/A Line End clamp attaches to an OL1 operating socket and is designed to be applied in a nearly horizontal position, from the tower cross arm over tension set insulators to the conductor. The CE13/A clamp accommodates a range of conductors from 19mm to 42mm.

Reference	Clamping Diameter	Short Circuit Rating	Cont. Current Rating	Weight
EFP-11868	19 — 42mm	20kA/ 1s	300A	0.99kg



EFP-16790

CE81 LINE END CLAMP

STANDARDS

ENA TS 41-21

/ USE

Designed for large special conductors such as used for river crossings and CCC conductor with double 'Armour Rods'.

The CE81 Line End clamp is to be applied in either an upward or downward direction using an OL1 operating socket attached to an insulated operating pole. The spring-loaded jaws enable the clamp to be slipped easily over the line conductor and retain the clamp in position whilst the operating screw is being tightened or loosened.

Reference	Short Circuit Rating	Cont. Current Rating	Weight
EFP-16790	20kA/ 1s	300A	0.99kg





SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS OVERHEAD LINES CLAMPS



Below are Overhead Line Clamps suitable for Substation Earthing.

- / This range offers solutions that are :
- Lightweight
 - Precision machined for improved performance



FA2738-A

CE22/A ESI-S1
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE1

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2738-A	10-38mm	25kA/1s & 17.5kA/2s	1	1.05kg



FA2143-B


CE22/B ESI-L2
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE3

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2143-B	38-76mm	25kA/1s & 17.5kA/2s	1	1.09kg



FA2143-A

CE22/A&B ST
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE4

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2143-A	19-76mm	25kA/1s & 17.5kA/2s	1	1.09kg



FA2739-A

CE22/C ESI-L3
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE5

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2739-A	60-90mm	25kA/1s & 17.5kA/2s	1	1.27kg



FA2169-B

CE25
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE2

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2169-B	35-75mm	53.7kA/1s	2	1.73kg



FA2191-A

CE15
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE6

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2191-A	90mm	51.6kA/ 2s	2	1.73kg



FA2367-A

CE28
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE7

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2367-A	100mm	45kA/ 1s & 31.8kA/ 2s	2	1.66kg



FA2180

CE27
LINE END CLAMP

STANDARDS

ENA TS 41-21

- ENA 41-21 Reference : 41-21-LE8

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2180	101.6mm	25kA/1s & 17.5kA/2s	1	1.55kg



FA2973-A
CE16/120
LINE END CLAMP

STANDARDS
ENA TS 41-21

• ENA 41-21 Reference : 41-21-LE9

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2973-A	120mm	61.2kA/ 2s	3	2.23kg



FA2004-A
CE16/140
LINE END CLAMP

STANDARDS
ENA TS 41-21

• ENA 41-21 Reference : 41-21-LE11

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
FA2004-A	140mm	61.2kA/ 2s	3	2.41kg




EFP-16703
CE51
LINE END CLAMP

STANDARDS
ENA TS 41-21

• ENA 41-21 Reference : 41-21-LE12

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
EFP-16703	140-160mm	53.7kA/ 1s & 38kA/ 2s	2	2.85kg

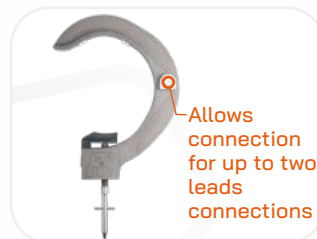

EFP-16702
CE50
LINE END CLAMP

STANDARDS
ENA TS 41-21

• ENA 41-21 Reference : 41-21-LE13

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
EFP-16702	190-200mm	53.7kA/ 1s & 38kA/ 2s	2	3.03kg



EFP-16749
CE71
LINE END CLAMP

STANDARDS
ENA TS 41-21

• ENA 41-21 Reference : 41-21-LE14

Reference	Clamping Diameter	Short Circuit Rating	Max Cable Connection	Weight
EFP-16749	220-250mm	25kA/ 1s 17.5kA/ 2s	1	3.5kg





SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

OPERATING POLES



Below are Operating Poles suitable for Distribution Earthing.

/ This range offers solutions that are :

- Lightweight
- High torsional and bending strength
- Easy interconnection in 4ft lengths
- Engineered precision joints to minimise flexing
- High electrical resistance value



EBR-18101/4

P&B STYLE 4FT (1.22M)
TOP POLE SECTION

STANDARDS

ENA TS 41-21

- Available with or without grip



EAR-18103/1

P&B STYLE 4FT (1.22M)
INTERMEDIATE POLE
SECTION

STANDARDS

ENA TS 41-21

- Available with or without grip

Reference	Material	Total Length	Use with	Weight
EBR-18101/4 (No Grip)	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	P&B Style Inter. and Bottom Poles	0.70kg

Reference	Material	Total Length	Use with	Weight
EAR-18103/1 (No Grip)	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	P&B Style Top, Inter. and Bottom Poles	0.70kg



EAR-18103/2

P&B STYLE 4FT (1.22M)
BOTTOM POLE SECTION

STANDARDS

ENA TS 41-21

- Available with or without grip



EBR-18163

BOWTHORPE STYLE
4FT (1.22M) TOP POLE
SECTION

STANDARDS

ENA TS 41-21

Reference	Material	Total Length	Use with	Weight
EAR-18103/2 (With Grip)	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	P&B Style Top and Inter. Poles	0.70kg

Reference	Material	Total Length	Use with	Weight
EBR-18163	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	Bowthorpe Style Inter. and Bottom Pole	0.70kg



EBR-18161

BOWTHORPE STYLE 4FT
(1.22M) INTERMEDIATE
POLE SECTION

STANDARDS

ENA TS 41-21



EBR-18162/1

BOWTHORPE STYLE 4FT
(1.22M) BOTTOM POLE
SECTION

STANDARDS

ENA TS 41-21

Reference	Material	Total Length	Use with	Weight
EBR-18161	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	Bowthorpe Style Top & Bottom Pole Sections	0.70kg

Reference	Material	Total Length	Use with	Weight
EBR-18162/1	Glass cloth reinforced epoxy resin tubing	4ft (1.22m)	Bowthorpe Style Inter. and Top Pole	0.70kg



EBB-14510

GOLF TYPE EARTHING
BAG

STANDARDS

ENA TS 41-21

- Used for carrying 4ft Operating Poles to site and keeps poles dry and safe.

Reference	Material	Dimension
EBB-14510	Re-inforced green PVC	1390 Long x 150 High x 240 Wide



Below are Operating Poles suitable for Substation Earthing.

/ This range offers solutions that are :

- Lightweight
- Precision machined for rigidity
- High electrical resistance



FA1346-E

8FT (2.44M) TOP POLE SECTION

STANDARDS

ENA TS 41-21

- 8ft pole with foam filled also available

Reference	Material	Total Length	Use with	Weight
FA1346-E (Pole Only)	Glass cloth reinforced epoxy resin tubing	8ft (2.44m)	S9D and CEA/S2 Sockets	1.40kg



FA1322-H

8FT (2.44M) BOTTOM POLE SECTION

STANDARDS

ENA TS 41-21

- Bottom sections supplied with End Plug

Reference	Material	Total Length	Use with	Weight
FA1322-H	Glass cloth reinforced epoxy resin tubing	8ft (2.44m)	S9D and CEA/S2 Sockets	1.40kg



EFR-18104/3

8FT (2.44M) POLE
(2X4FT SECTIONS
JOINED BY CHAIN)

STANDARDS

ENA TS 41-21

- Sections Available : Used as single-pole only

Reference	Material	Total Length	Compatible with	Weight
EFR-18104/3	Glass cloth reinforced epoxy resin tubing	8ft (2.44m)	S9D and CEA/S2 Sockets	1.38kg



EFR-18114

2FT SPECIAL POLE
ASSEMBLIES FOR EARTH
TAPE BRIDGING KITS

STANDARDS

ENA TS 41-21

- Special 2ft (0.6m) long upper and lower operating pole sections identified by blue pigmented open weave hand grip

	Top Section	Bottom Section
Reference	EFR-18114	EFR-18115



EAR-18106

REMOVABLE POLE END
PLUG

STANDARDS

ENA TS 41-21

- Attaches to the bottom pole section

Reference	Material	Colour	Compatible with	Weight
EAR-18106	Thermo-Plastic	Grey	Bottom Poles	0.16kg






SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS OPERATING POLES



Below are Operating Poles suitable for Transmission Earthing.

/ This range offers solutions that are :

- Open weave hand grips
- Available with or without OL1 Socket & Carry Sling
- Lightweight rigid sections
- 'Snap action' button joints



FA1816-B

8FT /16FT TELESCOPIC
POLE WITH OL1 SOCKET
& SLING

STANDARDS

ENA TS 41-21

/ USE

The two-part telescopic pole for use on Transmission line has an extended length of 4.83m (15' 10") and a closed length of 2.54m (8' 4"). Intermediate spring-loaded locking pegs provide partially extended lengths of 4m (13' 1") and 4.4m (14' 5"). The pole is supplied with an OL1 operating socket for the application of our Line End clamps with long taper style operating screws.

Reference	Extended Length	Retracted Length	OL1 Operating Socket	Sling	Weight
FA1816-B	16 ft / 4.83m	8 ft / 2.54m	Yes	Yes	3.40kg



FA1816-A-01

8FT /16FT TELESCOPIC
POLE

STANDARDS

ENA TS 41-21

/ USE

The two-part telescopic pole for use on Transmission line has an extended length of 4.83m (15' 10") and a closed length of 2.54m (8' 4"). Intermediate spring-loaded locking pegs provide partially extended lengths of 4m (13' 1") and 4.4m (14' 5").

Reference	Extended Length	Retracted Length	OL1 Operating Socket	Sling	Weight
FA1816-A-01	16 ft / 4.83m	8 ft / 2.54m	No	No	3.17kg



FA1817-A

6FT POLE WITH SLING

STANDARDS

ENA TS 41-21

/ USE

Transmission operating pole used to attach to the 8/16ft Telescopic Pole to extend overall length to 22ft / 6.7m.

Supplied with a carry sling.

Reference	Total Length	OL1 Operating Socket	Sling	Weight
FA1817-A	6ft / 1.8m	No	Yes	1.68kg



FA1817-B

6FT OPERATING POLE
WITHOUT SLING

STANDARDS

ENA TS 41-21

/ USE

Transmission operating pole used to attach to the 8/16ft Telescopic Pole to extend overall length to 22ft / 6.7m.

Does not include carry sling.

Reference	Total Length	OL1 Operating Socket	Sling	Weight
FA1817-B	6ft / 1.8m	No	No	1.6kg



EFR-18109

2FT BRIDGING POLE

STANDARDS

ENA TS 41-21

- Supplied with Operating socket, Rain Shield and Swivel Eye Fitting.
- Also available with GS1 Socket (Ref. EFR-18109/1)

Reference	Total Length	Weight
EFR-18109	2ft / 0.6m	0.98kg



EBR-14502

RAINSHIELD FOR
OPERATING POLES

STANDARDS

ENA TS 41-21

/ USE

Fits on to any standard 4ft Pole section.
Protects Engineers against conductive paths caused by rainwater.

Reference	EBR-14502
-----------	-----------



Distribution kits can be supplied with a wide range of operating sockets and heads. Operating sockets should be matched with both the Operating Pole style and operating screw type of the Line End clamp.

Below are Operating Heads & Sockets suitable for P&B Style & Bowthorpe Style Operating Poles listed above.

/ This range offers solutions that are :

- Lightweight
- Engineered precision to ensure smooth operation

- Anti corrosion partst
- Designed to fit to P&B Style & Bowthorpe style operating poles



EFS-18314

P331 OPERATING SOCKET

STANDARDS

ENA TS 41-21



EFS-18319

P3313 OPERATING SOCKET

STANDARDS

ENA TS 41-21

/ USE

Torsional type spring loaded socket

/ USE

Suitable for removal and fitting of LEL and S&E fuse isolators.

Reference	Pole Type	Op-screw type	Weight
EFS-18314	Bowthorpe Style	Long or Short Taper	0.31kg

Reference	Pole Type	Op-screw type	Weight
EFS-18319	Bowthorpe Style	LEL or S&E Fuse Isolators	0.29kg



EFS-16637

PB331 OPERATING SOCKET

STANDARDS

ENA TS 41-21



EFS-18304

RT/TL OPERATING SOCKET

STANDARDS

ENA TS 41-21

/ USE

Torsional type spring loaded socket.

/ USE

Orange/white indicator to show retention and release of clamp.

Reference	Pole Type	Op-screw type	Weight
EFS-16637	P&B Style	Long or Short Taper	0.31kg

Reference	Pole Type	Op-screw type	Weight
EFS-18304	Bowthorpe Style	Ring type	0.37kg




FA3714-A

HOOK TYPE SOCKET

STANDARDS

ENA TS 41-21



EFD-16731/2

DH1A APPLICATOR HEAD

STANDARDS

ENA TS 41-21

/ USE

Spring tension hook type socket.

/ USE

Aluminium dispenser head for CE62 Line End clamps.

Reference	Pole Type	Op-screw type	Weight
FA3714-A	Bowthorpe Style	Ring type	0.42kg

Reference	Pole Type	Op-screw type	Weight
EFD-16731/2	Bowthorpe Style	CE62 Only	0.51kg



SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS OPERATING HEADS & SOCKETS



Connects to
Bowthorpe
Style Top
Pole

EFT-20126

CATU DISPENSER HEAD
WITH P&B ADAPTOR

STANDARDS

ENA TS 41-21

/ USE

Aluminium dispenser head for CE62 Line End clamps.

Reference	Pole Type	Op-screw type	Weight
EFT-20126	Bowthorpe Style	CE62 Only	0.51kg



Connects to
P&B Style
Top Pole

FA1097-B

S9D : ESI-S1 OPERATING
SOCKET

STANDARDS

ENA TS 41-21

/ USE

Quick action sliding Socket supports clamps being applied in an upward direction. Ideally suited to use with the S9B clamp with a short taper op-screw.

Reference	Pole Type	Op-screw type	Weight
FA1097-B	P&B Style	Short taper	0.30kg



Connects to
Bowthorpe
Style Top
Pole

EFS-18339

SPLASH PLATE
HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for protection from arc splash when applying live (hot) line clamps.

Reference	Pole Type	Weight
EFS-18339	Bowthorpe Style	0.63kg



Connects to
P&B Style
Top Pole

EFS-12541

GS1 OPERATING
SOCKET

STANDARDS

ENA TS 41-21

/ USE

To suit square end op-screws.

Reference	Pole Type	Op-screw Type
EFS-12541	P&B Style	Square End



Connects to
P&B Style
Top Pole

FA1200-B

OL1 OPERATING SOCKET
WITH CONCEALED
JOINT

STANDARDS

ENA TS 41-21

/ USE

Spring loaded bayonet socket for clamp application in any direction.

Reference	Pole Type	Op-screw type	Weight
FA1200-B	P&B Style	Long taper	0.23kg



Connects to
P&B Style
Top Pole

EFS-11203

CEA : ESI-S2 OPERATING
SOCKET

STANDARDS

ENA TS 41-21

/ USE

Spring loaded bayonet socket for clamp application in any direction.

Reference	Pole Type	Op-screw type	Weight
EFS-11203	P&B Style	Short taper	0.33kg



Connects to
Bowthorpe
Style Top
Pole

EFS-18326

LIVE LINE TAPPING
SOCKET

STANDARDS

ENA TS 41-21

/ USE

Suitable for the fitting and removal of live (hot) line taps.

Reference	Pole Type	Op-screw type
EFS-18326	Bowthorpe Style	Live Line Taps



Connects to
Bowthorpe
Style Top
Pole

EFS-18362

DIN BAYONET SOCKET

STANDARDS

ENA TS 41-21

/ USE

Suitable for fitting and removal of clamps with short taper style DIN op-screws.

Reference	Type	Pole Type	Op-screw Type
EFS-18362	Spring Loaded	Bowthorpe Style	DIN Bayonet
EFS-18369	Non-sprung		



EMS-18368

P3437 UNIVERSAL POLE HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for fuse cut-outs die-cast for strength, durability and accuracy.

Reference	Pole Type	Fuse type	Weight
EMS-18368	Bowthorpe Style	Universal Cut-Outs	0.77kg



EFS-18330

SIDE SPINDLE ADAPTOR

STANDARDS

ENA TS 41-21

/ USE

Suitable for Brush or J&P fuses.

Reference	Pole Type	Fuse type	Weight
EFS-18330	Bowthorpe Style	Brush or J&P Fuses	0.15kg



EMS-18372

P3380 J&P FUSE CUT-OUT HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for fitting and removal of J&P fuse cut-outs, die-cast for strength, durability and accuracy.

Reference	Pole Type	Fuse type	Weight
EMS-18372	Bowthorpe Style	J&P Fuses	0.34kg



EMS-18317

P3458 FUSE CUT-OUT HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for Brush fuse cut-out and isolating links, die-cast for strength, durability and accuracy.

Reference	Pole Type	Fuse type	Weight
EMS-18317	Bowthorpe Style	Brush	0.30kg



EFS-18323

JBONDEN PMR RE-CLOSER HEAD

STANDARDS

ENA TS 41-21

/ USE

Fully insulated Re-Closer Head.

Reference	Pole Type	Re-closer
EFS-18323	Bowthorpe Style	Re-closer



EFS-18334

JB1030 FUSE HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for fitting and removal of JB1030 LV Yorkshire fuses.

Reference	Pole Type	Fuse Type	Weight
EFS-18334	Bowthorpe Style	JB1030 LV Yorkshire Fuses	0.34kg



EMS-18301

AEI HENLEY FUSE HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for the fitting and removal of Henley type fuses.

Reference	Pole Type	Fuse Type
EMS-18301	Bowthorpe Style	Henley



SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

POLE ADAPTOR HEAD



Connects to
Bowthorpe
Style Top
Pole

4927

MACH OP-SOCKET
ADAPTER

STANDARDS

ENA TS 41-21

/ USE

Allows the fitting of P&B Sockets or Heads to a Bowthorpe style top pole.

• PADS Number : 0054/003008

Reference	Pole Type	Fits to	Weight
4927	Bowthorpe Style	P&B Sockets & Heads	0.26kg



Connects to
Bowthorpe
Style Top
Pole

EFS-18315

UNIVERSAL HEAD
ADAPTER

STANDARDS

ENA TS 41-21

/ USE

Suitable for use with universal (rising sun) line fitting tools. Aluminium or glass filled nylon (insulated) versions available.

Reference	Type	Pole Type	Fits to	Weight
EFS-18315	Aluminium	Bowthorpe Style	Universal tools	0.44kg
EFS-18315/1	Nylon			



Connects to
Bowthorpe
Style
Intermediate
Pole

EFR-18360

UNIVERSAL ADAPTER
CASTELLATED HEAD

STANDARDS

ENA TS 41-21

/ USE

Suitable for use with universal (rising sun) line fitting tools.

Reference	Type	Pole Type	Fits to
EFR-18360	Aluminium	Bowthorpe Intermediate Only	Universal tools
EFS-18360/1	Nylon		



EFS-18321

TELE ROD UNI-ADAPTOR

STANDARDS

ENA TS 41-21

/ USE

Adaptor for use with a Tele Rod or Universal Head adaptor (EFS-18315) to allow fitting of Bowthorpe style sockets.

Reference	Pole Type	Fits to
EFS-18321	Bowthorpe Style	Universal tools



Connects to
P&B Style
Pole

EFS-13376

SOCKET ADAPTOR
ASSEMBLY

STANDARDS

ENA TS 41-21

/ USE

Allows the fitting of Bowthorpe style sockets & heads to P&B style top pole.

Reference	Pole Type	Fits to
EFS-13376	P&B Style	Bowthorpe Sockets & Heads



Connects to
Bowthorpe
Style Top
Pole

EMS-18380

VOLTAGE DETECTOR
REPLACEMENT HEAD

STANDARDS

ENA TS 41-21

/ USE

Insulated adaptor to fit a Metrohm Tester to a Bowthorpe style top pole.

Reference	Pole Type	Fits to
EMS-18380	Bowthorpe Style	Voltage Tester



Connects to
Bowthorpe
Style Top
Pole

EFS-18352

HEX TYPE SOCKET/HEAD
ASSY

STANDARDS

ENA TS 41-21

/ USE

For application of clamps with hexagonal (12mm A/F) operating screws employing spring-loaded locking device operated by push button upon the light polymer socket.

Reference	Pole Type	Fits to	Weight
EFS-18352	Bowthorpe Style	Hexagonal 12mm A/F	0.20kg



/ AREA OF
ACTIVITY



/ This range offers solutions that are :

- Less vulnerable to theft than copper
- Half the weight of copper for equivalent Short Circuit Rating

- Available in any length on request
- Fully tested and approved to ENA 41-21 standard



50SQMM ARCTIC BLUE ALUFLEX LEAD

STANDARDS

ENA TS 41-21



50SQMM ARCTIC ORANGE ALUFLEX LEAD

STANDARDS

ENA TS 41-21

/ USE

Produced from multi-stranded, commercially pure aluminium available in either blue, green, clear, orange, or reflect coloured PVC sheath "arctic" grade to protect the lead from damage. Other insulation colours are available upon request.

Leads are carefully manufactured at our factory and tested rigorously throughout the manufacturing process to ensure quality and performance.

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Blue PVC	8.9kA/ 1s	150A	0.19kg

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Orange PVC	8.9kA/ 1s	150A	0.19kg



50SQMM REFLECT ALUFLEX LEAD

STANDARDS

ENA TS 41-21



120SQMM CLEAR ALUFLEX LEAD

STANDARDS

ENA TS 41-21

/ USE

Market-leading Aluflex cable with orange marking helix for identification with additional reflective silver helical strip to aid identification at night or when used in tunnels.

Strands remain visible between helical strips to aid inspection.

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Reflect Orange PVC	8.9kA/ 1s	150A	0.19kg

/ USE

Produced from multi-stranded, commercially pure aluminium with Clear coloured PVC sheath "arctic" grade to protect the lead from damage. Other insulation colours are available upon request.

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Clear PVC	20kA/ 1s	300A	0.19kg



120SQMM ARCTIC ORANGE ALUFLEX LEAD

STANDARDS

ENA TS 41-21



150SQMM ARCTIC ORANGE ALUFLEX LEAD

STANDARDS

ENA TS 41-21

/ USE

Produced from multi-stranded, commercially pure aluminium with Orange coloured PVC sheath "arctic" grade to protect the lead from damage. Other insulation colours are available upon request.

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Orange PVC	20kA/ 1s	300A	0.19kg

Ref	Lead material	Insulation type	Short circuit rating	Continuous Current Rating	Weight per m
VARIOUS	Alu	Orange PVC	25kA/ 1s & 17.5kA/ 2s	350A	0.60kg



SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS FLEXIBLE LEADS AND ACCESSORIES

/ This range of Terminations are manufactured from specially milled and certified material and precision machined in our works, tested rigorously throughout the manufacturing process to ensure quality and performance. For use upon Field Equipment Earth. All of those alu terminations have a Ø11 diameter hole.

PB50/ 70/ 120 TYPE ALU. TERMINATION

STANDARDS

ENA TS 41-21

/ AREA OF
ACTIVITY



Reference	Description	Material	Compatible cable	Strain relief type	Weight
EMP-07880/1	PB50 Alu. Termination Ø11 Hole	Alu	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.06kg
EMP-07880/2	PB50 Alu. Termination Ø12 Hole	Alu	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.06kg
EMP-07880/3	PB50 Alu. Termination Ø13 Hole	Alu	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.06kg
EMC-07887	PB50S Termination Lug	Alu	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.06kg
EMP-07883/1	PB70 Alu. Termination Ø11 Hole	Alu	70sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.06kg
EMP-07883/2	PB70 Alu. Termination Ø12 Hole	Alu	70sqmm Aluflex Leads	70sqmm Strain Relief (EBT-16112)	0.06kg
EMP-07883/3	PB70 Alu. Termination Ø13.25 Hole	Alu	70sqmm Aluflex Leads	70sqmm Strain Relief (EBT-16112)	0.06kg
EMP-07881/1	PB120 Alu. Termination Ø11 Hole	Alu	120sqmm Aluflex Leads	120sqmm Strain Relief (6112-02)	0.06kg
EMP-07881/2	PB120 Alu. Termination Ø12 Hole	Alu	120sqmm Aluflex Leads	120sqmm Strain Relief (6112-02)	0.06kg
EMP-07881/3	PB120 Alu. Termination Ø13 Hole	Alu	120sqmm Aluflex Leads	120sqmm Strain Relief (6112-02)	0.06kg

PB50/95/120/150T TYPE TERMINATIONS

STANDARDS

ENA TS 41-21

/ AREA OF
ACTIVITY



Reference	Description	Compatible cable	Strain relief type	Weight
EMP-07884/1	PB50T Alu. Termination With Ø11-Dia Hole	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.03kg
EMP-07892/1	PB70T Alu. Termination Ø11 Hole	70sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.03kg
EMP-07892	PB70T Alu. Termination Ø13 Hole	70sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07889/1	PB95T Alu. Termination With Ø11 Hole	95sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07889	PB95T Alu. Termination With Ø13 Hole	95sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07889/2	PB95T Alu. Termination With Ø13 Hole -Long Palm	95sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07885/1	PB120T Alu. Termination with Ø11 Hole	120sqmm Aluflex Leads	120sqmm Support Springs (4906)	0.13kg
EMP-07885	PB120T Alu. Termination with Ø13 Hole	120sqmm Aluflex Leads	120sqmm Support Springs (4906)	0.13kg
EMP-07882	PB150T Alu. Termination : ESI-T1	150sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07882/2	SP150 Termination - Extra Long Palm	150sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg



FERRULE TYPE TERMINATIONS

STANDARDS

ENA TS 41-21

/ AREA OF ACTIVITY



Reference	Description	Material	Compatible cable	Strain relief type	Weight
EMP-07886	PB50F Ferrule Terminal	Alu	50sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.03kg
EMP-07893	PB70F Alu. Ferrule Termination	Alu	70sqmm Aluflex Leads	50sqmm Strain Relief (6112-01)	0.03kg
EMP-07897	PB95F Ferrule Termination	Alu	95sqmm Aluflex Leads	150sqmm Tension Spring (EBP-14714)	0.13kg
EMP-07891	PB120F Ferrule Termination	Alu	120sqmm Aluflex Leads	120sqmm Strain Relief (6112-02)	0.06kg



6112-01

50SQMM STRAIN RELIEF

STANDARDS

ENA TS 41-21

/ USE

Suitable for 50sqmm Aluflex Cables.

Reference	4927
-----------	------



EBT-16112

70SQMM STRAIN RELIEF

STANDARDS

ENA TS 41-21

/ USE

Suitable for 70sqmm Aluflex Cables.

Reference	EBT-16112
-----------	-----------



6112-02

120SQMM STRAIN RELIEF


STANDARDS

ENA TS 41-21

/ USE

Suitable for 120sqmm Aluflex Cables.

Reference	6112-02
-----------	---------



EBL-16548

50SQMM TENSION SPRING


STANDARDS

ENA TS 41-21

/ USE

Suitable for 50sqmm Aluflex Cables.

Reference	EBL-16548
-----------	-----------



4906

120SQMM TENSION SPRING


STANDARDS

ENA TS 41-21

/ USE

Suitable for 120sqmm Aluflex Cables.

Reference	4906
-----------	------



EBP-14714

150SQMM TENSION SPRING

STANDARDS

ENA TS 41-21

/ USE

Suitable for 150sqmm Aluflex Cables.

Reference	EBP-14714
-----------	-----------



SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

EARTH RODS AND NESTS



Below are range of Earth Rods & Nests suitable for Distribution Earthing.

- / This range offers solutions that are :
- Lasting resistance to corrosion
 - High tensile strength



MISC-00020

EARTH NEST KIT NO BAG

STANDARDS

ENA TS 41-21

/ USE

Earths Rods can be used individually or interconnected by 50sqmm Arctic Orange Leads to create a nest. Leads can be attached using S9A Earth End clamps or Split Connectors. Configurations can be fully customised depending on customer requirements.

Ref	Lead material	Lead Length	Earth Rod Material	Earth Rod Dimension
MISC-00020	Aluminium with PVC insulation	1.5m	Low carbon steel core with 99.95% pure copper and thickness 0.25mm	850mm long x 14.3mm O/D

Earth rods come pre-fitted with **single split connectors** to attach earth leads



EFD-20137/1

1.5M SCREW TYPE EARTH ROD WITH SINGLE SPLIT CONNECTOR

STANDARDS

ENA TS 41-21

/ USE

A special Screw Type Earth Rod with strong cast bronze spiral end fitting for easy driving into the soil and provide low resistance Earth connection. The 1.5m Screw Type Earth Rod can be used as part of an Earth Nest Kit for electrical grounding/earthing operation providing a low-resistance path for electricity to safely dissipate into the ground, protecting against faults.

Ref	Earth Rod Material	Earth Rod Dimension	Bottom Fitting
EFD-20137/1	Low carbon steel core with 99.95% pure copper and thickness 0.25mm	1.5m long x 17.2mm O/D	Bronze screw profile casting

Allows for easy and secure connection for Earth Rod to Earth Lead



EAD-20074

SPLIT CONNECTOR FOR EARTH ROD M12 X 90MM

STANDARDS

ENA TS 41-21

/ USE

Split type brass connector assembly for use with 14.3mm diameter copper clad earth rods. Provides excellent low-resistance connection to Earth Leads connected to Earth Kits or to Multi-point Aluminium Connecting Plate.

Ref	Material	Length	Rod Diameter
EAD-20074	Brass	42.7mm	14.3mm

- Available in lengths 850mm, 1,000mm and 1,200mm
- Copper clad for low resistance

Lasting resistance to corrosion

High tensile strength



Copper clad for low resistance

EBD-20070

850MM STEEL COPPER CLAD SPIKED EARTH ROD

STANDARDS

ENA TS 41-21

> Available in standard lengths 850mm. Other Lengths available (1,000mm and 1,200mm)

/ USE

Used as part of Earth Nest Kit and driving into the soil for electrical grounding/ earthing operation providing a low-resistance path for electricity to safely dissipate into the ground, protecting against faults.

Ref	Earth Rod Material	Earth Rod Dimension
EBD-20070	Low carbon steel core with 99.95% pure copper and thickness 0.25mm	850mm long x 14.3mm O/D

Earth rods come pre-fitted with **double split connectors** to attach earth leads



EFD-20137/2

1.5M SCREW TYPE EARTH ROD WITH DOUBLE SPLIT CONNECTORS

STANDARDS

ENA TS 41-21





Below are range of Cluster Bar & Terminal Plates suitable for Distribution Earthing.

/ This range offers solutions that are :

- Solid construction for many years' service
- Proven service record used by the ESI for over 40 years

• Used worldwide

- No plated components high-quality stainless-steel fasteners

Cluster bar assembly for use upon S9B clamp



EFD-16748

DLE/CAC CLUSTER BAR ASSEMBLY

STANDARDS

ENA TS 41-21

> Suitable for an additional cross-arm clamp with centre cable fixing for up to 4 leads

Cluster bar assembly for use upon S9B clamp



A3214-A

THREE-WAY CLUSTER BAR

STANDARDS

ENA TS 41-21

> Suitable for supporting two additional S9B clamps two phase leads and the earth lead

/ USE

The cluster bar mounts on the S9B Line End clamp and allows parking of two additional S9B clamps (and a Cross Arm Clamp if needed), reducing individual clamp applications and limiting Operating Pole use.

/ USE

The cluster bar is an attachment bolted to the centre of three-conductor clamps and facilitates the parking of the other two-conductor clamps with interconnecting leads, whilst the assembly is fitted or removed from the distribution line. The Cluster Bar is designed to be attached to the S9B Line End clamp, which then can accommodate two further S9B Clamps. This reduces the need to apply clamps individually by lowering the Operating Pole several times.

Ref	Material	Max Cable Connection	Weight
EFD-16748	Aluminium	4	1.43kg

Ref	Material	Max Cable Connection	Weight
A3214-A	Aluminium	4	1.38kg

Multi-point aluminium plate allows for interconnecting three phase leads and one down lead



A3478-B


TYPE A TERMINAL PLATE

STANDARDS

ENA TS 41-21

> The Type A Terminal Plate Assembly is available with or without a support hook

Available in two variations with chain or strap & carabine to aid with lifting



EFD-16730

TYPE B CRUCIFIX TERMINAL PLATE WITH CHAIN

STANDARDS

ENA TS 41-21

> Suitable for four lead attachment via M12 stainless steel fasteners

/ USE

As an alternative to the cluster bar, a terminal plate can be specified. These are smaller multi-point aluminium plate used for interconnecting phase and down leads.

Ref	Type	Material	Max Cable Connection	Weight
A3478-B	Without (Pictured)	Aluminium	4	0.99kg
A3478-A	With Hook			

/ USE

The Type B Crucifix assembly is suitable for mounting to poles using chain or alternatively a ratchet strap. A parking bar is used for supporting, resting and raising the line end clamps before application.

Ref	Type	Material	Chain material	Max Cable Connection	Weight
EFD-16730	Crucifix with Chain	Mild steel plated copper bar plated	Galvanised Steel	4	6.66kg
EFD 16730/1	Crucifix with strap and Carabine)				





SHORT CIRCUITING & GROUNDING DEVICES

BRITISH STANDARDS

CLUSTER BAR & TERMINAL PLATES

With Carabine hook and webbing strap to secure to structure.



EFD-20030

TYPE C TERMINAL PLATE

STANDARDS


ENA TS 41-21

/ USE

As an alternative to the cluster bar, a terminal plate can be specified. These are smaller multi-point aluminium plate used for interconnecting phase and down leads.

Ref	Material	Max Cable Connection	Weight
EFD-20030	Aluminium	4	1.64kg

Equipped with an Heavy-duty ratchet strap



EFD-16737

TYPE D TERMINAL PLATE

STANDARDS

ENA TS 41-21


> Suitable for four lead attachment via M12 stainless steel fasteners

/ USE

Aluminium busbar with stainless steel M12 fasteners. Heavy-duty ratchet strap for securing to pole or structure. Similar to the Type A terminal plate except with a ratchet strap for secure pole mounting.

Ref	Material	Chain material	Max Cable Connection	Weight
EFD-16737	Aluminium	Galvanised Steel	4	1.74kg

Suitable for five leads attachment via M12 stainless steel fasteners.

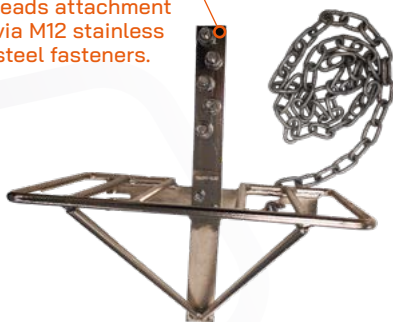

EFD-16795

CRUCIFIX PLATFORM (21 PATT)

STANDARDS

ENA TS 41-21

/ USE

Improved version to Type B Crucifix Terminal Plate suitable for mounting to poles using chain. A parking bar is used for supporting, resting and raising the line end clamp before application.

Ref	Material	Chain Material	Max Cable Connection	Weight
EFD-16795	Mild steel plated Copper bar plated	Galvanised Steel	5	6.66kg



6132

PVC BAG FOR SHORTING

STANDARDS

ENA TS 41-21

/ USE

Carrying bag for shorting cluster with 210 flap with velcro fixing with black nylon webbing shoulder strap.

Reference	Material	Dimension
6132	Green PVC Nylon Reinforced	640 Long x 560 High x 147 Wide



EBB-18507

CARRY BAG FOR SHORTING CLUSTER KIT

STANDARDS

ENA TS 41-21

/ USE

Large heavy duty bag suitable for carrying large earthing kits.

Reference	Material	Dimension
EBB-18507	Green PVC Nylon Reinforced	850 Long x 300 High x 147 Wide



Below are Earthing Spigots suitable for Substation Earthing.

/ This range offers solutions that are :

- 1kN Mechanical Load
- 900 Amps Continuous Current Rating
- 40kA/3s Short Circuit Rating including a peak at 100kA

- RIV and Corona Discharge Test @ 400kV Rating
- 80kA/1s Short Circuit Rating including a peak at 200kA Rating



A2617-A BOLT ON CORONA SHIELDS FOR SPIGOTS

STANDARDS

ENA TS 41-21

> Available versions for 275kV and 400kV

/ USE

Aluminium Corona Shields Bolt for Spigots fully tested available models for 275kV and 400kV.

Ref	Description	Voltage Rating
A2617-A	Stress Cone Bolted	275kV
EFF-16701	Spigot & Corona Assy	400kV



TYPE A & B ALUMINIUM SPIGOT

STANDARDS

ENA TS 41-21

/ USE

Suitable for 275kV & 400kV insulator post assemblies. Available with varying lengths of Spigots to suit the required rating. Optional Corona Shields available (bolt-on type) for non-shielded applications 275kV or 400kV.

Reference	Description	Features
FA2277-A	Spigot Type A/178/290/A	4-slots 18 wide on a 127mm PCD
FA2277-B	Spigot Type A/127/230/AL	
FA2369-A	Spigot Type B/178/290/AL	4-slots 22 wide on a 178 PCD
FA2369-B	Spigot Type B/178/410/AL	



Suitable for
busbar size
115mm to 250mm

EMF-20083 SUSPENDED BUSBAR SPIGOT

STANDARDS

ENA TS 41-21

- > Lightweight
- > Can be set up by one person
- > Suitable for existing and new busbars

/ USE

This Spigot range is designed to be permanently fitted to new or existing busbars. It accommodates up to five PENTA P&B Clamps suitable for 38mm (CE22/A or CE22/A+B), reducing the need for heavier large-diameter clamps. Suitable for busbar at any angle up to 60°.

* Note: A Suspended Busbar requires both a body and spigot assembly as shown on table below.

Ref	Body Part Number	Spigot Part Number	Busbar Size (mm)
CE75/250	EFF-16771	EFF-16780	250
CE75/220	EFF-16772	EFF-16780	220
CE76/200	EFF-16773	EFF-16780	200
CE76/190	EFF-16774	EFF-16780	190
CE76/160	EFF-16775	EFF-16780	160
CE77/140	EFF-16776	EFF-16780	140
CE77/127	EFF-16777	EFF-16780	127
CE77/120	EFF-16778	EFF-16780	120
CE77/115	EFF-16779	EFF-16780	115



Suitable for
busbar size
90mm

TYPE C SPIGOT

STANDARDS

ENA TS 41-21

/ USE

Simple clamp on spigots in aluminium and bronze to provide a suitable Earthing Point on-site from a busbar or stranded conductor. Optional bolt-on Corona Shields available. Different length 40mm diameter spigots are available to suit required rating.

Reference	Description	Spigot Length	Spigot Diameter	Busbar size
FA2438-A	Spigot Type C/90/230/AL	To suit rating/ Number of Line End clamps	Ø 40mm	90mm
FA2438-B	Spigot Type C/90/165/AL			



SHORT CIRCUITING & GROUNDING DEVICES BRITISH STANDARDS EARTHING SPIGOTS

Suitable for
busbar size
63.5mm



TYPE D SPIGOT

STANDARDS

ENA TS 41-21

/ USE

Type D aluminium Spigot to suit isolator or circuit breaker head.

Reference	Description	Spigot Diameter	Busbar size	Spigot Length
FA2448-A	SPIGOT D/63.5/230/AL	Ø 40mm	63.5mm	To suit rating/number of Line End clamps

Suitable for
busbar size
75mm



TYPE E SPIGOT

STANDARDS

ENA TS 41-21

/ USE

Simple clamp on spigot in bronze. Stainless steel fittings optional bolt-on Corona Shields available.

Reference	Description	Spigot Diameter	Spigot Length	Busbar Size
FA2447-A	Spigot Type E/75/410/BZ	Ø 40mm	410mm	75mm
FA2447-B	Spigot Type E/75/230/BZ	Ø 40mm	230mm	75mm

Suitable for
busbar size
38mm



TYPE M SPIGOT

STANDARDS

ENA TS 41-21

/ USE

Type M Spigot Simple clamp on spigot in bronze. Stainless steel fittings optional bolt-on Corona Shields available.

Reference	Description	Spigot Diameter	Busbar size
FA3650	Spigot Type M 38mm Busbar	Ø 40mm	38mm



Suitable for
busbar size
140mm

TYPE H SUSPENDED BUSBAR ALU. SPIGOT


STANDARDS

ENA TS 41-21

/ USE

Underslung design Busbar to provide a standard busbar size to suit a smaller clamp such as the CE22/B or CE22/A+B Line End. Aluminium with stainless steel fittings.

Reference	Description	Spigot Diameter	Busbar size
FA2528-A	Spigot Type H/140/381/AL	Ø 40mm	140mm

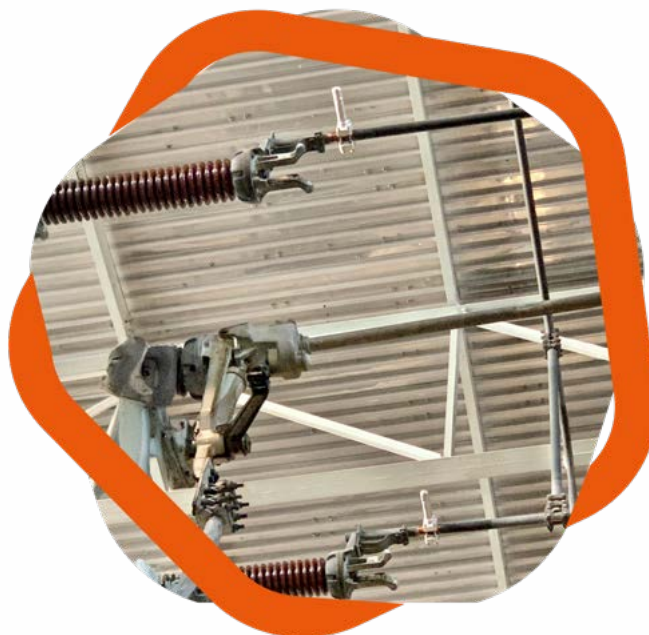



Below are DrESS Earth and Sparrow PLates suitable for Transmission Earthing.



EFP-16711

CE61 DEAS BAR

STANDARDS

ENA TS 41-21

/ USE

Insulated Earthing bar for use in the dead-end arcing horn bolt hole when lowering off tension set insulators. Suitable for use with CE69 Line End, CE18/A Bridging Earth, CE13/A Line End, PB50 terminated leads and CE52 legacy Line End clamps.

Ref	Short Circuit Rating	Continuous Current Rating
EFP-16711	9.1kA/ 1s	450A



EFP-16783

DRESS TEE CONNECTOR ASSEMBLY

STANDARDS

ENA TS 41-21

/ USE

To join Sparrow Plate connecting bonds.

Ref	Short Circuit Rating	Continuous Current Rating
EFP-16783	36kA/ 1s	600A



Compatible with PB120F ferrule terminations only.

EFP-17528

CE84 DrESS TEE CONNECTOR FOR BONDS WITH PB120F FERRULES

STANDARDS

ENA TS 41-21

/ USE

To join sparrow plate connecting bonds.

European Design Registration Number: 001404578-0003 and 001404578-0004

Ref	Short Circuit Rating	Continuous Current Rating
EFP-17528	36kA/ 1s	600A



Bonding lead connections are suitable for Palm terminations only.

EFP-16710

CE60 SPARROW PLATE MK2 (POST-2014)

STANDARDS

ENA TS 41-21


> Spares: CE60 Sparrow Plate 'back-to-back' fittings kit (Ref: EAP-20117)

/ USE

Fits up to six portable Line Earths and up to six further equipment earth with PB50F terminations. Provision for up to four interconnecting leads (120 sq.mm) with PB120F terminations.

European Design Registration Number: 001404578-0001 & 001404578-0002

Ref	Short Circuit Rating	Continuous Current Rating
EFP-16710	36kA/ 1s	600A



Bonding lead connections are suitable for Palm terminations only.

EFP-16785

CE60 SPARROW PLATE MK1 (PRE-2014)

STANDARDS


ENA TS 41-21

/ USE

Fits up to six portable Line Earth with PB50F Ferrule terminations and up to six further equipment earth. Provision for up to four interconnecting leads (120sqmm) with PB120 terminations.

Ref	Short Circuit Rating	Continuous Current Rating
EFP-16785	36kA/ 1s	600A



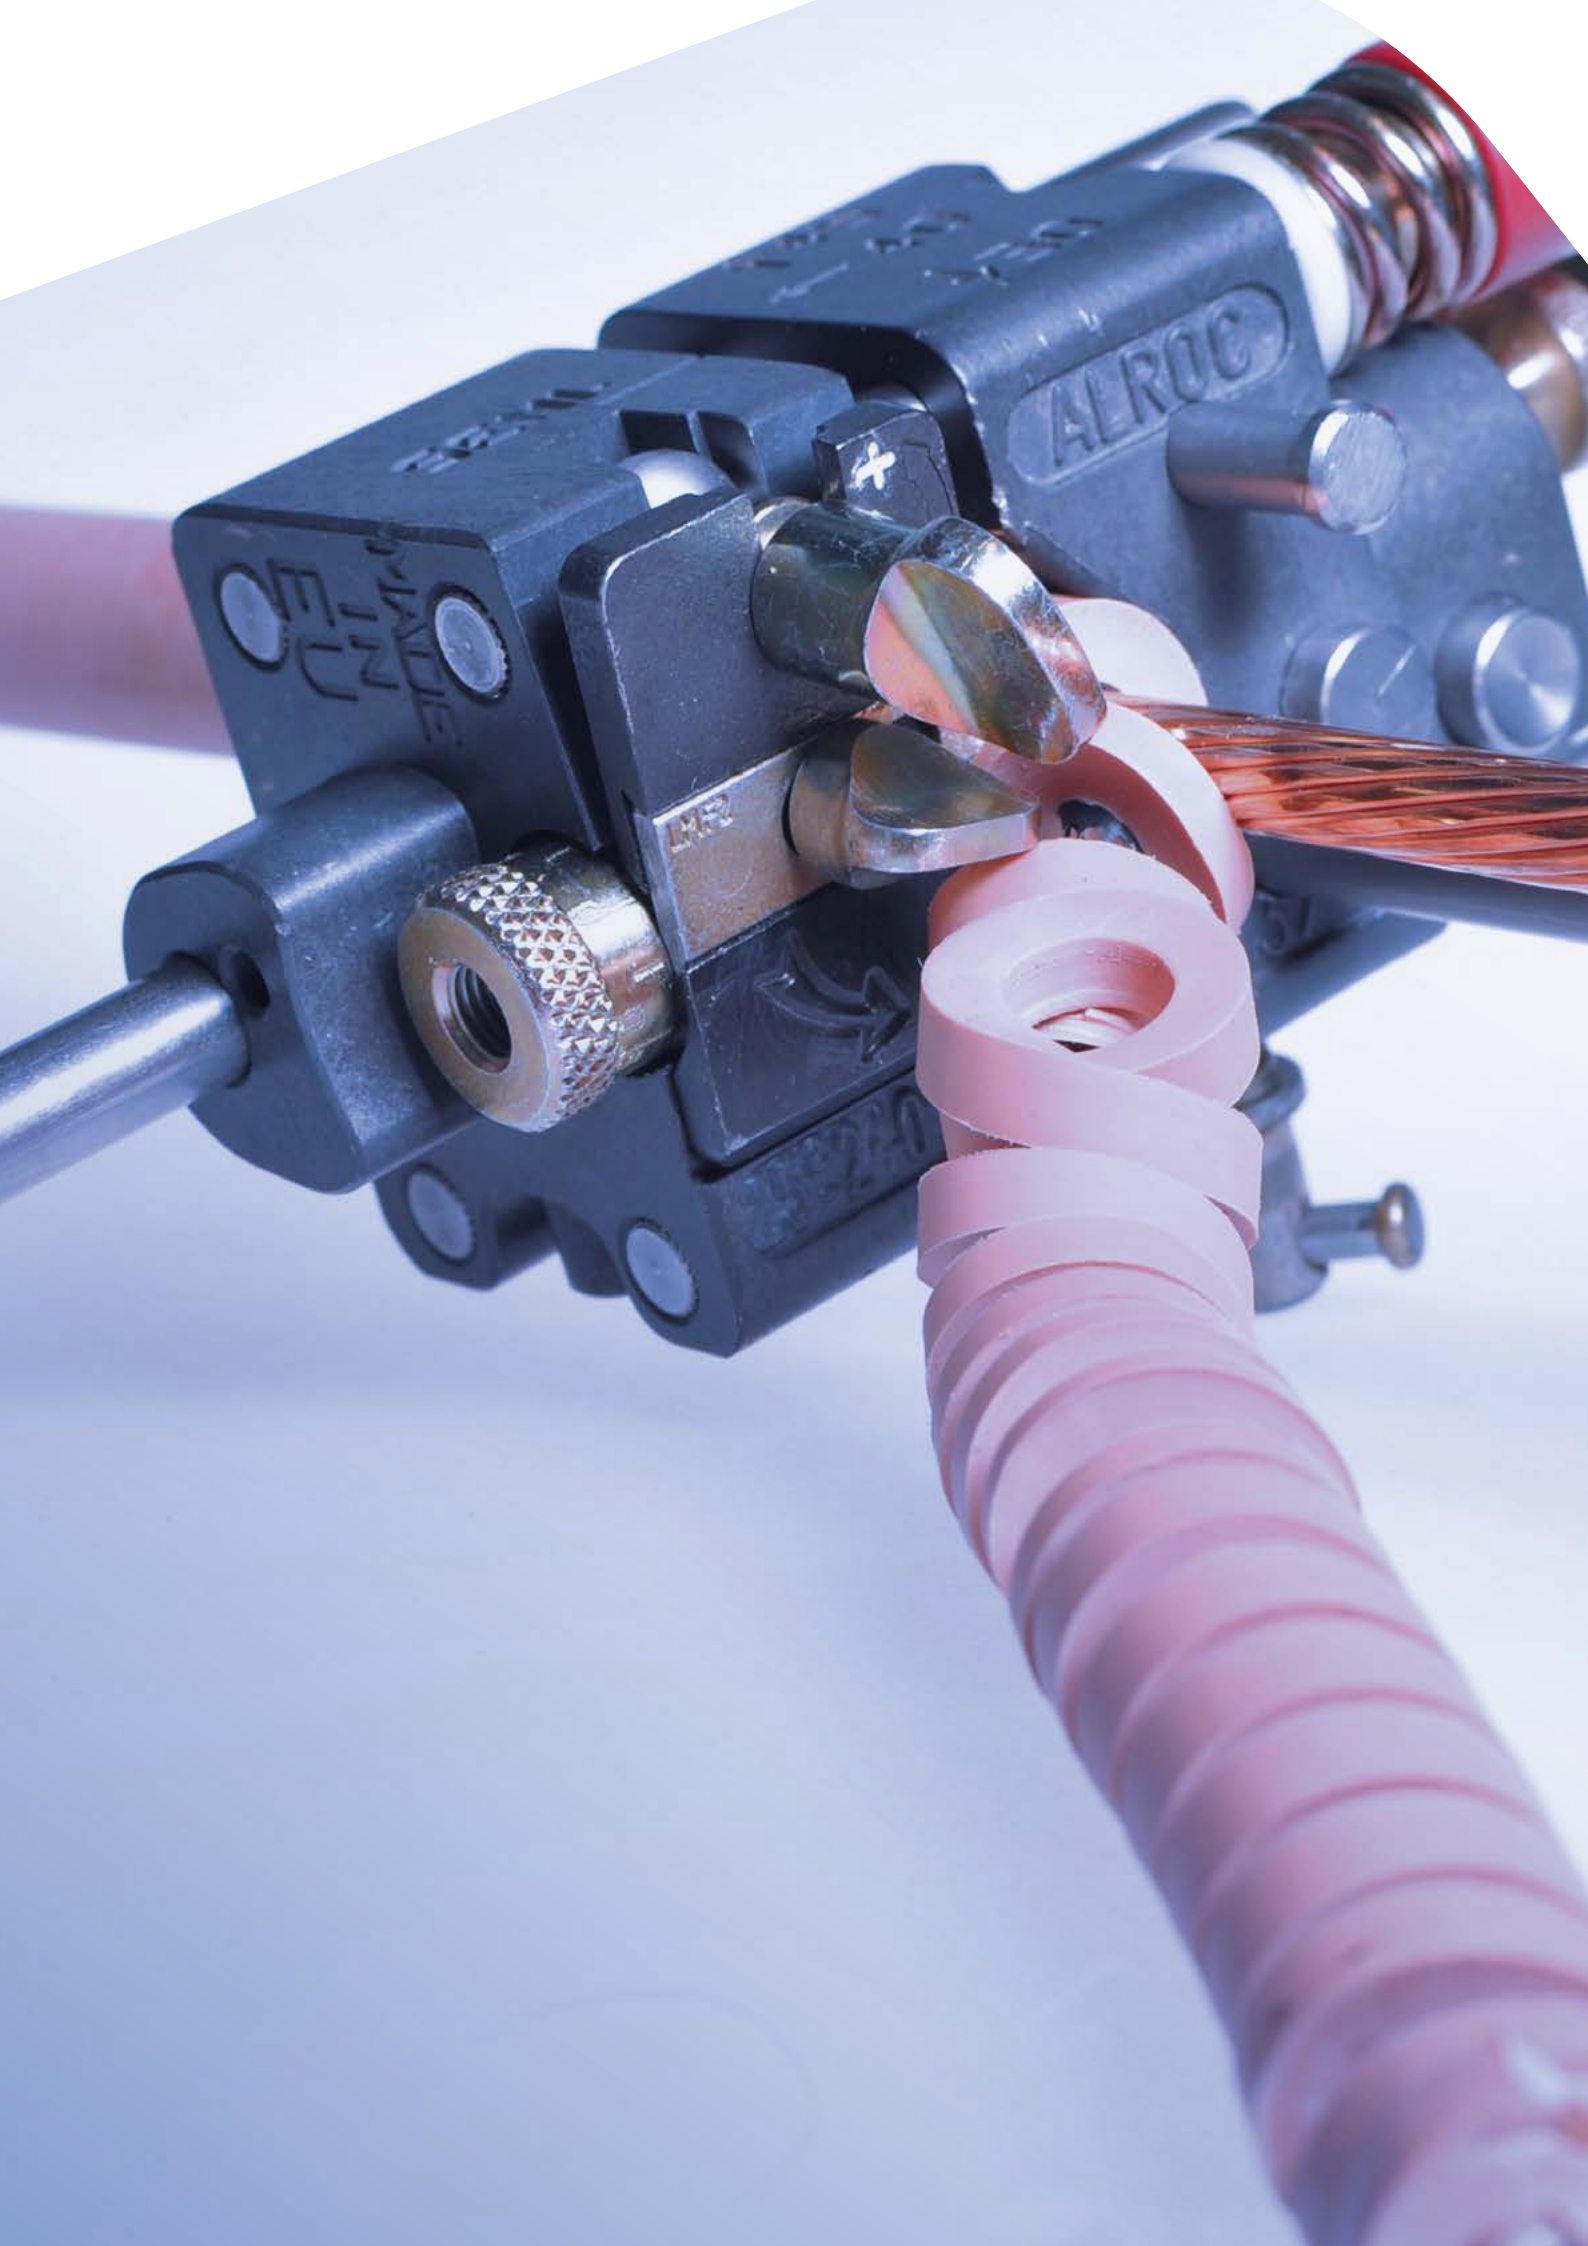




CABLE PREPARATION TOOLS

/ LV outer sheath	398
/ LV outer sheath and lead sheath	399
/ LV and MV: PILC cable/insulated overhead lines cables	406
/ MV outer sheath	407
/ MV bonded semiconductor and screen	421
/ Peelable semiconductor	423
/ Primary insulation	426
/ Multifonction tools	429
/ Kits	431
/ Insulated overhead lines	435
/ Miscellaneous	436



CABLE PREPARATION TOOLS LOW VOLTAGE OUTER SHEATH

PREMIUM

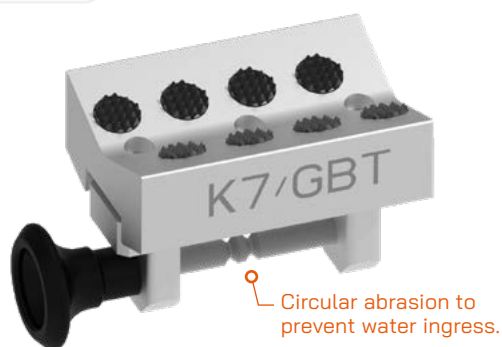

Circular abrasion to prevent water ingress.

K7/GBT NEW

SHEATH ABRADING CASSETTE TO BE MOUNTED ON ROTO-TMG

STANDARDS

COMPATIBLE WITH BT NFC 33-210

Reference	Max diameter	Min diameter	Length	Weight	Width	Height
K7/GBT	55 mm	20 mm	82 mm	200 g	50 mm	45 mm

ESSENTIAL

OSO-1000V NEW

UNIVERSAL OUTER SHEATH STRIPPING TOOL/HYBRID 1000V ENABLES LONGITUDINAL AND RING CUTS ON THREE-CORE AND UNICORE CABLES

STANDARDS

NF EN 60900

Cutting depth with 1/10 mm increments



2 blades for extended working life

Heavy duty

Reference	Max diameter	Min diameter	Cut deepness	Weight	Packaging
OSO-1000V	200 mm	25 mm	5 mm	250 g	Carton box

PREMIUM



Built in insulating material

PG3EC/2020

1000V HYBRID PLIERS FOR NETWORK CABLES CC 2.0LC 2.0

STANDARDS

IEC 60900/EN 60900/COMPATIBLE WITH BT NFC 33-210 TYPE HN33S33

/ TECHNICAL SPECIFICATIONS

PG3EC/2020 for cables from Ø 26 to 52 mm
(3 x 50² + 1 x 50² to 3 x 240 + 1 x 95²).
Circular and longitudinal cutting depth: 2 mm.

Reference	Length	Width	Height	Weight
PG3EC/2020	265 mm	90 mm	73 mm	440 g

Other cutting depths available on request.

/ SPARE PARTS



/ MTC3E/20
Circular cutting blade



/ MTL3E/20
Longitudinal cutting blade



PREMIUM



PG3BT/2020

ALUMINIUM PLIER FOR LV CABLE

TECHNICAL SPECIFICATIONS

PG3EC/2020 for cables from Ø 26 to 52 mm
(3 x 50² + 1 x 50² a 3 x 240 + 1 x 95²).
Circular and longitudinal penetration: 2 mm.

Reference	Lenght	Width	Height	Weight
PG3BT/2020	265 mm	95 mm	80 mm	600 g

Other cutting depths available on request.

SPARE PARTS



/ MTC3/20
Circular cutting
blade



/ MTL3/20
Longitudinal
cutting blade

PREMIUM



PG3EW/2828

INSULATED PLIERS FOR LV CABLE

STANDARDS

IEC 60900/EN 60900

Reference	Lenght	Width	Height	Weight
PG3EW/2828	265 mm	97 mm	73 mm	700 mm

Other cutting depths available on request.

SPARE PARTS



/ MTC3E/28
Circular cutting
blade



/ MTL3E/28
Longitudinal
cutting blade



CABLE PREPARATION TOOLS

LOW VOLTAGE

OUTER SHEATH/ARMORING/SCREEN

PREMIUM



PEF

CABLE'S SCREEN CUTTING PLIERS

/ USE

Ensures a clean-cut flush with the sheath when necessary.

Reference	Cutting capacity	Lenght	Width	Height	Weight
PEF	Steel < 5 mm	225 mm	95 mm	35 mm	290 g

VALUE



SBI

1000V INSULATING STRIP SAW

STANDARDS

EN 60900

Reference	Lenght	Width	Height	Weight
SBI	350 mm	53 mm	53 mm	330 g



DID YOU KNOW?

All Insulated, Insulating, Hybrid tools for low voltage applications must comply with EN 60900.

This European standard ensures that every tool provides electrical insulation up to 1000 V AC (1500 V DC), with individual dielectric testing performed on each piece during manufacturing.

- Always check that your tools display the 1000 V symbol and the CE marking – clear proof that they meet the required safety and performance standards.



PREMIUM



Special blade design
to creep the lead



AGPB4-1000
Insulated pliers

AGPB3-1000V AGPB4-1000V

1000V HYBRID PLIERS FOR LEAD SHEATH

STANDARDS

IEC 60900/EN 60900

/ KEY FEATURES

Precision Cutting: AGPB3-1000V and AGPB4-1000V are design to remove the lead sheath by creeping the lead circularly and longitudinally

Ensures clean lead sheath removal without damaging the underlying insulation.

Reference	Diameter of the cables	Lenght	Width	Height	Weight
AGPB3-1000V	Ø26 to 52mm	265 mm	100 mm	75 mm	470 g
AGPB4-1000V	Ø47 to 75mm	310 mm		110 mm	1000 g

PREMIUM

PINTEL4EC/2020 NEW

1000V HYBRID PLIERS FOR SHEATH REMOVAL

STANDARDS

NF EN 60900



Reference	Lenght	Width	Height	Weight	Min diameter	Max diameter
PINTEL4 EC/2020	265 mm	97 mm	73 mm	490 g	10 mm	30 mm

/ SPARE PARTS



/ MTP4E/20
Circular cutting blade



/ MTLP4E/20
Longitudinal cutting blade



CABLE PREPARATION TOOLS

LOW VOLTAGE OUTER SHEATH

ESSENTIAL



PINTEL4BT/1216-1000V

1000V INSULATED PLIERS FOR LV AUXILIARY
CABLE CC 1.2 LC 1.6

/ TECHNICAL SPECIFICATIONS

Penetration in circular cut: 1,2 mm.
Penetration in longitudinal cut: 1,2 - 1,6 - 1,8 mm.

🔧 Cable compatibility:

25 to 35 mm² — EDF HM-27/O3/139

16 to 50 mm² — NFC 33-210

25 to 150 mm² — NFC 33-209

25 to 35 mm² — NFC 32-321 (U1000)

Reference	Cable diameter	Lenght	Width	Height	Weight
PINTEL4BT/1216-1000V	Ø10 - 30mm	260 mm	90 mm	80 mm	620 g

/ SPARE PARTS



/ **MTCP4/12**
Circular cutting
blade



/ **MTLP4/16**
Longitudinal
cutting blade

ESSENTIAL



PINTEL4BT/1216R-1000V

1000V INSULATED PLIERS FOR LV AUXILIARY
CABLE WITH ADJUSTABLE LONGITUDINAL
CUTTING DEPTH CC 1.2 CL 1.2, 1.6, 1.8

/ TECHNICAL SPECIFICATIONS

✂ Cutting depth:

Circular cut: 1,2 mm

Longitudinal cut: 1,2 - 1,6 - 1,8

Reference	Cable diameter	Lenght	Width	Height	Weight
PINTEL4BT/1216-R-1000V	Ø10 - 30mm	260 mm	90 mm	80 mm	660 g

/ SPARE PARTS



/ **MVCP4/12**
Circular cutting
blade



/ **TRL/12-16-18**
Longitudinal
cutting head


ESSENTIAL

OSO

NEW

UNIVERSAL OUTER SHEATH STRIPING TOOL

Cutting depth with 1/10 mm increments

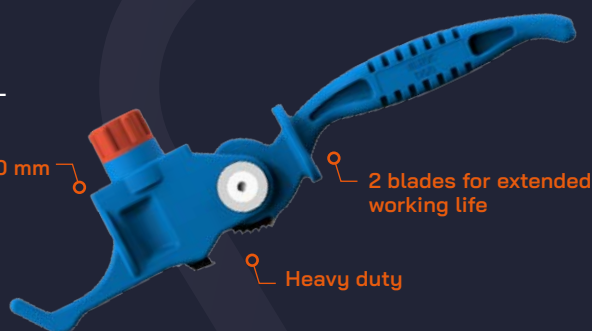

Reference	Min diameter	Max diameter	Max cutting depth	Weight	Packaging
OSO	25 mm	200 mm	5 mm	250 g	Carboard box



CPV-TST-BT

LOW VOLTAGE LIVE WORKING CASE

STANDARDS

EN 60900

/ TECHNICAL SPECIFICATIONS

CPV-TST-BT case contains the following tools:

- PINTEL4BT/1216-R-1000V: 1000V insulated pliers for LV auxiliary cable with adjustable longitudinal cutting depth
- PG3EC/2020: 1000V Hybrid pliers for network cables
- MS45 195: 1000V insulated cable cutter
- MS46 S: 1000V insulated ratchet cable cutter (end cutting)
- 5544E: 1000V insulating groove spreader
- MS2E: 1000V insulated scissors
- TL05: insulating lever
- D60: folding meter stick 10 parts
- SFB: White pencil

Reference	Lenght	Width	Height	Weight
CPV-TST-BT	505 mm	360 mm	120 mm	6,7 kg

VALUE




SBA

ALUMINIUM STRIP SAW

Reference	Lenght	Width	Height	Weight
SBA	340 mm	50 mm	50 mm	240 g

PREMIUM

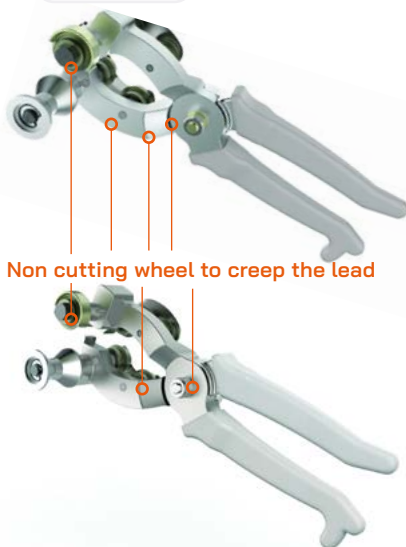

AGPB3 AGPB4

LV-MV PLIERS FOR LEAD SHEATH CABLES

/ THECHNICAL SPECIFICATIONS

AGPB3 for cables with Ø26 to 52 mm.

AGPB4 for cables with Ø47 to 75 mm.

Reference	Lenght	Width	Height	Weight
AGPB3	270 mm	92 mm	77 mm	610 g
AGPB4	300 mm	105 mm	105 mm	860 g

/ SPARE PARTS



/ MTC-AGPB3
Circular creeping
blade



/ MTL-AGPB3
Longitudinal
creeping blade



CABLE PREPARATION TOOLS LOW VOLTAGE OUTER SHEATH/LEAD SHEATH

ESSENTIAL



EVP

LEAD SHEATH SPREADER

Reference	Lenght	Width	Height	Weight
EVP	190 mm	16 mm	40 mm	200 g

PREMIUM



PINTEL4BT/1216

PLIERS FOR LV AUXILIARY CABLE CC 1.2 LC 1.6

STANDARDS

COMPATIBLE WITH EDF-HM-27/03/139, NFC 33-210, NFC 33-209, NFC33-221 (U1000), NFC33-400

/ TECHNICAL SPECIFICATIONS

Cutting depth:
PINTEL4BT/1216 for cables
with Ø 9 mm to 30 mm
Penetration in circular cut: 1,2 mm.
Penetration in longitudinal: 1,6 mm.

Cable compatibility:
25 to 35 mm² for cables EDF HM-27/03/139.
16 to 50 mm² for cables NFC 33-210.
25 to 150 mm² for cables NFC33-209.
25 to 35 mm² for cables NFC32-321 (U1000).

Reference	Lenght	Width	Height	Weight
PINTEL4BT/1216	260 mm	90 mm	68 mm	550 g

/ SPARE PARTS



/ MTCP4/12
Circular cutting
blade



/ MTLP4/16
Longitudinal
cutting blade




DID YOU KNOW?

An incorrect cutting depth setting can compromise the safety of the installation. If the cut is too shallow, the sheath won't be properly removed. Too deep, and the conductor may be nicked – creating a potential hot spot.

That's why PINTEL pliers with multi-depth adjustment are recommended for LV network cables.



PREMIUM

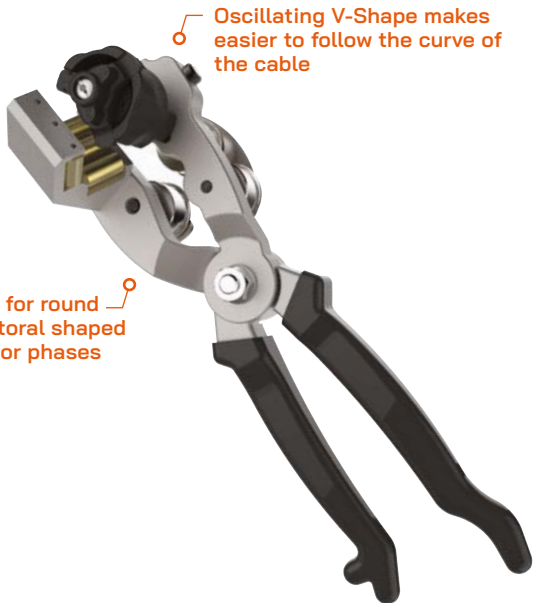

Oscillating V-Shape makes easier to follow the curve of the cable

V shape for round and sectoral shaped conductor phases

PINTEL4BT/1216-R

PLIERS FOR LV AUXILIARY CABLE WITH ADJUSTABLE LONGITUDINAL CUTTING DEPTH CC 1.2 CL 1.2, 1.6, 1.8

STANDARDS

COMPATIBLE WITH EDF-HM-27/03/139, NFC 33-210, NFC 33-209, NFC33-221 (U1000), NFC33-400

/ TECHNICAL SPECIFICATIONS

✂ Cutting penetration:

Penetration in circular cut: 1,2 mm.

Penetration in longitudinal cut: 1,2, 1,6 -1,8 mm.

🔧 Cable compatibility:

PINTEL4BT/1216-R for cable with Ø 10 mm to 30 mm

25 to 35 mm² for cables EDF HM-27/03/139.

16 to 50 mm² for cables NFC 33-210.

25 to 150 mm² for cables NFC33-209.

25 to 35 mm² for cables NFC32-321 (U1000).

Reference	Lenght	Width	Height	Weight
PINTEL4BT/1216-R	260 mm	90 mm	80 mm	580 g

/ SPARE PARTS



/ MTCP4/12
Circular cutting
blade



/ TRL/12-16-18
Longitudinal
cutting head



CABLE PREPARATION TOOLS

LOW VOLTAGE/MEDIUM VOLTAGE

PILC CABLE/INSULATED OVERHEADLINE CABLE



CPI-BT/HTA3

FULL CASE FOR LV/MV IMPREGNATED PAPER INSULATION CABLE

/ TECHNICAL SPECIFICATIONS

CPI-BT/HTA3 case contains the following tools :

- AGPB4: pliers for lead sheath cable Ø47 to 75 mm
- SBA: aluminium strip saw
- LSBA: spare blade for SBA
- PINT4PI/465: pliers to remove the primary insulation of LV/MV PILC cable
- AGPB3: pliers for lead sheath cable Ø26 to 52 mm
- EVP: lead sheath spreader
- PT15: banding cutting tool for steel strap
- C170: scissors
- EVG: plastic sheath spreader
- TP75: insulating gouge
- PILC accessories kit: wooden mallet, steel wire brush, wooden folding ruler, string, pencil


Reference	Lenght	Width	Height	Weight
CPI-BT/HTA3	575 mm	470 mm	145 mm	6,6 kg

PREMIUM

J1R1

NEW

ABC CABLE STRIPPING TOOL Ø6-21 MM

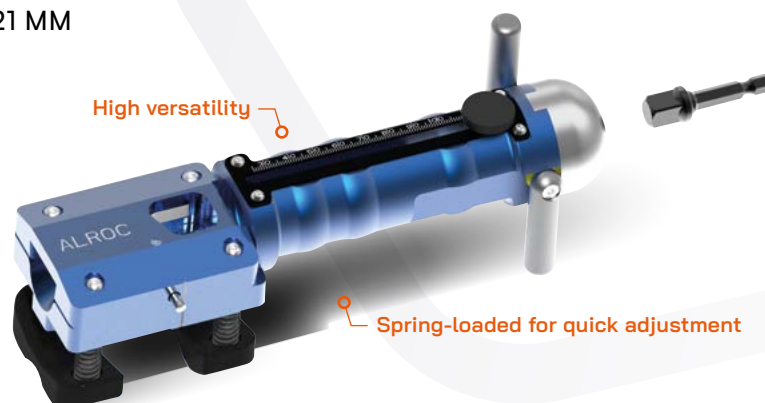


Reference	Diameter	Depth of cut	Stripping Lenght	Lenght	Width	Height	Weight
J1R1	6-21 mm	0.8 to 2.5 mm	25 to 100 mm	224 mm	65 mm	82 mm	800 g



ESSENTIAL

PG3NHTA/2020 NEW

PLIERS FOR MV CABLE OUTER SHEATH
LEFT-HANDED & RIGHT-HANDED

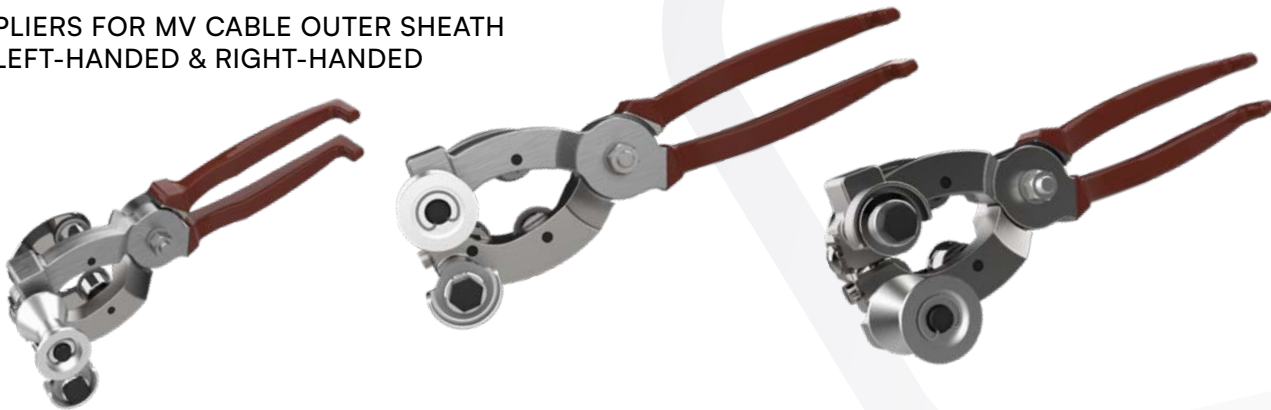

/ KEY FEATURES

 **Configurable Design:** Adjustable setup for right- or left-handed use, ensuring optimal ergonomics during sheath removal.

 **Custom Cutting Depth:** Custom-built configuration (PG3NHTA/yyzz)
Cutting depth from 0.5 mm to 5 mm, tailored on request for circular (yy) and longitudinal (zz) cuts.

Reference	Max diameter	Min diameter	Cutting depth	Packging	Weight
PG3NHTA/2020	52 mm	26 mm	2 mm	Cardboard box	600 g

PREMIUM




PG3NHTA/2833

PLIERS FOR MV CABLE OUTER SHEATH LEFT-HANDED & RIGHT-HANDED

/ KEY FEATURES

 The PG3HTA/2020 performs precise circular and longitudinal cuts on medium voltage cables, with adjustable left- or right-handed configuration.

Reference	Min Diameter	Max Diameter	Circular cutting depth	Longitudinal cutting depth	Packing	Weight
PG3NHTA/2020	26 mm	52 mm	2 mm	2 mm	Cardboard box	600 g
PG3NHTA/2828			2,8 mm	2,8 mm		
PG3NHTA/2833			2,8 mm	3,3 mm		
PG3NHTA/3033			3 mm	3,3 mm		

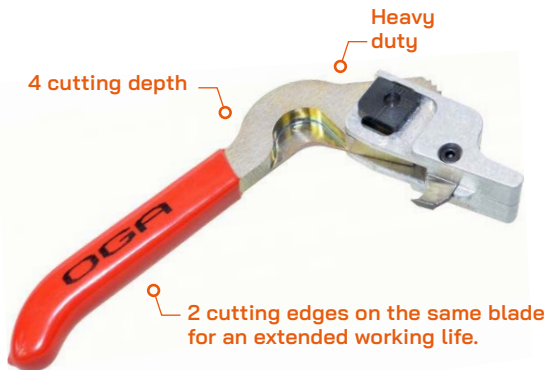

OGA

OUTER SHEATH STRIPPING TOOL

Reference	Length	Width	Height	Weight
OGA	180 mm	26 mm	62 mm	0,27 kg

/ SPARE PARTS



/ LKMS
Spare blade



UNDERGROUND MEDIUM VOLTAGE UNIPOLAR CABLE

COPPER WIRE SCREEN/BONDED SEMICONDUCTOR/XLPE INSULATION

1. Outer Sheath removal tool

/ PG4 SERIE




Ø Min 47 mm/Ø Max 75 mm

/ PG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ PRG4 SERIE

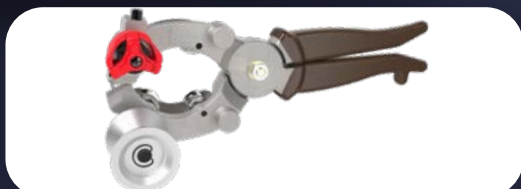

Ø Min 47 mm/Ø Max 75 mm

/ PRG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ MF2 SERIE 45 or 60




45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm




2. Bonded Semiconductor removal tool

/ BSC/25-40

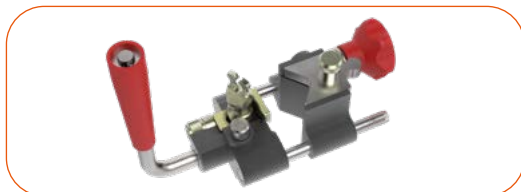


Ø Min 14 mm/Ø Max 44 mm

/ CWB/12-44

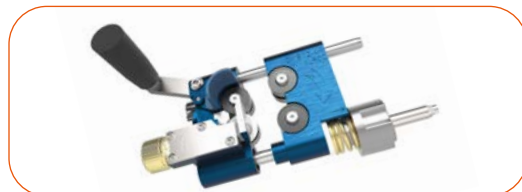

Ø Min 12 mm/Ø Max 44 mm

/ CWB/18-60-S

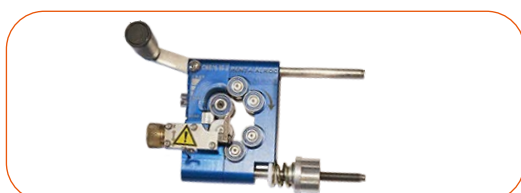

Ø Min 18 mm/Ø Max 60

/ GRI



Ø Min 15 mm/Ø Max 240 mm

3. Insulation removal tool

/ MF2 SERIE 45 or 60



45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm

/ BRMRD1E



Ø Min 14 mm/Ø Max 40 mm

/ CWI SERIE **NEW**



Ø Min 13 mm/Ø Max 38 mm



MEDIUM VOLTAGE UNDERGROUND MULTICORE CABLE/WITH STEEL TAPE ARMORING

COPPER FOIL SCREEN/PEELABLE
SEMICONDUCTOR/XLPE INSULATION



1. Outer Sheath removal tool

/ PG5 SERIE



Ø Min 69 mm/Ø Max 95 mm

/ PRG4 SERIE




Ø Min 47 mm/Ø Max 75 mm

/ PG4 SERIE



Ø Min 47 mm/Ø Max 75 mm

/ OGA

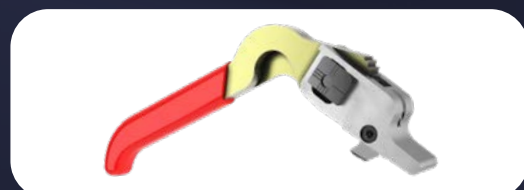

Ø Min 20 mm/Ø Max 200 mm



2. Peelable Semiconductor removal too

/ ORACL



Ø Min 10 mm/Ø Max 100 mm


/ CWE/14-50 MVS



Ø Min 14 mm/Ø Max 50 mm


3. Insulation removal tool

/ BRMRD1E

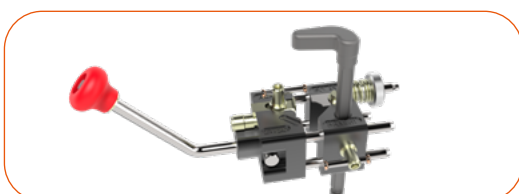

Ø Min 14 mm/Ø Max 40 mm

/ MF2 SERIE 45 and 60

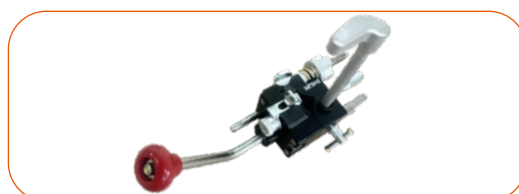

45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm

/ CWI SERIE **NEW**



Ø Min 13 mm/Ø Max 38 mm



UNDERGROUND MEDIUM VOLTAGE UNIPOLAR CABLE

COPPER WIRE SCREEN/PEELABLE
SEMICONDUCTOR/EPR INSULATION

1. Outer Sheath removal tool

/ PG4 SERIE




Ø Min 47 mm/Ø Max 75 mm

/ PG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ PRG4 SERIE



Ø Min 47 mm/Ø Max 75 mm

/ PRG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ MF2 SERIE 45 or 60




45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm



2. Peelable Semiconductor removal tool

/ CWE/14-50 MVS

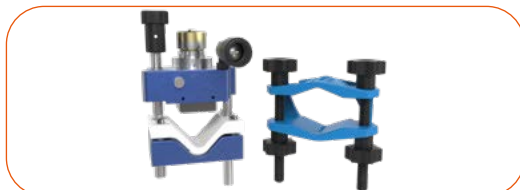

Ø Min 14 mm/Ø Max 50 mm

/ ORACL



Ø Min 10 mm/Ø Max 100 mm

/ LHMR SERIE 1 and 2



1. Ø Min 14 mm/Ø Max 44 mm
2. Ø Min 38 mm/Ø Max 60

3. Insulation removal tool

/ MF2 SERIE 45 or 60



45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm

/ BRMRD1E



Ø Min 14 mm/Ø Max 40 mm

/ CWI SERIE **NEW**



Ø Min 13 mm/Ø Max 38 mm



UNDERGROUND MEDIUM VOLTAGE UNIPOLAR CABLE

ALUMINIUM SCREEN/PEELABLE
SEMICONDUCTOR/XLPE INSULATION

1. Outer Sheath removal tool

/ PG4 SERIE




Ø Min 47 mm/Ø Max 75 mm

/ PG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ PRG4 SERIE

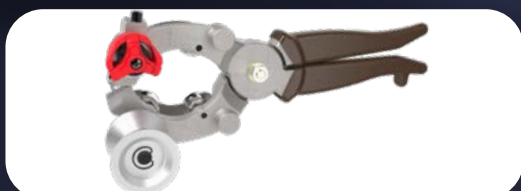

Ø Min 47 mm/Ø Max 75 mm

/ PRG3 SERIE



Ø Min 26 mm/Ø Max 52 mm

/ MF2 SERIE 45 or 60



45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm



2. Peelable Semiconductor removal tool

/ CWE/14-50 RANGE



Ø Min 14 mm/Ø Max 50 mm

/ ORACL



Ø Min 10 mm/Ø Max 100 mm

/ LHMR RANGE 1 and 2



1. Ø Min 14 mm/Ø Max 44 mm
2. Ø Min 38 mm/Ø Max 60

3. Insulation removal tool

/ MF2 SERIE 45 or 60



45. Ø Min 16 mm/Ø Max 45 mm
60. Ø Min 16 mm/Ø Max 58 mm

/ BRMRD1E



Ø Min 14 mm/Ø Max 40 mm

/ CWI SERIE **NEW**




Ø Min 13 mm/Ø Max 38 mm



UNDERGROUND MEDIUM VOLTAGE UNIPOLAR CABLE/ ALUMINIUM SCREEN/PEELABLE SEMICONDUCTOR/XLPE INSULATION

/ ROTO-TMG + K7/GRATT (sheath abrasion)

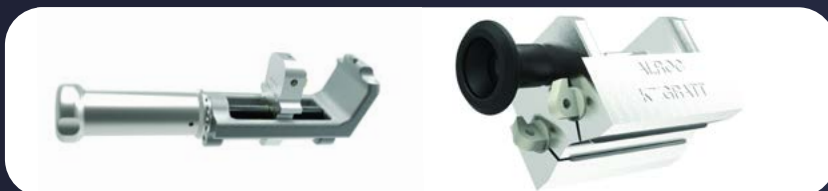

Ø Min 16 mm/Ø Max 60 mm

/ If the semiconductor is bonded to the insulation



/ CWB/12-44



Ø Min 12 mm/Ø Max 44 mm

/ GRI



Ø Min 15 mm/Ø Max 240 mm

/ EV/NPT-4F
(spacing of the tabs)



Ø Min 35 mm/Ø Max 60 mm

/ MF3/45-C



Ø Min 16 mm/Ø Max 45 mm



/ ALROC-FENTE to make slits in the sheath and screen



Ø Min 16 mm/Ø Max 60 mm

/ ROTO-TMG + GFE-TMG to tighten the screen on the "cheese grater"



Ø Min 16 mm/Ø Max 60 mm

/ EV/NPT (spacing of the tabs)



Ø Min 15 mm/Ø Max 240 mm

/ P115 to tighten and cut ligarex band



Ø Min 16 mm/Ø Max 240 mm


/ Peelable/easy peel semiconductor



/ SCH to chamfer insulation (To be mounted on MF3 Serie)



Ø Min 14 mm/Ø Max 60 mm

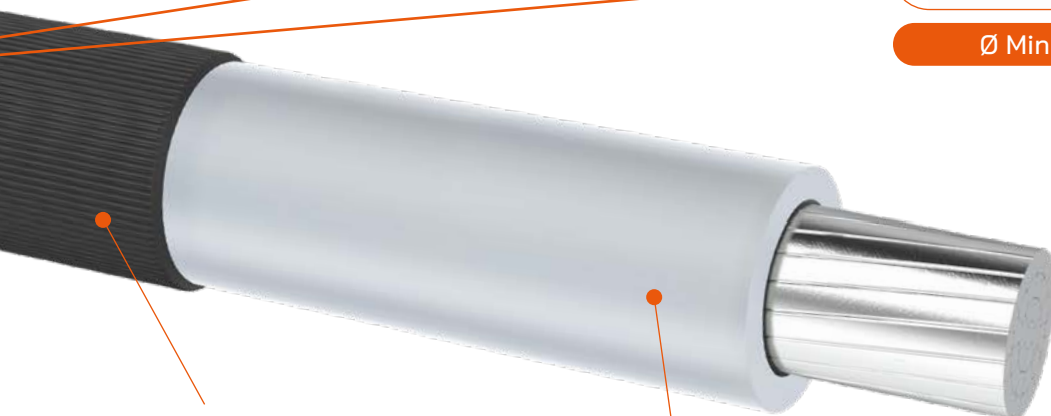



CABLE PREPARATION TOOLS MEDIUM VOLTAGE OUTER SHEATH

PREMIUM



PG4HTA/3033

PLIERS FOR MV CABLE OUTER SHEATH

/ KEY FEATURES

Tool Capacity:
For cables Ø 47–75 mm.
Cutting thickness: 3.0 mm (circular),
3.3 mm (longitudinal).

Custom Depth configuration:
Available in custom cutting depths
from 0.5 to 5 mm.
Model code: PG4HTB/yyzz (yy =
circular, zz = longitudinal).

Reference	Length	Width	Height	Weight	Packaging
PG4HTA/3033	300 mm	110 mm	105 mm	0,87 kg	Box

/ SPARE PARTS



/ MTC4/30
Circular cutting
blade



/ MTL4/33
Longitudinal
cutting blade



PG5HTB/3535

PLIERS FOR MV CABLE OUTER SHEATH

/ KEY FEATURES

Circular and
longitudinal cutting for
safe sheath removal.

For cables Ø 69 — 95
mm — tailor-made tool
(PG5HTB/yyzz).

Customizable cutting
depth from 0.5 mm to
5 mm.

Reference	Length	Width	Height	Weight	Packaging
PG5HTB/3535	360 mm	140 mm	160 mm	2 Kg	None

/ SPARE PARTS




/ MTC5/35
Circular cutting
blade



/ MTL5/35
Longitudinal
cutting blade
3.5

PREMIUM

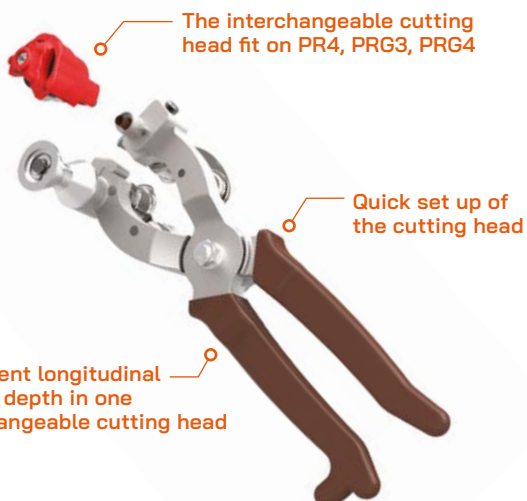

The interchangeable cutting
head fit on PR4, PRG3, PRG4

Quick set up of
the cutting head

3 different longitudinal
cutting depth in one
interchangeable cutting head

PRG3/C22-L222833 PRG4/C25-L252830

PLIERS FOR MV CABLE OUTER SHEATH WITH
ADJUSTABLE LONGITUDINAL CUTTING DEPTHS

/ KEY FEATURES

Performs circular and
longitudinal cuts for fast and safe
sheath removal.

Customizable cutting depth from
0.5 mm to 5 mm.

Reference	Length	Width	Height	Weight
PRG3/C22-L222833	270 mm	100 mm	80 mm	630 g
PRG4/C25-L252830	300 mm	120 mm	105 mm	890 g



ESSENTIAL



Fast assembling/disassembling
of the optional k7 blocks:
GFE-TMG & K7/GRATT

ROTO-TMG

MAINTAINING TOOL FOR SHEARBOLT CONNECTOR

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

For cable with Ø 16 mm to 60 mm (50 to 630 mm²).

Available options for more functions (GFE-TMG, K7/GRATT).

Reference	Length	Width	Height	Weight
ROTO-TMG	255 mm	85 mm	90 mm	840 g

ESSENTIAL



Circular abrasion of the sheath
to provide better sealing of the
cable/accessory interface

K7/GRATT

SHEATH ABRASING BLOCK FOR ROTO-TMG TOOL

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

Use with ROTO-TMG.

For cable with Ø16 to 60 (50 to 630 mm²).

Reference	Length	Width	Height	Weight
K7/GRATT	85 mm	40 mm	85 mm	230 g

ESSENTIAL



Good penetration of the pins
(cheese grater) into the aluminium
screen of the cable

GFE-TMG

BLOCK WITH ROLLS FOR ROTO-TMG

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

Use with ROTO-TMG tool.

For cables from Ø16 to 60 (50 to 630 mm²).


Reference	Length	Width	Height	Weight
GFE-TMG	75 mm	45 mm	50 mm	200 g



CABLE PREPARATION TOOLS MEDIUM VOLTAGE OUTER SHEATH/SCREEN

PREMIUM

Minimal effort to realize the slits

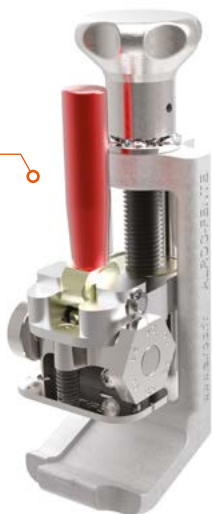

ALROC-FENTE

SLITTER FOR SHEATH/ALUMINIUM SCREEN 50-630 MM²

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

Slits on outer sheath: 40 mm long.

For cable from Ø 16 to 60 (25 to 630 mm²)

Sheath thickness: 2 to 3,5 mm (6 positions setting).

Reference	Length	Width	Height	Weight
ALROC-FENTE	270 mm	75 mm	145 mm	1 kg

ESSENTIAL

Spread angle set by the EV/NPT



EV/NPT

SHEATH/ALUMINIUM SCREEN SPREADER
FOR CABLE WITH CROSS SECTION < 400 MM²

STANDARDS

COMPATIBLE WITH POPY NIKOL C33-226

/ KEY FEATURES

⚙ Designed to spread the outer sheath with aluminium screen tabs of C33-226 cables without damaging the metallic screen — ideal for grounding screen positioning.

Reference	Length	Width	Height	Weight
EV/NPT	230 mm	15 mm	40 mm	240 g

ESSENTIAL

Limited opening angle of the tabs given by the tool to prevent aluminum screen from breaking



EV/NPT-4F

SHEATH/ALUMINIUM SCREEN SPREADER FOR
CABLE WITH CROSS SECTION > 400 MM²

/ KEY FEATURES

⚙ Spreads the outer sheath with the aluminium screen attached, without damaging it — ensuring a clean, safe and reliable earthing connection.

Reference	Length	Width	Height	Weight
EV/NPT-4F	230 mm	20 mm	55 mm	290 g



PREMIUM



P115

BANDING & CUTTING TOOL FOR STEEL STRAP

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ USE

Pliers specially designed for ligarex steel strap when tightening the earthing connection between aluminium screen and the "cheese grater" earthing connection. Equipped with a cutting part to adjust the strap length once tighten.

/ TECHNICAL SPECIFICATIONS

Material: Steel
For all diameters and cross-sections.
For steel strap up to 10 mm wide


Reference	Dimensions	Weight
P115	160 x 25 x 56 mm	240 g

PREMIUM

CWB/12-44 NEW

TOOL FOR BONDED SEMICONDUCTOR WITH CHAMFER ON THE SEMICON CUTBACK

No Stop needed, feed adjustment button

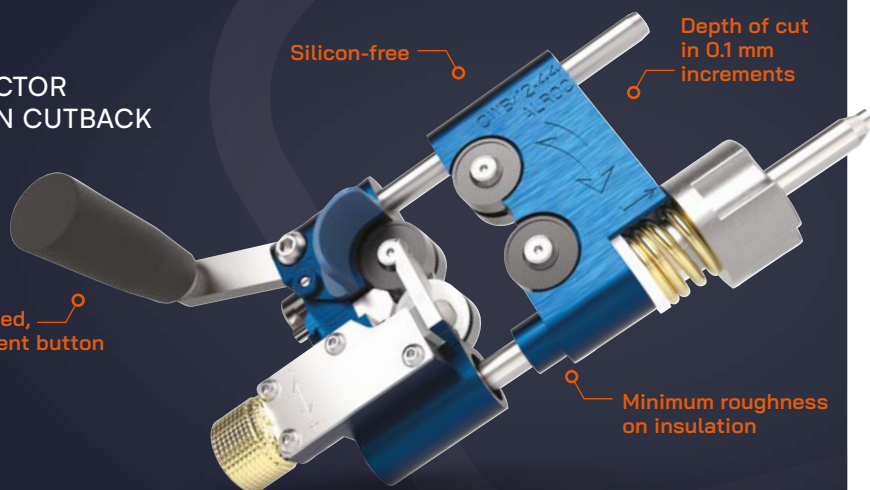

Reference	Diameter	Maximum cutting depth	Lenght	Width	Height	Weight
CWB/12-44	12-44 mm	1.8 mm	185 mm	103 mm	74 mm	525 g



DID YOU KNOW?

In synthetic underground distribution cables (HTA/Medium voltage), there is a layer called "external semiconductor," which is found on the cable's insulation.


Depending on the process used during the manufacture of these cables, it is possible to operate in two ways :

- **Double extrusion:** internal semiconductor + insulation
- **Triple extrusion:** internal semiconductor + insulation + external semiconductor

The external semiconductor will be **strippable** in the first case and **non-strippable** in the second. **In the first case**, when the cable is referred to as "strippable," the external semiconductor can be presented like a banana peel. To remove it during the preparation of a cable for a joint or termination, the external semiconductor can be incised and, only afterward, peeled off from the insulation, just like peeling a banana. **In the second case**, when the cable is referred to as "non-strippable," the external semiconductor can be presented like an apple peel. To remove it, the external semiconductor can thus be "peeled" like the skin of an apple.



PREMIUM

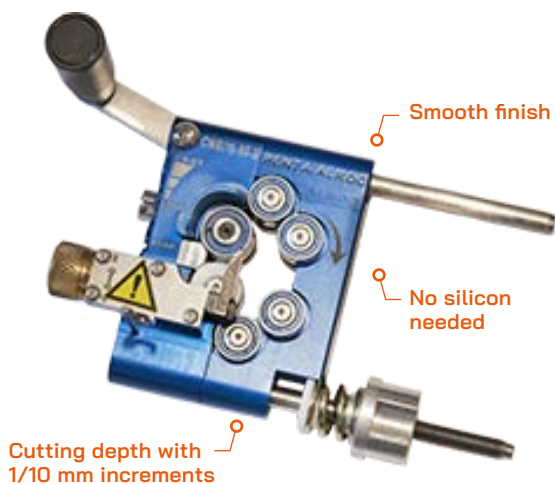

CWB/18-60-S

BONDED SEMICONDUCTOR REMOVAL TOOL WITH CHAMFER CUT AND AUTO-STOP FUNCTION

/ KEY FEATURES

⚙️ CWB/18-60-S enables easy removal of the bonded semi-conductor without the use of silicon leaving a 13° chamfer on the semicon cutback.

Reference	Length	Width	Height	Weight	Min diam.	Max diam.	Max cutting depth
CWB/18-60-S	198 mm	126 mm	73 mm	730 g	18 mm	60 mm	1,8 mm


BSC/25-40

TOOL FOR BONDED SEMICONDUCTOR REMOVAL WITH CHAMFER CUT

/ TECHNICAL SPECIFICATIONS

Diameter: 14-44 mm
Cutting depth: 0,4 to 1,5 mm
Chamfer angle: 14,5°
Remaining quotation: 0,984 or 1,574 inb

Reference	Length	Width	Height	Weight	Packaging
BSC/25-40	155 mm	82 mm	65 mm	620 g	Box

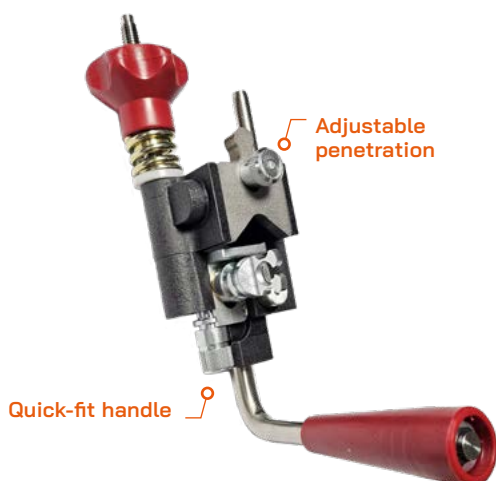

VALUE



GRI

SCRAPER FOR BONDED SEMICONDUCTOR RESIDUES OR SHEATH SEMICONDUCTIVE LAYER

STANDARDS

COMPATIBLE WITH NIKOL C33-226


Reference	Length	Width	Height	Weight
GRI	250 mm	40 mm	25 mm	190 g



PREMIUM

CWB/14-50-MVS NEW

MONO-FUNCTION TOOL FOR SEMI-CONDUCTOR
PEELING MACHINE AND STOPPER FOR CABLE MV

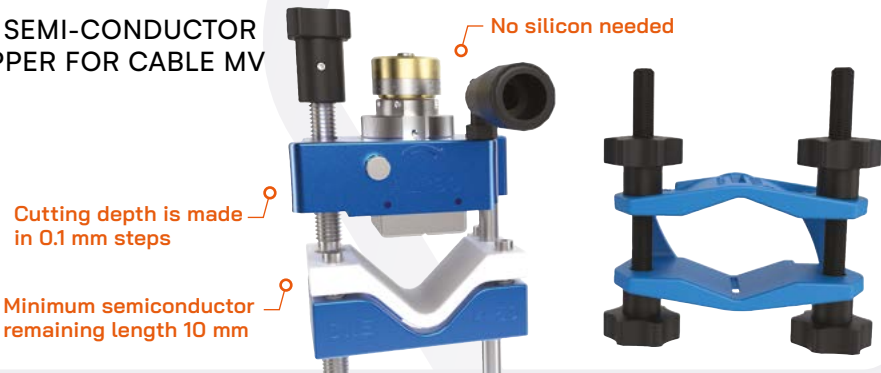

Reference	Lenght	Width	Height	Weight
CWE/14-50-MVS	150 mm	80 mm	48 mm	695 g

LHM1R 30/45E

/ KEY FEATURES

⚙ LHM2R 30/60 allowsto make an incision on the peelable semi-conductor of the cable in order to remove it more easily with the hand.

Reference	Lenght	Width	Height	Weight	Packaging
LHM1R 30/45E	200 mm	75 mm	140 mm	630 g	Carton box

LHM2R 30/60

/ KEY FEATURES

⚙ LHM1R 30/45E tools allowsto make an incision on the peelable semi-conductor of the cable in order to remove it more easily with the hand.

Reference	Lenght	Width	Height	Weight	Min - max diameter
LHM2R 30/60	216 mm	112 mm	137 mm	900 g	38 - 60 mm



CABLE PREPARATION TOOLS


MEDIUM VOLTAGE PEELABLE & BONDED SEMICONDUCTOR

ESSENTIAL

ORACL

NEW

TOOL TO PERFORM CONTROLLED
LONGITUDINAL SCORING ON
PEELABLE SEMICONDUCTOR

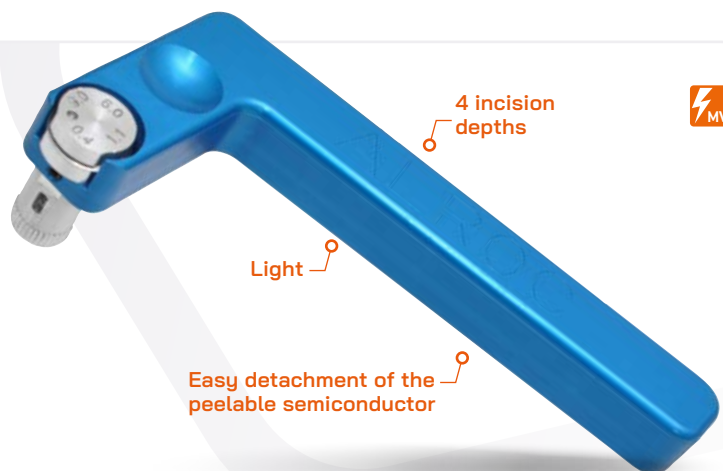


/ TECHNICAL SPECIFICATIONS

Diameter: 10 - 100 mm

Scoring depth: : 0.4/0.6/0.9/1.1 mm

Reference	Lenght	Width	Height	Weight
ORACL	135 mm	55 mm	35 mm	120 g

ESSENTIAL

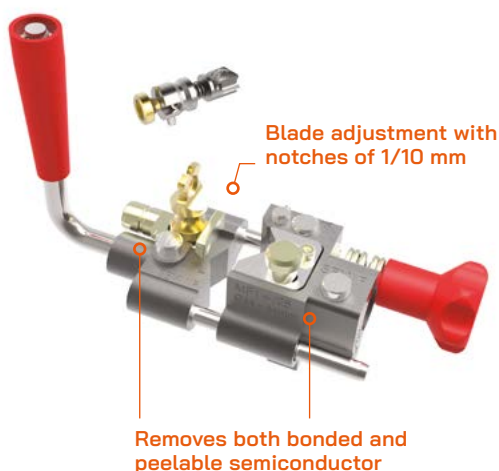

MF1PLUS/25-SRC

MULTI-FUNCTION TOOL FOR BONDED AND PEELABLE
SEMICONDUCTOR

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS


For cable with Ø14 to 44 mm (25 to 240 mm²).

Remaining Lenght of semiconductor: 25, 30, 40, 45 mm.

Delivered with SRC stylus providing chamfer on the peelable semiconductor cutback.

Reference	Lenght	Width	Height	Weight
MF1+/25	190 mm	85 mm	125 mm	750 g

ESSENTIAL

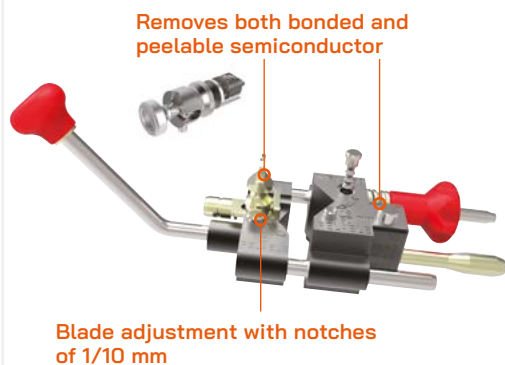

MF1PLUS/60-SRCD

MULTI-FUNCTION TOOL FOR BONDED AND PEELABLE
SEMICONDUCTOR

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

For cables with Ø18 to 60 (50 to 630 mm²).

Remaining Lenght of semiconductor: 30, 40, 45, 50, 55mm.

Delivered with SRC-D stylus providing chamfer on the peelable semiconductor cutback

Reference	Lenght	Width	Height	Weight
MF1+/60	305 mm	105 mm	100 mm	1.100 kg



ESSENTIAL



SRC

ADJUSTABLE SCORING STYLUS FOR PEELABLE SEMICONDUCTOR WITH CHAMFERED TRANSITION

STANDARDS

COMPATIBLE WITH POPY VINYL C33-226, UTE C33-223, NFC33-223, HN33S23

/ USE

SRC stylus enables the user to score the peelable semiconductor with a chamfered semiconductor cutback.

4 scoring depths: 0.4 mm/0.7 mm/0.9 mm/1.1 mm

Reference	Length	Width	Height	Weight
SRC	70 mm	20 mm	30 mm	80 g

ESSENTIAL



SRC-D

ADJUSTABLE SCORING STYLUS FOR PEELABLE SEMICONDUCTOR WITH CHAMFERED TRANSITION

STANDARDS

COMPATIBLE WITH POPY VINYL C33-226, UTE C33-223, NFC33-223, HN33S23

/ USE

SRC-D stylus for MF1+/60 enables the user to score the peelable semiconductor with a chamfered semiconductor cutback.

4 scoring depths: 0.4 mm/0.7 mm/0.9 mm/1.1 mm

Reference	Length	Width	Height	Weight
SRC-D	70 mm	20 mm	30 mm	80 g

ESSENTIAL

Removes the need of knife to grab the peelable semiconductor once scored



DSP

PEELABLE SEMICONDUCTOR LIFTER

Reference	Length	Width	Height	Weight	Diameter
DSP	108 mm	35 mm	35 mm	130 g	10-80 mm



CABLE PREPARATION TOOLS

MEDIUM VOLTAGE PRIMARY INSULATION

VALUE

MVS NEW

TOOL STOPPER

Clean and straight sheath
and semicon cutback

Reference	Length	Width	Height	Weight	Diameter	Material
MVS	100 mm	40 mm	100 mm	175 g	18-60 mm	Plastic



ESSENTIAL



CWI-R

LV/ MV CABLE SHEATH (LV)/INSULATION (MV)
REMOVAL TOOL


/ USE

The tool is Manually operated or can be motorised if using a powered Screwdriver and enables easy cable clamping alongside cutting-depth adjustment. Up to 400 mm² cross section.

Reference	Length	Width	Height	Weight	Diameter
CWI-R	248 mm	87 mm	79 mm	1.2 kg	13-38 mm



ESSENTIAL

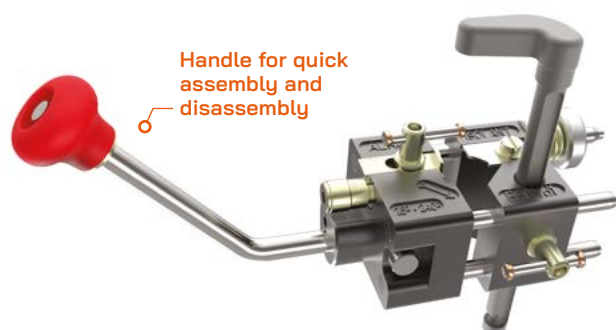

Handle for quick
assembly and
disassembly

Adjustment of the length of the insulation
to be removed With BR stopper

BRMRD1E


PRIMARY INSULATION REMOVAL TOOL Ø14 - 40 MM

Reference	Length	Width	Height	Weight
BRMRD1E	151 mm	92 mm	67 mm	1100 g



ESSENTIAL

Back-iron to control the feed
for easy rotation and neat
insulation cutback

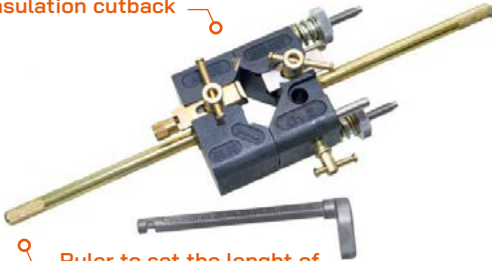

Ruler to set the length of
insulation to be removed

LH2

PRIMARY INSULATION REMOVAL TOOL Ø38 - 60 MM

/ USE

The LH2 enables the user to remove the
primary insulation of MV underground
cable

/ TECHNICAL SPECIFICATIONS

Diameter: 38 - 60
Max cutting depth: 17 mm

Reference	Lenght	Width	Height	Weight
LH2	425 mm	105 mm	85 mm	2 kg

VALUE



SRC must be used with
MF3 SERIE & MF1+ SERIE

SCH

STYLUS FOR CHAMFERING THE PRIMARY INSULATION
OF MEDIUM-VOLTAGE UNDERGROUND CABLES

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

Use with tools MF1+ SERIE & MF3 SERIE.

Reference	Lenght	Width	Height	Weight
SCH	65 mm	20 mm	30 mm	60 g

ESSENTIAL



LHA

TOOL TO CHAMFER MV CABLE PRIMARY
INSULATION

/ USE

The LHA enables the user to make a
chamfer of 30° at the extremity of the
insulation of MV cables

/ TECHNICAL SPECIFICATIONS

Diameter: 14 - 44 mm
Angle of the chamfer: 30°

Reference	Lenght	Width	Height	Weight
LHA	275 mm	75 mm	45 mm	0,56 kg



CABLE PREPARATION TOOLS MEDIUM VOLTAGE PRIMARY INSULATION

VALUE



TCD2000

PENCILING TOOL FOR 150 MM²
AND 240 MM² 20KV CABLE

STANDARDS

COMPATIBLE WITH C33-226, UTE C33-223

/ TECHNICAL SPECIFICATIONS

For cables 150 mm² and 240 mm² C33-226, UTEC33-223.

Pre-adjusted tool.

Cone Length : 30 to 40 mm.

Reference	Length	Width	Height	Weight
TCD2000	200 mm	88 mm	70 mm	610 g

ESSENTIAL



Custom fitted penciling tools available on request (cable sample mandatory for perfect fitting)

TC50 - TC95 - TC150 - TC240 - TC630

PENCILING TOOLS

STANDARDS

COMPATIBLE WITH NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

For cables sections from 50 mm² to 630 mm² NFC33-223, HN33S23.

Pre-adjusted tool.

Cone length: 30 to 40 mm.

Reference	Cable section	Length	Width	Height	Weight
TC50	50 mm ²	190 mm	60 mm	70 mm	500 g
TC95	95 mm ²				
TC150	150 mm ²				
TC240	240 mm ²				
TC400	400 mm ²	205 mm			
TC630	630 mm ²				



A must for MV
taped joint

CPM-TC223-NG

PENCILING TOOL CASE 50 MM² TO 240 MM²

STANDARDS

COMPATIBLE WITH C33-223, UTE C33-223, NFC33-223, HN33S23

/ KEY FEATURES

- Set of penciling tools for 20kV cable with:
 - 50, 95, 150, 240 Mm² cross section nfc 33-223
 - 150 and 240 mm² cross section UTE C33-223



ESSENTIAL



MF2/45 MF2/60

MULTIFUNCTION TOOL FOR OUTER SHEATH
AND REMOVAL

/ KEY FEATURES


⚙ The MF2 SERIE tools enables the user to :
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
Set the length to be removed and remove the insulation with a straight and neat cut

Reference	Length	Width	Height	Weight	Diameter
MF2/45	273 mm	95 mm	165 mm	1,25 kg	16-45 mm
MF2/60	170 mm	90 mm	120 mm	1,4 kg	16-58 mm

PREMIUM



Tool feed rate adjustment (chip thickness)

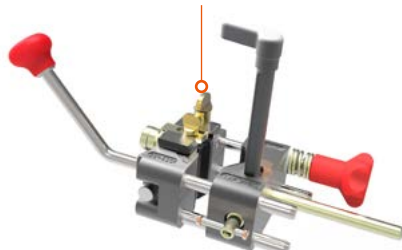

MF2/40

MULTIFUNCTION TOOL FOR OUTER SHEATH
AND INSULATION REMOVAL

STANDARDS

COMPATIBLE WITH C33-223, UTE C33-223, NFC33-223, HN33S23

/ TECHNICAL SPECIFICATIONS

Quick release handle.
MF2/40 for cable from Ø16 to 40mm (25 to 240mm²) 12/20 kV max.
MF2/60 for cable from Ø16 to 58mm (25 to 630mm²).

Reference	Lenght	Width	Height	Weight
MF2/40	150 mm	80 mm	100 mm	1.240 kg
MF2/60	170 mm	90 mm	120 mm	1.400 kg

ESSENTIAL



MF3/45-C

MULTIFONCTION TOOL FOR OUTER SHEATH, PEELABLE
SEMICONDUCTOR AND PRIMARY INSULATION

/ KEY FEATURES

⚙ Multifunction tool for cables with Ø16—45 mm — removes the outer sheath, scores the peelable semicon with SRC stylus leaving a nice chamfered transition, remove the primary insulation.

Reference	Lenght	Width	Height	Weight
MF3/45-C	303 mm	95 mm	165 mm	1,5 kg



CABLE PREPARATION TOOLS MEDIUM VOLTAGE MULTIFUNCTION TOOL

ESSENTIAL



MF3/60-C MF3/60-SRC


MULTIFONCTION TOOL FOR OUTER SHEATH, PEELABLE SEMICONDUCTOR WITH CHAMFER AND INSULATION

/ KEY FEATURES

⚙ Multifunction tool for cables Ø16—58 mm — removes sheath and insulation with clean cuts and scores the peelable semiconductor with chamfer using the included SRC stylus.

Reference	Length	Width	Height	Weight
MF3/60-C	303 mm	95 mm	165 mm	1,5 kg

PREMIUM

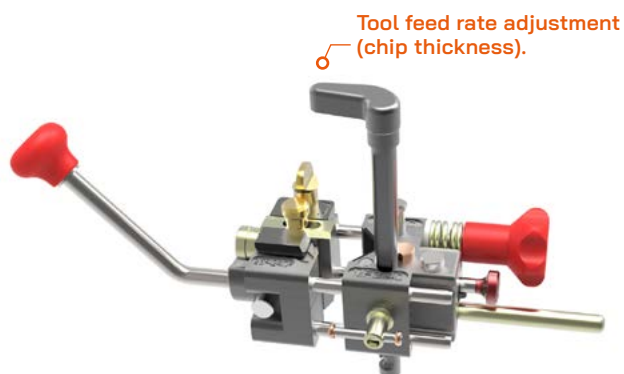

MF3/40-SR MF3/60-SR

MULTIFUNCTION TOOL FOR COVERING, SEMI-CONDUCTOR PEELABLE AND THICK INSULATING

/ TECHNICAL SPECIFICATIONS

Quick release handle.

MF3/40-SR for cable Ø16 to 40 mm

(25 to 240 mm²).

MF3/60 for cable from Ø16 to 58 mm

(25 to 630 mm²).

Reference	Length	Width	Height	Weight
MF3/40-SR	165 mm	80 mm	100 mm	1.520 kg
MF3/60-SR	185 mm	90 mm	120 mm	1.650 kg



IMAGE FOR ILLUSTRATION ONLY

	OUTER SHEATH REMOVAL			BONDED SEMICON REMOVAL			PEELABLE SEMICON REMOVAL			INSULATION REMOVAL			INSULATION CHAMFERING	
	ø Min	ø Max	Max thickness	ø Min	ø Max	Max thickness	ø Min	ø Max	Max thickness	ø Min	ø Max	Max thickness	ø Min	ø Max
CMV-3CH2	26 mm	52 mm	2 mm	14 mm	60 mm	1,4 mm				16 mm	45 mm	7 mm	14 mm	44 mm
CMV-3F-NP	18 mm	58 mm	7 mm	18 mm	60 mm	1,8 mm				18 mm	58 mm	7 mm		
CMV-3F-PGNP	47 mm	75 mm	3,5 mm	18 mm	60 mm	1,8 mm				38 mm	60 mm	17 mm		
CMV-4-CH	16 mm	45 mm	7 mm	12 mm	44 mm	12 mm				16 mm	45 mm	7 mm		
CMV-4F-PNP	16 mm	58 mm	7 mm	18 mm	60 mm	1,8 mm				16 mm	58 mm	7 mm		



ESSENTIAL



KIT-400-2020

FULL KIT FOR MEDIUM VOLTAGE UNDERGROUND
CABLE 50 MM² UP TO 400 MM²

/ COMPOSITION

- MF3/45-C
- SCH
- CWB/12-44
- MVS
- ALROC-FENTE
- ROTO-TMG
- GFE-TMG
- K7/GRATT
- EV/NPT
- EV/NPT-4F
- GRI
- P115

Reference	Length	Width	Height	Weight
KIT-400-2020	575 mm	470 mm	145 mm	10,7 kg

ESSENTIAL



KIT-630-2020

FULL KIT FOR MEDIUM VOLTAGE UNDERGROUND
CABLE 50 MM² UP TO 630 MM²

/ COMPOSITION

- MF3/60-C
- SCH
- CWB/18-60-S
- ALROC-FENTE
- ROTO-TMG
- GFE-TMG
- EV/NPT
- EV/NPT-4F
- P115
- K7/GRATT
- GRI

Reference	Length	Width	Height	Weight
KIT-630-2020	575 mm	470 mm	145 mm	10,9 kg

ESSENTIAL



CNPT/240-1-MV-NG

FULL CASE 50 MM² TO 240 MM²

STANDARDS

COMPATIBLE WITH C33-223, UTE C33-223, NFC33-223, HN33S23

/ COMPOSITION

- ALROC-FENTE
- EV/NPT
- EV150/240
- EV2000 150/240
- GFE-TMG
- GRI
- K7/GRATT
- MF1+/25
- MF2/40
- P115
- ROTO-TMG
- SCH
- SRC

Reference	Length	Width	Height	Weight
CNPT/240-1-MV-NG	390 mm	310 mm	145 mm	6,9 kg



CABLE PREPARATION TOOLS MEDIUM VOLTAGE KITS

ESSENTIAL



CNPT/240-2-MV-NG

FULL CASE FOR MEDIUM VOLTAGE CABLE 50 MM² TO 240 MM² INCLUDING PENCILING TOOLS

STANDARDS

COMPATIBLE WITH C33-223, UTE C33-223, NFC33-223, HN33S23

/ COMPOSITION

- ALROC-FENTE
- EV/NPT
- EV150/240
- EV2000 150/240
- GFE-TMG
- K7/GRATT
- MF1+/25
- P115
- ROTO-TMG
- SCH
- SRC
- GRI
- TC150
- TC240
- TC50
- TC95
- TCD2000
- MF2/40

Reference	Length	Width	Height	Weight
CNPT/240-2-MV-NG	575 mm	470 mm	145 mm	11,5 kg

ESSENTIAL



New generation

CNPT/630-1-MV-NG

FULL KIT FOR MEDIUM VOLTAGE CABLE 50 MM² TO 630 MM² INCLUDING PENCILING TOOL FOR 630 MM² CABLE

STANDARDS

COMPATIBLE WITH C33-223, UTE C33-223, NFC33-223, HN33S23

/ COMPOSITION

- ALROC-FENTE
- EV/NPT
- EV630
- MF2/60
- GFE-TMG
- K7/GRATT
- MF1+/60
- P115
- ROTO-TMG
- SCH
- TC630
- SRC-D

Reference	Length	Width	Height	Weight
CNPT/630-1-MV-NG	575 mm	470 mm	145 mm	10 kg

ESSENTIAL



CNPT/HTA-630-RSM comes with full self maintenance kit

CNPT/HTA-400-RSM

FULL KIT FOR MEDIUM VOLTAGE UNDERGROUND CABLE 50 MM² UP TO 400 MM²

/ COMPOSITION

- MF3/45-C
- CWB/12-44
- MVS
- SCH
- ALROC-FENTE
- ROTO-TMG
- GFE-TMG
- K7/GRATT
- EV/NPT
- GRI
- P115
- EV/NPT-4F

Reference	Length	Width	Height	Weight
INCLUDES SELF MAINTENANCE KIT	575 mm	470 mm	145 mm	11 g
KIT/400-2020				10,7 g



ESSENTIAL



CNPT/HTA-630-RSM comes with full self maintenance kit

CNPT/HTA-630-RSM

FULL KIT FOR MEDIUM VOLTAGE UNDERGROUND
CABLE 50 MM² UP TO 630 MM²

/ COMPOSITION

- MF3/60-C
- CWB/18-60-MVS
- SCH
- ALROC FENTE
- ROTO-TMG
- GFE-TMG
- K7/GRATT
- EV/NPT
- EV/NPT-4F
- GRI
- P115

Reference	Length	Width	Height	Weight
INCLUDES SELF MAINTENANCE KIT	575 mm	470 mm	145 mm	11,2 kg
KIT/630-2020				10,9 kg

ESSENTIAL



CNPT/1200

FULL KIT FOR 20KV 1200 MM² CABLE
(PEELABLE SEMICONDUCTOR)

/ KEY FEATURES

⚙ The CNPT/1200 case contains storage spaces for the following products:
EV630, P115, DSP, LHA/60, and TC1200.

/ COMPOSITION

- EV/NPT
- LMF2
- MF3/60
- PRG4/C35-L40

Reference	Length	Width	Height	Weight
CNPT/1200	575 mm	470 mm	145 mm	6.5 kg

KIT-AMSUD

FULL KIT FOR MEDIUM VOLTAGE UNDERGROUND
POWER CABLES

/ THE CASE INCLUDES :

- MF3/60-SRC
- SCH
- CWB/18-60-S
- ALROC-FENTE
- ROTO-TMG
- GFE-TMG
- P115
- DSP
- EV/NPT
- MVS



Operates over a wide cable range



ESSENTIAL



CKM-HTA-240-NG maintenance kit enables to change on site all the spare parts of the tools.

CKM-HTA-240-NG

SELF MAINTENANCE KIT FOR CNPT/240-1-MV-NG & CNPT/240-2-MV-NG CASE

/ TECHNICAL SPECIFICATIONS

CKM-HTA-240-NG kit contains the following products:

- LRTT x2: blade for sheath abrasion (K7/GRATT)
- LMF2: Blade for sheath and insulation (MF2/40)
- LFE: blade for slits on outer sheath (ALROC-FENTE)
- LS-C: blade for incision of semiconductor with chamfer (SRC)
- kit MF3/40 X5: wear pads (MF2/40, MF3/40)
- C-RTT: Tools for disassembly/reassembly of K7/GRATT blades
- O65/3187: 3 mm Allen wrench for LFE blade change
- C-SR: wrench for stylus SR, SRC and SRC-D

Reference	Length	Width	Height	Weight
CKM-HTA-240-NG	170 mm	150 mm	32 mm	300 g

ESSENTIAL



CKM-HTA-630-NG maintenance kit enables to change on site all the spare parts of the tools.

CKM-HTA-630-NG

SELF MAINTENANCE KIT FOR CNPT/630-1-MV-NG CASE

/ TECHNICAL SPECIFICATIONS

CKM-HTA-630-NG kit contains the following products:

- LRTT x2: blade for sheath abrasion (K7/GRATT)
- LMF2: Blade for sheath and insulation (MF2/40)
- LFE: blade for slits on outer sheath (ALROC-FENTE)
- LS-CD: blade for incision of semiconductor with chamfer (SRC-D)
- kit MF3/40 X5: wear pads (MF2/40, MF3/40)
- C-RTT: Tools for disassembly/reassembly of K7/GRATT blades
- O65/3187: 3 mm Allen wrench for LFE blade change
- C-SR: wrench for stylus SR, SRC and SRC-D

Reference	Length	Width	Height	Weight
CKM-HTA-630-NG	170 mm	150 mm	32 mm	300 g

ESSENTIAL



CIR001

TOOL CASE FOR INDUSTRIAL CABLE

/ THE CASE CONTAINS :

- -PRG3/CIR20: pliers for cable sheath removal ø26 to 52 mm with ring cutting depth 2.0 mm.
- PINTEL4/CIR10: pliers for cable sheath removal ø10 to 30 mm with ring cutting depth 1.0 mm.
- TRL/10-15-20: longitudinal cutting head: 1.0/1.5/2.0 mm.
- TRL/24-28-32: longitudinal cutting head: 2.4/2.8/3.2 mm.

Reference	Length	Width	Height	Weight
CIR001	390 mm	310 mm	145 mm	2.9 g



DPC/10-45

OUR SELECTION

MV OVERHEAD INSULATED CABLE MIDSPAN
STRIPPER Ø10-45 MM

/ TECHNICAL SPECIFICATIONS

Capacity: Ø 10-45 mm
Max cutting depth: 11 mm
Delivered in a soft case.

Reference	Length	Width	Height	Weight
DCP/10-45	230 mm	70 mm	75 mm	890 g

ESSENTIAL



DCG54-148 DCG54-70

CABLE STRIPPER (SHEATHED BRIDGE) 54.6
MM²/148 MM² OR 54,6 MM²/70 MM²

STANDARDS

COMPATIBLE WITH LV AERIAL BUNDLED CONNECTORS AND MV SHEATHED
BRIDGES WITH 54.6 MM² AND 148 MM² CROSS SECTION.

/ TECHNICAL SPECIFICATIONS

Preset stripping length 45 mm or 160 mm for DCG54-148
Preset stripping length 34 mm, 60 mm or 160 mm for DCG54-70

Reference	Length	Width	Height	Weight
DCG54-70	255 mm	35 mm	45 mm	450 g
DCG54-148	280 mm			480 g



ESSENTIAL



DCAP54-148

STRIPPING BODY FOR INSULATED OVERHEAD
AERIAL CABLES

/ KEY FEATURES

⚙ The DCAP allows for easy and quick stripping of overhead insulated cable ends (insulated bridge) with cross-section of 54.6 mm² and 148 mm² Preset stripping length 55 mm or 160 mm.

Stripping bushings (54,6 mm² or 148 mm²) to be ordered separately.

Reference	Length	Width	Height	Weight	Diameter
DACP54-148	200 mm	45 mm	60 mm	400 g	12-20 mm

ESSENTIAL

Claws at the end of the pliers to
ease the removal of the jacket
once cut



PGO/CIR0911

PLIERS FOR INDUSTRIAL CABLE SHEATH
10-28 MM CC 0.9 MM CL 1.1 MM


/ KEY FEATURES

⚙ Compact pliers for cables Ø5—17 mm — performs of circular cut 0.9 mm deep and a longitudinal cut 1.1 mm deep for precise sheath removal on industrial cable for precise sheath removal on industrial cables.

Reference	Length	Width	Height	Weight
PGO/CIR0911	195 mm	72 mm	70 mm	360 g

ESSENTIAL

Claws at the end of the pliers to
ease the removal of the jacket
once cut

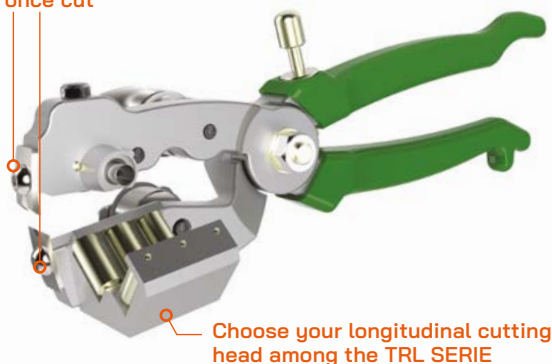

Choose your longitudinal cutting
head among the TRL SERIE

PINTEL4/CIR10

PLIERS FOR INDUSTRIAL CABLE SHEATH 10-28
MM CC 1.0 LONGITUDINAL CUTTING HEAD TRL
SERIE, TO BE ORDERED SEPARATELY

/ KEY FEATURES

⚙ Pliers for cables Ø10—30 mm — performs circular cut with 1.0 mm penetration for clean sheath removal; longitudinal cutting head to be ordered separately.

Reference	Length	Width	Height	Weight
PINTEL4/CIR10	260 mm	90 mm	68 mm	540 g



ESSENTIAL



Choose your longitudinal cutting head among the TRL SERIE

PRG3/CIR20

PLIERS FOR INDUSTRIAL CABLE SHEATH
28-52 MM CC 2;0 LONGITUDINAL CUTTING HEAD
TRL SERIE, TO BE ORDERED SEPARATELY

/ KEY FEATURES

⚙️ Pliers for cables Ø26—52 mm — performs circular cut with 2.0 mm penetration for precise sheath removal on industrial cables.

Reference	Length	Width	Height	Weight
PRG3/CIR20	270 mm	100 mm	80 mm	630 g

PREMIUM



PINTEL4PI/465

PLIERS TO REMOVE THE PRIMARY INSULATION
OF LV/MV PILC CABLE

/ USE

PINTEL4 PI/465 tool enables the user to perform a controlled circular cut into the paper impregnated insulation in order to remove it without damaging the conductor.

/ TECHNICAL SPECIFICATIONS

PINTEL4PI/465 for cable with phases diameter ranging from 10 to 26 mm
Circular cutting depth: 4.65 mm

Reference	Length	Width	Height	Weight
PINTEL4PI/465	260 mm	60 mm	55 mm	380 g

ESSENTIAL



Interchangeable longitudinal cutting head for PRG3, PRG4, PRG3/CIR, PINTEL4/CIR

TRL SERIE

INTERCHANGEABLE LONGITUDINAL CUTTING
HEAD WITH 1 OR 3 CUTTING DEPTH POSITIONS

/ TECHNICAL SPECIFICATIONS

1 or 3 cutting depths per cutting head. Available on request.

Reference	Compatible with	Length	Width	Height	Weight
TRL/XX	PRG3, PRG4, PRG3/CIR, PINTEL4/CIR	50 mm	40 mm	40 mm	40 g
TRL/XXXXXX	PRG3, PRG4, PRG3/CIR, PINTEL4/CIR	60 mm			70 g



DID YOU KNOW?

The PINTEL4 SERIE is the result of decades of expertise in live and de-energized cable preparation. Designed and manufactured with the precision required for electrical safety work, PINTEL tools combine robust construction, ergonomic handling, and absolute cutting accuracy.

Each model is engineered to adapt to real field conditions — from urban LV networks to industrial installations — ensuring efficient sheath removal, repeatable performance, and compliance with the EN 60900 safety standard for live working serie PINTEL4 1000V.

Their interchangeable longitudinal cutting head, with multi-cutting depth settings, make them indispensable for training centers, maintenance teams, and network operators in more than 20 countries worldwide.

With PINTEL, precision isn't optional — it's built in.





SUBSTATION AND RESCUE EQUIPMENT

/ SAFETY KIT	440
/ STORAGE BOX	443
/ ACCESSORIES FOR STICKS	444
/ VOLTAGE DETECTOR	445
/ VOLTAGE DETECTOR STICKS	446
/ VOLTAGE DETECTOR FOR MV SUBSTATION	447
/ INSULATING STOOLS	448
/ WALL-MOUNTED RESCUE KIT	450
/ MOBILE ELECTRICAL SAFETY KIT	452
/ FIRST AID KIT	453
/ RESCUE KIT	454
/ INSULATING STICK	455
/ FIRE EXTINGUISHING BALL	456
/ FIRE SET	457



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.

SUPERIOR

TK3S

OUR SELECTION

SAFETY SET FOR SUBSTATIONS WITH
BARE CONDUCTORS

STANDARDS

IEC 60855-1 / STEDFN°71 / UNE 204001 / IEC
60903 / NFC 71810 / C18311 / EDF SPSC221 /
IEC 61235 / IEC 60855-1



- Set available with voltage detector
TAGDP and its insulating stick
TP13G1MU.

Reference	Description
TK3S	Safety set for substations with bare conductors
TK3S-TAG	Safety set for substations with bare conductors with TAGDP

/ This kit contains :

Reference	Description
BGT-E	Insulating storage box for electrician gloves
GLE36-3/10	Latex insulating gloves class 3 size 10
TB11D	Stand for MV fuses
TT015M 24KV	Insulating stool 24 kV
TP13PM	Insulating stick range 5-45 kV
S4310	Work light for intervention
TP12ECSC	Rescue stick 45 kV with hook and without handguard
CROTP12	Hook with PVC sheathe for stick TP12
TDP536	Voltage detector for indoor use, 5-36kV

The pair of insulating gloves is also available in size 9 and 11, please specify in your order.

SUPERIOR



Reference	Description
TK3C	Safety set for substations with signage
TK3C-TAG	Safety set for substations with signage, with TAGDP

TK3C

SAFETY SET FOR SUBSTATIONS WITH SIGNAGE

STANDARDS

IEC 60855-1 / STEDFN°71 / UNE 204001 / IEC 60903 / NFC 71810 / C18311
/ EDF SPSC221 / IEC 61235 / IEC 60855-1

/ TECHNICAL SPECIFICATIONS

- Set available with voltage detector
TAGDP and its insulating stick
TP13G1MU.

/ This kit contains :

Reference	Description
BGT-E	Insulating storage box for electrician gloves
GLE36-3/10	Latex insulating gloves class 3 size 10
TB11D	Stand for MV fuses
TT015M 24KV	Insulating stool 24 kV
TP13PM	Insulating stick range 5-45 kV
S4310	Work light for intervention
TP12ECSC	Rescue stick 45 kV with hook and without handguard
CROTP12	Hook with PVC sheathe for stick TP12
TDP536	Voltage detector for indoor use, 5-36kV
	+ 10 aluminium signs and posters

The pair of insulating gloves is also available in size 9 and 11, please specify in your order.



SUPERIOR



/ TECHNICAL SPECIFICATIONS

- Set available with voltage detector TAGDP and its insulating stick TP13G1MU.

TK3GT

SEFETY KIT WITH SIGNAGE, HELMET AND FIRE EXTINGUISHER

STANDARDS

IEC 60855-1 / STEDFN°71 / UNE 204001 / IEC 60903 / NFC 71810 / C18311 / EDF SPSC221 / IEC 61235 / IEC 60855-1 / EN 397 / EN 50365 / ANSI Z891 / EN 166 / EN 170 / EN ISO 16321-1 / GS-ET-29 / ANSI Z87-1 / IEC 62819

/ This kit contains :

Reference	Description
BGT-E	Insulating storage box for electrician gloves
GLE36-3/10	Latex insulating gloves class 3 size 10
TB11D	Stand for MV fuses
TT015M 24KV	Insulating stool 24 kV
TP13PM	Insulating stick range 5-45 kV
S4310	Work light for intervention
TP12ECSC	Rescue stick 45 kV with hook and without handguard
CROTP12	Hook with PVC sheathe for stick TP12
TDP536	Voltage detector for indoor use, 5-36kV
	6 Aluminium signs
V1-BK	Electrician safety helmet with integrated ArcFlash face shield
E072KGS	Carbon dioxide fire extinguisher
	Fire burd and shovel

For other rope lentghs, please contact us.

The pair of insulating gloves is also available in size 9 and 11, please specify in your order.

TK3C-EXP-LIGHT

SAFETY KIT

/ This kit contains :

Reference	Description
TT015M36KV	Insulating stool 36 kV for inside use
GLE36-3/10	Pair of insulating gloves class 03 size 10
TP12ECSC	Insulating rescue stick
TP13PM	Voltage detector stick 5-45kV
RGX-CP	Plastic storage box for insulating gloves
CROTP12	Hook with PVC sheathe for stick TP12
TDP536	Voltage detector for indoor use, 5-36kV

Reference	Description
TK3C-EXP-LIGHT	Safety kit

The pair of insulating gloves is also available in size 9 and 11, please specify in your order.





SUBKIT-EXP

SAFETY KIT

/ This kit contains :

Reference	Description
GLE41-4/10	Insulating latex gloves, class 4 size 10
BGT-EXST	Insulating storage box for electrician gloves
TT015M45KV-EX	Insulating single piece plastic stool for inside use
TP12ECSC-EX	Insulating rescue stick 45 kV
CROTP12	Hook with PVC sheath for stick TP12
TP13PM-EX	Insulating stick 5-45 kV
TDP536	Voltage detector for indoor use, 5-36 kV

Reference	Description
SUBKIT-EXP	Safety kit

The pair of insulating gloves is also available in size 9 and 11, please specify in your order.

SUPERIOR



S4310

PORTABLE LAMP FOR INTERVENTION

STANDARDS

NFC 71-810

Advantages

- **Flexible usage** : can serve both as an intervention lamp and as an emergency / escape light (BAPI or BAES)
- **Back up autonomy** : internal rechargeable batteries supplies light even when mains power is lost, ensuring safety or intervention capability.
- **Ergonomic and compact design.**

/ USE

Light designed for safety operations and checking operations in technical facilities such as:

- electrical station and substation,
- boiler room,
- lift machinery.

It can be configured either as BAPI (portable intervention lamps) or as a BAES (emergency escape lighting unit) depending of the application.

/ TECHNICAL SPECIFICATIONS

Articulated handle. Switch with 2 positions : 45 lm and 100 lm.
On request: configuration in « Automatic switch on in case of power break ».
Delivered with a bracket (without screw) for wall mounting and a carrying handle.
Voltage : 230 VAC / 50Hz
Lamp output : 1 white LED 2,1W
Charge monitor : 1 Green LED
Battery : 2,4V 1,5Ah
Autonomy : 1 hour (100 lumens) or 3 hours (45 lumens)
Temperature of use : 0° to +40° C
IP42. (protection offers reasonable resistance to small solid object and water splashes, suitable for technical or maintenance environment)
IK10.

Reference	Dimensions	Weight
S4310	240 x 138 x 60 mm	800 g



PRO-ELITE

RGX-BGT

OUR SELECTION

STORAGE BOX FOR INSULATING GLOVES

Advantages

- Transparent window (with UV filtration) to check the presence of gloves in the box
- Large interior volume suitable for storing gloves, overgloves and a bottle of talcum powder
- Integrated and retractable handle

/ USE

This storage and protection box for insulating gloves can be used either :

- as a wall-mounted box (electrical substations, technical rooms),
- as a portable box (thanks to its retractable handle).


/ TECHNICAL SPECIFICATIONS

Made entirely from plastic.
Can hold 1 pair insulating gloves from class 00 to 4, 1 pair leather overgloves and a bottle of talcum powder.
Equipped with 4+4 pre-drilled holes for wall mounting (drilling dimensions indicated).

Reference	Talcum powder bottle	Dimensions	Weight
RGX-BG	No	500 x 250 x 100 mm	1 100 g
RGX-BGT	Yes		



ESSENTIAL

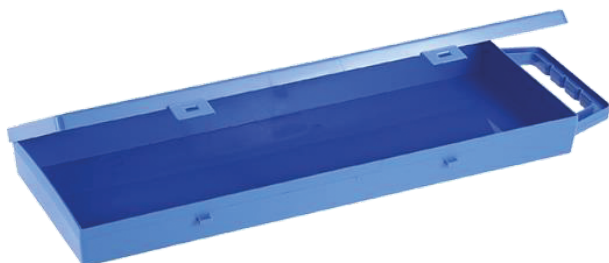

RGX-CP

POLYPROPYLENE CASE WITH HANDLE

/ TECHNICAL SPECIFICATIONS

Dimensions : 432 x 170 x H 52 mm / 17.01 x 6.69 x H 2.05 inch
Available colours : Black or Blue

Reference	Description
RGX-CP	Polypropylene



TB11D

STAND FOR MV FUSES

/ USE

For the provision of spare fuses in transformer stations or MV cells.

/ TECHNICAL SPECIFICATIONS

- Bracket consisting of 2 parts (1 upper part with 3 slots for fuses max. $\phi 65$ mm, 1 lower part with flat bottom).
- Material: white injection-moulded thermoplastic.
- Pre-drilled back for wall mounting (supplied with plugs and fixing screws, without fuse).

Reference	Dimensions	Weight
TB11D	2 elements of 280 x 90 x 225 mm	540 g



TL06

STICK ACCESS HOLE

/ USE

Access hole for passing voltage detection stick through the protective wall of an "open" installation, guaranteeing personal protection.

/ TECHNICAL SPECIFICATIONS

Materials: moulded plastic.

External installation by 3 screws tightened onto a steel fixing flange.

Reference	Opening	Weight
TL06	$\phi 60$ mm	110 g



TS48

WALL BRACKETS FOR STICKS

/ TECHNICAL SPECIFICATIONS

Semi-rigid plastic, supplied with wood fixing screws.



TP13P TP13T

VOLTAGE DETECTOR STICK WITH AIR GAP
ARRESTER FOR INDOOR USE

STANDARDS

EN 166 / EN 170

/ USE

Stick for detecting the absence of voltage before earthing a line or a transformer to carry out work in MV substations or cells.
The detector's battery-free operation and built-in self-test make it possible, in indoor substations, to have a testing device that is always ready for use.

/ TECHNICAL SPECIFICATIONS

TP13PM :

1 section insulating stick with a universal end fitting
Fibreglass composite tube, diameter 32 mm.
Operating voltage: 5 to 45 kV.
Test voltage on 300 mm: 50 kV.
Overall length: 1,50 m.
Weight: 600 g.

TR245U :

Telescopic insulating stick with a universal end fitting
Polyurethane foam-filled fibreglass composite upper tube, Ø 32 mm.
Fibreglass composite lower tube, Ø 39 mm.
Operating voltage: 25 to 63 kV kV.
Test voltage on 300 mm: 100 kV (upper section) / 50 kV (lower section).
Folded length: 0,85 m.
Extended length: 1,50 m.
Weight: 1,050 kg.

TDP536 : see next product description.

Reference	Opening	Detector	Insulating Stick	Length	Weight
TP13P	1 element insulating stick range 5 to 36 kV 5-36 kV	TDP536	TP13 PM	1,50 m	800 g
TP13T	Insulating telescopic stick 5-36 kV		TR245U	0,85/1,50 m	1 350 g



TDP536 TDP572

VOLTAGE ABSENCE DETECTOR WITH AIR GAP
ARRESTER FOR INDOOR USE

/ TECHNICAL SPECIFICATIONS

- 2 standard voltage ranges: 5-36 kV (ref. TDP536) or 5-72.5 kV (ref. TDP572)
- Operates without battery
- Flashing warning light.
- Integrated piezoelectric self-test system for checking all moving parts.
- Dimensions compatible with use of stick holder rings.
- Black polycarbonate container, fixed using universal end-fittings.
- Fixing on all types of stick using available intermediary joints.
- Supplied with straight antenna of dimensions - L 40 mm - Ø 10 mm

Reference	Voltage	Detector	Weight
TDP536	5 to 36 kV	Body Ø 49 mm x L 195 mm	300 g
TDP572	5 to 72,5 kV		

SUPERIOR



TP13C

COMPACT VOLTAGE DETECTOR STICKS

Advantages

- Compact voltage detector.
- Working without battery.
- Black polycarbonate shell.
- All weather use.
- Temperature : -20°C to +40°C.
- Red telescopic stick with 6 elements included.
- Soft handle with hand guard.
- Visual indication by 1 red light.
- Integrated auto-test without battery (with piezoelectric).
- Supplied with carrying bag suitable for belt fixing.

/ USE

TP13C is designed to check absence or presence of nominal voltage by direct contact. It is usually used prior to earthing operation of a three-phase voltage system. TP13C was specially adapted to be used in MV substations through 50 mm diameter spy holes.

/ TECHNICAL SPECIFICATIONS

- 3-phase AC indoor system.
- Nominal voltage from 5 kV up to 36 kV
- Frequency : 50Hz - 60Hz
- Telescopic stick size : extended length: 900mm - folded length: 320mm
- Delivered with 40 mm straight probe

Reference	Voltage	Frequency	Dimensions	Weight
TP13C	5 to 36 kV	50 to 60 Hz	350 x 70 x 60 mm	400 g

SUPERIOR



TP13CS

COMPACT VOLTAGE DETECTOR STICKS

/ USE

Voltage detection on MV Substation. TP13CS is designed to check absence or presence of nominal voltage by direct contact. It is usually used prior to earthing operation of a three-phase voltage system. TP13CS was specially adapted to be used in MV substations through 50 mm diameter spy holes.

/ TECHNICAL SPECIFICATIONS

- Detector characteristics:
 - 3-phase AC indoor system.
 - Nominal voltage from 5 kV up to 36kV.
 - Frequency: 50Hz 60 Hz to be specified.
 - All weather use.
 - Temperature: -20°C to +40°C.
 - Acoustic indication by buzzer.
 - Visual indication by 1 red lights.
 - Built-in «All check» test provides checking of all electronic and battery level. Green led indicates the unit is ready.
 - Supply: 9 V alkaline battery 6LR61.
 - White polycarbonate shell.
 - Body: Ø 49mm, L=140mm.
 - 40mm 'Y' shape universal contact probe (straight probe, 'V' shape probe and hook probe available on request).
- Stick characteristics:
 - Red telescopic stick with 6 elements
 - Soft handle with handguard

Reference	Extended length	Folded length	Dimensions (protective bag size)	Weight
TP13CS	900mm	320mm	350x70x60 mm	650 g



PRO-ELITE

TAGDP NEW

VOLTAGE DETECTOR FOR MV SUBSTATION

STANDARDS

EN 353-2 / INSULATING STICKS : EN 50508 & IEC 61235

Advantages

- Optimised indication that can be clearly perceptible in all working conditions
- The design prevents accidental interchange of housing or circuitry and damage to electronic autonomy of more than 6 years.
- Increased autonomy thanks to its lithium battery, easy maintenance of the device and guaranteed autonomy of more than 6 years.
- Insulating stick : optimal ratio weight/stiffness and good grip of the stick.

/ USE

Voltage detector needed in safety equipment required in Medium Voltage Substations according to the NFC 13 200 standard (High voltage electrical installations for electrical energy production area, industrial, tertiary and agricultural area, etc.

These voltage detectors, with integrated insulating pole, are designed for "proving dead", making sure that nominal voltage is actually absent on a circuit in an MV substation between 1 kV and 36 kV (no voltage verification)

- The device will detect any nominal voltage present in MV substation.
- It will avoid detecting most induced voltages in order to allow grounding operations.



/ TECHNICAL SPECIFICATIONS

AC voltage range possible choice from 1 to 36 kV

Network frequency : 50 and 60 Hz


- Permanent standby status with automatic wake-up fonction.
- The presence of voltage within the calibrated range or above is indicated by a **RED** light and a beeping sound.
- Self-test OK : the OK status (ready for use) of the device is indicated by a **GREEN** light.
- The self-test checks all the circuits, the reference detection level and the battery voltage.
- The "ready for use" state is indicated by the **GREEN** indication for 1,5 minute.
- A low battery level is indicated by an **ORANGE** light.
- Designed for indoor use.
- Operating temperature : - 25°C to +55° C.
- Humidity : 96 % maximum.
- Power supply voltage : 9 V lithium cell - IEC 6LR61.
- Accepts the use of rechargeable battery with identical supply voltage.
- Grey polycarbonate housing.
- Dimensions : Ø 59 mm, L = 260 mm with the contact electrode.
- Net weight detector : 0,450 kg with the contact electrode.
- Operating manual with a choice of languages, depending on the package.
- Delivered in a vinyl sheath with KSMP32 wall bracket.

Insulating stick : stick in 1 element

- Round hollow tube 32 mm diameter in accordance with IEC 61235.
- Rubber hand guard 20 mm height.

Reference	Voltage range	Frequency	Contact electrode	Total lenght**	User manual*	Packaging
TAGDP0104FXTPI25	1 - 4 kV	50 / 60 Hz	V. 56	1,25 m	Pack F	Vinyl sheath
TAGDP0310FXTPI25	3-10 kV					
TAGDP0520FXTPI25	5-20 kV					
TAGDP1036FXTPI25	10-36 kV					

* Other Insulating stick available on required. ** Pack F : FR/GB/DE/ES/PT/PL — Pack G : GB/GR/NL/BG/IT/AR/TR

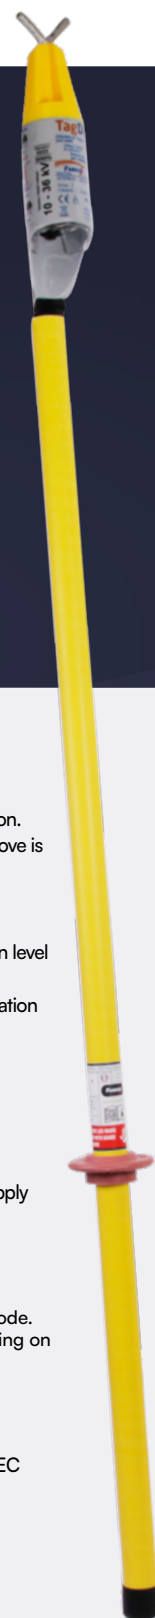

SUPERIOR



TT015M

INSULATING PLASTIC STOOL FOR INSIDE USE

STANDARDS

ST EDF N°71

/ USE

Used to provide insulation for a technician during 1st category work or operating on manually operated 2nd or 3rd category separating instruments (switchgear...). Provides insulation from the ground when working near electrical installations. For inside use only.

/ TECHNICAL SPECIFICATIONS

One-piece moulded plastic stool with anti-slip tray. Fixed insulating legs in PVC, inclined in order to keep the platform away from contact with vertical wall. All stools are supplied with anti-slip pads.

Reference	Voltage	Height under platform	Dimensions	Weight
TT015M 24KV	24 kV	150 mm	50 x 50 cm	3,6 kg
TT015M 36KV	36 kV			
TT015M 45KV	45 kV	237 mm		3,9 kg

PRO-ELITE



TT016

INSULATING PLASTIC STOOL FOR INSIDE USE

STANDARDS

ST EDF N°72

/ USE

Used to provide insulation for a technician during 1st category work or operating on manually operated 2nd or 3rd category separating instruments (switchgear...). Provides insulation from the ground when working near electrical installations.

/ TECHNICAL SPECIFICATIONS

Plastic stool with anti-slip tray. Insulating PVC legs, inclined in order to keep the platform away from contact with vertical wall. All stools are supplied with anti-slip pads. Screw legs.

Reference	Voltage	Height under platform	Dimensions	Weight
TT016 24KV	24 kV	150 mm	50 x 50 cm	3,6 kg
TT016 45KV	45 kV	237 mm		3,9 kg
TT016 63KV	63 kV	317 mm		4,1 kg

PRO-ELITE



TT018

INSULATING PLASTIC STOOL FOR OUTSIDE USE

STANDARDS

ST EDF N°72

/ USE

Used to provide insulation for a technician during 1st category work or operating on manually operated 2nd or 3rd category separating instruments (switchgear...). Provides insulation from the ground when working near electrical installations. For inside use only.

/ TECHNICAL SPECIFICATIONS

Plastic stool with anti-slip tray. Insulating PVC legs with insulating skirts, inclined in order to keep the platform away from contact with vertical wall. All stools are supplied with anti-slip pads. Screw legs.

Reference	Voltage	Number of skirts	Height under platform	Dimensions	Weight
TT018 24KV	24 kV	2	245 mm	50 x 50 cm	4,15 kg
TT018 45KV	45 kV	3	362 mm		4,6 kg
TT018 63KV	63 kV		413 mm		4,8 kg

TOGETHER

#WEARE **PENTASTIC**



FOLLOW US !



@PENTAESP

PRO-ELITE

PS2

NEW

WALL-MOUNTED RESCUE KIT

STANDARDS

LV / 25 KV / 36 KV

Advantages

- Complete proximity rescue kit for assisting a victim of an electrical accident.
- Transparent, UV-resistant door makes it easy to see all components from the outside.
- Storage and protection of components from dust, spray and splashes for outdoor use, outdoor use and resistance to severe weather weatherproof (IP54).
- Lockable case to prevent the borrowing of material.
- Great modularity, and possibility of adaptation according to needs (optional additional unit and possibility to organize the storage space with removable trays).



/ USE

Quick access wall-mounted rescue kit for rescue intervention in the event of an incident on or near a low voltage or medium voltage electrical installation.

/ TECHNICAL SPECIFICATIONS

- Weatherproof plastic box, resistant to weather, dust, splashes and marine spray (IP54). Non-metalllic
- UV-resistant transparent door with locking handle that can accommodate a seal or padlock (max. Ø 4.8 mm shackle).
- Equipment mounting insert optimized for efficient storage and quick response.
- Possible to add a shelves for storing protects.
- Wall mounting kit included.




❌ Do not attempt to move the casualty without appropriate equipment.



✅ Free the victim (or cable) using the rescue kit.

Reference	Description	Dimensions
PS2-BT-EN	Large wall-mounted kit with equipment for low-voltage use with insulating mat and posters in English	790 x 790 x 280 mm
PS2-25KV-EN	Large wall-mounted kit with equipment for use up to 25 KV use with insulating stool and posters in English	
PS2-36KV-EN	Large wall-mounted kit with equipment for use up to 36 KV use with insulating stool and posters in English	
PS2-GM	Small empty module, supplied with no components, no posters and no shelf (2 shelves possible)	790 x 400 x 280 mm
PS2-PM	Large empty module, supplied with no components, no posters and no shelf (3 shelves possible)	
PS2-CLAY	Single shelf only	650 x 230 x 40 mm

* For a customised configuration : please contact us.



Rescue stick



Voltage detector



Insulating gloves



Insulating boots



Insulating stool



Talc bottle



Adhesive barrier tape



TYPE KIT

/ LV VERSION

- Class 0 insulating gloves
- Class 0 insulating mat


/ 25 KV VERSION

- Class 3 insulating gloves
- 24 KV stool

/ 36 KV VERSION

- Class 4 insulating gloves
- 36 KV stool

MODULAR DESIGN ENABLES CUSTOMISATION TO YOUR OPERATION

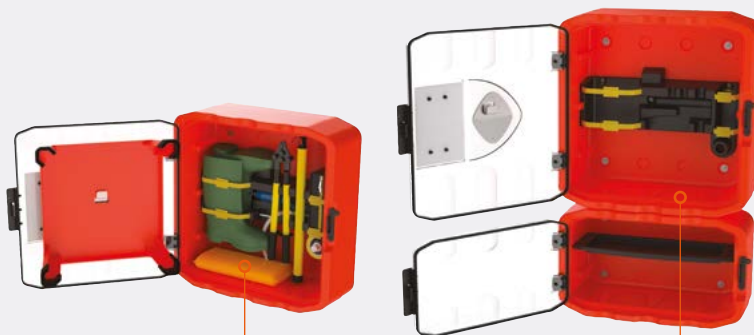

Large module

Large module with
small module optional

Shelf

3 positions possible in the large module [ref. : PS2-GM]
2 positions in the small module [ref. : PS2-PM]

Dedicated shelf

for the products (insulating gloves,
boots, pole ...)

COMPONENTS INCLUDED IN THE DIFFERENT KITS

Reference	Description	Quantity	PS2-BT-EN (LV version)	PS2-25KV-EN (25 KV version)	PS2-36KV-EN (36 KV version)
TB19-45	Live working safety boots - Size 45	1 pair		•	•
GLE36-0/10	Insulating gloves Class 0 - Size 10	1 pair	•		
GLE36-3/10	Insulating gloves Class 3 - Size 10	1 pair		•	
GLE41-4/10	Insulating gloves Class 4 - Size 10	1 pair			•
RGX-SAC	Canvas storage bag for insulating gloves	1 unit	•	•	•
TS10T	Powder flask	1 unit	•	•	•
UNITAGUFE	Voltage detector	1 unit	•	•	•
PPOLF2/011APV	insulating telescopic pole	1 unit	•	•	•
CSVES	Rescue hook for insulating pole	1 unit	•	•	•
RBCLO600X1000	Insulating mat Class 0 - Size 0,6 x 1 m	1 unit	•		
TT015M36KV	Insulating stool 36 KV	1 unit		•	•
ST174JN	Boundary tape	1 unit	•	•	•
AF2-PS2--EN	Set of two adhesive door posters for version identification, and instructions for use	1 unit	•	•	•

PRO-ELITE

VES

ELECTRICAL SAFETY KIT

STANDARDS

IEC 61243-3 / NFC 18510



- **COMPACT** : For easier storage in vehicles, the case has been dimensioned according to the european standard box
- **MOBILITY** : Exclusive wheel system and handle to facilitate access to the intervention area.
- **HIGHT RESISTANCE** : The materials and the manufacturing process were selected to ensure a maximum durability of the case.
- **HIGH VISIBILITY** : Retro reflective strips providing excellent visibility for rescue personnel.
- **OPTIMAL STORAGE** : The case packs a lot of equipment into a small space.
- **Insulating stool use as a lid.**



/ USE

The electrical safety kit allows to assist people in presence of electrical hazards, up to 25 kV network with model VES25 or up to 36 kV network with model VES36.

This kit is particularly suitable for the following situations :

- Road accidents
- Electric and hybrid cars
- Cable removal
- Work on photovoltaic panels
- Work on electrified railways
- Industry

/ TECHNICAL SPECIFICATIONS

Contents:

- Insulating stool : 25 000V or 36 000V models available.
- Insulating gloves : class 3 for model VES25 or class 4 for model VES36.
- Insulating boots : protection against step voltage (voltage gradient in the ground).
- Insulating polr, equipped with a hook telescopic pole with pentagonal shape for a perfect grip.
- Voltage detector : detects all voltages of 127 V AC and above (does not detect DC voltages).
- Cable cutter : Insulated 36 000 V cable cutter.
- Talc shaker : for easier donning of gloves.
- Fabric case for gloves : Mechanical and UV protection.
- Adhesive marker tape : for marking off an area, preventing a disconnect switch from being reset, etc.
- Instruction for use : in diagram form for quick reading and guidance.



Reference	Max operating voltage	Distinctive feature	Dimensions	Weight
VES25	25 000 V	25 kV stool and gloves class 3	600 x 400 x 310 mm	15 kg
VES36	36 000 V	36 kV stool and gloves class 4		

A flat bottom version is also available, allowing all types of equipment to be stored inside the mobile case. Custom configurations available upon request (please contact us)



SUPERIOR



B88 B89

FIRST AID KIT

/ TECHNICAL SPECIFICATIONS

- Contents :
- 5 sterile compresses 5 x 5 cm (10 for B89)
 - 2 extensible strips 3 m x 7 cm (4 for B89)
 - 1 sterile compression dressing small size
 - 1 large sterile compression bandage
 - 10 assorted adhesive dressings (20 for B89)
 - 1 roll of plaster 5 m x 2 cm
 - 1 spray 50 ml of chlorhexidine (for B89 only)
 - 2 alcohol compresses
 - 2 anti-shock calendula compresses (3 for B89)
 - 2 Chlorhexidine compresses (3 for B89)
 - 2 packets of anti-burn gel (3 for B89)
 - 2 packets of bactericidal gel (3 for B89)
 - 1 pair of scissors
 - 1 splinter pliers
 - 1 box of 12 safety pins
 - 1 pair of vinyl gloves (2 for B89)
 - 1 first aid guide in 6 languages

Supplied with wall bracket.

Reference	Description	Dimensions	Weight
B88	First aid set - 4 people	18 x 13 x 6 cm	400 g
B89	First aid set - 8 people	26 x 20 x 9 cm	700 g

SUPERIOR



C347

SURVIVAL BLANKET

Advantages

- SUPERIOR first aid item.

/ USE

Single-use survival blanket. High protection against cold, heat, rain, snow, wind and damp. May also be used as a means of signalling. Do not use it during storms.

/ TECHNICAL SPECIFICATIONS

This survival blanket is made from metallic polyester film, which reflects 90% of heat radiation. Delivered in individual bag. (14x11 cm)

Reference	Dimensions	Weight
C347	210 x 160 cm	60 g

SUPERIOR



B134ENS

FOLDING RESCUE STRETCHER SET

/ USE

Ideal to quickly evacuate a person.

/ TECHNICAL SPECIFICATIONS

The set contains :

- a reinforced coated canvas stretcher, foldable along its length and width. Aluminium handles and feet.
- Dimensions : 229 x 58,5 x 14 cm
- Dimensions folded : 115 x 12 x 18 cm
- Weight : 8 kg
- Max load : 150 kg

- a soft cover with protective frame, handles and carrying straps
- a first aid kit for 4 people
- a survival blanket, 210 x 160 cm
- a pillow with washable cover, 35 x 35 cm
- a blanket 150 x 200 cm

Reference	Dimensions	Weight
B134ENS	Folding rescue stretcher set	13 kg



TP12

INSULATING RESCUE STICK

/ USE

Stick for rescuing an injured technician (electrocution, dizziness...), working on category 1, 2 and 3 substations. It is used to grasp the injured person by the waist and bring them back to a protected area.

/ TECHNICAL SPECIFICATIONS

Test voltage on 300 mm : 100 kV.
Hook : steel tube 18 x 1,5 cm.
Length : 600 mm, delivered dismantled.
Ref. TP12X includes stick (ref. TP12) with adaptor for voltage detector 5-36 kV (TDP536).
Length of the protected area : shaft : 600 mm

Reference	Description	Operating voltage	Overall length without hook	Weight
TP12 45KV	Rescue stick 45 kV with handguard and hook	45 kV	1,47 m	1,4 kg
TP12 90KV	Rescue stick 90kV with handguard and hook	90 kV	1,97 m	1,7 kg
TP12EC	Rescue stick 45 kV with hook without hand-guard	45 kV	1,47 m	1,35 kg
TP12225KV	Rescue stick 225 kV	225 kV	2,25 m	1,95 kg

TP31ST2

3 ELEMENTS RESCUE STICK 50 KV

/ USE

Stick for rescuing an injured technician (electrocution, dizziness...).
It is used to grasp the injured person by the waist and bring them back to a protected area, it can also be used to push a cable away from a victim.
Indoor and outdoor use.

/ TECHNICAL SPECIFICATIONS

The 3 sections are assembled by aluminium screw connectors.
Dielectric strength : 100 kV/30 cm
Hook : steel tube 180 x 15 mm, length 500 mm
The hook can be equipped with the voltage detector TDPESEC (detector not included).

Reference	Length	Weight
TP31ST2	2 m	1,7 kg

BEXT-DA

INNOVATION

FIRE EXTINGUISHING BALL
WITH AUTOMATIC RELEASE

STANDARDS

NB 1395 / P1-0218/2010

Advantages

- Easy to use
- Lightweight and compact
- Self-activating
- No false alarms
- Alarm function
- Enhanced user safety
- Flexible
- Maintenance-free
- Environmentally-friendly



/ USE

On contact with the flame, the detonator inside the ball activates the wick on its outer surface.

In 3 to 10 seconds, an explosion is triggered : the extinguishing powder disperses over an area of 8 to 10 m2 in an open field.

The fire is extinguished instantly by the action of the blast.

To trigger the explosion, the ball can be thrown into the fire, or if the room is unoccupied, the ball is activated by contact with the fire.

Recommended areas are those at high risk of fire, such as electrical cabinets, kitchens, chimneys, engine compartments, etc.

/ TECHNICAL SPECIFICATIONS

- 1.5 kg
- Diameter: 152 mm
- Non-toxic, environmentally friendly
- Self-acting fire extinguishing device
- Triggers in 3 to 10 seconds on contact with flames
- 120 dB alarm on activation
- The extinguishing ball has a 5-year performance life
- Ideal for all prevention scenarios. Extinguishes 5 classes of fire:
 - Class A (wood, paper, textiles, rubber)
 - Class B (flammable liquids, fuels, paints)
 - Class C (gas fuels or gas fires)
 - Electrical fires (<5KW)
 - Class F (Edible oil fires)
- Equivalent to a standard 2.5 kg extinguisher.
- 5-year life and warranty.
- Must be protected from rain and not be direct exposed to sunlight.

Reference	Description	Weight
BEXT-DA	Fire extinguishing ball automatic release	1,5 kg



SUPERIOR



BIO1

FIRE SET

/ USE

To be used in boiler room, substations, fuel storage facilities.
Allows to store sand necessary to stop an incipient fire.

/ TECHNICAL SPECIFICATIONS

Reinforced box made with polypropylene with high resistance to flammability, water and dust, fuel, UV rays and changes of temperature.
Box with an ergonomic shovel with clip for lid fitment.
Nylon handles suitable for padlocks.
Side handles for easy carrying.
Fast and easy to assemble, and stock thanks to its stackability when disassembled.

/ This kit contains :

Reference	Weight
BIO1	Polypropylene sand box

/ Options :

Reference	Description	Capacity
S56	Red steel bucket 1 with handle	11 L

Reference	External dimensions	Internal dimensions	Weight	Capacity
BIO1	65.5 x 52 x 57 cm	53.6 x 42 x 53.7 cm	6,3 Kg	108,5 L

SUPERIOR



C348

FIRE BLANKETS

STANDARDS

BS EN 1869

/ USE

The fire blanket is useful for the protection of the men and the material.
It must always be accessible in offices, workshops and substations.

/ TECHNICAL SPECIFICATIONS

Blanket supplied in an ABS plastic box, which is both chemical and corrosion-resistant.
Instructions provided as symbols that can be readily understood by all.
Box is visible in the dark due to its glow-in-the-dark label.
Ideal where space is limited.
Reusable blankets that must be disposed of when damaged or contaminated.
Temperature range : -20° C to +100° C.
Weight of the blanket : 520 g/m²

Reference	Cover dimensions	Box dimensions	Weight
C348A	120 x 120 cm	26 x 16 x 4 cm	800 g
C348B	120 x 180 cm	37 x 18 x 4 cm	1 400 g





PERMANENT EARTHING

/ EARTH CLAMP	460
/ PLATES, WASHERS, EXOTHERMIC WELDING AND KIT	461
/ BUCHHOLZ RELAYS	462



PENTA
ELECTRICAL SAFETY PRODUCTS

| Your life,
Our work.



PERMANENT EARTHING EARTH CLAMPS

CPAR

EARTH CLAMP



STANDARDS

According to RTE standard SF404

/ USE

The earth clamp is a set of copper alloy blocks holding the rise of the earth circuit loop.

/ TECHNICAL SPECIFICATIONS

Copper alloy clamp and screws for metal structures up to 20mm thick.

Rated Isc (A) from 30 to 40 kA/1 s and 63kA/0.5 s

Reference	Description	Weight
CPAR50-120L	STN-75/116 : Earth clamp for 50 to 120 mm ² cables	255 g
CPAR150L	STN-146 : Earth clamp for 150 mm ² cables	310 g
CPAR185L	STN-182 : Earth clamp for 185 mm ² cables	465 g

The use of a bi-metallic plate and washer for mounting on galvanised steel structures reduces the galvanic torque and corrosion.

2CPAR

DOUBLE EARTH CLAMP



STANDARDS

According to RTE standard SF404

/ USE

These clamps are similar to the winged earth clamp but include an additional copper alloy block allowing the mounting of an extra conductor.

/ TECHNICAL SPECIFICATIONS

Copper alloy clamp and screws for metal structures up to 20mm thick.


Rated Isc (A) from 30 to 40 kA/1 s and 63kA/0.5 s

Reference	Description	Weight
2CPAR50-120L	STND-75/116 : Double earth clamp for 50 to 120 mm ² cables	340 g
2CPAR150L	STND-146 : Double earth clamp for 150 mm ² cables	370 g
2CPAR185L	STND-182 : Double earth clamp for 185 mm ² cables	649 g

The use of a bi-metallic plate and washer for mounting on galvanised steel structures reduces the galvanic torque and corrosion.

CLPAR

WINGED EARTH CLAMP

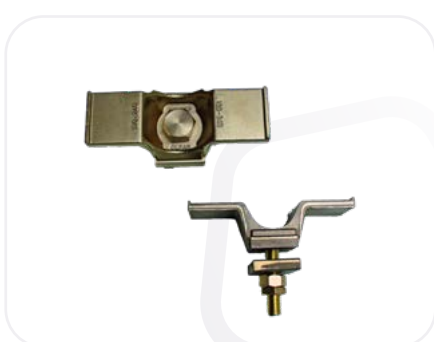

STANDARDS

According to RTE standard SF404

/ USE

These clamps are similar to single earth clamps but provides a pair of wings used for temporary grounding connection during maintenance work on the earthing circuit.

/ TECHNICAL SPECIFICATIONS

Copper alloy clamp and screws for metal structures up to 20mm thick.


Rated Isc (A) from 30 to 40 kA/1s and 63kA/0.5s.

Reference	Description	Weight
CLPAR50-120L	STA-2/75-116 : Winged earth clamp for 50 to 120 mm ² cables	614 g
CLPAR150L	STA-2/146 : Winged earth clamp for 150 mm ² cables	640 g
CLPAR185L	STA-2/182 : Winged earth clamp for 185 mm ² cables	911 g

The use of a bi-metallic plate and washer for mounting on galvanised steel structures reduces the galvanic torque and corrosion.

2CLPAR

DOUBLE WINGED EARTH CLAMP

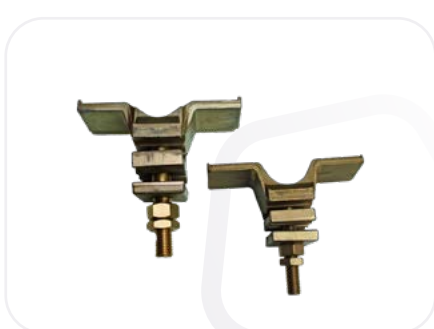

STANDARDS

According to RTE standard SF404

/ USE

These clamps are similar to the winged earth clamp but include an additional copper alloy block allowing the mounting of an extra conductor.

/ TECHNICAL SPECIFICATIONS

Copper alloy clamp and screws for metal structures up to 20mm thick.

Rated Isc (A) from 30 to 40 kA/1s and 63kA/0.5s.

Reference	Description	Weight
2CLPAR50-120L	STDA-2/75-116 : Double winged earth clamp for 50 to 120 mm ² cables	692 g
2CLPAR150L	STDA-2/146 : Double winged earth clamp for 150 mm ² cables	640 g
2CLPAR185L	STDA-2/182 : Double winged earth clamp for 185 mm ² cables	1 061 g

The use of a bi-metallic plate and washer for mounting on galvanised steel structures reduces the galvanic torque and corrosion.



BP13026KITCDT

CRIMPING TOOL KIT FOR SUBSTATIONS

/ USE

This crimping kit is specially designed for your work on grounding circuits on HTA / HTB electrical substations, it includes :

- A robust, reliable 13-ton crimping tool with two batteries

/ TECHNICAL SPECIFICATIONS

Bimetallic plates and washers composed of 15% copper and 85% aluminium (clad aluminium).

- **Plates:** Dimensions 55 × 40 × 1 mm
- **Washers:** Outer diameter 30 mm, thickness 2 mm

Reference	Strength	Crimping	Crimping time	Autonomy	Battery	Operating temperature	Dimensions	Weight	Hexagonal crimping
BP13026KITCDT	130 kN	26 mm	8-9 sec. depending on section	approx. 150 cycles	18 V Li-Ion 5 A	-10 / + 50°C	400 x 75 x 310 mm	6,5 Kg (with battery)	6 > 300 mm²

- A set of 8 dies for tubular lugs of type CDCT and C crimp of type RDCT

Reference	Application		RDCT (C crimps)	CDCT (Tubular lugs)
BP13026KITCDT	Substations	Earthing circuits	From 75 to 150 mm²	From 75 to 240 mm²



BUCHHOLZ RELAYS



/ Our range of Buchholz Relays has a proven track record of many years' service. As well as supplying a standard range of approved equipment, we also have the capability to design new solutions for any transformer protection requirement.

Our range includes a range of Buchholz Relays of many sizes and configurations, Dry Air Pumps and gas collectors.



/ Buchholz Relays from Penta P&B can provide a service for many decades if maintained properly. Our Relays have been providing transformer protection globally for many years.

Most faults in an oil filled Transformer are accompanied by the generation of gas. By using a suitable Relay, the formation of gas can be used as a warning of a developing fault. Once a specified volume of gas has collected within the Buchholz Relay, the alarm element will cause an alarm indication.

If there is a more serious fault within the Transformer, the trip element will function, the oil/gas mixture will be forced into the relay. The trip element will cut off the supply of the transformer to protect it from further damage, and protect those working around it.

> Possible causes for Alarm indication

- Breakdown of insulation.
- Overheating.
- Operation under short-circuit conditions.
- Overload.
- Overheating on windings.

> Possible causes for Trip

- Short circuits.
- Punctured bushings.
- Winding/earth faults.



/ Mounting Position

The relay should be mounted in the connecting pipe between the transformer and conservator tank. This pipe should be as long and as straight as possible, and must be arranged to slope upwards towards the conservator at an angle within the limits of 3 to 7 degrees to the horizontal. There should be a straight run on the transformer side of the relay of at least five times the inside diameter of the pipe, and at least three times diameter on the conservator side. A machined surface is provided on the relay body to help ensure matching of the mounting flanges, both in the inclined position and horizontal element. When fitting the relay to the pipework, do not attempt to use the mounting holes for alignment.

/ Connections

The terminal boxes on double element relays are normally supplied with tapped M20, 25 mm gland entries and bushing. The 750/760 style relays have M25 gland entries and a further two M20 entries.

/ Testing on Site

Double element relays are provided with a separatable valve to enable the injection of compressed air when testing on-site. To test the operation of the alarm element, air from an air bottle should be admitted slowly so that the alarm operates fully but so as to prevent the element from fluttering. To test the trip element, the valve controlling the air bottle must be quickly shut so that the trip operates satisfactorily. The pressure required is dependent upon the equipment used. To facilitate site testing the portable Dry Air Pump is available.

/ Routine Testing


Relays are individually calibrated in accordance with BEBS T2 (1966). Values are taken after the relay has stabilised to room temperature. The oil level is checked to detect any small amounts of gas collected in the top of the relay. Drain points are also tested. The alarm element is set at approximately 75% of the steady oil flow and the trip at 125% ($\pm 10\%$). If fitted, all valves and their connections must be checked. Finally the optical window should be inspected. The alarm flag should operate to function at a steady oil flow of approximately 60 mm/sec. The test element has been concluded with Silicon oil.

MK10 MODEL

/ TRIP OPERATION

When a serious fault occurs, the generation of gas is so rapid that an oil surge is sent through the relay. This flow will impinge upon the flap fitted to the trip element causing it to rotate about its axis and bring the Mercury switch to the closed position, which in turn operates the tripping device. In the event of serious oil loss from the transformer, both alarm and trip elements operate, in line of normal approved industry requirements.

The oil level in the double element relay can be monitored against a graduated scale on the windows both sides.

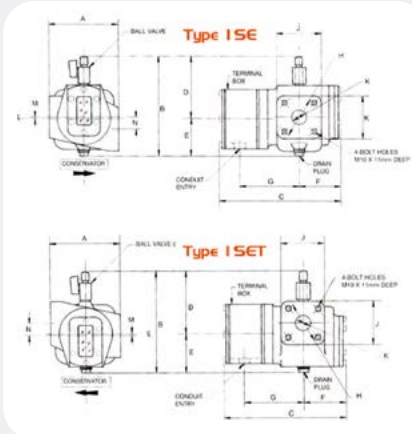



SINGLE ELEMENT AND TAP-CHANGER TYPES

Single element type relays are available for 1" bore size, designated 1SE, which operate indiscriminately for gas or oil collection and are suitable for small oil filled transformer, capacitor and potential transformer protection. A special range of single element relays are also available for Tap-changer type transformers which operate for a surge condition or loss of oil only and allow gas, normally produced during tap changing operations to pass freely. The SE relay has only one operating element and operates in the same manner as the DE relays. A special open frame unit designated R575/1 suitable for fitting inside the header tank tap-changers which operate due to gas collection, oil loss and surge conditions is available. A protective diode unit type D1 can also be provided to protect Reed switches employed in single element units.







Model	Steady Oil Flow (mm/sec) to Operate Trip Element Switch		Oil level (cc) to operate Alarm Element Switch @ 500 Inclination		For equipment containing
	Pipe angle 10° Not less than	Pipe angle 90° Not more than	Min.	Max.	
1SE	650	900	140	200	N/A
1SE/VO			120	160	
1SE/VK/ML	900	1050	150	230	
1SET	450	600	N/A	N/A	
1SET/VO					
1SET/HF	650	750			Up to 1000 litres — 1000 kVA
1DE	1000	1300			
1DE/VO					
1DE/Vc/o					
2DE	1100	1400	200	300	
2DE/VO					1001/10,000 litres — 1001/10,000 kVA 10,000/50,000 litres — 10,001 kVA / 99 MVA
2DE/Vc/o					
3DE	1200	1600			
3DE/VO					
3DE/Vc/o					
3DE/HF2	1900	2500	250	350	50,000 litres + — 100 MVA +
3DE/HF2/VO					

Type	Dims	A	B	C	D	E	F	G	H	J	K	L	M	N
1DE	mm in	127 5.0	269 10.6	232 9.13	171 6.75	98 3.9	76 3.0	114 4.5	72 2.84	76 3.0	25 1.0	N/A	N/A	N/A
2DE	mm in	184 7.25	269 10.6	232 9.13	158 6.2	111 4.37	76 3.0	114 4.5	110 4.33	139 5.5	51 2.0	13 0.5	N/A	N/A
3DE	mm in	184 7.25	269 10.6	234 9.21	158 6.2	111 4.37	80 3.15	114 4.5	130 5.12	160 6.31	76 3.0	13 0.5	N/A	N/A
1SE	mm in	120 4.75	174 6.85	212 8.35	110 4.33	64 2.52	76 3.0	103 4.0	72 2.84	76 3.0	25 1.0	N/A	3.0 0.13	22 0.85
1SET	mm in	120 4.75	174 6.85	212 8.35	104 4.1	70 2.75	76 3.0	103 4.0	72 2.84	76 3.0	25 1.0	N/A	3.0 0.13	22 0.85

As well as conventional MK10 model Relays, we also provide DIN style relays depending upon your requirements. We can also supply bespoke flange sizes, paint types and numbers of fitting holes. Please contact us for more information on this service.

Model	Steady Oil Flow (mm/sec) to Operate Trip Element Switch		Oil level (cc) to operate Alarm Element Switch @ 500 Inclination		For equipment containing
	Pipe angle 10° Not less than	Pipe angle 90° Not more than	Min.	Max.	
25DE	1000	1300			Up to 1000 litres — 1000 kVA
25DE/VO					
25DE/Vc/o					
50DE	1100	1400	200	300	
50DE/VO					
50DE/Vc/o					1001/10,000 litres — 1001/10,000 kVA 10,000/50,000 litres — 10,001 kVA / 99 MVA
75DE	1200	1600			
75DE/VO					
75DE/Vc/o					
75DE/HF2	1900	2500	250	350	
50DE/HF2/VO					50,000 litres + — 100 MVA +
50DE/HF2/Vc/o					

Type	Dims	A	B	C	D	E	F	G	H	J	K	L	M	N
25DE	mm in	200 7.87	269 10.6	232 9.13	171 6.75	98 3.9	76 3.0	114 4.5	85 3.35	115 4.53	25 1.0	16 0.63		
50DE	mm in	184 7.25	269 10.6	232 9.13	158 6.2	111 4.37	76 3.0	114 4.5	125 4.92	165 6.5	51 2.0	13 0.5		
75DE	mm in	184 7.25	269 10.6	254 10	158 6.2	111 4.37	100 3.94	114 4.5	160 6.3	200 7.87	76 3.0	13 0.5		

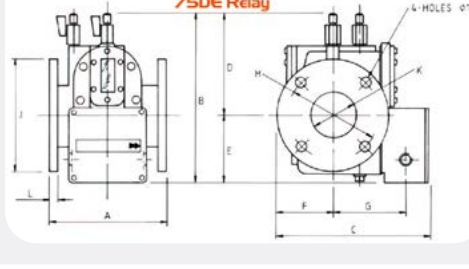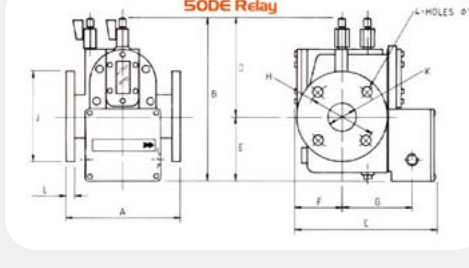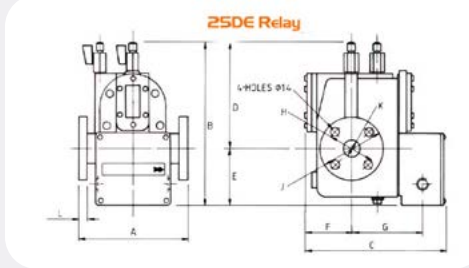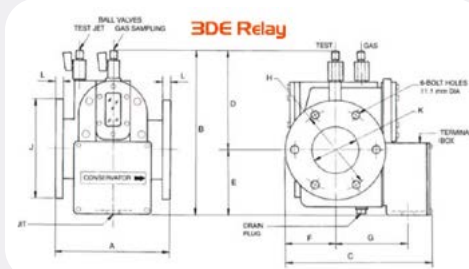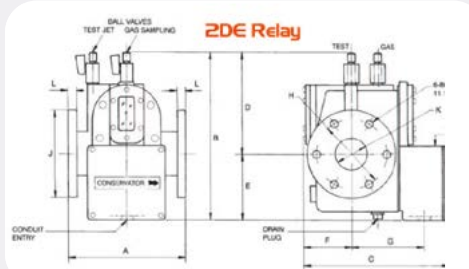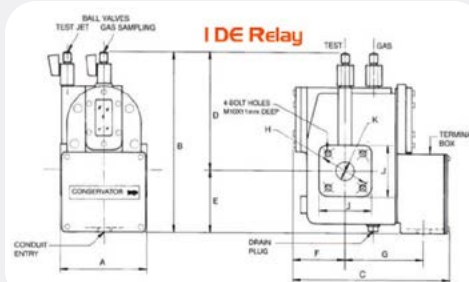

A photograph of a white rectangular warning sign attached to a silver chain-link fence. The sign features a red oval with the word 'DANGER' in white, and the words 'HIGH VOLTAGE' in large black letters below it. The background behind the fence is a clear blue sky.

DANGER

**HIGH
VOLTAGE**



SIGNAGE, LIGHTING AND MARKING THE WORK AREA

/ SIGNAGE	466
/ SUBSTATION AND WORK SITE MARKINGS	474
/ HEADLAMPS	478
/ FLASHLIGHTS	479
/ WORK LIGHT/SPOTLIGHT	480
/ REMOTE AREA LIGHTING SYSTEM	482



SIGNAGE, LIGHTING AND MARKING THE WORK AREA

SIGNAGE SAFETY SIGNS



S80ALPAS

OUR SELECTION

ELECTRICAL ACCIDENT RESPONSE - SAFETY SIGN FOR ELECTRICAL AREAS

Advantages

- Protective film to protect the sign before installation.

STANDARDS

According to NFC 18-510 emergency response principles (Protect - Alert - Assist)

/ USE

This sign provides guidance on the initial actions to take when an electrical accident occurs.

It helps personnel:


- Protect the area and prevent additional risks,
- Alert emergency services,
- Provide basic first-aid measures when necessary.

It ensures a structured and safe immediate response to electrical incidents.

/ TECHNICAL SPECIFICATIONS

- 4 holes for small models.
- 6 holes for large models.

Reference	Language	Dimensions	Weight
S80ALPAS-NEU-GB	English	350 x 500 mm	500 g
S80ALPAS-NEU-GB-PM			
S80ALPAS-AR-PM	Arabic with Emergency number	210 x 297 mm	250 g

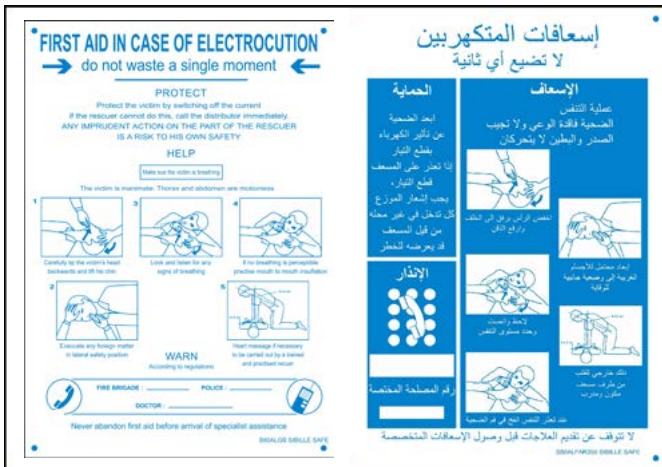

S80A--

OUR SELECTION

ELECTRICAL INJURY FIRST AID
SAFETY SIGN FOR ELECTRICAL AREAS

Advantages

- Protective film to protect the sign before installation.

STANDARDS

February 14, 1992 Decree (Protect - Assist - Alert)

/ TECHNICAL SPECIFICATIONS

4 holes for small models. 6 holes for large model

/ USE



This sign provides the first-aid procedures for victims of electric shock or electrocution:

- Protect the victim from the electrical source,
- Save the victim (provide immediate resuscitation if needed),
- Alert emergency services.

It ensures first-aid practices in workplaces dealing with electrical risks.

Reference	Description	Emergency number marking	Language	Dimensions	Weight
S80ALAF20BGM	Aluminium	Yes	French	350 x 500 mm	500 g
S80ALAF20BGM-NEU		No			
S80ALGB350		No	English		
S80ALFGB350		French: Yes/English: No	French + English		
S80ALFAR350		French: Yes/Arabic: No	French + Arabic		
S80ALGBAR350		No	English + Arabic		
S80ALAF20BPM	Adhesive	Yes	French	210 x 297 mm	250 g
S80ALAF20BPM-NEU		No			
S80ALGB210		No	English		
S80AAF20BPM		Yes	French		
S80AGBAF20BPM		Yes	English		
					20 g

For a customised sign (material, color, text, etc.): Please contact us.

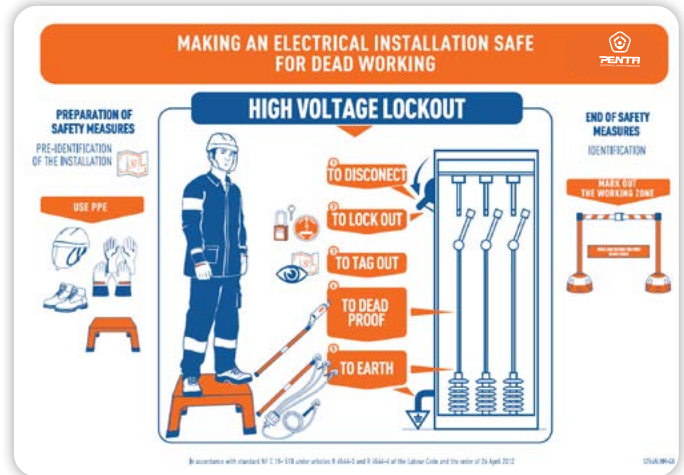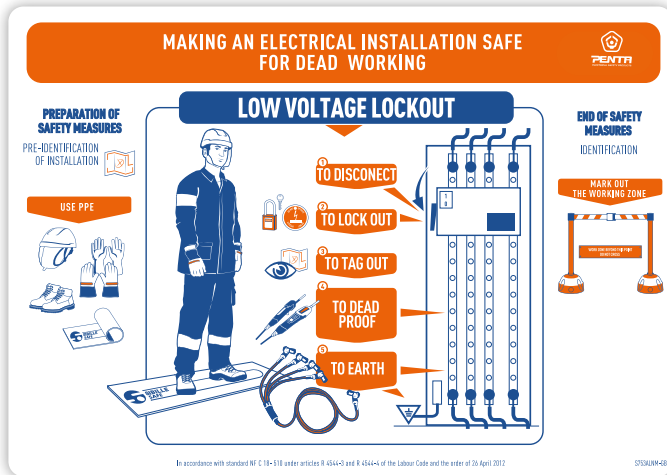

S753ALNM-GB

OUR SELECTION

“DE-ENERGIZED ELECTRICAL WORK”
LOW VOLTAGE LOCKOUT

Advantages

- Protective film to protect the sign before installation.

/ USE

Low Voltage
Electrical Safety Rules
Reminder sign for
De-energized Work =
GOLDEN RULES

/ TECHNICAL SPECIFICATIONS

- Aluminium sign.
- White background.
- 6 holes Ø 4,5 mm
- Dimensions: 500 x 350 mm
- Weight: 500 g

Reference	Description
S753ALNM-GB	English
S753ALNM	French

S754ALNM-GB

OUR SELECTION

“DE-ENERGIZED ELECTRICAL WORK”
HIGH VOLTAGE LOCKOUT

Advantages

- Protective film to protect the sign before installation.

/ USE

High Voltage
Electrical Safety Rules
Reminder sign for
De-energized Work =
GOLDEN RULES

/ TECHNICAL SPECIFICATIONS

- Aluminium sign.
- White background.
- 6 holes Ø 4,5 mm
- Dimensions: 500 x 350 mm
- Weight: 500 g

Reference	Description
S754ALNM-GB	English
S754ALNM-AR	Arabic
S754ALNM	French



S755ALNM-GB

“SAFETY REQUIREMENTS” SIGN

Advantages

- Protective film to protect the sign before installation.
- Enhanced rigidity.
- Optimal coating adhesion and uniform color aging.
- Excellent adhesion and outstanding resistance to weather, UV exposure, and chemicals.

/ USE

Sign must be systematically displayed in all rooms and areas where electrical hazards exist, such as electrical substations, industrial facilities..

/ TECHNICAL SPECIFICATIONS

- White background and blue text
- 6 holes.
- Dimensions: 500 x 350 mm
- Weight: 500 g

Reference	Lang.
S755ALNM-GB	English
S755ALAR	Arabic
S755ALNM	French

For a customised sign (material, color, text, etc.): Please contact us.



S756ALNM-GB

“GENERAL REQUIREMENTS” SIGN

Advantages

- Protective film to protect the sign before installation.
- Screen-printed raw aluminum backing for enhanced rigidity.
- White pre-coated surface for optimal coating adhesion and uniform color aging.
- Two-component polyurethane ink providing excellent adhesion and outstanding resistance to weather, UV exposure, and chemicals.

/ USE

Sign must be systematically displayed in all rooms and areas where electrical hazards exist, such as electrical substations, industrial facilities...

/ TECHNICAL SPECIFICATIONS

- White background and blue text
- 6 holes.
- Dimensions: 500 x 350 mm
- Weight: 500 g

Reference	Lang.
S756ALNM-GB	English
S756ALAR	Arabic
S756ALNM	French

For a customised sign (material, color, text, etc.): Please contact us.



SIGNAGE, LIGHTING AND MARKING THE WORK AREA

SIGNAGE SAFETY SIGNS

CAUTION



**BURIED
CABLES**

S757AL-GB SIBILLE SAFE

S757AL-GB

“CAUTION BURIED CABLES” SIGN

/ TECHNICAL SPECIFICATIONS

- Aluminium
- 4 holes Ø 4.5 mm
- Language: english
- Dimensions: 200 x 150 mm

Reference	Language
S757AL-GB	English
S757AL	French

**DANGER
KEEP OUT**

**Electrical
station**

S750ALGB SIBILLE

S750ALGB

“DANGER - KEEP OUT - ELECTRICAL STATION” ALUMINIUM SIGN

/ TECHNICAL SPECIFICATIONS

- Aluminium
- 4 holes Ø 4.5 mm
- Interaxial distance: 185 x 135 mm
- Dimensions: 200 x 150 mm

Reference	Language
S750ALGB	English
S750AL-AR	Arabic
S750AL	French

**TRANSFORMER
SUBSTATION
HIGH VOLTAGE**

DANGER of DEATH

S80ALPR10NEU-GB

SIGN FOR POST OFFICE DOOR

/ TECHNICAL SPECIFICATIONS

- Screen-printed aluminium sign
- Notched model
- 4 holes Ø 4.5 mm
- Centre-to-centre distance: 300 x 200 mm

Reference	Language
S80ALPR10NEU-GB	English
S80ALPR10NEU	Arabic

S759AL-NEU

STATION SIGNALLING KIT IN FRENCH LANGUAGE



/ This kit contains

Reference	Description
S335ALPR40	PR40 aluminium sign with changeable layout
S750AL	“Danger - no entry - transformer station” poster
S755ALNM	“Safety regulations” poster
S756ALNM	“General requirements” poster
S80AL-PASNEU-FR-GM	Poster for post office care for the electrified
S81ALTM	Earth triangle for metallic grounds
S81ALTN	Neutral earth triangle
S81ALT10100	T10 Flash Triangle

For a customised sign (material, color, text, etc.): Please contact us.



S773AL-NEU

STATION SIGNALING KIT - IN FRENCH LANGUAGE



/ TECHNICAL SPECIFICATIONS

Safety kit containing a set of aluminium posters.

/ This kit contains

Reference	Description
S80AL-PASNEU-FR-GM	Poster for post office care for the electrified,
S80ALPP30	"No posting" poster
S81ALT10100	T10 Flash Triangle
S81ALTM	Earth triangle for metallic grounds
S81ALTN	Neutral earth triangle
S335ALPR40	PR40 aluminium sign with changeable layout
S750AL	"Danger - no entry - transformer station" poster
S754ALNM	"Electrical work off voltage" sign medium-voltage
S755ALNM	"Safety regulations" poster
S756ALNM	"General requirements" poster

S774AL-NEU-GB

STATION SIGNALLING KIT - IN FRENCH LANGUAGE



/ TECHNICAL SPECIFICATIONS

- Aluminium kit:
- Warning triangle (S81ALT10100) and earthing triangle (S81ALTMGB/S81ALTNGBGED)
- 3 holes diam. 4,5 mm,
- S750ALGB sign: 4 holes diam. 4,5mm,
- S754ALNM-GB sign: 6 holes diam. 4,5mm.

/ This kit contains

Reference	Description
S81ALT10100	Triangle with lightning symbol
S750ALGB	Warning sign "danger keep out"
S754ALNM-GB	Warning sign work on disconnected line — HV
S80ALPAS-NEU-GB	"Responding to an electrical accident" sign
S81ALTNGBGED	Triangle "ground for neutral"
S81ALTMGB	Triangle "Ground frame"

S784AL-NEU

STATION SIGNALLING KIT - IN FRENCH LANGUAGE



/ TECHNICAL SPECIFICATIONS

Safety kit containing a set of aluminium posters.

/ This kit contains

Reference	Description
S80AL-PASNEU-FR-GM	Poster for post office care for the electrified
S81ALT10100	T10 Flash Triangle
S80ALPP30	"No posting" sign
S81ALTM	Earth triangle for metallic grounds
S81ALTN	Neutral earth triangle
S335ALPR40	PR40 aluminium sign with changeable layout
S750AL	Danger - no entry - transformer station alu poster
S754ALNM	Sign "electrical work off voltage" medium-voltage

S786AL-NEU

STATION SIGNALING KIT - IN FRENCH LANGUAGE



/ TECHNICAL SPECIFICATIONS

Safety kit containing a set of aluminium posters.


/ This kit contains

Reference	Description
S80ALPASNEU-FR-PM	Poster for post office care for the electrified
S80AL-PASNEU-FR-GM	Poster for post office care for the electrified
S80ALPP30	No-posting sign
S81ALT10100	T10 Flash Triangle
S81ALTM	Earth triangle for metallic grounds
S81ALTN	Neutral earth triangle
S335ALPR40	PR40 aluminium sign with changeable layout
S750AL	Danger - no entry - transformer station alu poster
S754ALNM	Sign "electrical work off voltage" medium-voltage
S755ALNM	"Safety regulations" poster
S756ALNM	"General requirements" poster



S87

MANDATORY SAFETY SIGNS

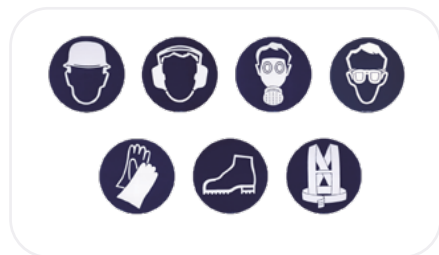

Reference	Symbol	Material	Diameter
S8701	Wear safety helmet	Plastic	30 cm
S637A50		Adhesive	6 cm
S637A75		Adhesive	8 cm
S8702	Wear ear protection	Plastic	30 cm
S506A50		Adhesive	6 cm
S506A75		Adhesive	8 cm
S8703	Wear respiratory protection	Plastic	30 cm
S638A50		Adhesive	6 cm
S638A75		Adhesive	8 cm
S8704	Wear eye protection	Plastic	30 cm
S639A50		Adhesive	6 cm
S639A75		Adhesive	8 cm
S8705	Wear hand protection	Plastic	30 cm
S640A50		Adhesive	6 cm
S640A75		Adhesive	8 cm
S8706	Wear safety footwear	Plastic	30 cm
S641A50		Adhesive	6 cm
S641A75		Adhesive	8 cm
S8707	Wear safety harness	Plastic	30 cm
S642A50		Adhesive	6 cm
S642A75		Adhesive	8 cm



S81 - S72 - S73 - S74

ELECTRICAL HAZARD WARNING SIGNS AND EARTH SIGNS

/ TECHNICAL SPECIFICATIONS

- Triangular sign with 3 holes Ø 4.5 mm
- Interaxial distance:
80 mm for the 100 mm model
- Interaxial distance:
180 mm for the 200 mm model

Reference	Symbol	Material	Diameter
S81AL T10 100	Lightning T10	Aluminium	100 mm
S81 T10 100		Plastic	
S81 AL T10 200		Aluminium	200 mm
S81 T10 200		Plastic	
S81A T10 50		Adhesive	50 mm
S81A T10 100			100 mm
S81A T10 200		Adhesive	200 mm
S728AL 100	Electrocuted man	Aluminium	100 mm
S728AL 200		Aluminium	200 mm
S728		Plastic	100 mm
S728A 050	Earth	Adhesive	50 mm
S728A 100			100 mm
S81TGB EARTH		Plastic	100 mm
S81ALTGB EARTH	Grounding	Aluminium	
S734AGB EARTH		Adhesive	
S81ALTGB GING		Aluminium	
S81TGB GRDING	Ground	Plastic	
S734AGB GDING		Adhesive	
S81ALTGB GROUND		Aluminium	
S81TGB GROUND	Grounded for neutral	Plastic	
S734AGB GROUND		Adhesive	
S81ALTNGB GED		Aluminium	
S81TNGB GRED	Ground for neutral	Plastic	
S736AGB GRDED		Adhesive	
S81ALTNGB GND		Aluminium	
S81TNGB GROUND	Ground frame	Plastic	
S736AGB GROUND		Adhesive	
S81ALTMGB		Aluminium	
S81TMGB	Ground frame	Plastic	
S735AGB		Adhesive	



S621 - S632

EXPLOSION SIGN

/ TECHNICAL SPECIFICATIONS

Adhesive or plastic triangular sign.
Yellow background, black symbol and border.

Reference	Description	Diameter	Weight
S621	Adhesive triangular sign	10 cm	30 g
S632	Plastic triangular sign		40 g



S83M

“WORKING AREA LIMIT”
IN FRENCH LANGUAGE
MAGNETIC DISC Ø 300 MM

/ TECHNICAL SPECIFICATIONS

- Green background, white print.

Reference	Marking	Diameter
S83M	“Limite zone de travail”	30 cm

For a customised sign (material, color, text, etc.):
Please contact us.



S84M-GB

PROHIBITION ELECTRICAL
HAZARDS + SYMBOL MAGNETIC
DISC Ø 300 MM

/ TECHNICAL SPECIFICATIONS

- Red background, white print.

Reference	Marking	Diameter
S84M-GB	“Prohibition electrical hazards”	30 cm

This electrical room contains
equipment containing SF6.
If an unpleasant odor or
abnormal noise is detected
in the vicinity, notify
the electrical department
immediately.

S737AL-GB SIBILLE SAFE


S737AL-GB

“EQUIPMENT CONTAINING SF6”
SIGN

/ TECHNICAL SPECIFICATIONS

- Aluminium
- 4 holes Ø 4.5 mm, centres 286 x 186 mm
- Dimensions: 300 x 200 mm

Reference	Language
S737AL-GB	English
S737AL	French

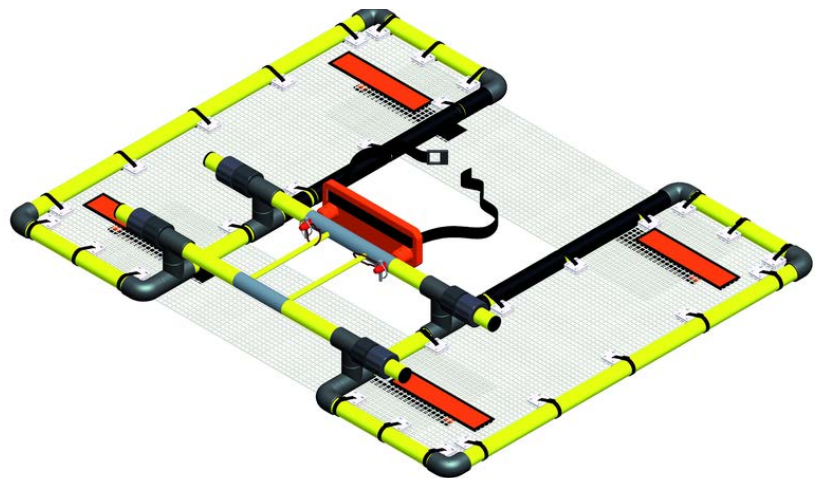

ELISOL

MARKING OF THE MINIMUM APPROACH DISTANCE

Advantages

Operator safety is guaranteed:

- The vicinity zone is marked with insulated frames covered with wire mesh which eases the respect of the distances.
- After the installation has been completed, the permanent surveillance from the ground is not compulsory (even if strongly advised).
- Flexibility: adapt itself to all poles

/ USE

Material demarcation of the working area during operations on power poles.

- The 2 frames covered with wire mesh slide to adapt themselves to all types and diameters of poles.
- Two additional insulated wire meshes can be set up with Velcro closures to close gaps between the frames.
- Reliability: long-lasting on construction site.
- Based on a well proven technology for high Voltage, the components of this boundary marker are designed to deal with mechanical and electrical stress.

/ TECHNICAL SPECIFICATIONS

Minimum Approach Distance (from live parts) = $0,50 U (kV) + 0,50m$



SIGNAGE, LIGHTING AND MARKING THE WORK AREA

SIGNAGE



XE90

NET WITH RIGID MESH

/ USE

Perfect to quickly and clearly delimit a working and/or dangerous zone. For indoor and outdoor use.

/ TECHNICAL SPECIFICATIONS

- H.D.P.E. mesh
- Dimensions: 1,2 x 20 m
- Possibility to mark the mesh (in any languages), please contact us.
- To be used with marker posts, ref. XE9107N

Advantages

- Easy to wind and unwind thanks to its rigid mesh

Reference	Colour	Marking
XE9072V-80X80	Green	Yes*
XE9092	Yellow	Yes*
XE9061J	Yellow	No
XE9093V	Green	No
XE9093R	Red	No

* One side, white on green, "LIMITE DE LA ZONE DE TRAVAIL - NE PAS FRANCHIR" and one side, white on red "VOUS ÊTES EN DEHORS DE LA ZONE DE TRAVAIL"



XE91

NET WITH TENNIS LIKE MESH

/ USE

Great to delimit working zones for substations, industrial sites - indoor and outdoor.

Reference	Colour	Marking
XE9133-100X100	Green	Yes
XE9120	Red	
XE9105	Yellow	
XE9105V	Green	

/ TECHNICAL SPECIFICATIONS

- Polyamide mesh
- Dimensions: 1,2 x 20 m
- Possibility to mark the mesh (in any languages), please contact us.
- To be used with marker posts, ref. XE9107

Advantages

- Easy to set up with the pull-out handle.
- Light weight compare to the XE90 nets, thanks to its supple and flexible mesh.



XE9072C

ROPE FOR WARNING MESH

/ TECHNICAL SPECIFICATIONS

- Rope: Ø 6 mm
- Supplied with 21 steel pins

Reference	Length	Weight
XE9072C	25 m	540 g



EPFIPE

EXTRA LARGE SAFETY PIN FOR WARNING MESH

/ TECHNICAL SPECIFICATIONS

- Transport/storage pin for warning mesh.
- Made in stainless steel Ø 4 mm



XE9070

BASE FOR ROD

/ USE

To maintain the rods on concrete ground.

/ TECHNICAL SPECIFICATIONS

- Equipped with a carrying handle.
- Welded and painted.
- Can be fitted with posts reference XE9107N, XE9062, S168,F05, FTPICLO.
- Dimensions: 400 x 300 x 105 mm

Reference	Description	Weight
XE9070	Base for rod	6,72 kg
XE907015	Base with 15 kg weight for fixing rod	15 kg



ESSENTIAL

XE9070X

INNOVATION

STACKABLE BASE FOR FIXING ROD
XE9107 AND XE9107N

Advantages

- Very resistant to all weather.
- Compact and stackable in order to optimize storage.
- Easy to use and move thanks to two ergonomic handles.
- Sustainable solution: base made from recycled material.



/ USE

To maintain fixing rods and demarcation nets, in order to mark out work areas of a de-energized workstation. For electrical maintenance operations, especially for substations.

Reference	Description	Dimensions	Weight
XE9070X	Stackable base for fixing rod	50 x 44 x 9,5 cm	8 kg
XE9107	Aluminium rod with hooks	1,40 m x 25 mm	820 g
XE9107N	Aluminium rod with clamping buckles		

/ TECHNICAL SPECIFICATIONS

- Base made from recycled material.
- Base with carrying handle.
- Stackable base.
- 4 mm metal plate, screwed under the base to secure the part holding the rod.




XE9068

HANDLE FOR MESH
CLAMPS

/ TECHNICAL SPECIFICATIONS

- Painted steel
- Dimensions: 430 x 120 x 10 mm
- Weight: 640 g



XE9060

UNWINDING TROLLEY

/ TECHNICAL SPECIFICATIONS

- Tubular steel frame.
- Large diameter wheels.
- Capacity max: 60 m.
- Dimensions: 155 x 100 x 70 cm
- Weight: 36 kg



EDFM

INSULATED FRAME TO
DELIMIT THE WORKING
ZONE

/ TECHNICAL SPECIFICATIONS

- Made in cylindrical polyethylene tubes
- "Electrocuted man" banner.
- Rotating clamp with steel collar
- Dimensions: 560 x 560 mm
- Weight: 1,5 kg



XE9066

HOLDING CLAMP

/ USE

Allows the hanging of warning nets by using the existing supports.

/ TECHNICAL SPECIFICATIONS

- Dimensions: 115 x 90 x 25 mm
- Weight: 420 g



XE9067

CLAMP

/ TECHNICAL SPECIFICATIONS

- To suspend the mesh
- Dimensions: 260 x 105 x 70 mm
- Weight: 500g

One-piece unit,
high mechanical
resistance



Stainless steel wire
detectable with on surface
locating equipment

S126AR

WARNING MESH
FOR BURIED CABLES

STANDARDS

EN 12613

/ TECHNICAL SPECIFICATIONS

- Meshing: 85 x 85 mm
- Dimensions: 0,30 x 100 m
- Weight: 2,45 kg



SIGNAGE, LIGHTING AND MARKING THE WORK AREA SUBSTATION AND WORK SITE MARKINGS

ESSENTIAL

BINARD

NEW

NET AND CHAIN WINDER/UNWINDER



/ USE

The reel/unwinder is a removable structure equipped with a net reel and a chain reel that allows the marking of cells (transformers). The interchangeable elements make it easy to install only the net or chain part or both. The net and the chain are each protected by a UV protective cover.

Reference	Description	Dimensions	Weight
CDC-BINARD	Lockout trolley	190 x 80 x 150 cm	45 kg
CDB-BINARD	Marking trolley	140 x 82 x 210 cm	36 kg
ED-BINARD	Unwinder	130 x 40 x 130 cm	



XE9107N

FIXING ROD WITH ADJUSTABLE STRAPS

/ USE

To fix and maintain in place the marking net on electrical sites, outdoors, especially in substations. Great for XE90 nets (rigid mesh).

/ TECHNICAL SPECIFICATIONS

- Made in aluminium with 3 adjustable riveted straps.
- To be put on base XE9070X or in a buried beacon.

Reference	Diameter	Length	Weight
XE9107N	Ø 25 mm	1,40 m	820 g



XE9107

FIXING ROD WITH HOOKS

/ USE

Ideal to secure XE91 nets (tennis like mesh) and delimit a working zone.

/ TECHNICAL SPECIFICATIONS

- Made of aluminium with 4 hooks to maintain the mesh.
- It is recommended to place a rod every 3 metres.

Reference	Diameter	Length	Weight
XE9107	Ø 25 mm	1,40 m	840 g



S168

FIXING ROD WITH PENETRATION TIP

/ USE

Fixing rod to maintain nets outdoor.

/ TECHNICAL SPECIFICATIONS

- Made of steel and painted, with 3 hooks to maintain the mesh.
- It is recommended to place a rod every 3 metres.

Reference	Diameter	Length	Weight
S168	Steel Ø 16 mm	1,3 m	2,06 kg



F05

FIXING ROD WITH PENETRATION TIP, FOR WARNING LANTERN

/ USE

Rod with hook on top to suspend chains, ropes, road marking ribbons, lanterns or to maintain demarcation nets.

/ TECHNICAL SPECIFICATIONS

- Made of steel with 1 hook on top. Outdoor use.

Reference	Diameter	Length	Weight
F05	Ø 14 mm	1,3 m	1,7 kg



FTPICLO

FIXING ROD WITH PENETRATION TIP, FOR FENCES

/ USE

Rod with hook on top to suspend chains, ropes, roadmarking ribbons, lanterns or to maintain demarcation nets. Outdoor use.

/ TECHNICAL SPECIFICATIONS

- Made of steel and painted, with 2 hooks.
- U hook on top: Ø 14 mm.

Reference	Diameter	Length	Weight
FTPICLO	Steel Ø 18 mm	1,5 m	3,30 kg



F06

FIXING ROD WITH PENETRATION TIP

/ USE

Rod with hook on top to suspend chains, ropes, road marking ribbons, lanterns or to maintain demarcation nets or fences. Outdoor use.

/ TECHNICAL SPECIFICATIONS

- Made of steel, with 1 hook.
- U hook on top: Ø 16 mm.

Reference	Diameter	Length	Weight
F06	Ø 16 mm	1,2 m	2,1 kg





F10

FIXING ROD WITH METAL BASE

/ USE

Rod with hook on top to suspend chains, ropes, road marking ribbons, lanterns or to maintain demarcation nets or fences. Indoor and outdoor use.

/ TECHNICAL SPECIFICATIONS

- Made of steel and painted, rod with a hook on top.
- Square base (side of 350 mm), to be placed on the ground.

Reference	Diameter	Length	Weight
F10	Ø 16 mm	1 m	4,2 kg



S82R10

PLASTIC SIGN FOR "WORK ZONE" IN FRENCH

Reference	Weight	Dimensions	Version
S82AIR10	160 g	300 x 200 mm	Magnetic
S82R10	80 g	300 x 200 mm	Plastic
S82ALR10	220g	300 x 200 mm	Aluminium

Customization with a minimum of order: please contact us.



S120D - S120E

RED WARNING FLAG - ELECTRICAL HAZARD

/ TECHNICAL SPECIFICATIONS

Made in vinyl coated fabric.

Colours: red background, white symbol or/and lettering.

Other languages, colours and dimensions are available (with a minimum of order), please contact us.

Reference	Description	Dimensions	Weight
S120D	Horizontal flag, with wooden stick (75 cm length), with white symbol electrocuted man and "DANGER DE MORT"	600 x 350 mm (flag only)	130 g
S120E	Vertical flag with a cotton string	500 x 350 mm	100 g



S85

RED WARNING BANNER - ELECTRICAL HAZARD

/ TECHNICAL SPECIFICATIONS

Coated fabric banner with a cotton string drawstrings and 4 metallic eyelets.

Colours: red background and white symbol and lettering.

Other languages, colours and dimensions are available (with a minimum of order), please contact us.

Reference	Marking	Dimensions	Weight
S85GBB	Installation under voltage Danger of death	1 x 0,2 m	95 g
S85GBC	Protected area boundary No entry		
S85GBA	Danger of death		
S85GBC1	Working area boundary No entry		



S175JRNGP

REFLECTIVE SAFETY TAPE

/ TECHNICAL SPECIFICATIONS

- 1 side: yellow fluorescent with a 10 mm retro reflective band: "grey class B"
- 1 side: red fluorescent
- Reel dimensions: Ø 17 cm
- Tape dimensions: 50 mm x 50 m
- Weight: 600 g



S67

ADHESIVE TAPE

/ TECHNICAL SPECIFICATIONS

- Red background, white writing
- Dimensions: 50 mm x 100 m
- Weight: 300 g

Other languages, colours and dimensions are available (with a minimum of order), please contact us.



DDS

RED AND WHITE STRAP DISPENSER FOR TRAFFIC CONES

/ USE

- To be used with traffic cones for quick delimitation
- Indoor and outdoor use

Ref.	Lenght	Strap width
DDS3	3 m	50 mm
DDS4	4 m	



S170 S170S

DEMARICATION TAPE IN COATED FABRIC

/ TECHNICAL SPECIFICATIONS

- Red tape for marking the working area.

Ref.	Description	Tape lenght	Weight
S17010	Tape with a D-shape ring at the end	10 m	170 g
S17020	Tape with a D-shape ring at the end	20 m	360 g
S170S20	Tape with with a carabiner at the end, and, 25 cm above on the tape a D-shape ring		170 g
S170T2	Tape with a D-shape ring at the end, mounted on a metallic reel T04		1 090 g



T04

METALLIC REEL

/ TECHNICAL SPECIFICATIONS

- Reel fitted with a pin for blocking the tape and a spring with snap fastener for the D-shaped ring.
- Delivered without tape.
- Usable with S17010 and S17020 tapes.
- Dimensions: 24 x 18 x 14,5 cm
- Weight: 860 g



S951SAFE/S952SAFE/S953SAFE/S954SAFE/S955SAFE LED HEADLAMPS | SHARED FEATURES

All models share the following characteristics:

- Universal mounting on all helmets on the market thanks to the CASADH mounting plate (optional).
- Practical: it can be rotated vertically by 180° (for the S953SAFE: 150°) thanks to precise adjustment by notching.
- Polyamide housing, resistant to hydrocarbon splashes, oils and corrosive liquids.
- High-quality polycarbonate lens.
- Lamp cleaning by rinsing with clean water and drying.
- Adjustable, hypoallergenic elastic headband, washable at 30°C.
- Supplied with 4 hook for attaching the headband to safety helmets.
- Made in France.



S951SAFE
LED HEADLAMP
UP TO 50 LUMENS

/ KEY FEATURES

- IP54 waterproof rating: resistant to weather conditions (rain, snow, etc.) and dust.
- Wide uniform beam with 3 intensity levels for comfortable illumination of the work area and hands.
- High impact and crush resistance (Fall height 2 m).
- Electronic LED protection (in case of reverse polarity). Self-cleaning contact.
- Supplied with 3 round Alkaline batteries LR03AAA 1.5 V
- Waterproof battery cap.

STANDARDS

ANSI FL1 | IEC 62471 | EN 60598-1

Brightness levels	Light output	Light beam distance	Runtime
Max	50 lumens	25 m	18 h
Mid	25 lumens	18 m	30 h
Eco	10 lumens	12 m	89 h



S952SAFE
LED HEADLAMP
UP TO 150 LUMENS

/ KEY FEATURES

- IP54 waterproof rating: resistant to weather conditions (rain, snow, etc.) and dust.
- Dual beam: wide beam for close-up work, narrow beam for distance.
- Shock-resistant with anti-accidental ON/OFF lock.
- Electronic LED protection (in case of reverse polarity).
- Self-cleaning contact.
- Supplied with 3 round Alkaline batteries LR03AAA 1.5 V
- VARIO mode for precise adjustment of light intensity.
- Battery test mode to check the remaining charge.

STANDARDS

ANSI FL1 | IEC 62471 | EN 60598-1

Beam	Light output	Light beam distance	Runtime
Narrow	150 lumens	81 m	7h30 (300h in VARIO mini mode)
Wide & uniform	140 lumens	33 m	



S953SAFE
RECHARGEABLE
LED HEADLAMP
UP TO 330 LUMENS

/ KEY FEATURES

- IP54 waterproof: weather- and dust-resistant.
- High impact and crush resistance (Fall height 2 m)
- Side switch for selecting lighting modes.
- Charge completion indicator light.
- USB-C charging: 7 h charge time, 400+ cycles.
- 3.7 V 3500 mAh lithium-ion battery: over 9 hours of runtime.
- Brightness adjustable on all three beams with memory of the last setting.

STANDARDS

ANSI FL1 | IEC 62133 | UN 38.3 | EN 60598-1 | EN 62471 | EN 60598-1

Mode	Beam	Light output	Light beam distance	Runtime
Fast movement	Dual beam (narrow and wide)	6 to 330 lumens	9m to 86m	97h to 9h
Inspection	Focused	6 to 270 lumens	15m to 110m	90h to 10h
Close-up work	Wide, uniform	6 to 280 lumens	7m to 46m	90h to 10h
Signaling (red light)	Medium	/	/	52h (Steady red) 102h (Flashing red)



S954SAFE
LED HEADLAMP
251 LUMENS

/ KEY FEATURES

- IP54 waterproof: weather- and dust-resistant.
- Triple beam: wide for close-up work, focused for distance, and combined for optimal illumination on the move.
- Shock-resistant with anti-accidental ON/OFF lock.
- Electronic LED protection (in case of reverse polarity). Self-cleaning contact.
- Supplied with 3 round Alkaline batteries LR03AAA 1.5 V
- Equipped with a progressive brightness dimmer on all three beams, with memory of the last setting.
- Battery test mode to check the remaining charge.

STANDARDS

ANSI FL1 | IEC 62471 | EN 60598-1

Beam	Light output	Light beam distance	Runtime
Focused	228 lumens	100 m	7h30 (300h in VARIO mini mode)
Wide	215 lumens	44 m	
Combined	251 lumens	75 m	



S955SAFE
RECHARGEABLE
LED HEADLAMP
UP TO 1,000 LUMENS

/ KEY FEATURES

- IP67 waterproof: dustproof and submersible (1 m/30 min).
- Triple beam: wide for close-up work, focused for distance, and combined for optimal illumination on the move.
- Shock-resistant with anti-accidental ON/OFF lock.
- 7,000 mAh lithium-ion battery: USB-C rechargeable, 400+ cycles.
- Charging time: 3 h, with charge status indicator light.
- Battery discharge indicator (6 levels) with 10-hour backup reserve
- Progressive dimmer with memory on all beams.
- Multi-color signal beam (blue, red, green, white, orange, turquoise, fuchsia) with continuous, flashing, or pulse modes.

STANDARDS

ANSI FL1 | IEC 62133 | NF EN 62471 | EN 60598-1

Beam	Light output	Light beam distance	Runtime
Focused	5 to 410 lumens	15m to 151m	200h to 11h45
Wide & uniform	5 to 400 lumens	6m to 61m	200h to 11h45
Combined	10 to 1000 lumens	17m to 170m	150h to 5h30
Steady color	/	/	162h
Flashing color	/	/	300h



LGT-TRL300

LED FLASHLIGHT KIT WITH HOSTER

/ USE

Ideal for all types of work sites and/or interventions in professional environments.

/ TECHNICAL SPECIFICATIONS

- Rechargeable LED flashlight (10 W).
- With tactical switch and zoom function for distance or close-up lighting.
- IP44: protected against splashing water and solid objects.
- Zoom function: $\times 1$, $\times 250$, $\times 500$, $\times 1000$, $\times 2000$, with two lighting levels (100%/50%).
- Delivered with: 1 rechargeable battery (Li-ion 3,7 V 2200 mAh), 1 charger with USB cable, 1 adapter for 1860 Li-on battery, 1 adapter for 3 AAA batteries (AAA batteries not included), 1 holster, 1 wrist strap, 1 handlebar adapter, all in a plastic case.

Reference	Light output	Beam distance	Runtime	Dimensions
LGT-TRL300	350 lumens	300 m	2 h	137 x 40 mm



RL-LAMP

RECHARGEABLE FLASHLIGHT

/ TECHNICAL SPECIFICATIONS

- LED High Power CREE XP-L - 800 lumens
- Compact, lightweight, and durable design (aluminum alloy).
- Zoom function (12° — 75°)
- IP44 — protected against solid objects larger than 1 mm and splashing water.
- 18650 Li-ion battery, 3,7 V/2200 mAh
- Supplied with 50 cm micro-USB cable and protective case

Ref.	Light output	Beam distance	Runtime	Weight
RL-LAMP	800 lumens	300 m	10h (50%)	220 g



S600N

LED PHOTOLUMINESCENT FLASHLIGHT PELI™

/ USE

Designed for easy one-handed use in emergency situations. Ideal for use in difficult environments - public works.

/ TECHNICAL SPECIFICATIONS

- Wide beam for even proximity lighting.
- 3 lighting modes: high, low, flashing.
- Virtually indestructible polymer material.
- IPX8 waterproofing: continuous immersion.
- Operation indicator light.
- Supplied with 3 x LRO6AA 4.5V alkaline batteries.
- Runtime: 202h (low mode)
- Photoluminescent technology emitting a bright beam

/ Accessories

Reference	Description	Reference	Light output	Lighting distance
KFS600N	Lateral fixing for helmet	S600N	39 - 378 lm	62 - 196 m

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.



LGT-BAR-SFN

NEW

RECHARGEABLE INSPECTION LAMP
12 LEDS, 520 LUMENS



/ USE

- To be used to illuminate a space that does not have permanent lighting.
- Designed for indoor and outdoor use. Ideal for all types of work.

Reference	Light output	Runtime	Dimensions	Weight
LGT-BAR-SFN	520 lm	24h	3,50 x 4,40 x 30 cm	240 g

/ TECHNICAL SPECIFICATIONS

- Rechargeable inspection lamp
- Built-in Li-Ion battery (3.7 V/2.2 Ah) with charge indicator
- IP54: protected against dust ingress and splashing water
- IK07: impact-resistant (protection against 2 J impacts)
- Charging time: 5h,
- With on/off switch,
- 3 lighting modes (10%, 40%, 100%)
- With a sturdy, retractable, and rotatable hook, and integrated magnet in the mounting base
- Supplied with USB charging cable.

LGT-BAP5M

PROFESSIONAL WORK LIGHT



/ USE

Designed for outdoor use and for all types of activities. Use to illuminate an area that does not have permanent lighting.

/ TECHNICAL SPECIFICATIONS

- Hand lamp with switch and 5 meter cable (h05vv-f 2 x 0,75mm², PVC).
- E27 base for 1 bulb max 60W (not included).
- LED compatible.
- French 6A plug.
- Power supply: 220V
- Equipped with a 360° adjustable hook
- Metal cage, highly impact-resistant.

Reference	Dimensions	Weight
LGT-BAP5M	325 x 90 x 90 mm	500 g

Lightweight, compact and easy to install, it offers safety and lighting quality to its wearer



LGT-LPL142

LED CHEST LIGHT

/ KEY FEATURES

Worn at sternum level and held in place by a harness with a reflective strip, the chest lamp increases the user's visibility and helps to improve safety.

Complementary to a headlamp or torch, it offers a light that is always directed towards the front.

Ideal for public works, intervention on power lines and railways...

/ TECHNICAL SPECIFICATIONS

- 2 LED chest lamp.
- 2 types of beam: fine and wide and uniform.
- 180° adjustable light beam.
- Battery test mode: indication of the remaining battery capacity (4 levels)
- Supplied with 3x1.5 V LR03/AAA alkaline batteries

- Polyamide housing, resistant to hydrocarbonsplashes, oils and corrosive liquids.
- Protection: IP54 weatherproof (rain, snow...) and dustproof.
- Elastic strap harness
- High resistance to impacts and crushing drop height: 2m

Ref.	Light output	Beam distance	Runtime	Dimensions	Weight
LGT-LPL142	140 - 150 lm	33 - 81 m	7h30	60 x 45 x 35 mm	153 g



High performance
reflector.

Adjustable bracket

Long range:
800 metres

Very bright LED light:
800 lumens.




LGT-SPOT800N

RECHARGEABLE LED SPOTLIGHT

/ TECHNICAL SPECIFICATIONS

- 10W high power LED
- Hyper-resistant nylon structure (IK08)
- Beam angle: 30° - 270° diffused light
- USB 2A power bank function for charging smartphones and tablets
- Tripod mountable (please contact us)
- Automatically switches on in the event of a power outage
- Large, ergonomic handle, comfortable even when wearing gloves.
- IP44: protected against solid objects and splashing water.
- Supplied with 2 chargers (mains and car charger) with strap
- Li-Ion 18650 battery, 3.7 V/2.4 Ah.

Reference	Light output	Beam distance	Runtime	Weight
LGT-SPOT800N	735 lm	735m	5h (50%)/2,5h (100%)	900 g

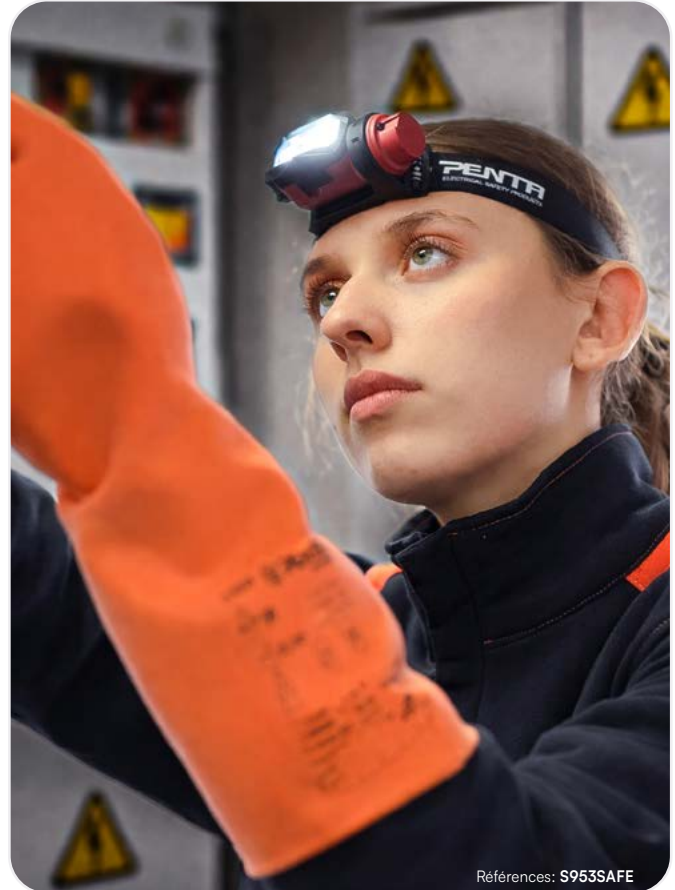

Références: S953SAFE

SFE9410N NEW

RECHARGEABLE PORTABLE
4 LED LANTERN PELI™

STANDARDS

ANSI FL1/Approved to NFPA (National Fire Protection Association) 1901

Advantages

- Ultra powerful 3 369 lumens rechargeable projector.
- The flexible battery system allows you to select between Li-ion, AA alkaline or AA NiMH to operate the light.
- 4 battery slots to extend runtime or reduce weight.
- Spot, Flood, Spot/Flood and Flashing modes.
- Glove-friendly switch activation.
- Battery status indicator switch.



Beam	Light output	Light beam distance	Runtime
Combined	3 369 lumens	417 m	2h45
Wide	1 119 lumens	47 m	5h30
Focused	2 623 lumens	489 m	4h15

/ TECHNICAL SPECIFICATIONS

- Body material in ABS with polycarbonate lens.
- Rear taillights with dedicated switch and adjustable colors (Green, Blue, Red)
- Delivered with removable shoulder strap.
- IP67 Protection: Dust-proof, and temporary immersion (-1 meter for 30 minutes).
- Wide base for stability.
- Charging time: 5h30.
- Length: 20,4 cm.

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.



SIGNAGE AND MARKING THE WORK AREA

REMOTE AREA LIGHTING SYSTEM



SFE9430

REMOTE AREA LIGHTING SYSTEM PELI™

/ USE

- Lighting for construction sites.
- Ideal for first responders as well as industrial applications.

/ TECHNICAL SPECIFICATIONS

- Body and head made in polycarbonate/ABS.
- Mast made in fibreglass (glass-reinforced plastic).
- Fully extendable mast with 360° rotating head
- Waterproof rubber activation switch
- Mast extension lock
- Low battery warning system
- Mast length: 82 cm

- Cable length: 35 cm
- Beam: 125°
- IP54: dust protected and splash-resistant
- Includes 110 — 240 Volt (50/60Hz) charger and universal adaptors

Ref.	Light output	Runtime	Dimensions (closed)	Weight
SFE9430	Full power: 3000 lm Low power: 1500 lm	Full power: 8 h Low power: 15 h	400 x 200 x 230 mm	10,3 kg

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.

Dual telescopic LED lighting heads.



Smart battery level indicator.

Can be plugged into the mains for continuous operation.

Light, quiet and heat-free operation.

Remote activation via Bluetooth with power dimming.

SFE9460

REMOTE AREA LIGHTING SYSTEM PELI™

STANDARDS

ROHS (RESTRICTION OF HAZARDOUS SUBSTANCES) COMPLIANT

/ USE

Lighting system for difficult access areas. Ideal for emergency interventions. Area lighting to illuminate a construction site at night or an accident area.

/ TECHNICAL SPECIFICATIONS

- Two swivelling telescopic masts (each extends to nearly 1.80m/6 feet) and two 360 degree articulated light arrays.
- 2 polycarbonate/ABS heads with 10 LEDs each.
- Battery type: 12V rechargeable, sealed.
- Battery level indicator: LED display
- Battery charging time: 6 hours.
- Body made in polypropylene, masts made in aluminium.
- Supports for vertical and horizontal masts.
- The system is integrated into a heavy-duty wheeled protective case for easy transportation.
- 2 intensity modes.

Reference	Light output	Runtime	Max. height	Dimensions	Weight
SFE9460	12000 lm (6000 per lighting head)	3 to 24 h	1,80 m	591 x 356 x 235 mm	27,7 kg

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.

Remote activation via Bluetooth with variable light control



Battery level indicator

Easily transportable with shoulder strap

Can be plugged into the mains for constant operation

SFE9440N

STAND-ALONE LED LIGHTING SYSTEM PELI™

STANDARDS

ROHS (RESTRICTION OF HAZARDOUS SUBSTANCES) COMPLIANT

/ USE

Quickly illuminates ravines, confined spaces, riverbanks, etc., all places that conventional torches cannot reach.

/ TECHNICAL SPECIFICATIONS

- Polycarbonate/ABS body and head and aluminium mast.
- Mast extends to 2.13 metres, allowing illumination in difficult to access areas.
- 125° beam angle with a maximum output of 5,300 lumens.
- 340° Rotating light head
- 3 intensity modes: low, medium, high.
- Rechargeable Lithium-Ion battery.
- Battery charge time: 3h45.
- IP65: dust-tight and protected against water jets.

Reference	Light output	Runtime	Max. height	Dimensions	Weight
SFE9440N	5300/2800/1400 lm	Up to 8h	2,13 m	950 x 200 x 200 mm	7,30 kg

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.



LGT-HL200

ATEX HEADLAMP - ZONE 0

/ USE

Intrinsically safe LED headlamp for use in hazardous areas (ATEX).
Ideal for people working in chemical, pharmaceutical, electrical, oil and gas plants and in fire rescue situations.

/ TECHNICAL SPECIFICATIONS

- ABS material: High impact resistance, and excellent heat resistance.
- IP67: Fully protected against dust and the effects of water immersion (up to 1 metre).
- Power source: 3 AAA Alkaline batteries (not included).

Reference	Light output	Beam distance	Runtime	Weight
LGT-HL200	100 lm (50%) 200 lm (100%)	100 m	17,5 h (100 lm) 9 h (200 lm)	135 g



SLTA01

NEW

ATEX FLASHLIGHT - ZONE 0

/ USE

Flashlight for use in ATEX Zone 0 hazardous environments.

/ TECHNICAL SPECIFICATIONS

- Shock-resistant technical polymer construction,
- IPX7: waterproof up to 1 m for 30 minutes
- 1 meter impact resistance tested,
- Length: 16,2 cm
- LED lifetime: 50 000 hours
- Temperature class T4: <135°
- Powered by 2 x AA alkaline batteries (included).

Reference	Light output	Beam distance	Runtime	Weight
SLTA01	65 lumens	96 m	24 h	100 g



LGT-LAX117

ATEX ZONE 1 PENLIGHT PELI™

STANDARDS

IEC 60079-0/EN 60079-11/EN 60079-28/Directive 2014/34/EU.
Certified ATEX Zone 1 (Category 2): II 2G Ex ib op is IIB T4 Gb

/ USE

Intrinsically safe penlight for use in hazardous areas (ATEX Zone 1).
Ideal for people working in chemical, electrical, oil and gas environments, and in fire rescue situations

/ TECHNICAL SPECIFICATIONS

- Aluminium core,
- ABS overmoulded polymer material,
- Activated with a click on the rear switch,
- Battery: 2 AAA batteries,
- IP68: Fully sealed against dust and water from more than 1 metre for 1 hour.
- Autonomy: 8h15

Reference	Light output	Lighting distance	Distance	Weight
LGT-LAX117	ATEX penlight	94 lumen	22 m	54 g
LGT-LAX117SUP	ATEX penlight with helmet holder	N/A	N/A	N/A
SUPLAX117	Helmet holder	N/A	N/A	N/A



- 3 lighting intensities: full power (300 lumens), middle power (150 lumens), low power (60 lumens)

- 30° focused light: Seeing far ahead accurately



LGT-PEX350

NEW

RECHARGEABLE ATEX SPOTLIGHT - ZONE 0

/ USE

Spotlight for use in ATEX Zone 0 hazardous environments.
Included: 220V adapter + Wall-mounted charging base

/ TECHNICAL SPECIFICATIONS

- Polycarbonate and ABS materials: High level impact resistance, chemical attack, and UV
- Aluminium heatsink for better heat dissipation
- Battery type: 3,7V 2AH 18650 type li-ion battery
- Battery charging time: 6h
- IP64: dust-tight and protected against water splashes from any direction

Reference	Light output	Beam distance	Runtime	Dimensions (mm)	Weight
LGT-PEX350	60 - 300 lm	300 m	50 h - 4h	260 x 150 x 175	1 kg

Compact and easy to manage portable lighting system.



Battery level indicator.



Can be plugged into mains for constant operation.

SFE9435N

REMOTE AREA LIGHTING SYSTEM PELI™ ATEX - ZONE 0

STANDARDS

ATEX ZONE 0 (CAT.1) (EUROPE)/IECEX IA/C1/D1 (NORTH AMERICA)

/ TECHNICAL SPECIFICATIONS

- 10 LED light head.
- 2 lighting modes: low, high.
- Polycarbonate/ABS body and aluminium head.
- Power supply: NimH rechargeable battery.
- Charging time: 8h.
- IP54 protection.
- Beam: 125°

Reference	Light output	Runtime	Max. height	Dimensions	Weight
SFE9435N	800 - 1600 lumens	Up to 10h	0,80 m	390 x 200 x 230 mm	7,30 kg

The Peli brand, Peli Products all registered and/or unregistered trademarks of Peli Products, S.L.U. its parent companies, subsidiaries and/or affiliates.





NETWORK CONSTRUCTION



PENTA
ELECTRICAL SAFETY PRODUCTS

Your life,
Our work.



T43F2 • T44F3 • T45F4

“TIRVIT” TENSIONER



Simplicity

Robustness

Light

Compact

Handy

/ USE

The “Tirvit” tensioner is a compact and robust tool designed to stretch and tension electrical and telephone cables, guy wires, and fences of varying lengths.

/ TECHNICAL SPECIFICATION

The self-tightening cams, activated by reciprocating movements, grip directly onto the passing wire or cable.

T43F2 and T44F3 equipped with an anchor chain.
T45F4 equipped with a steel anchor sling.

Ref.	Capacity	Cable Ø	Cable cross section	Dimensions	Weight
T43F2	400 kg	6-8 mm	22 - 40 mm ²	535x88x653mm	4 kg
T44F3	600 kg	7-15 mm	30 - 120 mm ²	625x110x730mm	5,2 kg
T45F4	800 kg	14-18 mm	110 - 190 mm ²	625x115x720mm	6,2 kg



Polyamide braided rope Ø 10 mm

Block in insulating material for LV live working



TP10

INSULATED ROPE-OPERATED HOIST 240 DAN

STANDARDS

IN CONFORMITY WITH FT BT 320B

/ USE

The rope hoist is used to apply tensile forces to a conductor or bundle cables in order to replace insulators and their fittings or to adjust conductors or to transfer them from supports.

/ TECHNICAL SPECIFICATION

5 m working height.
2 swivelling aluminium-copper hooks.
Hooks with gripping ring.
Hoist with insulating rope blocks.

Ref.	Max load	Rope length	Weight
TP10	240 daN	25 m	2,89 kg

Spare part	Description
C325D10L025	Polyamide braided rope 8 strands Ø10 mm L. 25 m
TP10L	Replacement safety clip for TP10 hoist

TP550 - TP1300

NEW

ROPE PULLEY BLOCK TACKLE HOIST 550 DAN AND 1300 DAN WITH SYNTHETIC BLOCKS

STANDARDS

MACHINERY DIRECTIVE 2006/42/EC

Wide opening swivel hook equipped with safety latch



The block frame and sheaves are made of synthetic material

/ USE

This hoist is used to apply tensile forces (e.g. for adjusting conductors), lift loads (e.g. a transformer) or move a triangulation.

/ TECHNICAL SPECIFICATION

- 2 blocks of 3 sheaves mounted on ball bearings
- 100m polyamide braided rope Ø12mm
- Carrying rope bag

Reference	WLL	Comment	Weight/pair
TP550-100	550 daN		
TP1300-100	1300 daN	100m rope + bag	
TP550	550 daN	196 x 110 x 62 mm	2,5 kg
TP1300	1300 daN	210 x 110 x 62 mm	2,8 kg



T88F

ROPE-OPERATED HOIST 550 DAN

STANDARDS

IN CONFORMITY WITH FT
BT 320B AND FT HTA545



T88FSEUL



LWA525-LWB71A-D12



PALIS1300



LWA525-LWB71A-D12

TP11

ROPE-OPERATED HOIST 1300 DAN

STANDARDS

IN CONFORMITY WITH FT HTA545

USE

This hoist is used, in addition to conventional handling and lifting operations, to adjust the conductors or to move a triangulation made by insulating poles on a support.

TECHNICAL SPECIFICATIONS

Hoist with insulating rope blocks. Includes 2 blocks with 3 sheaves mounted on ball bearings. Hoist delivered with 100 metres of Ø12mm polyamide braided rope. Hoist with insulating rope blocks.

Ref.	WLL	Dimensions	Weight
T88F	550 daN	520 x 110 x 62 mm	2x 1,75 kg no rope

Spare part	Description
T88FSEUL	Pair of hoist blocks T88F (without rope)
LWA525-LWB71A-D12	Braided polyamide rope 100 m Ø 12 mm

Ref.	Dimensions	WLL	Weight
TP11	520 x 110 x 62 mm	1 300 daN	2x 1,75kg no rope

Spare part	Description
PALIS1300 ->	Pair of blocks TP11 (without rope)
LWA525-LWB71A-D12	Braided polyamide rope 100 m Ø 12 mm

PLH

NEW

MANUAL RATCHET CABLE HOIST

STANDARDS

MACHINERY DIRECTIVE 2006/42/
EC. CE LIFTING TOOL APPROVED



PLH1000-4



PLH1000-9



PLH1600-6



USE

"Winch" hoists dedicated to lifting, handling, pulling (hauling) or mechanically tensioning cables operations.

TECHNICAL SPECIFICATIONS

- Anti-corrosion treated flexible steel wire rope
- Hoist body in light aluminium alloy and anticorrosion
- Forged steel hooks with safety latch and free 360° rotation.
- Interlocking pawl mechanism for secure holding in position.
- The load is lowered tooth by tooth.

Reference	Single line			Double line			Ø cable	Dimensions	Weight
	WLL	Lifting height	Hook to hook min	WLL	Lifting height	Hook to hook min			
PLH1000-4	500 kg	4,3 m	0,51 m	1000 kg	2,1 m	0,58 m	5,6 mm	645 x 115 x 105 mm	4,4 kg
PLH1000-9		9,1 m	0,56 m		4,5 m	0,74 m		845 x 180 x 125 mm	6,4 kg
PLH1600-6	800 kg	6,1 m		1600 kg	3,0 m		6,4 mm	975 x 180 x 125 mm	7,2 kg

Part of the quality management system to ISO9000, lifting equipment
Compliance to standards and recommendations must be verified periodically



P11

NEW

CHAIN LEVER HOIST

Durable high quality
hoist manufacturing

Freewheel system under no load for quickly
approaching the hook to the load.



Compact and lightweight
hoist.

Automatic double brake security

/ USE

This hoist is particularly suitable for lifting, handling, pulling (hauling) and mechanical tensioning operations. It is a high-powered manual hoist suitable for all applications. Machinery directive 2006/42/EC.

/ TECHNICAL SPECIFICATIONS

Rubber handle.
Hook free rotation 360° on both extremities.
COROLIM lifting chain anticorrosion.
The hoist disengage the chain when iddle (without load).

Ref.	WLL	Lifting height	Number of strands	Chain dimensions	Force on lever	Dimensions	Weight
P11C08L15	800 kg	1,5 m	1	5,6 x 17 mm	26 daN	350 x 158 x 132 mm	6,7 kg
P11C16L15	1 600 kg			7,1 x 21 mm	29 daN	410 x 185 x 145 mm	11,2 kg
P11C32L15	3 200 kg		2	10 x 28 mm	33 daN	530 x 212 x 198 mm	20,4 kg
P11C63L15	6 300 kg				37 daN	650 x 212 x 230 mm	24,9 kg
P11C08L30	800 kg	3,0 m	1	5,6 x 17 mm	26 daN	350 x 158 x 132 mm	7,6 kg
P11C16L30	1 600 kg			7,1 x 21 mm	29 daN	410 x 185 x 145 mm	12,6 kg
P11C32L30	3 200 kg			10 x 28 mm	33 daN	530 x 212 x 198 mm	23,2 kg

For other dimensions, please contact us.

T420

NEW

ALUMINIUM CABLE WINCH

STANDARDS

MACHINERY DIRECTIVE 2006/42/EC
COMPLIES WITH EN 1315

- Cable winch with no length constraints.
- The rope always stays in the grip during operation, which provides an anti-disconnect safety feature.
- Lever equipped with a safety pin to prevent overloading.



/ USE

Wire rope hoist works in all positions (horizontal, vertical) and can be used for lifting, pulling and lashing. The hoist is supplied with 20m cable and a hook.

/ TECHNICAL SPECIFICATIONS

Hoist made of compact and lightweight cast aluminium body.
100% of the hoists pass a dynamic proof load test 1,25 x WLL.
Hoist equipped with a carrying handle.
Rubber mud flaps to limit debris entry.

Hoist supplied with 20m of 6x19 IWRC 1770 N/mm² cable.
Safety factor of 5 on cables.
Hook with safety latch.
Hoist equipped with RFID chip.
Only accessible spare parts are available (shaft, lever, pins, ...)

Ref.	WLL lifting	Hand force max on lever	Ø cable	Lever L1/L2	Dimensions	Weight (hoist)
T42016	1,6 T	41 daN	Ø 11 mm	0,7 / 1,2 m	545 x 284 x 97 mm	12 kg
T42032	3,2 T	45 daN	Ø 16 mm	0,7 / 1,2 m	660 x 325 x 116 mm	23 kg
T42054	5,4T	85 daN	Ø 20 mm	0,7 / 1,2 m	940 x 440 x 170 mm	61 kg



- Capstan winch with rope for pulling without length limit.
- Approved for lifting up to 250 kg. 775 daN pulling winch.
- Rope guide with lock to ensure load retention.



- Capstan winch with rope for pulling without length limit.
- Pulling winch with a capacity of 1000 daN.

PCH1000

CAPSTAN WINCH FOR PULLING AND LIFTING

/ USE

This hoist can be used for both lifting and pulling operations.
This hoist is suitable for all trades: Lifting, pulling, unwinding, moving, etc.

/ TECHNICAL SPECIFICATIONS

- 50cc 4-stroke petrol engine for lead-free petrol.
- Starter by launcher.
- Centrifugal clutch by engine speed acceleration.

Ref.	Power	WLL Lifting	WLL Pulling	Rope	Dimensions	Weight
HL-PCH1000	1,6 kW	250 kg	775 kg	Ø 12 mm	505 x 371 x 361 mm	19 kg

KITPCW5000

CAPSTAN WINCH KIT - PULLING

/ USE

This hoist is mainly used for pulling operations and is suitable for all kinds of jobs.

/ TECHNICAL SPECIFICATIONS

50cc 4-stroke petrol engine for unleaded petrol.
Starter by launcher.

Composition :

- 1 PCW5000 winch for pulling
- 2 polyester slings
- 1 anchor plate on towing ball
- 2 stainless steel pulleys
- 1 polyester rope Ø12mm with threaded loops
- 2 carabiners
- 1 transport box (59 x 56 x 54 cm IP67)

Ref.	Power	WLL Lifting	WLL Pulling	Rope	Dimensions	Weight
KITPCW5000	1,6 kW	Not allowed	1000 kg	Ø 12 mm	507 x 371 x 361 mm	196 kg



PREMIUM

KITPCH1000TOP

NEW

CAPSTAN WINCH KIT

- Capstan winch with rope for pulling without length limit, approved for lifting up to 250 kg.
- Pulling winch with a capacity of 775 daN.
- Rope guide with lock to ensure load retention.
- Wide selection of accessories for working in all situations.



/ USE

This hoist can be used for both lifting and pulling operations.
This hoist is suitable for all trades.
Applications : lifting, pulling, unwinding, moving, etc.

/ TECHNICAL SPECIFICATIONS

50cc 4-stroke petrol engine for lead-free petrol.
Starter by launcher.
Centrifugal clutch by engine speed acceleration.

Composition :

- 1 PCH1000 winch for pulling and lifting
- 1 anchor on posts (wood or concrete)
- 1 anchor on towing ball Ø50mm
- 1 horizontal pulling support
- 1 vertical pulling support

- 1 polyester rope Ø12mm L100m looped
- 1 rope bag
- 2 polyester slings
- 2 stainless steel pulleys
- 2 carabiners

Ref.	Power	WLL Lifting	WLL Pulling	Rope	Dimensions	Weight
KITPCH1000TOP	1,6 kW	250 kg	1000 kg	Ø 12 mm	507 x 371 x 361 mm	19 kg

/ ACCESSORIES

FOR PCH1000, KITPCW5000 AND KITPCH1000TOP

Ref.	Description
HL-1263	493
HL-1266	Towing balls anchoring system Ø50mm
HL-1806	Pylon mount anchoring system for steel angle 10 to 30 cm



HL-1263



HL-1266



HL-1806

Ref.	Description
HL-1268	Horizontal pull winch plate
HL-1264	Vertical pull winch support



HL-1216/2ESC



HL-1257XL

Ref.	Description
HL-1216/2ESC	Double braided polyester rope, spliced Ø12mm L:200m BL:3300kg
HL-1257XL	Rope bag XL with 2 handles Ø37cm x H60cm capacity 200 m



HL-1216/2ESC



HL-1257XL

Ref.	Description
HL-1274	Swing side snatch block with sheave Ø100mm BL:9185kg
HL-1276	Steel locking carabiners BL:2550kg
HL-1281	Hook with safety latch BL:3000kg



HL-1274



HL-1276



HL-1281



Simple and robust
mechanical jack

Very resistant



C390

POLE EXTRACTOR JACK

/ USE

Used at the foot of the pole to apply an upward pull-out force.

/ TECHNICAL SPECIFICATIONS

- Crank-operated jack with rising shaft.
- It is equipped with a chain for attachment.
- The safety crank is foldable.

Ref.	Force	Stroke	Height	Weight
C390	5 t	600 mm	900 mm	22 kg

Spare part	Description
C390M	Folding safety crank
C390C	Chain, length 1.05 m

Pole extractor which allows to apply the turning force in both directions without dismantling



V16

POLE EXTRACTOR

/ USE

Used on the base of the post to apply rotational force.

/ TECHNICAL SPECIFICATIONS

- Steel post turners with a specially shaped foot that allows right or left hand turning without dismantling the system.
- It is secured by a 1.20 m long strap.
- Ø 40 mm socket.
- Delivered without handle (use a Ø40 mm handle).

Ref.	Dimensions	Weight
V16	250 x 250 x 200 mm	5 kg



Integrally cast
for greater
mechanical
strength

F60

LIFTING FORK FOR WOODEN POLES

/ USE

Used along the pole to apply a pushing force.

/ TECHNICAL SPECIFICATIONS

- Fork made of special forged steel.
 - 3 solid steel tips,
 - conical socket Ø 45 mm,
 - opening 285 mm.
- Product delivered without handle.

Ref.	Dimensions	Weight
F60	320 x 380 x 50 mm	1,35 kg

F60MH

NEW

LIFTING FORK FOR METAL POSTS

Fork equipped
with anti-slip EPDM
sleeves

Can be used with standard
wooden handles



Delivered with a
protective cover

/ USE

Fork to be mounted at the end of the wooden handle M25250 or M25300.
A set of 4 forks allows the lifting of supports with a team of 5 people including 1 guide.

/ TECHNICAL SPECIFICATIONS

- Steel fork protected against corrosion.
- EPDM rubber with longitudinal grooves to limit slipping.
- Delivered without wooden handle.
- Cylinder for fixing the handle Ø 38 mm

Ref.	WILL	Opening	Dimensions	Weight
F60MH	100 kg	35 cm	382x267x50mm	1,7 kg

Long wooden handle that can be used
on all types of tools.



M25

HARDWOOD CYLINDRICAL HANDLE

/ USE

Can be used on pole jacks, pole extractors, forks, etc.

/ TECHNICAL SPECIFICATIONS

Cylindrical hardwood handle.

Ref.	Length	Ø	Weight
M25250	2,5 m	40 mm	1 kg
M25300	3 m		1,4 kg



Steel head, screw,
column and base

Heavy duty jack
with bronze nut
and bolt

Screw head equipped
with shaft support

V042

MECHANICAL REEL LIFTER WITH CENTRAL AXIS

/ USE

Reel lifter sold individually.

A pair of V042 reel lifters and an AV042 axle make up a reel lifting set.

/ TECHNICAL SPECIFICATIONS

- Robust jack with central screw and bronze nut.
- Steel head, screw, column and base.
- Screw head equipped with pin support.
- Supplied without spindle bar (to be ordered separately).

Ref.	Max load	Min-Max drum diameter	Min. height	Stroke	Base diam.	Weight
V04201T	1 t	1,20 - 1,76 m	55 cm	380 mm	40 cm	24 kg
V04202T	2 t	1,50 - 2,30 m	70 cm	500 mm	57 cm	35 kg
V04204T	4 t	1,90 - 3,10 m	90 cm	700 mm	57 cm	57 kg
V04206T	6 t	1,90 - 2,70 m	90 cm	500 mm	70 cm	64 kg
V04210T	10 t	2,50 - 3,50 m	120 cm	600 mm	77 cm	113 kg



Designed to
unwind reels

Rollers mounted
on sealed ball
bearings

D25

ONE-PIECE REEL UNWINDER

/ USE

Allows the rotation of the reel on the 2 rollers that support it.

A locking system facilitates the fitting of the reel out of the unwinder.

/ TECHNICAL SPECIFICATIONS

- Very robust painted steel frame with 2 carrying handles.
- Rollers with guide flanges.
- Locking system for reel change.

Ref.	WLL	Drum Ø min/max	Width	Dimensions	Weight
D25	800 t	600 / 1050 mm	max. 560 mm	800 x 715 x 115 mm	23 kg

For other dimensions, please contact us.

AV042

SPINDLE FOR REEL LIFTER

Ref.	WLL	Length	Ø spindle	Weight
AV042-1T	1.000 kg	2 m	Ø 60 mm	18 kg
AV042-2T	2.000 kg		Ø 76 mm	27 kg
AV042-4/6T	4 and 6.000 kg		Ø 80 mm	80 kg
AV042-10T	10.000 kg		Ø 90 mm	100 kg

Great stability and
easy loading of
the reel (anti-slip
ramps).



Very robust device
ideal for unwinding reel

The 2-shoe system
gives it optimised
storage and weight

D260

PAIR OF CABLE DRUM UNWINDERS ON BASE

/ USE

Allows the rotation of the reel on the rollers of the 2 shoes that support it.

/ TECHNICAL SPECIFICATIONS

- Steel frame with Ø70mm aluminium rollers mounted on sealed bearings.
- Great stability and easy change of the reel.
- Sold in pairs.

Ref.	WLL	Drum Ø min/max	Dimensions	Weight
D260	1 000 t	300 / 1 600 mm	800 x 200 x 115 mm	10 kg x2



VALUE

D85C

NEW

MECHANICAL TRACTION DYNAMOMETER

Direct and instant needle reading (no battery)

Very robust mechanical design with aluminium body



Two ring ends for easy hanging



/ USE

Dynamometer to be applied within a pulling chain in order to be able to read directly the mechanical tension in kN. The device is specially designed for construction or maintenance work on power lines.

/ TECHNICAL SPECIFICATIONS

- Dynamometer to be installed in series in the pulling chain.
- The extremities eyes allow to attach through hooks, shackles, ...
- Accuracy of reading $\pm 3\%$.
- Needle dial embedded in the body of the dynamometer for optimum protection.
- Safety factor 3 (breaking $> 3 \times$ capacity).

Ref.	Capacity	Graduation	A	B	C	Weight
D85C1T	10 kN (1000daN)	20 daN	215 mm	65 mm	28 mm	1,2 kg
D85C2T	20 kN (2000daN)	50 daN				
D85C3T	30 kN (3000daN)		250 mm	80 mm	2 kg	



Robust design for site use.

Built-in, protected LCD display with high readability.

Electronic measurement accuracy



Compact and lightweight due to strain gauge design.



D86

ELECTRONIC TRACTION DYNAMOMETER

/ USE

Used for any mechanical tension measurement
 - Vertical: mass of a suspended load.
 - Horizontal: tension of ropes or cables in traction.
 Industrial and electrical networks applications.
 Machinery directive 2006/42/EC.

/ TECHNICAL SPECIFICATIONS

- Versatile: suspended or traction work.
- Intended to measure traction forces (N) or suspended weight (kg).
- Accuracy of $\pm 0.3\%$.
- Operates with 2 x 1.5V (AAA batteries).
- Indication of battery power load.
- IP65 / NEMA 4 sealing: Allows outdoor use.
- Operating temperature: -20°C to $+50^{\circ}\text{C}$.
- Safety factor: 4.
- Delivered in plastic carrying case with foam inside.



Shackles for attachment	Description
D86M03T2	Anchor shackle for D86 1T and 3,2T dynamometers
D86M06T3	Anchor shackle for D86 6,3T dynamometers

Ref.	WLL	Precision	Reading unit	Dimensions	Weight
D86C01T	1 000 kg	± 3 kg	1 kg	191 x 84 x 36 mm	0.75 kg
D86C03T2	3 200 kg	$\pm 9,6$ kg	5 kg	191 x 100 x 36 mm	0.95 kg
D86C06T3	6 300 kg	$\pm 18,9$ kg	10 kg	236 x 122 x 35 mm	1.45 kg



ESSENTIAL

P225

PLASTIC-COATED
UNWINDING PULLEY

OUR SELECTION

Anchored by a hook
with a safety catchRatchet strap support
SP12M or SP20M

/ USE

Pulley designed for unwinding LV Aerial Bundled Cables up to 3x150 mm².

/ TECHNICAL SPECIFICATIONS

- Plastic coated aluminium sheave for insulated cables.
- Aluminium alloy pulley which is strong and light.

Ref.	Deep groove Ø	Groove width	WLL	Dimensions	Weight
P225	130 mm	60 mm	800 daN	460 x 250 x 140 mm	2,6 kg

Accessories	Description	Lenght	WLL	Weight
SP12M	Ratchet strap pulley support	1,2 m	1000 daN	2,9 kg
SP20M		2 m		3 kg

Anchored by a hook
with a safety catch

P226

PLASTIC-COATED
UNWINDING PULLEY
WITH HOOK

/ USE

Pulley designed for unwinding LV aerial bundled cables up to 3x150mm².

/ TECHNICAL SPECIFICATIONS

- Plastic coated aluminium sheave for insulated cables.
- Aluminium alloy pulley which is strong and light.
- Opening pulley with lockable clevis that allows working with greater lateral effort.

Ref.	Deep groove Ø	Groove width	WLL	Dimensions	Weight
P226	130 mm	60 mm	800 daN	485 x 250 x 150 mm	2,9 kg

Accessories	Description	Lenght	WLL	Weight
SP12M	Ratchet strap pulley support	1,2 m	1000 daN	2,9 kg
SP20M		2 m		3 kg




P227

LOW-VOLTAGE BUNDLE CABLE HOOK-TYPE PULLING
PULLEY

/ TECHNICAL SPECIFICATIONS

- Designed for guiding low-voltage twisted cables
- Maximum working load: 800 daN
- Sheave made of insulating plastic material
- Structure made of treated aluminium alloy for enhanced strength
- Equipped with a tilting safety locking system
- Pulley Ø (bottom of groove): 140 mm; groove width: 80 mm
- Swivel hook mounted on a ball joint, fitted with a safety latch and a ring for pole handling (passage Ø: 16 mm)
- Latch opening: 22 mm
- Distance between the pulley's central axis and the hook attachment point: 300 mm

Ref.	Total height	Weight
P227	450 mm	2.3 kg

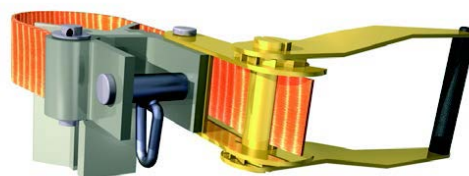

SP20

STRINGING BLOCK WITH HOOK FOR LV AERIAL BUNDLE
CABLE

/ USE

Stringing blocks designed for unwinding of LV aerial bundled cables.
Hook attachment for use on any existing structure
Recommended cables : LV ABC up to 3 x 150mm²
Accessory : pulley support with ratchet strap around the post

/ TECHNICAL SPECIFICATIONS

- Hook equipped with safety latch rotating 360°
- Sheave groove width : 60mm
- Sheave groove Ø : Ø130mm.
- Dimensions : 460 x 250 x 140 mm

Ref.	WLL	Dimensions	Weight
SP20	800 daN	460 x 250 x 140 mm	2.5 kg



P229 NEW

PLASTIC-COATED
UNWINDING PULLEY
WITH HOOK
AND OPENING CLEVIS

Plastic coated
aluminium sheave
for insulated cables



/ USE

Pulley designed for unwinding LV aerial bundled cables.

/ TECHNICAL SPECIFICATIONS

- Anchoring by hook with safety latch.
- Opening clevis.

Ref.	Deep groove Ø	Groove width	WLL	Dimensions	Weight
P229	250 mm	80 mm	1 500 daN	800 x 480 x 250 mm	10,7 kg

P220 OUR SELECTION

STRINGING PULLEYS
FOR BARE CABLES



/ USE

Pulleys designed for stringing overhead line LV or MV bare cables. It is recommended to use a pulley with a sheave Ø at least 20 times larger than the external diameter of the cable (15 times in case of a small winding).

/ TECHNICAL SPECIFICATIONS

- Strong and light pulley made of light aluminium alloy.
- Rotating hook with safety latch.
- Side opening clevis with latch that prevents the cable from escaping.

Ref.	Groove width	Deep groove Ø	WLL	For cables	Weight
P220 0500	22 mm	150 mm	500 daN	Up to 43 mm ²	1,15 kg
P220 0800	38 mm	250 mm	800 daN	Up to 117 mm ²	2,1 kg
P220 1300	40 mm	300 mm	1 300 daN	Up to 148 mm ²	4 kg


P25F300 NEW

RIGID INSULATOR
PULLEY BLOCK

Direct attachment to the TR rod
of the insulator, without disassembly

The conductor is pulled and adjusted
through the pulley before being transferred
and fixed to the rigid insulator

The swivel pulley sheave allows angled use

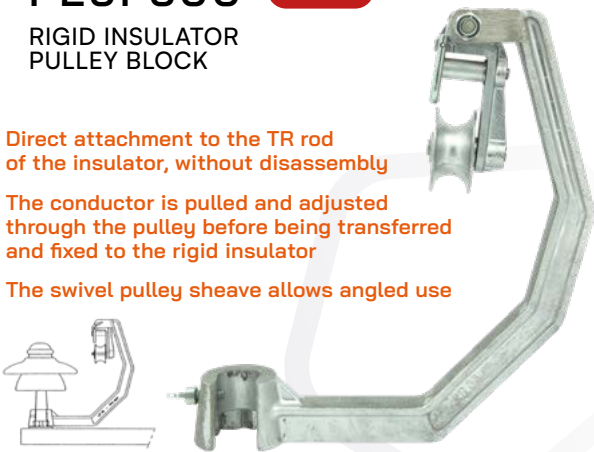


/ USE

Pulley designed for overhead stringing of bare cables on networks equipped with rigid insulators. It is to be attached on the reinforced TR rod (EDF standard) of the rigid insulator. This pulley can also be used to release a one-sided force on a support where one of the spans will be removed for maintenance.

/ TECHNICAL SPECIFICATIONS

- Aluminium alloy assembly.
- Slotted fixing ring with butterfly tightening screw.
- Swivel sheave equipped with a safety catch.

Ref.	Groove width	Groove depth Ø	WLL	Dimensions	Weight
P25F300	24 mm	35 mm	300 daN 150 daN	320 x 310 x 65 mm	1,2 kg

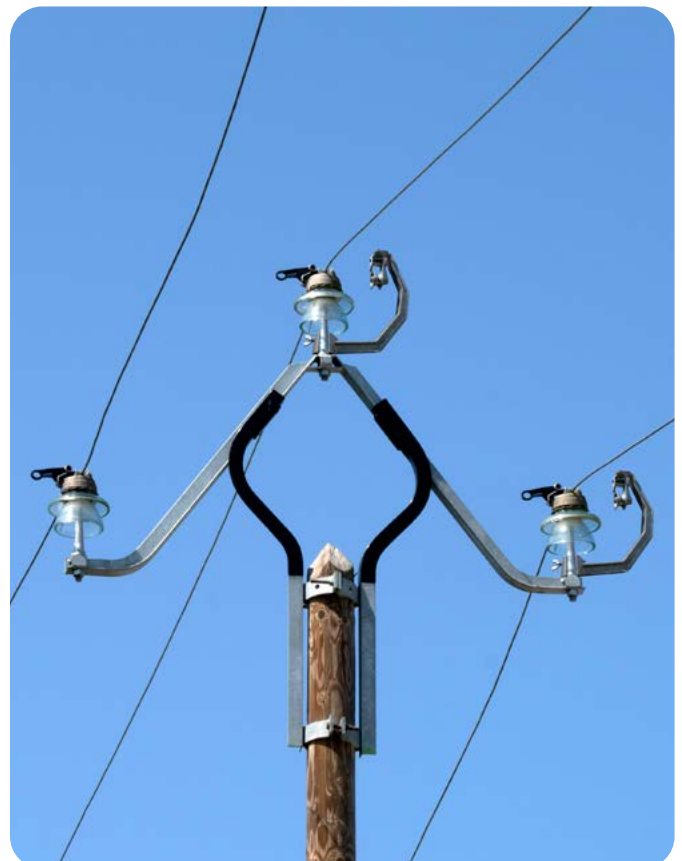



TP95

INSULATING UNWINDING PULLEY

/ USE

Used for unwinding operations near live conductors.

Pulley used to unwind or adjust a bare or insulated conductor or an ABC cable up to 4x25mm².

In conformity with EDF SERECT 315

/ TECHNICAL SPECIFICATIONS

- Safety latch to secure the conductor on the sheave.

Ref.	Groove width	Groove depth Ø	WLL	Hook opening	Dimensions	Weight
TP95	25 mm	140 mm	100 daN	23 mm	392 x 200 x 83 mm	1,7 kg

Steel pulley with anti-corrosion treatment

Pulley with cable guide flanges to prevent derailment



P230

PULLEY WITH HOOK

/ USE

Pulley designed to transmit forces using steel cables.

/ TECHNICAL SPECIFICATIONS

Pulley with opening shell and bronze ring. Hook fitted with safety clip.

Ref.	Deep groove Ø	Cable Ø	WLL	Dimensions	Weight
P230160	140 mm	10-11,5 mm	1,25 t	342 x 197 mm	5,2 kg
P230200	172 mm	13-15 mm	2 t	430 x 255 mm	9,3 kg

Offshore pulley made of high-strength HR steel with anti-corrosion treatment



P222

PULLEY WITH HOOK FOR WIRE ROPE

/ USE

Pulley designed to transmit forces using steel cables. Intensive use possible.

/ TECHNICAL SPECIFICATIONS

- Hook pulley with safety latch.
- Openable clevis pulley, waterproof components.
- Anchoring: hook

Ref.	Deep groove Ø	Cable Ø	WLL	Dimensions	Weight
P2221	60 mm	9-10 mm	2 t	262 x 82 mm	2,6 kg
P2222	90 mm	12-14 mm	5 t	367 x 120 mm	7 kg



Stainless steel frame and nylon sheave

PDRE

UNWINDING PULLEY FOR TELECOM CABLES

/ USE

Pulley designed for unwinding telecommunication cables up to 112 pairs.

/ TECHNICAL SPECIFICATIONS

- Anchored by a single hook.
- Stainless steel hook and stem.
- Polyamide sheave.

Ref.	Deep groove Ø	Groove width	WLL	Weight
PDRE	20 mm	45 mm	150 daN	350 g

Steel pulley protected against corrosion



Simple, light and economical pulley

P223

SCISSOR TYPE PULLEY WITH HOOK FOR STEEL WIRE ROPE

/ USE

Pulley designed to transmit forces using steel cables.

/ TECHNICAL SPECIFICATIONS

- Pulley with swivel flanges for cable routing.
- Multiple anchoring: shackle, hook, sling, chain

Ref.	Deep groove Ø	Cable Ø	WLL	Dimensions	Weight
P2232	132 mm	10-12 mm	3,2 t	260 x 164 mm	4,8 kg

Compact and robust pulley constructed from HR steel



Very ergonomic thanks to the swivel hook and opening flange

P224

SNATCH BLOCK FOR WIRE ROPE, PULLEYS FOR LIFTING, PULLING AND RETURNING FORCE

/ USE

Pulleys for lifting, pulling and returning wire rope. Swivel hook suspension.

/ TECHNICAL SPECIFICATIONS

- 360° rotating hook equipped with safety latch.
- Opening by unscrewing the retained bolt and rotating the movable flange around sheave axis.
- Sheave mounted on bronze bushing.
- Lifting approved — safety factor 4.

Ref.	WLL	Wire rope Ø	Ø groove	Height H (mm)	Length L (mm)	Width E (mm)	Hook P (mm)	Weight
P224 C20T	2,5 t	9-11 mm	80/60 mm	279	86	81	23	3,6kg
P224 C32T	3,2 t	12/16 mm	110/76 mm	330	120		27	6,7 kg
PC224 C52T				369		97		8,1 kg
PC224 C54T	5,4 t	16/20 mm	150/116 mm	419	160		35	11 kg
PC224 C80T	8 t	20/22 mm	200/160 mm	533	210	125	43	24 kg



TP90C-25

NEW

25M ROPE WITH
PULLEY AND HOOK
WLL:50DAN

/ This kit contains

- TP90 insulating pulley
- TC160H insulating hook
- 25 meters braided rope



Ref.	Deep groove Ø	Cable Ø	WLL one rope strand	WLL total at hook	Weight
TP90	45 mm	10 mm max.	60 daN	120 daN	390
Ref.	WLL		Weight		
TC160H	50 daN		45 g		

TP90

OUR SELECTION

INSULATING PULLEY
WITH HOOK FOR
SERVICE ROPE



Very light pulley for simple
manual work

Insulating pulley due to flanges and
sheave made of insulating materials



/ USE

Pulley used for :

- angle transmission of the service rope
- lifting tools and materials,
- removing connections using a TM05 clamp.

It can be attached to a bracket, to the ring of a TE40, TE45, TE50 anchor bracket, to a TC155 rope tie, to a TC125 ring clamp

/ TECHNICAL SPECIFICATIONS

- Hook pulley with safety latch equipped with a manoeuvring ring (for hook pole).
- Hook opening: 20 mm.

Ref.	Deep groove Ø	Cable Ø	WLL one rope strand	WLL total at hook	Weight
TP90	45 mm	10 mm max.	60 daN	120 daN	390

TC160H

OUR SELECTION

INSULATING HOOK 50 DAN
FOR SERVICE ROPES



STANDARDS

IEC 60900: 2012



/ USE

Live working up to 1000V AC and 1500V DC.

Used with a TP90 pulley and a service rope, this hook can be used to lift tools or equipment when working under tension.

/ TECHNICAL SPECIFICATIONS

Insulating hook made of red polyamide with 30% glass fibre.
The hook has 2 holes of Ø 16 mm for the rope to pass through.

Ref.	WLL	Weight
TC160H	50 daN	45 g



LW08-05-ALU

SERVICE HOOK

/ USE

The service rope hook is used to hoist the material and tools required by the lineman.

Ref.	WLL	Length	Width	Height	Weight
LW08-05-ALU	100 daN	140 mm	80 mm	10 mm	0,09 kg

Opening fork pulley in
polyamide reinforced
with glass-fiber



Hook with
safety catch,
rotates 360°

TP92

NEW

RETURN PULLEY BLOC WITH OPENING FORK 500 DAN

STANDARDS

MACHINERY DIRECTIVE 2006/42/EC

/ USE

Pulley used as a return or sheave block.

Used, for example, on rope hoists.

Applications include electrical networks and the lifting industry.

/ TECHNICAL SPECIFICATIONS

Product :

- Opening fork locked by a screwed pin.
- Steel swivelling hook having an opening of Ø20mm.

Ref.	WLL	Ø rope max	Ø sheave	Weight	Dimensions
TP92	500 daN at hook 250 daN on 1 strand	16 mm	56 mm	0,7 kg	320 x 80 x 80 mm



Very light aluminium alloy pulley with opening flange



Sheave mounted on armoured ball bearing and greased for life

802-842

RETURN PULLEY FOR SERVICE ROPES

/ USE

Mainly used as a return pulley for ropes up to maximum Ø16 mm (hoist, service or operating ropes).

/ TECHNICAL SPECIFICATIONS

Light alloy pulley with rustproofed tempered steel hook fitted with a safety clip; light alloy sheave mounted on reinforced permanently greased ball bearings for rapid jam-free unwinding

Ref.	Deep groove diam	Rope diam.	WLL total at hook	WLL one rope strand	Dimensions	Weight
802	130 mm	Ø16mm max.	500 daN	250 daN	155 x 80 x 365 mm	3,06 kg
842	60 mm		250 daN	125 daN	90 x 80 x 265 mm	1,37 kg

Very versatile shell blocks for use in tensioning or lifting loads



Maintenance-free shell blocks with nylon sheaves.

PDL

PAIR OF SHELL BLOCKS WITH HOOK

/ USE

Shell blocks that are assembled with a service cord.

/ TECHNICAL SPECIFICATIONS

- Shell blocks with hook and safety latch.
- Shell blocks made of corrosion-resistant steel.
- Anchoring: hook.

Ref.	Number of sheaves	Deep groove diameter	Rope diameter	WLL	Weight
PDL250	3	32 mm	8-10 mm	250 kg	1,3 x 2 kg
PDL320	2	40 mm	10-12 mm	320 kg	1,8 x 2 kg
PDL500	3	40 mm	10-12 mm	500 kg	2,4 x 2 kg

LW08-16

NEW

SELF-CENTERING LIFTING SPREADER BEAM



/ USE

The lifting spreader beam is used for lifting equipment such as pole-mounted electrical transformers, pole-mounted circuit breakers, etc. To adjust the distance between clevises, both clevises must be moved simultaneously by hands.

/ TECHNICAL SPECIFICATIONS

- Body, lifting ring, clevises, locking pins are made of corrosion protected metal.
- Swivelling and sliding clevises are symmetrically moved and balanced by a wire rope system. For guiding the load : 2 holes Ø 27 mm are located at both ends of the spreader body.
- Minimum distance between clevises : 0,28 m
- Maximum distance between clevises : 0,85 m

Ref.	Lifting eye Øs	Dimensions	WLL	Weight
LW08-16	35 mm (int) 63 mm (ext)	0,95 x 0,25 x 0,06 m	650 daN	5,5 kg

ESSENTIAL


TM05N

OUR SELECTION

CLAMPING HAND WITH INSULATING BODY

STANDARDS

FT BT 330

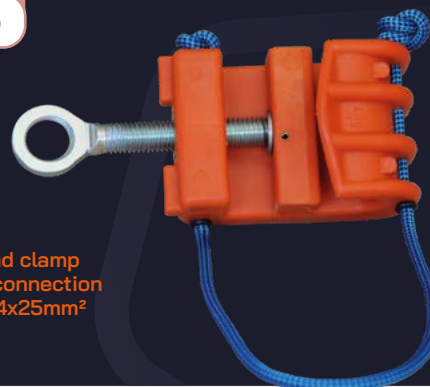

Insulated hand clamp for handling connection cables up to 4x25mm²

/ USE

Used with an operating rope, the tightening hand allows to grab, fix or remove insulated aerial bundled cables, or to apply a mechanical tension force.

/ TECHNICAL SPECIFICATIONS

- Clamping hand consisting of :
- a C-shaped insulating body
 - a screw with a metal ring protected against corrosion
 - Ø 5mm synthetic fibre rope handle in blue/black

Ref.	Capacity	Cable	WLL	Dimensions	Weight
TM05N	11 to 23 mm	Up to 4 x 25 mm ²	80 daN (pull on the loop)	160 x 100 x 60 mm	300 g



G32DR - G32AN - G32AR - G32ST

NEW

UNWINDING ROLLERS



G32DR

• Protects cables when passing through corners.



G32AN

• Protects cables from friction on sharp edges.



G32AR



G32ST

• Protects cables from friction on sharp edges.

/ G32DR

STRAIGHT UNWINDING ROLLERS

/ USE

Roller for straight unwinding of cables on the ground or in trenches.

/ TECHNICAL SPECIFICATIONS

Very robust frame. Roller Ø76mm.
Roller mounted on ball bearings.

Ref.	Cable Ø	WLL	Dimensions	Weight
G32DR135	135 mm max	200 daN	300 x 240 x 250 mm	3,6 kg

For other dimensions, please contact us.

/ G32AN

CORNER UNWINDING ROLLERS

/ USE

Roller for turns unwinding of cables on the ground or in trenches.

/ TECHNICAL SPECIFICATIONS

Very robust frame.
Roller mounted on ball bearings.
Roller Ø76mm.

Ref.	Cable Ø	WLL
G32AN135	135 mm max	Horizontal : 400 - Vertical : 200 daN
Dimensions		Weight
510 x 370 x 375 mm		10,5 kg

/ G32AR

EDGE UNWINDING ROLLERS

/ USE

Roller for unwinding cables at the "stair nosing".

/ TECHNICAL SPECIFICATIONS

Very robust frame, 3 rollers mounted on ball bearings. Rollers Ø76mm.
Radius of curvature downwards 700mm.

Ref.	Cable Ø	WLL	Dimensions	Weight
G32AR160	160 mm max	300 daN	490 x 240 x 400 mm	9 kg

For other dimensions, please contact us.

/ G32ST

REEL RUN OFF ROLLERS

/ USE

Rollers for centering cables when running off the reel.

/ TECHNICAL SPECIFICATIONS

Very robust frame.

Ref.	Cable Ø	WLL
G32ST160	200 mm max	200 daN
Dimensions		Weight
1000 x 510 x 480 mm		13,5 kg



Simple wire clamp with self-tightening cam for effortless installation.

Lightweight and equipped with a shackle.



T47

WIRE ROPE GRIPPER

/ USE

For use on overhead power line networks, to take up load or maintain tensional force while awaiting adjustment.

/ TECHNICAL SPECIFICATIONS

- Aluminium alloy body.
- Grooved cam, spring loaded.

Ref.	Cable diameter	WLL	Weight
T47PT43	6 - 8 mm	400 kg	290 g
T47PT44	7 - 15 mm	600 kg	550 g
T47PT45	14 - 18 mm	800 kg	610 g

Tensioner very robust made of forged steel.



Galvanised steel for protection against corrosion.

T51

PARALLEL JAWS TENSIONER

/ USE

Mechanical tensioner used to apply traction forces to copper, aluminium and steel wires.

Ref.	WLL	Ø Min - Max	Cables	Weight
T51D1-5	500 daN	1 - 5 mm	1 - 16 mm ²	0,25 kg
T51D3-9	1000 daN	3 - 9 mm	9 - 45 mm ²	0,85 kg
T51D4-12	1700 daN	4 - 12 mm	16 - 75 mm ²	1,20 kg
T51D6-18	3000 daN	6 - 18 mm	25 - 180 mm ²	1,85 kg
T51D10-28	3500 daN	10 - 28 mm	50 - 240 mm ²	3,80 kg

/ G18A - G18C - G18AC

OUR SELECTION



CABLE GRIP WITH STEEL JAWS

/ USE

Application of overhead power line networks Aluminium, Aluminium Alloy or Alu-Steel (Al, AAC, AAAC, ACSR, ...).

- Steel cable grip with parallel jaws.
- Movable jaw with fine grooves for aluminium cables.
- Wide range of cable diameters.
- Safety catch to prevent the cable from coming out of the jaws.

/ TECHNICAL SPECIFICATIONS

Wire grip made of steel protected against corrosion. Equipped with a spring to tighten the cable. Large hanging ring.



WLL
1000 DAN



WLL
2000 DAN



G18A

Ref.	Cable Ø	Clamping Length	Capacity Aluminium	WLL	Weight
G18A1T5-22	5-22 mm	60 mm	16 - 288 mm ²	1000 daN	1,4 kg
G18A2T5-25	5-25 mm	110 mm	16 - 366 mm ²	2000 daN	2,1 kg
G18A2T16-32	16-32 mm		147 - 612 mm ²		2,3 kg

G18C

Ref.	Cable Ø	Tightening Length	Capacity Copper	WLL	Weight
G18C1T5-22	5-22 mm	60 mm	16-300 mm ²	1000 daN	1,4 kg
G18C2T5-25	5-25 mm	110 mm	16-370 mm ²	2000 daN	2,1 kg
G18C2T16-32	16-32 mm		150-600 mm ²		2,3 kg

G18AC

Ref.	SWL	Min-Max	Cable	Jaw length	Hanging eye	Weight
G18AC2T5-16AD	2000 daN	Ø 5-16 mm	16-148 mm ²	100 mm	32 mm	1,7 kg
G18AC2T5-25AD		Ø 5-25 mm	16-366 mm ²	110 mm		2,1 kg



Aluminium alloy cable clamp for optimum weight



G10 - G12 - G08 - G09

CABLE CLAMPS WITH ALUMINIUM ALLOY JAWS

/ USE

Application for overhead power line networks. Allows traction to be applied by distributing the clamping force over the entire length of the jaws.

/ TECHNICAL SPECIFICATIONS

- 2 versions:
 - Aluminium cable clamp for non-insulated cables.
 - Plastic-coated cable clamp for insulated cables (e.g. ABC cables).

Ref.	Cable Ø	Length	Specificity	Capacity al	LV capacity	MV capacity	WLL	Weight
G10	6-14 mm	160 mm	Aluminium jaws	22-117 mm ²	-	-	800 daN	1,6 kg
G12	6-13,5 mm		Epoxy coated jaws	-	ABC with messenger 54.6 or 70mm ²	-		
G08	10-20 mm	175 mm	Aluminium jaws	59,7-228 mm ²	-	-	1 400 daN	4,1 kg
G09			Epoxy coated jaws	-	ABC with messenger 54.6 or 70mm ²	ABC with messenger 50 mm ²		



Robust cable clamp with steel body



Aluminium jaws to suit the cable diameter.

G15

STEEL CABLE GRIPS WITH INTERCHANGEABLE JAWS

/ USE

Application for overhead power line networks. Allows traction to be applied by distributing the clamping force over the entire length of the jaws.

/ TECHNICAL SPECIFICATIONS

- Aluminium cable clamp for non-insulated cables.
- Anchor shackle to apply the tensile force.
- Supplied without jaws.

Ref.	WLL	Weight	Jaws reference	Min-max	Cables	Jaw lenght
G15	2 500 daN	7 kg	G15F170-185	17-18,5 mm	170-200 mm ²	280 mm
			G15F185-200	18,5-20mm	200-240 mm ²	
			G15F200-215	20-21,5 mm	240-280 mm ²	
			G15F215-230	21,5-23 mm	280-320 mm ²	

For other dimensions, please contact us.



An accessory that keeps the insulator chain under stress while adjusting the conductor tension.



EA4BS11

ANCHORING STIRRUP

STANDARDS

COMPLIES WITH FT HTA 530

/ USE

Used to anchor behind the ball socket of an insulator and apply tension to the conductor. Used with a hoist to take up the tension.

/ TECHNICAL SPECIFICATIONS

- Designed to fit between the NTI rod insulator and the ball socket.

Ref.	WLL	Length	Weight
EA4BS11	1 300 daN	350 mm	2,5 kg



Single loop
with crimped sleeve



C86

PULLING SLEEVE OR CABLE PULLER IN GALVANIZED STEEL

/ USE

Cable pulling socks for pulling insulated or bare cables.
Used for unwinding cables on pulleys or ground rollers.

/ TECHNICAL SPECIFICATIONS

- Single loop closed pulling socks.
- Sock made of galvanised steel cables.

Ref.	Min-max	Breaking load	Lenght engaged	Ø loop	Weight
C86D8-15	Ø 8-15 mm	1.100 daN	365 mm	Ø4 mm	0.07 kg
C86D15-25	Ø 15-25 mm	2.500 daN	560 mm	Ø6 mm	0.19 kg
C86D25-45	Ø 25-45 mm	3.800 daN	660 mm	Ø8 mm	0.32 kg
C86D45-60	Ø 45-60 mm	7.800 daN	665 mm	Ø9 mm	0.66 kg
C86D60-80	Ø 60-80 mm	8.900 daN	760 mm		0.81 kg
C86D80-100	Ø 80-100 mm		900 mm		1.2 kg

Note: the breaking load is not the working load limit. It is necessary to apply a safety factor.

Model C85D12-17 specifically
designed for bundled cables
messenger wire.



C85

PULLING SLEEVE OR CABLE PULLER IN GALVANIZED STEEL

/ USE

Cable pulling socks for pulling insulated or bare cables.
Model C85D12-17 specific for pulling messenger wires
of aerial bundled cables LV and MV.
Ideal for unwinding cables on pulleys or ground rollers.

/ TECHNICAL SPECIFICATIONS

- Closed single loop cable pulling socks.
- Ligated thimble loop for improved flexibility.
- Brazed sock end for better strength.
- Sock made of galvanised steel cables.

Ref.	Min-max	Breaking load	Lenght engaged	Ø loop	Weight
C85D10-15	Ø 10-15 mm	790 daN	300 mm	Ø6 mm	0.07 kg
C85D12-17	Ø 12-17 mm	2.100 daN	400 mm		0.14 kg
C85D15-20	Ø 15-20 mm	1.500 daN	360 mm	Ø8 mm	0.13 kg
C85D18-25	Ø 18-25 mm		465 mm		0.14 kg
C85D23-30	Ø 23-30 mm	2.300 daN	550 mm		0.23 kg

Note: the breaking load is not the working load limit. It is necessary to apply a safety factor.



Cable puller with ligated
double thimble loops.



C90

DOUBLE LOOP PULLING SLEEVES OR CABLE PULLER IN GALVANISED STEEL

/ USE

Cable puller designed for pulling electrical cables
from overhead networks.

/ TECHNICAL SPECIFICATIONS

- Cable puller in galvanised steel.
- Open end with double loop.

Ref.	Min-max	Breaking load	Length engaged	Weight
C90D18-25	Ø 18-25 mm	1500 daN	465 mm	0.28 kg
C90D23-30	Ø 23-30 mm	2300 daN	475 mm	
C90D30-38	Ø 30-38 mm	2300 daN	500 mm	
C90D35-43	Ø 35-43 mm	4900 daN	525 mm	0.52 kg

Note: the breaking load is not the working load limit. It is necessary to apply a safety factor.



C91 NEW

PULLING SLEEVE OR CABLE PULLER IN POLYAMIDE

Open ended cable puller with large flexible loop for use on the bundled in combination with C85D12-17.



/ USE

Cable puller designed for the aerial pulling of bundled cables with messenger wire.

/ TECHNICAL SPECIFICATIONS

- Cable pulling sock built with polyamide wires.
- Single flexible loop.
- Open end to make it pass through.

Ref.	Min. - max.	Breaking load	Length	Weight
C91D25-32	Ø 25 to 32 mm	850 daN	550 mm	60 g
C91D32-43	Ø 32 to 43 mm	1300 daN	650 mm	130 g
C91D40-50	Ø 40 to 50 mm		725 mm	140 g
C91D42-55	Ø 42 to 55 mm		750 mm	220 g
C91D65-75	Ø 65 to 75 mm	2140 daN	1000 mm	340 g
C91D75-85	Ø 75 to 85 mm	2850 daN	1300 mm	500 g
C91D85-100	Ø 85 to 100 mm		1400 mm	600 g

/ AERIAL BUNDLE CABLE STRINGING SET

Cable pulling sock recommended for use on cable bundle		
Network	Cable bundle	Recommended ref.
LV	3 × 25 mm ² + (N) 54,6 mm ² à 3 × 35 mm ² + (N) 54,6 mm ²	C91D25-32
	3 × 50 mm ² + (N) 54,6 mm ² à 3 × 70 mm ² + (N) 70 mm ²	C91D32-43
		C91D40-50
	3 × 150 mm ² + (N) 70 mm ²	C91D42-55
MV	3 × 50 mm ² + (P) 50 mm ² à 3 × 95 mm ² + (P) 50 mm ²	C91D65-75
	3 × 150 mm ² + (P) 50 mm ²	C91D75-85
	3 × 240 mm ² + (P) 50 mm ²	C91D85-100



Composition of a pulling set

Ref.	Description	Destination
C85D12-17	Galvanised steel pulling sock Ø12-17mm	Pulling of neutral or messenger
C91D...	Polyamide pulling sock adapted to Ø	Holding of cables bundle extremity
E41D34R6000	Swivel Ø34mm BL:6000daN	Rotation freedom during pulling
C85D12-17	Galvanised steel pulling sock Ø12-17mm for fixing on pulling rope/cable extremity	



Clevis swivel



E41

STRINGING SWIVELS

/ USE

Swivel to allow rotation of the ropes when pulling.

/ TECHNICAL SPECIFICATIONS

- Steel swivel on bronze ring or ball bearing system.

Ref.	Outside Ø	Length	Clevis opening	BR (breakage)	Weight
E41D16R1700	16 mm	70 mm	8 mm	1.700 daN	0.10 kg
E41D22R4000	22 mm	88 mm	10 mm	4.000 daN	0.23 kg
E41D34R6000	34 mm	122 mm	16 mm	6.000 daN	0.52 kg
E41D38R9000	38 mm			9.000 daN	0.69 kg



TC155

INSULATING
POLYAMIDE
ROPE TIE



/ USE

Tie designed to hang a TP10 rope hoist or a TP90 pulley block in order to apply tensioning force to conductors of a LV or MV network.

/ TECHNICAL SPECIFICATIONS

- Made of Ø 16 mm synthetic rope.
- Thickened 14 cm loops at each end with heatshrinkable chains.
- 14 cm spliced loops at both ends covered with heatshrink.

Ref.	WLL	Length	Weight
TC155	300 daN	1 m	250 g

E27

CHAIN SLING



/ USE

Used for lifting transformers.

/ TECHNICAL SPECIFICATIONS

- 2 hooks with safety latch.
- WLL: 2.8 t (0 to 45°)
- WLL: 2.0 t (45° to 60°)

Ref.	WLL	Length	Weight
E27	2000 (<60°) daN	1 m	6,4 kg

E35

STEEL
SLING WITH
SLEEVED
THIMBLED
LOOPS



/ USE

Approved sling for lifting with a safety factor of 5:1.

/ TECHNICAL SPECIFICATIONS

- Galvanised steel cable sling.

Ref.	WLL	Length	Cable (mm)	Weight
E35N14T08M	1,4 t	0,8 m	Ø 12	0,9 kg
E35N14T12M		1,2 m		1,1 kg
E35N14T2M		2 m		1,5 kg
E35N14T3M		3 m		2 kg
E35N27T08M	2,7 t	0,8 m	Ø 16	1,9 kg
E35N34T12M	3,4 t	1,2 m	Ø 18	2,9 kg
E35N34T2M		2 m		3,8 kg
E35N34T3M		3 m		4,9 kg
E35N52T3M	5,2 t	3 m	Ø 22	5,2 kg

E25

POLYESTER ROUND SLING

STANDARDS

EN 1492-2

/ USE

Round sling with safety factor 7:1.
Dedicated to lifting loads. For concrete applications, a protective sheath is required.

/ TECHNICAL SPECIFICATIONS

- 100% high tenacity polyester.
- Label: identification, information, certificate, traceability.
- Reinforced sheath.

Estrope polyester									
WLL and color code	1.000 kg	2.000 kg	3.000 kg	4.000 kg	5.000 kg	6.000 kg	8.000 kg	10.000 kg	
0,5 m	E25N1T05M	E25N2T05M	E25N3T05M						
1,0 m	E25N1T1M	E25N2T1M	E25N3T1M	E25N4T1M	E25N5T1M				
1,5 m	E25N1T15M	E25N2T15M	E25N3T15M	E25N4T15M	E25N5T15M				
2,0 m	E25N1T2M	E25N2T2M	E25N3T2M	E25N4T2M	E25N5T2M	E25N6T2M			
2,5 m	E25N1T25M	E25N2T25M	E25N3T25M	E25N4T25M	E25N5T25M	E25N6T25M	E25N8T25M		
3,0 m	E25N1T3M	E25N2T3M	E25N3T3M	E25N4T3M	E25N5T3M	E25N6T3M	E25N8T3M	E25N10T3M	
4,0 m	E25N1T4M	E25N2T4M	E25N3T4M	E25N4T4M	E25N5T4M	E25N6T4M	E25N8T4M	E25N10T4M	

E26

POLYESTER FLAT WEBBING SLING

STANDARDS

EN 1492-1

/ USE

Lifting sling with safety factor 7:1.
Dedicated to lifting loads. For concrete applications, a protective sheath is required.

/ TECHNICAL SPECIFICATIONS

- 100% high tenacity polyester.
- Label: identification, information, certificate, traceability.

Polyester flat webbing sling						
WLL and color code	1.000 kg	2.000 kg	3.000 kg	4.000 kg	5.000 kg	6.000 kg
Length / Webbing width	38 mm	60 mm	90 mm	120 mm	140 mm	170 mm
1,0 m	E26N1T1M	E26N2T1M				
1,5 m	E26N1T15M	E26N2T15M	E26N3T15M			
2,0 m	E26N1T2M	E26N2T2M	E26N3T2M	E26N4T2M	E26N5T2M	
2,5 m	E26N1T25M	E26N2T25M	E26N3T25M	E26N4T25M		
3,0 m	E26N1T3M	E26N2T3M	E26N3T3M	E26N4T3M	E26N5T3M	E26N6T3M
4,0 m	E26N1T4M	E26N2T4M	E26N3T4M	E26N4T4M	E26N5T4M	E26N6T4M
5,0 m	E26N1T5M	E26N2T5M	E26N3T5M	E26N4T5M	E26N5T5M	E26N6T5M
6,0 m	E26N1T6M	E26N2T6M	E26N3T6M	E26N4T6M	E26N5T6M	E26N6T6M



C319

SEMI-STATIC POLYAMIDE BRAIDED ROPE

/ USE

Suitable for work at height, climbing, hoisting.

/ TECHNICAL SPECIFICATIONS

- Ø 10.5 mm.
- Very robust polyamide.

Ref.	Rope diam.	Length	Packaging	Weight
C319D10L050	10.5 mm	50 m	Roll of rope	3,2 kg
C319D10L060		60 m		3,9 kg
C319D10L100		100 m	On reel	6,5 kg
C319D10L200		200 m		13 kg

Manufactured according to EN ISO 1346



C320

4-STRAND POLYPROPYLENE ROPE

/ USE

Service rope.

/ TECHNICAL SPECIFICATIONS

- Made of UV treated yarns.
- 4 strands

Ref.	Rope Ø	Length	Breaking load	Weight
C320D10L100	10 mm	100 m	1 390 kg	4,5 kg
C320D12L025	12 mm	25 m	1 940 kg	1,6 kg
C320D12L100		100 m		6,5 kg
C320D14L025	14 mm	25 m	2 600 kg	2,2 kg
C320D14L100		100 m		9 kg
C320D16L100	16 mm	100 m	3 330 kg	11,5 kg
C320D18L100	18 mm		4 510 kg	15 kg
C320D20L100	20 mm		5 050 kg	18 kg

Flexible and resistant polyamide rope.



C325

POLYAMIDE BRAIDED ROPE 8 STRANDS

/ USE

Rope suitable for pulling work and for fitting to hoists.
C325D10L025 suitable for TP10 hoist.
C325D12L100 suitable for TP550 hoist.

/ TECHNICAL SPECIFICATIONS

- High density polyamide rope with UV protection.

Ref.	Rope Ø	Length	Breaking resistance	Weight
C318D03L100	3 mm	100 m	180 kg	0,5 kg
C325D06L100	6 mm		600 kg	1,7 kg
C325D08L100	8 mm		1 100 kg	4 kg
C325D10L100	10 mm		1 600 kg	5,5 kg
C325D12L100	12 mm		2 400 kg	8,5 kg
C325D14L100	14 mm	25 m	2 800 kg	10 kg
C325D10L025	10 mm		1 600 kg	1,4 kg
C325D12L050	12 mm		2 400 kg	4,3 kg
C325D14L250	14 mm	250 m	2 800 kg	25 kg
C325D16L300	16 mm	300 m	3 500 kg	42 kg

M120

HIGH STRENGTH CHAIN SHACKLE

NEW



/ USE

Compact shackle used for lifting loads.

/ TECHNICAL SPECIFICATIONS

Chain shackle with screwed pin.
Shackle in galvanised forged steel.



Ref.	WLL	Ø	A	B	Weight
M120D08	500 kg	8 mm	13 mm	22 mm	40 g
M120D11	1000 kg	11,2 mm	17 mm	31 mm	130 g
M120D12	1500 kg	12,7 mm	18 mm	36 mm	190 g
M120D16	2000 kg	15,8 mm	20 mm	41 mm	290 g
M120D19	3250 kg	19 mm	27 mm	51 mm	580 g
M120D22	4750 kg	22 mm	32 mm	63 mm	930 g

For other dimensions, please contact us.

M220

HIGH STRENGTH ANCHOR SHACKLE

NEW



/ USE

Compact shackle used for lifting loads.

/ TECHNICAL SPECIFICATIONS

Anchor shackle with screwed pin.
Shackle in galvanised forged steel.



Ref.	WLL	Ø	A	B	Weight
M220D08	500 kg	8 mm	13 mm	29 mm	50 g
M220D11	1000 kg	11,2 mm	17 mm	36 mm	150 g
M220D12	1500 kg	12,7 mm	18 mm	43 mm	200 g
M220D16	2000 kg	15,8 mm	20 mm	47 mm	300 g
M220D19	3 250 kg	18,6 mm	27 mm	60 mm	650 g
M220D22	4 750 kg	22 mm	32 mm	71 mm	1 kg
M220D25	6 500 kg	25 mm	37 mm	84 mm	1,5 kg

For other dimensions, please contact us.



ESSENTIAL

POT150


NEW

LIFTING BRACKET TO BE POSITIONED
AT TOP OF ELECTRICAL POST

STANDARDS

MACHINERY DIRECTIVE 2006/42/EC

Delivered without rope and without hook.

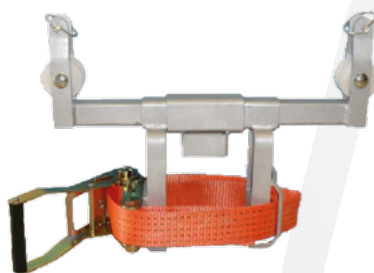

- Allows the technician to work in a better position.
- Saves time and therefore reduces operation and shutdown time.



- Relieves forces during aerial work.
- Allows lifting forces to be applied from the ground.

/ USE

Lifting bracket that can be positioned on top of posts.
Can be fixed to the top of wooden or concrete posts up to 370mm width.
Used for the following operations :

- Lifting of LV aerial bundle line/cable for clamping.
- Applying a lifting force from the top of the post.
- Applying a lifting force on a crossbar.
- Lifting equipment to a technician positioned at height.



Positioning on top of wooden post



Readjusting the height of a post fitting



Setting height of a crossbar

/ TECHNICAL SPECIFICATIONS

Product :

- Zinc plated welded steel frame.
- Clamping on the support by means of a ratchet strap.
- Centering on the head of the support can be adjusted and therefore transfer of the forces in the axis of the post.
- Transfer of the mechanical force by 2 Teflon guide pulleys.

Ref.	Post width	WLL	Dimensions	Weight
POT150	370 mm max	150 kg	550 x 230 x 325 mm	6,8 kg

PREMIUM

BEHRALIFT

INNOVATION

TEMPORARY SUPPORT FOR THE INSTALLATION/
REMOVAL OF MV BUNDLED CONDUCTORS

- The installation or removal of the bundled conductor can be easily carried out on uneven ground.
- The use of complex and expensive equipment is no longer necessary.
- This device is the only solution to hoist the line from the top of the pole.
- The jib has been designed so that it can be used on all three types of existing supports (Dervaux, Malico, FAV).




/ USE

The BEHRALIFT device is designed to hook or unhook MV aerial bundled cables at the top of wooden poles during maintenance work or when the conductor falls due to bad weather.

/ TECHNICAL SPECIFICATIONS

WLL : 400 daN

Ref.	WLL	Dimensions	Weight
BEHRALIFT	400 daN	730 x 310 x 310 mm	8 kg





PREMIUM

LP-LIFTPLAQ

INNOVATION

MANHOLE MAGNETIC LIFTER WITH WHEELS

- **Ergonomics:** straight back, bent legs and reduced effort.
- **Safety:** no contact between hands and plates.
- **Use on different types of plates and pads.**



/ USE

Tool specially designed for the handling of plates and manhole covers. Very versatile, it can be used on: round, rectangular, triangular, BV Enedis, K2C, hinged, partially covered with concrete or bitumen, ...

/ TECHNICAL SPECIFICATIONS

- Frame : painted steel with 2 solid wheels Ø160mm
- Accessories: Handle with chisel tip and bronze weight.
- Very powerful permanent magnet.
- Magnet ejector.
- Magnet cover provided.

/ ACCESSORIES

Ref.	WLL	Dimensions	Weight
LP-LIFTPLAQ	110 kg	1000 x 200 x 350 mm	18 kg

Ref.	Description
LP-ERT10	Pair of wheels width expanders 110cm (2x55cm)
LP-KIT4	4-leg chain sling with hooks
LP-TLIFT	T-wrench for manhole with rectangular central hole
LP-R160X2	Set of 2 wheels Ø160mm
LP-R260ACX2	Set of 2 puncture-proof wheels Ø260mm

ESSENTIAL

LP-MINI-PLUS

INNOVATION

MANHOLE MAGNETIC MANUAL LIFTER

- **Powerful, light and compact.**
- **Safety:** no hand to manhole contact (risk of pinching or cutting).
- **Use on different types of manholes and pads.**
- **Adjustable telescopic handle adapts to the size of the operator, which helps to respect the correct gestures and postures.**

/ USE

Tools for handling manholes covers and pads without touching them. Professional dry and wet underground network applications. They allow a powerful grip while reducing the risk of musculoskeletal disorders.

Ref.	Magnet	Height	Dimensions	Weight
LP-MINI-PLUS	Permanent and powerful 250 x 155 mm magnet 590 kg of grip in optimal condition	Adjustable : 72 / 79 / 85 cm	39 x 15,5 x 50 cm retracted handle	4 kg



MARTAP

PLATE REMOVING HAMMER

/ USE

Hammer used to loosen, lift and remove almost all chamber covers (metal or concrete). Used separately or in pairs, as required.

/ TECHNICAL SPECIFICATIONS

- Curved end with bar for blind holes.
- Straight end for through holes.
- Bronze striking plate.



Ref.	Dimensions	Weight
MARTAP	1 050 x 270 x 40 mm	5,5 kg



P101

PLATE REMOVING HAMMER

/ USE

Pliers designed to lift, open and move cast iron manholes and plates.

/ TECHNICAL SPECIFICATIONS

Clamp made of special steel.

Ref.	WLL	Dimensions	Weight
P101	30 kg	630 x 245 x 50 mm	2,9 kg




/ A045 – A060 – A090

NEW

FIBER GLASS DUCT ROD

- High strength fibreglass rod with polypropylene outer sheath.
- Robust reel.



/ A045

Ø 4.5MM FIBER GLASS DUCT ROD

/ USE

Fiber glass duct rod for Ø 40-60 mm sheaths.
Recommended bending radius >310 mm.

/ TECHNICAL SPECIFICATIONS

- Fiber glass duct mounted on rotating reel.
- Painted steel reel equipped with a brake.
- Ø reel: 320 mm.
- Threaded end with eyelet head.

Ref.	Ø	Length	End Fitting	Breaking	Dimensions	Weight
A045L060TDN	4,5mm	60 m	M5	170 daN traction	360 x 190 x 450 mm	4,1 kg

For other dimensions, please contact us.



/ A060

Ø 6MM FIBER GLASS DUCT ROD

/ USE

Fiber glass duct for Ø 50-80 mm sheaths.
Recommended bending radius >400 mm.

/ TECHNICAL SPECIFICATIONS

- Fiber glass duct mounted on rotating reel.
- Painted steel reel equipped with a brake and 2 wheels. Ø reel: 520 mm.
- Threaded end with eyelet head.

Ref.	Ø	Length	End Fitting	Breaking	Dimensions	Weight
A060L060TDN	6 mm	60 m	M6	230 daN traction	540 x 250 x 640 mm	7,7 kg
A060L100TDN		100 m				9,5 kg

For other dimensions, please contact us.



/ A090

Ø 9MM FIBER GLASS DUCT ROD

/ USE

Fiber glass duct for Ø 65-125 mm sheaths.
Recommended bending radius >Ø 620mm.

/ TECHNICAL SPECIFICATIONS

- Fiber glass duct mounted on rotating reel.
- Painted steel reel equipped with a brake.
- Ø reel: Ø750mm.
- Threaded end with eyelet head.

Ref.	Ø	Length	End Fitting	Breaking	Dimensions	Weight
A090L100TD2RN	9 mm	100 m	M12	340 daN traction	780 x 400 x 820 mm	19,3 kg
A090L150TD2RN		150 m				24 kg
A090L200TD2RN		200 m				28,5 kg

For other dimensions, please contact us.



TE40 - TE45 - TE50

ANCHOR CLAMP

STANDARDS

FT BT 320B

/ USE

Clamp to be tightened on the structure to create an anchoring point.
Ring screw tightening to be used with hooked poles.

Ref.	Version	Tightening capacity	Dimensions	Weight
TE40EAC	Round bar mounting	Ø 26 mm	140x100x65 mm	450 g
TE45EAD	Large plate mounting	40 to 60 mm - thickness 8 to 10 mm	100x95x70 mm	590 g
TE50EAS	Small plate mounting	35 to 40 mm - thickness 7 to 8 mm	100x90x50 mm	360 g



T89

LASHING STRAP WITH RATCHET TENSIONER

STANDARDS

EN 12195-2

/ TECHNICAL SPECIFICATIONS

Device equipped with :
- 50mm wide blue webbing 100% polyester - anchor fitting n° 1
- double safety ratchet tensioner

Ref.	Lashing capacity	Bare strap failure	Length	Strap width	Weight
T89	2000 daN	6000 daN	8 m	50 mm	0,3 kg



TE13AUD

SINGLE SECTION INSULATING LADDER

STANDARDS

EN 50528 / EN 131-1 / EN 131-2

- Rugged and reliable construction: the ladders have a unique screw assembly system, allowing the replacement of rungs.
- Improved ergonomics through the use of rectangular composite profiles with rounded edges.
- Tri-oval shape rungs, flat top, for a safer foot support.



/ TECHNICAL SPECIFICATIONS

- Anti-slip rubber feet.
- Ribbed anti-slip aluminium rungs, tri-oval shape, inclined to have an horizontal foot position.
- Anatomic 250 mm distance between rungs making it possible to support the knee and make work safer and more comfortable.
- The uprights are made of fibreglass/polyester composite material.
- The material offers high mechanical performance.
- A fibreglass surface finish makes them more efficient and improves UV resistance.
- In addition to its insulation qualities, the material is non-rotting and lightweight for user convenience.
- The optional V-shaped pole support has an anti-slip rubber profile.

Factory assembled accessories
(integrated wall wheels)

				Option reference	OPE802130	OPE802152	OPE802065	OPE802073
				Option description	Pair of inner clam cleats	Rope 6m	Pole support E320V	Compensating stabiliser 70x30
Reference	Length	Weight	Nbr rungs					
TE13AUD 2M	2 m	6 kg	7		✓	✓	✓	✓
TE13AUD 3M	3 m	8,5 kg	11		✓	✓	✓	✓
TE13AUD 4 M	4 m	11,5 kg	15		✓	✓	✓	✓



TE17AUD - TE12AUD

ROPE-OPERATED INSULATING EXTENSION LADDER WITH 2 OR 3 SECTIONS

STANDARDS

EN 50528 / EN 131-1 / EN 131-2



Option: V-shaped pole support, factory installed



Option : factory-fitted cleats, supplied with a halyard rope



Standard wall wheels, factory assembled



Option: compensating stabiliser, factory assembled



TECHNICAL SPECIFICATIONS

- Automatically engaging aluminium double-safety rung lock.
- Ø 10 mm extension rope, strength 1800 daN.
- Anti-slip rubber feet.
- Guided by nylon-coated low-friction guides.
- Ribbed anti-slip aluminium rungs, tri-oval shape, inclined to have an horizontal foot position.
- Anatomic 250 mm distance between rungs making it possible to support the knee and make work safer and more comfortable.
- Standard wall wheels make it easier to extend the ladder and protect the fibreglass surface.
- The uprights are made of fibreglass/polyester composite material.
- The material offers high mechanical performance.
- A fibreglass surface finish makes them more efficient and improves UV resistance.
- In addition to its insulation qualities, the material is non-rotting and lightweight for user convenience.
- The optional V-shaped pole support has an anti-slip rubber profile.

TE17AUD

Factory assembled accessories
(integrated wall wheels)

				Option reference	OPE802130	OPE802152	OPE802153	OPE802154	OPE802065	OPE802073	OPE802074	OPE802143
				Option description	Pair of inner clam cleats	Rope 6m	Rope 8m	Rope 10m	Pole support E320V	Compensating stabiliser 70x30	Compensating stabiliser 85x30	Compensating stabiliser 110x30
Reference	Folded length	Open length	Weight	Nbr rope								
TE17AUD250M	2,5m	4m	16 kg	1	✓	✓			✓	✓		
TE17AUD3M	3m	5m	18 kg		✓	✓			✓	✓		
TE17AUD 3.50M	3,5m	6m	19 kg		✓	✓			✓	✓		
TE17AUD4M	4m	7m	25 kg		✓		✓		✓		✓	
TE17AUD450M	4,5m	8m	29 kg		✓		✓		✓		✓	
TE17AUD5M	5m	9m	35 kg		✓		✓		✓		✓	
TE17AUD550M	5,5m	10m	39 kg		✓			✓	✓		✓	
TE17AUD6M	6m	10,5m	43 kg		✓			✓	✓			✓
TE17AUD7M	7m	12m	48 kg		✓			✓	✓			✓

TE12AUD

Factory assembled accessories
(OPTIONAL wall wheels)

					Option reference	OPE802130	OPE802153	OPE802154	OPE802155	OPE802071	OPE802065	OPE802074	OPE802143
					Option description	Pair of inner clam cleats	Rope 8m	Rope 10 m	Rope 12 m	Pole support E300V	Pole support E320V	Compensating stabiliser 85x30	Compensating stabiliser 110x30
Reference	Folded length	Open length	Interm. weight	Weight	Nbr rungs	Nbr rope							
TE12AUD250M	2,5m	5,5m	4m	25 kg	3 x 9	1	✓	✓		✓		✓	
TE12AUD3M	3m	7m	5m	28 kg	3 x 11		✓	✓		✓		✓	
TE12AUD350M	3,5m	8,5m	6m	31 kg	3 x 13		✓	✓		✓		✓	
TE12AUD425M	4,25m	10,25	7,25m	45 kg	3 x 16	2	✓		✓		✓	✓	
TE12AUD6M	6m	14m	10m	75 kg	3 x 23		✓		✓		✓		✓



TE22AUD

MANUALLY-OPERATED INSULATING EXTENSION LADDER WITH 2 SECTIONS

STANDARDS

EN 50528 / EN 131-1 / EN 131-2

- Rugged and reliable construction.
- The rungs and uprights are repairable.
- New tri-oval shape rungs.



/ USE

Ladders for live working below 1000V AC / 1500V DC

/ TECHNICAL SPECIFICATIONS

- Anti-slip rubber feet.
- Guided by nylon-coated low-friction guides.
- Ribbed anti-slip aluminium rungs, tri-oval shape, inclined to have an horizontal foot position.
- Anatomic 250 mm distance between rungs making it possible to support the knee and make work safer and more comfortable.
- Standard wall wheels make it easier to extend the ladder and protect the fibreglass surface.
- The uprights are made of fibreglass/polyester composite material.
- The material offers high mechanical performance.
- A fibreglass surface finish makes them more efficient and improves UV resistance.
- In addition to its insulation qualities, the material is non-rotting and lightweight for user convenience.
- The optional V-shaped pole support has an anti-slip rubber profile.

> OPTIONAL ACCESSORIES

Description
Cleats and rope
Compensating stabilizer
V-shaped pole support

Factory assembled accessories
(OPTIONAL wall wheels)

Reference	Folded length	Open length	Weight	Nbr rungs	Option reference	OPE802130	OPE802152	OPE802065	OPE802073
					Option description	Pair of inner clam cleats	Rope 6m	Pole support E320V	Compensating stabiliser 70x30
TE22AUD2M	2m	3,25m	12 kg	2 x 7		✓	✓	✓	✓
TE22AUD25M	2,5m	4m	15 kg	2 x 9		✓	✓	✓	✓
TE22AUD3M	3m	5m	17 kg	2 x 11		✓	✓	✓	✓



TE13VAL / TE17VAL / TE12VAL / TE22VAL

INSULATING LADDERS

STANDARDS

EN 50528 / EN 131-1 / EN 131-2

TECHNICAL SPECIFICATIONS

- Anti-slip rubber feet.
- Ribbed anti-slip aluminium rungs, tri-oval shape, inclined to have an horizontal foot position.
- Anatomic 250 mm distance between rungs making it possible to support the knee and make work safer and more comfortable.
- The uprights are made of fibreglass/polyester composite material.
- The material offers high mechanical performance.
- A fibreglass surface finish makes them more efficient and improves UV resistance.
- In addition to its insulation qualities, the material is non-rotting and lightweight for user convenience.
- The optional V-shaped pole support has an anti-slip rubber profile.

TE13VAL

Factory assembled accessories
(OPTIONAL wall wheels)

			Option reference	OPE802130	OPE802152	OPE802065	OPE802073
			Option description	Pair of inner clam cleats	Rope 6m	Pole support E320V	Compensating stabiliser 70x30
Reference	Length	Weight	Nbr rungs				
TE13VAL2M	2 m	5,5 kg	7	✓	✓	✓	✓
TE13VAL25M	2,5 m	6,9 kg	9	✓	✓	✓	✓
TE13VAL3M	3 m	8,3 kg	11	✓	✓	✓	✓
TE13VAL35M	3,5 m	9,7 kg	13	✓	✓	✓	✓
TE13VAL4M	4 m	11 kg	15	✓	✓	✓	✓
TE13VAL5M	5 m	14 kg	19	✓	✓	✓	✓

TE17VAL

Factory assembled accessories
(integrated wall wheels)

				Option reference	OPE802130	OPE802152	OPE802153	OPE802154	OPE802065	OPE802073	OPE802074	OPE802143
				Option description	Pair of inner clam cleats	Rope 6m	Rope 8m	Rope 10m	Pole support E320V	Compensating stabiliser 70x30	Compensating stabiliser 85x30	Compensating stabiliser 110x30
Reference	Folded length	Open length	Weight	Nbr rope	Nbr rungs							
	2,5m	4m	16 kg	2 x 9	1	✓	✓		✓	✓		
TE17VAL3M	3m	5m	18 kg	2 x 11		✓	✓		✓	✓		
TE17VAL35M	3,5m	6m	19 kg	2 x 13		✓	✓		✓	✓		
TE17VAL4M	4m	7m	25 kg	2 x 15		✓		✓	✓		✓	
TE17VAL45M	4,5m	8m	29 kg	2 x 17		✓		✓	✓		✓	
TE17VAL5M	5m	9m	35 kg	2 x 19		✓		✓	✓		✓	
TE17VAL55M	5,5m	10m	39 kg	2 x 21		✓		✓	✓		✓	
TE17VAL575M	6m	10,5m	43 kg	2 x 23		✓		✓	✓			✓
TE17VAL7M	7m	12m	48 kg	2 x 27		✓		✓	✓			✓

TE12VAL

Factory assembled accessories
(OPTIONAL wall wheels)

					Option reference	OPE802130	OPE802153	OPE802154	OPE802155	OPE802071	OPE802065	OPE802074	OPE802143
					Option description	Pair of inner clam cleats	Rope 8m	Rope 10 m	Rope 12 m	Pole support E300V	Pole support E320V	Compensating stabiliser 85x30	Compensating stabiliser 110x30
Reference	Folded length	Open length	Interm. length	Weight	Nbr rungs	Nbr rope							
	2,5m	5,5m	4m	25 kg	3 x 9	1	✓	✓		✓		✓	
TE12VAL3M	3m	7m	5m	28 kg	3 x 11		✓	✓		✓		✓	
TE12VAL35M	3,5m	8,5m	6m	31 kg	3 x 13		✓	✓		✓		✓	
TE12VAL425M	4,25m	10,25	7,25m	45 kg	3 x 16	2	✓		✓		✓	✓	
TE12VAL6M	6m	14m	10m	75 kg	3 x 23		✓		✓		✓		✓



TE18AUD – TE20AUD

CONVERTIBLE INSULATING LADDER 2 AND 3 SECTIONS

STANDARDS

EN 50528 / EN 131-1 / EN 131-2

Can be used on stairs



/ USE

Ladders for live working below 1000V AC / 1500V DC

/ TECHNICAL SPECIFICATIONS

- Anti-slip rubber feet.
- Guided by nylon-coated low-friction guides.
- Ribbed anti-slip aluminium rungs, tri-oval shape, inclined to have an horizontal foot position.
- Anatomic 250 mm distance between rungs making it possible to support the knee and make work safer and more comfortable.
- Standard wall wheels make it easier to extend the ladder and protect the fibreglass surface.
- The uprights are made of fibreglass/polyester composite material.
- The material offers high mechanical performance.
- A fibreglass surface finish makes them more efficient and improves UV resistance.
- In addition to its insulation qualities, the material is non-rotting and lightweight for user convenience.
- The optional V-shaped pole support has an anti-slip rubber profile.

TE20AUD

Factory assembled accessories
(integrated wall wheels)

					Option reference	OPE802120	OPE802081	OPE802152
					Option description	Pole support TRF367V	Pair of exterior clam cleats	Rope 6M
Reference	Folded length	Open length	Weight	Nbr rungs				
TE18AUD2M	2m	3m	13 kg	2 x 7		✓	✓	✓
TE18AUD250M	2,5m	4m	16 kg	2 x 9		✓	✓	✓
TE18AUD3M	3m	5m	19 kg	2 x 11		✓	✓	✓

TE20AUD

Factory assembled accessories
(integrated wall wheels)

						Option reference	OPE802119	OPE802081	OPE802152
						Option description	Pole support TRF284V	Pair of exterior clam cleats	Rope 6M
Reference	Folded length	Open length	Intern. length	Weight	Nbr of rungs				
TE20AUD2M	2m	4m		19 kg	3 x 7		✓	✓	✓
TE20AUD250M	2,5m	5,5m	4m	23 kg	3 x 9		✓	✓	✓
TE20AUD3M	3m	6,25m	4,75m	27 kg	3 x 11		✓	✓	✓



TE10AUD

INSULATING DOUBLE SECTION ARTICULATED LADDER

STANDARDS

EN 50.528-2010 / MARKING TST-BT/ EN 131

- Work position as a stepladder or an extension ladder
- Transport handle and wheels.
- Robust and light construction thanks to ergonomic uprights with rounded edges.
- Ladder levellers for uneven surfaces - stable position to work on stairs.
- Ultra-compact for transport in small vehicles.



/ TECHNICAL SPECIFICATIONS

- Double aluminium rung. Anti-slip and tri-oval shaped rung.
- 250 mm anatomic distance between rungs.
- Repairable rungs thanks to the screw assembly system.
- 3 position hinge with automatic locking 35/180°.
- Non-slip rubber shoes with wide grooves.
- Optional V-shaped pole support with rubber profile.

Option reference	OPE802095	OPE802096	OPE802152
Option description	Pole support DF300V	Pair of inner clam cleats	Rope 6M

Reference	Folded length	Open length	Max. working height	Height of the last rung	Transport dimension	Weight			
TE10AUD108M	1,08m	1,88m	2,75m	0,75m	114 x 58 x 15 cm	9,8 kg	✓	✓	✓
TE10AUD135M	1,35m	2,42m	3m	1m	140 x 58 x 15 cm	11 kg	✓	✓	✓
TE10AUD162M	1,62m	2,95m	3,25m	1,25m	164 x 58 x 15 cm	12,8 kg	✓	✓	✓



PREMIUM

Ergonomic work platform with all regulatory guards

Easy set-up

Rugged and lightweight

Stability



TE30AUD

LIGHTWEIGHT ROLLING INDIVIDUAL PLATFORM

STANDARDS

EN 131-7

/ USE

Automatically opening ultra-light model designed to replace stepladders and combination ladders, but with a safe work platform and adjustable legs to adapt to level differences (pavements, steps). Particularly suited to work at low heights in urban environments.

Three versions are available:

- Folding version for saving storage space
- Ultra-light version for working on flat ground
- Multi-purpose version for adapting to the terrain (two telescopic front extensions and sliding rear surface)

/ TECHNICAL SPECIFICATIONS

- Patented platform opening/closing system : the two front legs that offer stability can be opened and positioned in a single movement.
- 400 x 480 mm floor with openings for better adherence.
- Uprights, extensions and work platform made of aluminium.
- Adjustable front extensions with a 30-mm pitch.
- Integrated transport wheels Ø 125 mm.
- Load capacity : 150 kg.



Ref.	Version	Nber of rungs	Platform height	Max working height	Adjustment range	Weight
TE30AUD19M	Ultralight	3	0,75 m	2,75 m	No	13 kg
TE30AUD22M		4	1 m	3 m		14 kg
TE30AUD25M		5	1,25 m	3,25 m		15 kg
TE30AUDP19M	Polyvalent	3 - 4	0,75 - 1 m	2,75 - 3 m	0 to 250 mm	18 kg
TE30AUDP22M		4 - 6	1 - 1,5 m	3 - 3,50 m	0 to 500 mm	21 kg

TE41AUD

LIGHTWEIGHT ROLLING INDIVIDUAL PLATFORM IN FIBREGLASS AND ALUMINIUM

STANDARDS

EN 131-7

/ USE

An ultra-lightweight, self-opening model designed to replace stepladders and convertible ladders but incorporating a safe workstation and adjustable legs to accommodate different levels (pavements, stairs).

Particularly suitable for low-level work in urban environments.

/ TECHNICAL SPECIFICATIONS

- Patented platform opening/closing system : the two front legs that offer stability can be opened and positioned in a single movement.
- 420 x 480 mm floor with openings for better adherence.
- Pivoting swing gate for a safe and easy access.
- Uprights and adjustable legs made of composite fibreglass polyester : non-conductive.
- Floor and swing gates made of aluminium.
- Non-slip d-shaped rungs.
- Tool holder injected in the handrail.
- Integrated transport wheels Ø 125 mm.

Intuitive and easy set-up

Lightweight patented leg cinematic



Extended guardrail for a comfortable workstation even for plus-sized people

Ref.	Number of rungs	Platform height	Max. working height	Dimensions	Weight
TE41AUD1-86M	2	0,50 m	1,50 / 2,50 m	1,86 x 0,75 x 0,22 m	12 kg
TE41AUD2-14M	3	0,75 m	1,75 / 2,75 m	2,14 x 0,75 x 0,22 m	13 kg
TE41AUD2-42M	4	1 m	3 m	2,42 x 0,75 x 0,22 m	14 kg



ESSENTIAL



TE32

INSULATED STEPLADDER

STANDARDS

EN 131 / EN 50528

/ USE

"Full-safety" stepladder with ultra-strong fibreglass stiles, insulated from low and medium voltages.

/ TECHNICAL SPECIFICATIONS

Fibreglass stiles : electrical protection against low and medium voltages up to 10 000V.

Ribbed 80-mm anti-slip steps with 250 mm spacing.

Stand larger than the climbing section.

Anti finger-pinching articulation.

Retractable large-capacity tool holder. Aluminium platform : 250 x 250 mm.

Anti-slip pads.

Max. working load : 150 kg.

Please contact us if need of spare parts or repair.

Ref.	Nbr of rungs	Platform height	Folded height	Work amplitude	Spacing	Spacing	Dimensions	Weight
TE32 3M	3	0,69 m	1,45 m	2,58 m	0,52 m	0,71 m	1 390 x 500 x 80 mm	5,9 kg
TE32 4M	4	0,92 m	1,70 m	2,81 m	0,55 m	0,87 m	1 640 x 530 x 80 mm	6,9 kg
TE32 5M	5	1,15 m	1,95 m	3,04 m	0,57 m	1,03 m	1 890 x 550 x 80 mm	8 kg
TE32 6M	6	1,38 m	2,20 m	3,27 m	0,60 m	1,20 m	2 140 x 580 x 80 mm	9,4 kg
TE32 7M	7	1,61 m	2,45 m	3,50 m	0,63 m	1,37 m	2 390 x 600 x 80 mm	11 kg

ESSENTIAL



LV LADDER KIT

LOW VOLTAGE SPLICED LADDER KIT

/ USE

For Low Voltage Live Working.
For climbing on poles, regardless of the height.
Positions line workers safely.

/ TECHNICAL SPECIFICATIONS

FiBKit made up of:

- Aluminium base with adjustable feet for adapting to ground irregularities (Ref. EB)
- Aluminium intermediate elements (Ref. EM)
- Insulating intermediate elements to keep the lineworker safe in the work area (Ref. EI)

Ref.	Description	Weight	Nbr of rungs
EB210	Metal Base element 2,10 m with adjustable feet + 2 cradles with straps	7 kg	7
EB300	Metal base element 3,00 m with adjustable feet + 2 cradles with straps	9 kg	10
EM300	Metal intermediate element 3,00 m with adjustable feet + 2 cradles with straps	8 kg	10
EM210	Metal intermediate element 2,10 m with adjustable feet + 2 cradles with straps	6 kg	7
EI120	Insulating intermediate element 1,20 m + 1 cradle with strap	7,4 kg	4
EI210	Insulating intermediate element 1,20 m + 1 cradle with strap	4,7 kg	7
EI300	Insulating intermediate element 1,20 m + 1 cradle with strap	9,5 kg	10

ESSENTIAL



MV LADDER KIT

MIDDLE VOLTAGE SPLICED LADDER KIT

/ USE

For Middle Voltage Live Working.
For climbing on poles, regardless of their height.
Positions line workers safely

/ TECHNICAL SPECIFICATIONS


FiBKit made up of:

- Aluminium base with adjustable feet for adapting to ground irregularities (Ref. EB)
- Aluminium intermediate elements (Ref. EM)
- Insulating intermediate elements to keep the lineworker safe in the work area (Ref. EI)

Ref.	Description	Weight	Nbr of rungs
EB210	Metal Base element 2,10 m with adjustable feet + 2 cradles with straps	7 kg	7
EB300	Metal base element 3,00 m with adjustable feet + 2 cradles with straps	9 kg	10
EM300	Metal intermediate element 3,00 m with adjustable feet + 2 cradles with straps	8 kg	10
EM210	Metal intermediate element 2,10 m with adjustable feet + 2 cradles with straps	6 kg	7
EI120	Insulating intermediate element 1,20 m + 1 cradle with strap	7,4 kg	4
EI210	Insulating intermediate element 1,20 m + 1 cradle with strap	4,7 kg	7
EI300	Insulating intermediate element 1,20 m + 1 cradle with strap	9,5 kg	10



VALUE

**K37218188**

CRADLE KIT FOR LV AND MV SPLICED LADDERS

/ USE

The cradle kit is designed to be fitted on spliced ladders, type ESE120, ESE210, ESE300, EI120, EI210 and EI300. Supplied in a transparent nylon bag.

/ TECHNICAL SPECIFICATIONS

The kit includes the following :

- a cradle made of synthetic material,
- 4 struts,
- 4 fastening bolts with nuts and washers.

Ref.	Dimensions	Weight
K37218188	320 x 200 x 60 mm	367

VALUE

**K37238373**

STRAP KIT FOR LV AND MV SPLICED LADDERS

/ USE

The strap kit is designed to be fitted on ESE120, ESE210, ESE300, EI120, EI210 and EI300 type spliced ladders. Supplied in a transparent nylon bag.

/ TECHNICAL SPECIFICATIONS

The kit includes the following :

- a short strap with a hook, 300 mm long
 - a long strap with a ratchet load binder, 1200 mm long
- The straps are always placed above the rung located at the level of the cradle.

Ref.	Weight
K37238373	380

ESSENTIAL

**E17NM**

ALUMINIUM HOOK LADDER

/ USE

Straight ladder for linesmen, with a pair of hooks and safety chains. The hooks fixed to the ladder uprights are also held by a steel cable going through the entire length of the uprights. This new system offers full safety. Vertical or horizontal use.

/ TECHNICAL SPECIFICATIONS

- High-strength rectangular aluminium uprights.
 - Ø 26 mm rungs, serrated, anti-slip.
 - Rung distance: 25 cm.
 - Ø 25 mm hooks
 - Hanging Ø : 250 mm.
 - Nominal load : vertical position 225 DaN / bridge position 265 DaN (for ladders 3 to 5 meters high).
 - Safe working load : 150 kg max.
 - On request, we can supply ladders in 5 and 6 meters.
- Please contact us for replacement chains.

Ref.	Height	Width	Uprights section	Dimensions	Weight
E17NM 2	2 m	38 cm	80 x 27 mm	2000 x 380 x 330 mm	14,5 kg
E17NM 3	3 m			3000 x 380 x 330 mm	16 kg
E17NM 4	4 m		94 x 27 mm	4000 x 380 x 330 mm	18,5 kg

PREMIUM


D2001

OUR SELECTION

PAIR OF CLIMBERS FOR CONCRETE POSTS

STANDARDS

TECHNICAL SPECIFICATION EDF N° ST52
FICHE EDF SPS N° B312



/ USE

Climbers are designed for climbing and working on overhead power line posts made of reinforced concrete, with a rectangular or I-shaped cross section.

/ TECHNICAL SPECIFICATIONS

The climber main body is made of light aluminium alloy.

Ref.	Load per foot without deformation	Breaking load per foot	Capacity of use	Dimensions	Weight per leg
D2001	500 daN	> to 800 daN	120 to 450 mm	0,570 x 0,200 x 0,180 m	3.7kg or 7.4kg the pair of climbers



ESSENTIAL

G20

CLIMBING IRONS

STANDARDS

IN COMPLIANCE WITH EDF TECHNICAL SPECIFICATION SPS B3



Conforms to S71-012 standard

/ USE

Climbers for wooden round poles.
Application for power line networks.

/ TECHNICAL SPECIFICATIONS

- Forged and treated special steel.
 - Stability without deformation 400kg/climbers.
 - Drawn and hollowed out soles (2 oblong holes).
 - Chrome-plated leather straps, hand-sewn and riveted.
- The replacement of the straps can only be done in an authorized workshop (hand sewing).



Ref.	Opening	Nbr of spikes	Dimensions	Weight
G20 24	24 cm	7	385 x 195 x 95 mm	2,6 g
G20 26	26 cm	8	420 x 220 x 100 mm	2,9 g
G20 32	32 cm		490 x 250 x 100 mm	3,6 g
G20 35	35 cm		515 x 230 x 240 mm	

VALUE

G21

CLIMBING IRONS



/ USE

Climbing irons designed especially for electricity companies and contractors.

/ TECHNICAL SPECIFICATIONS

- Forged special steel.
- Chrome-plated leather straps passing directly around the shaft.

Ref.	Nbr of spikes	Dimensions	Weight
G21 25	6	370 x 200 x 170 mm	2,7 kg
G21 30			3 kg
G21 35			3,2 kg

Spare parts	Description
G21 25	Set of leather straps + rivets for G21



G24

CLIMBING IRONS

STANDARDS

APPROVED BY FRANCE TELECOM CONFORMS TO S71-012 STANDARD



/ USE

Climbing irons for wooden round pole telecom applications.

/ TECHNICAL SPECIFICATIONS

- Forged and treated special steel.
- Stability without deformation 400kg/climbing iron.
- Drawn and hollowed out soles (diamond).
- Riveted 1st choice chrome leather straps.

Ref.	Opening	Number of spikes	Dimensions	Weight
G24 24	24 cm	7	390 x 190 x 175 mm	2,7 kg
G24 30	30 cm		425 x 230 x 175 mm	3 kg
G24 35	35 cm		495 x 260 x 180 mm	3,2 kg

Spare parts	Description
G24J	Set of 4 leather straps for G24 climbers

Please contact us for irons with riveted belts.







G22F



G22L

- Jaw opening adjustable from 5 to 20 mm.
- Jaws equipped with rubber pads to prevent damage to coatings.

G22

CLIMBING IRONS FOR PYLONS, STEEL PROFILES AND CATENARY POSTS

/ USE

Climbing irons for metal poles and metal profiles.

/ TECHNICAL SPECIFICATIONS

Forged special steel. Interchangeable rubber pads.
Chrome-plated 1st choice leather straps.

Ref.	Version	Dimensions	Weight
G22F	Positioning at the front of the profile	235 x 110 x 80 mm	3,7 kg
G22L	Positioning on the side of the profile	300 x 120 x 80 mm	4,8 kg

Spare parts	Description
G22B	Set of 4 replacement rubber pads for G22F and G22L
G22SF	Set of leather straps for G22F
G22SL	Set of leather straps for G22L



Rubber protection to prevent damage to the coverings.

G23

CLIMBING IRONS FOR ROUND OR HEXAGONAL POLES

/ USE

Climbing irons specially designed for climbing metal, cement or wooden poles.
Can be used on hexagonal, truncated cone and cylindrical poles.

Ref.	Opening	Dimensions	Weight
G23	18 cm	360 x 220 x 180 mm	4 kg

Spare parts	Description
G23A	Set of 2 replacement rubber pads for G23
G23B	Set of 2 replacement rubber tubes for G23

/ TECHNICAL SPECIFICATIONS

- Painted steel climbing irons.
- Interchangeable pads and rubber tubes.
- Chrome-plated leather belts.



- Adjustable opening during ascent.
- Rubber protection to prevent damage to the coverings.

G25

ADJUSTABLE CLIMBERS FOR ROUND POLES

/ USE

Iron climbers specially designed for climbing truncated cone or cylindrical poles, metal or concrete poles.

Ref.	Opening	Weight
G25D14-30	14 to 30 cm	7,1 kg
G25D16-33	16 to 33 cm	7,4 kg
G25D26-40	26 to 40 cm	7,4 kg
G25D28-46	28 to 46 cm	7,7 kg

/ TECHNICAL SPECIFICATIONS

- Body in aluminium and shaft in special treated steel.
- Rubber glides and grooved tubes. Leather straps.

Spare parts	Description
G25A	Set of 2 rubber pads for G25
G25B	Set of 2 rubber tubes for G25



G26

CLIMBING IRONS FOR PRUNERS

/ USE

Designed to climb on trees and poles of different diameters.

/ TECHNICAL SPECIFICATIONS

- Zinc-plated forged steel.
- Length of spikes: 5 cm.
- Stem height 42 cm.
- Chrome-plated leather straps.

Ref.	Dimensions	Weight
G26	440 x 150 x 100 mm	2,7 kg



Quick attachment to all round or rectangular posts.

Lightweight alloy construction.



Strap clamp that absorbs jolts and allows fixing in different positions

TP73

PLATFORM FOR WORKING AT HEIGHT

/ USE

Quick attachment to all poles for work at height:
- Round 150 to 300 mm - Rectangular 200 to 400 mm

/ TECHNICAL SPECIFICATIONS

- Platform secured by ratchet strap.
- Strap protected by a sleeve.
- Working area: 1000 x 356 mm
- Weight: 10kg allows for mounting with service rope.
- Sturdy welded aluminium construction with rivets.
- Retaining plinths to secure equipment and position technician's feet.

Ref.	Working load	Dimensions	Weight
TP73	100 kg max	1 000 x 356 x 310 mm	10 kg

- Steel protected against corrosion.
- Designed for use on poles with holes.



TC12

POSITIONING FOOT-REST FOR CONCRETE POLES

STANDARDS

IN COMPLIANCE WITH EDF TECHNICAL SPECIFICATION SPS B223

/ USE

Foot-rest for positioning a climber on a concrete pole. Max pole width : 340 mm. The technician must be secured to the concrete pole.

/ TECHNICAL SPECIFICATIONS

- Ø14mm steel rod with fixed bracket at 1 end.
- Mobile bracket with spring loaded pin for longitudinal positioning according to the width of the post.
- Captive chain to connect the 2 components.
- Anti-slip stirrups in ribbed sheet metal.

Ref.	Working load	Weight
TC12 14	150 kg max.	2,4 kg



UNIVERSAL INSULATED POLE PLATFORM

STANDARDS

ISO 9001:2015 | ISO 45001:2018 | ISO 14001:2015

/ KEY FEATURES

- Insulated platform
- Innovative polyurethane pads for grip to wood, steel, composite and concrete poles
- Replaceable poly pad kit available separately
- Engineered Ertalon frame and deck
- Low maintenance
- High tensile rated steel chain, electroplated for corrosion resistance
- Easy to use chain gate locking mechanism
- Non-slip rough-top rubber matting
- WLL 200kg
- Two sizes available



PLATFORM FOR WOODEN POLES

/ USE

Designed especially for overhead line work, the PAAC pole platform is approved and used by many electricity authorities.

/ TECHNICAL SPECIFICATIONS

- Non-slip rubber tread surface
- Rated securing chain
- Locking assembly
- Non-slip spikes for hardwood poles

Ref.	WLL	Width	Lenght	Weight
PA12198	150 kg	360 mm	560 mm	10 kg

PREMIUM

LWA146

OUR SELECTION

POSITIONING GIRDER

- Specially designed to work with 1 or 2 technicians (1 on each side of the pole).
- Allows to work directly on the armament or at a distance during live work.
- Very light aluminium alloy beam.

/ USE

The girder allows 2 operators to position themselves at height on a concrete pole.
The technician must be secured to the pole.

/ TECHNICAL SPECIFICATIONS

- Beam secured by 2 ratchet straps.
- Sturdy welded aluminium alloy beam.

Ref.	Beam	Working load	Dimensions	Weight
LWA146C	1.6 m	265 daN max	1,6 x 0,5 x 0,1 m	9,8 kg
LWA146	2.0 m		2,0 x 0,5 x 0,1 m	10,8 kg





ESSENTIAL

POTAMAR


OUR SELECTION

GUYING SYSTEM FOR WOODEN POLES

STANDARDS

COMPLIANCE WITH EDF/GDF SPS A54 SPECIFICATION

- Quick opening and closing system of the jaws.
- Universal joint for attaching the control rod to a rope.
- System for keeping the operating pole in line with the axis.
- High performance aluminium alloy.

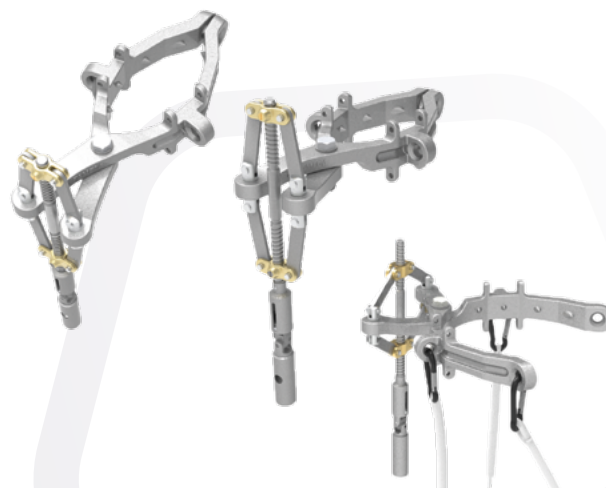

/ USE

A device used to ensure the stability of a wooden pole prior to operate on the pole either for repair, connection or temporary anchoring after damage.

/ TECHNICAL SPECIFICATIONS

The guy-wire device consists of :

- 1 clamp with 2 jaws: Articulated parallelogram type with quick tightening and loosening and including a universal joint.
- 6 interlocking aluminium alloy tubes, each about 1m long, which form the control pole.
- 3 guying ropes, each consisting of a Ø12mm rope, 10m long, with carabiner.
- 3 anchor poles of 0.9m in galvanised steel.

Device delivered with 2 bags: one for the clamp and the ropes and another for the tubes and the stakes.

Ref.	Description	Weight
POTAMAR	Guying system for wooden poles	20,50 kg

PREMIUM

KOALA

INNOVATION

GUYING EQUIPMENT FOR ELECTRICAL POST NETWORK

STANDARDS

EN 131-1 / EN 131-2 / EN 50528

The guy ropes are made of flat textile webbing.

Tensioners equipped with torque limiters to ensure a balance of the 3 tensions of the guy wires



Lightweight



/ USE


Application for overhead power line networks on poles up to 12m high. Device ensuring the stability of the poles during operations: repair, connection or temporary anchoring. Can be used on poles: wood, steel, concrete. To be installed before climbing the pole.

/ TECHNICAL SPECIFICATIONS

- Grip capacity 200mm, weight of clamp + pole set < 10kg.
- Ratchet and disengageable tensioners.
- 1000V insulated interlocking poles.
- 120° positioning jig.
- Suitable for poles with horizontal traction up to 200kg.
- Tested and resistant to extreme loads : 817 kg horizontal tension + 578 kg vertical tension, applied simultaneously.

Ref.	Tightening capacity	Height	Length of guy wires	Weight
KOALA	10 to 20 cm	Stick 8,40 m	Straps 20 m	25 kg

Options	Description
KL-PK20	Koala Clamp with DIN clamp + 2 shackles
KL-PL084D	Lifting stick: 1 upper element with insulated DIN end cap + 6 plug-in elements
KL-SH20	20m orange single loop guy strap on reel + 1 carabiner
KL-SH07	7m red double loop guy strap on reel + 1 carabiner
KL-SH13	13m red single loop guy strap on reel + 1 carabiner
KL-PA	Galvanised anchor stake
KL-TC	Ratchet strap tensioner
KL-CS	Torque limiting spanner
KL-EP	Anchor stake puller
KL-GP	3x120° positioning template
KL-SL	Reinforced bag for sticks, stakes and accessories
KL-SD	Backpack for Koala clamp and accessories

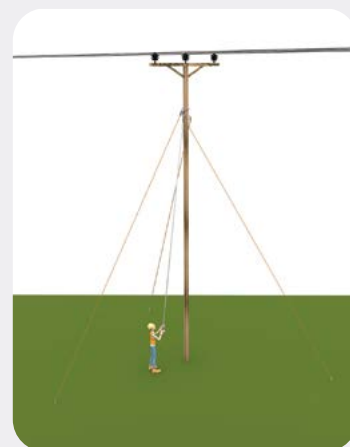



MC25

OUR SELECTION

MANUAL HYDRAULIC CABLE CUTTER Ø 25 MM

The ergonomically designed movable handle makes it possible to start cutting one-handed.

High usage convenience in comparison with a mechanical tool.



VALUE

MC40

OUR SELECTION

MANUAL HYDRAULIC CABLE CUTTER Ø 40 MM


- Reinforced blades for longer life.
- Identical and replaceable blades and counter-blades.



• 2-speed tool: Fast advance / High pressure.



New counter blade that reduces the deformation of the cable when cutting

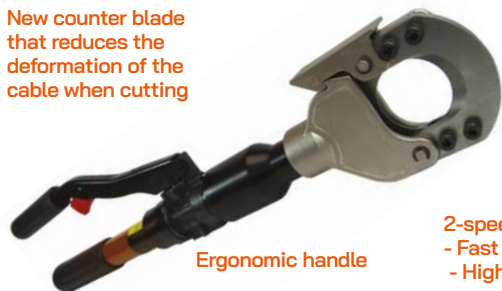

2-speed tool:
- Fast advance
- High pressure.
Ergonomic handle



Ref.	Force	Max. passage	Cables	Dimensions	Weight
MC55	43 kN	Ø 55 mm	Copper/Alu	560 x 55 x 140 mm	3,7 kg

/ USE

Guillotine type hydraulic cable cutter for copper, aluminium or steel cables with maximum diameter of 25 mm.
Improvement of the pumping force.
Do not use this tool on live cables.

/ TECHNICAL SPECIFICATIONS

- Cutting head strengthened at the fork and at the lock.
- Quick opening and closing head, rotatable 180°.
- Automatic release with audible "click" in the event of overload.
- Piston return by release trigger.
- Periodic inspection frequency: 1 year or 10,000 cycles.
- Supplied in plastic case (490 x 302 x 90 mm).

Ref.	Force	Max. passage	Cables	Dimensions	Weight
MC25	55 kN	Ø 25 mm	Steel / Copper / Alu	380 x 60 x 140 mm	2,94 kg

	TYPE OF CABLES	MAX. HARDNESS	MAX. CUTTING Ø *
MULTI-STRAND CABLES	7 x 19 strands - steel	100 > 120 daN/mm ²	Ø 15 > 16 mm
	7 x 37 strands - steel	130 > 145 daN/mm ²	Ø 12 > 13 mm
ELECTRICAL CABLES	Bare - copper/aluminum		300 mm ²
	Rigid multi-strand - copper/aluminum		Ø 20 > 22 mm
	Semi-rigid multi-strand - copper/aluminum		
ROUND BARS	Copper	< 20 daN/mm ²	Ø 20 > 22 mm
	Hard copper	20 > 28 daN/mm ²	Ø 15 > 18 mm
	Aluminum	< 20 daN/mm ²	Ø 20 > 25 mm
	Mild steel	42 > 45 daN/mm ²	Ø 12 > 14 mm
	Medium hard steel	50 > 70 daN/mm ²	Ø 10 mm
INSULATED CABLES	Depends on the thickness of insulation		150 > 240 mm ²
	Stainless steel	< 150 daN/mm ²	Ø 8 > 10 mm

* Other dimensions and cables to be approved with tests.

/ USE

Guillotine type hydraulic cable cutter for copper, aluminium or steel cables with a maximum diameter of 40 mm.

/ TECHNICAL SPECIFICATIONS

- Very powerful tool with 8.8 t shearing force.
- Safe opening and closing cutting head, rotatable to 340°.
- Automatic release with audible "click" in case of overpressure.
- Piston return by turning the handle and closing.
- Delivered in a canvas bag.

Ref.	Force	Max. passage	Cables	Dimensions	Weight
MC40	88 kN	Ø 40 mm	Steel / Copper / Alu	645 x 85 x 165 mm	5,9 kg

	TYPE OF CABLES	MAX. HARDNESS	MAX. Ø OF CUT (mm) *
CABLES	Copper	< 40 daN/mm ²	Ø 32 (630 mm ²)
	Aluminum	< 20 daN/mm ²	Ø 40
	Hard copper	< 34 daN/mm ²	Ø 40
	Steel	< 180 daN/mm ²	7 x Ø 3.0 (= Ø 9.0)
			19 x Ø 2.1 (= Ø 10.5)
			19 x Ø 2.3 (= Ø 11.5)
	Multistrands steel	< 180 daN/mm ²	Ø 18 (strands quantities: 200)
	ACSR	< 180 daN/mm ²	26 x Ø 2.50 + 7 x Ø 1.95 (= Ø 15.85)
	(medium hard steel)		26 x Ø 3.06 + 7 x Ø 2.38 (= Ø 19.38)
			26 x Ø 3.60 + 7 x Ø 2.80 (= Ø 22.80)
BARS	Steel	< 60 daN/mm ²	Ø 18
		< 42 daN/mm ²	Ø 20
	Copper	< 30 daN/mm ²	Ø 30
		< 25 daN/mm ²	Ø 32
	Aluminum	< 16 daN/mm ²	Ø 40

* Other dimensions and cables to be approved with tests.

MC55

MANUAL HYDRAULIC CABLE CUTTER Ø 55 MM

/ USE

Guillotine type hydraulic cable cutter for copper or aluminium cables up to Ø55 mm.

/ TECHNICAL SPECIFICATIONS

- Quick opening and closing head, rotatable 180°.
- Automatic release with audible "click" in the event of overload.
- Piston return by release trigger placed on the moveable handle.
- Tool delivered in canvas bag.

MAX. CUTTING CAPACITIES			* Other dimensions and cables to be approved with tests.	
	TYPE OF CABLES	MAX. HARDNESS	SECTIONS	MAX. Ø OF CUT *
CABLES	Copper leads cables		4 x 185 mm ² or 630 mm ² max.	Ø 51 mm
	Underground aluminum		3 x 240 + 1 x 95 mm ²	Ø 55 mm
BARS	Telephone cables			Ø 16 - 18 mm
	Round annealed copper	< 20 daN/mm ²		Ø 20 - 25 mm
	Round annealed aluminum (A5)	< 16 daN/mm ²		



MC85

MANUAL HYDRAULIC CABLE CUTTER Ø 85 MM



- 2-speed tool:
- Fast advance
- High pressure.



New counter blade that reduces the deformation of the cable when cutting.

/ USE

Hydraulic guillotine type cable cutter for copper or aluminium cables up to 85 mm diameter. Particularly suitable for cutting insulated underground cables.

/ TECHNICAL SPECIFICATIONS

- Two speed hydraulic system, reducing the number of pump strokes.
- Safe opening and closing of the cutting head, rotatable by 180°.
- Automatic release with audible «click» in case of overpressure.
- Return of the piston by means of a discharge lever by turning the mobile handle and closing. Tool delivered in canvas bag.

MAX. CUTTING CAPACITIES

TYPE OF CABLES	MAX. Ø OF CUT *
UNDERGROUND INSULATED ALUMINUM CABLES	3 x 240 mm ² + 1 x 95 mm ²
COPPER CABLES	1 x 630 mm ² > 800 mm ²
TELEPHONE CABLES	630 mm ²
	Ø 85 mm

* Other dimensions and cables to be approved with tests.

Ref.	Force	Max. passage	Cables	Dimensions	Weight
MC85	55 kN	Ø 85 mm	Copper / Alu	745 x 72 x 190 mm	7,6 kg

- New reinforced blades for longer life.
- Identical and replaceable blades and counter-blades.



XC25W

HYDRAULIC CUTTING HEAD Ø 25 MM

/ USE

Guillotine type hydraulic cable cutter for copper, aluminium or steel cables with a maximum diameter of 25 mm.

/ TECHNICAL SPECIFICATIONS

Reinforced cutting head in the clevis and closing lock. Quick opening and closing. The tool is supplied with its own hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

	TYPE OF CABLES	MAX. HARDNESS	MAX. CUTTING Ø *
MULTI-STRAND CABLES	7 x 19 strands – steel	100 > 120 daN/mm ²	Ø 15 > 16 mm
	7 x 37 strands – steel	130 > 145 daN/mm ²	Ø 12 > 13 mm
ELECTRICAL CABLES	Bare – copper/aluminum		300 mm ²
	Rigid multi-strand – copper/aluminum		Ø 20 > 22 mm
	Semi-rigid multi-strand – copper/aluminum		
	Copper	< 20 daN/mm ²	Ø 20 > 22 mm
ROUND BARS	Hard copper	20 > 28 daN/mm ²	Ø 15 > 18 mm
	Aluminum	< 20 daN/mm ²	Ø 20 > 25 mm
	Mild steel	42 > 45 daN/mm ²	Ø 12 > 14 mm
	Medium hard steel	50 > 70 daN/mm ²	Ø 10 mm
INSULATED CABLES	Depends on the thickness of insulation		150 > 240 mm ²
	Stainless steel	< 150 daN/mm ²	Ø 8 > 10 mm

* Other dimensions and cables to be approved with tests.

Ref.	Force	Max. passage	Cables	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XC25W	55 kN	Ø 25 mm	Steel / Copper / Alu	215 x 52 x 90 mm	2,4 kg	XC25W-5	XC25W-7	XC25W-E

- Identical and replaceable blades and counter-blades.



Reinforced blades for longer life.

XC40W

HYDRAULIC CUTTING HEAD Ø 40 MM

/ USE

Guillotine type hydraulic cable cutter for copper, aluminium or steel cables with a maximum diameter of 40mm.

/ TECHNICAL SPECIFICATIONS

Very powerful tool with 8.8 t shearing force. Cutting head with safe opening and closing. The tool is supplied with its own hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

	TYPE OF CABLES	MAX. HARDNESS	MAX. HARDNESS
CABLES	Copper	< 40 daN/mm ²	< 40 daN/mm ²
	Aluminum	< 20 daN/mm ²	< 20 daN/mm ²
	Hard copper	< 34 daN/mm ²	< 34 daN/mm ²
	Steel	< 180 daN/mm ²	< 180 daN/mm ²
BARS	Multistrands steel	< 180 daN/mm ²	< 180 daN/mm ²
	ACSR (medium hard steel)	< 180 daN/mm ²	< 180 daN/mm ²
	Steel	< 60 daN/mm ²	< 60 daN/mm ²
	Copper	< 42 daN/mm ²	< 42 daN/mm ²
	Aluminum	< 30 daN/mm ²	< 30 daN/mm ²
		< 25 daN/mm ²	< 25 daN/mm ²
		< 16 daN/mm ²	< 16 daN/mm ²

* Other dimensions and cables to be approved with tests.

Ref.	Force	Max. passage	Cables	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XC40W	88 kN	Ø 40 mm	Steel / Copper / Alu	285 x 85 x 105 mm	4,3 kg	XC40W-5	XC40W-7	XC40W-E



- New counter blade that reduces the deformation of the cable when cutting.



XC55N

HYDRAULIC CUTTING HEAD Ø 55 MM

/ USE

Guillotine type hydraulic cable cutter for copper or aluminium cables up to 55 mm Ø.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing.

The tool is supplied with its own hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

MAX. CUTTING CAPACITIES

* Other dimensions and cables to be approved with tests.

	TYPE OF CABLES	MAX. HARDNESS	SECTIONS	MAX. Ø OF CUT *
CABLES	Copper leads cables		4 × 185 mm ² or 630 mm ² max.	
	Underground aluminum		3 × 240 + 1 × 95 mm ²	Ø 51 mm
	Telephone cables			Ø 55 mm
BARS	Round annealed copper	< 20 daN/mm ²		Ø 16 – 18 mm
	Round annealed aluminum (A5)	< 16 daN/mm ²		Ø 20 – 25 mm

Ref.	Force	Max. passage	Cables	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XC55N	43 kN	Ø 55 mm	Copper / Alu	300 x 55 x 110 mm	3 kg	XC55N-5	XC55N-7	XC55N-E

- New counter blade that reduces the deformation of the cable when cutting.



XC85N

HYDRAULIC CUTTING HEAD Ø 85 MM

/ USE

Compact hydraulic cable cutter, guillotine type, for copper or aluminium cables with a maximum diameter of 85 mm.

/ TECHNICAL SPECIFICATIONS

Cutting head with secure opening and closing.

Blade and counter-blade with tapered profiles.

The tool is supplied with its own hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

MAX. CUTTING CAPACITIES

TYPE OF CABLES	MAX. Ø OF CUT *
UNDERGROUND INSULATED ALUMINUM CABLES	3 × 240 mm ² + 1 × 95 mm ²
	1 × 630 mm ² > 800 mm ²
COPPER CABLES	630 mm ²
TELEPHONE CABLES	Ø 85 mm

* Other dimensions and cables to be approved with tests.

Ref.	Force	Max. passage	Cables	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XC85N	55 kN	Ø 85 mm	Copper / Alu	395 x 80 x 170 mm	6,2 kg	XC85N-5	XC85N-7	XC85N-E



XC100S-5

HYDRAULIC CUTTING HEAD Ø 100 MM

/ USE

The XC100S-5 cable cutter head connects to a 700 bar hydraulic pump or unit, via hose and high pressure couplings.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing.
Control and maintenance service: 1 year or 10,000 cycles.

Ref.	Force	Max. passage	Cables	Dimensions	Weight
XC100S-5	130 kN	Ø 120 mm	Copper - Alu - flat wire - round wire	215 x 52 x 90 mm	2,4 kg



XC120W-5

HYDRAULIC CUTTING HEAD Ø 120 MM

/ USE

The XC120W-5 cable cutter head connects to a 700 bar hydraulic pump or unit, via hose and high pressure couplings.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing.
Control and maintenance service: 1 year or 10,000 cycles.

Ref.	Force	Max. passage	Cables	Dimensions	Weight
XC100S-5	N/A	N/A	N/A	N/A	N/A



Dual trigger control: advance, hold, retract.

Sturdy shell with non-slip coating.

BLC25

18V BATTERY OPERATED HYDRAULIC CABLE CUTTER Ø 25 MM

/ USE

Compact electro-hydraulic guillotine type cable cutter for copper, aluminium or steel cables up to Ø25 mm.

/ TECHNICAL SPECIFICATIONS

- Reinforced cutting head in the clevis and closing lock.
- Quick opening and closing, 180° rotation.
- LED lighting on the front of the tool.
- Lightweight 18V Li-Ion 2Ah battery with charge indicator.
- Delivered in plastic case with 1 battery and 1 charger.

	TYPE OF CABLES	MAX. HARDNESS	MAX. CUTTING Ø *
MULTI-STRAND CABLES	7 x 19 strands – steel	100 > 120 daN/mm ²	Ø 15 > 16 mm
	7 x 37 strands – steel	130 > 145 daN/mm ²	Ø 12 > 13 mm
ELECTRICAL CABLES	Bare – copper/aluminum		300 mm ²
	Rigid multi-strand – copper/aluminum		Ø 20 > 22 mm
	Semi-rigid multi-strand – copper/aluminum		
ROUND BARS	Copper	< 20 daN/mm ²	Ø 20 > 22 mm
	Hard copper	20 > 28 daN/mm ²	Ø 15 > 18 mm
	Aluminum	< 20 daN/mm ²	Ø 20 > 25 mm
	Mild steel	42 > 45 daN/mm ²	Ø 12 > 14 mm
	Medium hard steel	50 > 70 daN/mm ²	Ø 10 mm
INSULATED CABLES	Depends on the thickness of insulation		150 > 240 mm ²
	Stainless steel	< 150 daN/mm ²	Ø 8 > 10 mm

* Other dimensions and cables to be approved with tests.

Ref.	Force	Max. passage	Cables	Battery	Dimensions	Weight	Accessories	Description
BLC25	55 kN	Ø 25 mm	Steel / Copper/ Alu	18V-2Ah	128 x 75 x 400 mm	3,3 kg	AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
							AC18220	Charger 220V AC European plug



BLC35C

Ø35MM SCISSOR CABLE CUTTER

/ USE

Electro-hydraulic cable cutter for cutting copper or aluminum cables up to Ø35mm maximum. Do not use to cut live cables. Machinery directive 2006/42/EC, EMC 2014/30/CE.

/ TECHNICAL SPECIFICATIONS

- Blades guided by rail.
- Double switch control : advance, hold, retract.
- ON/OFF control switch.
- Hanging shackle.
- Battery lightweight 18V 2A with power load indicator.



MAX. CUTTING CAPACITIES	Possible cutting tests
SEMI RIGID MULTI STRAND COPPER CABLE	240 mm ²
COPPER FLEXIBLE MULTI STRAND CABLE	Ø 35 mm – 300 mm
ALUMINUM MULTI STRAND CABLE	Ø 35 mm
TELEPHONE CABLE	Ø 35 mm

No round bars, no steel sheet reinforced cable either.

Ref.	Force	Max. Ø	Dimensions	Weight	Accessories	Description
BLC35C	45 kN	Ø 35 mm	107 x 78 x 445 mm	3,3 kg	AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
					AC18220	Charger 220V AC European plug
					77501-SFE	Plastic carrying case



Communicating
IntelLED system and
work area lighting



Reinforced blades
for longer life



2-speed tool:
- Fast advance
- High pressure.

	TYPE OF CABLES	MAX. HARDNESS	MAX. Ø OF CUT (mm) *
CABLES	Copper	< 40 daN/mm ²	Ø 32 (630 mm ²)
	Aluminum	< 20 daN/mm ²	Ø 40
	Hard copper	< 34 daN/mm ²	Ø 40
	Steel	< 180 daN/mm ²	7 x Ø 3.0 (= Ø 9.0) 19 x Ø 2.1 (= Ø 10.5) 19 x Ø 2.3 (= Ø 11.5)
	Multistrands steel	< 180 daN/mm ²	Ø 18 (strands quantities: 200)
BARS	ACSR	< 180 daN/mm ²	26 x Ø 2.50 + 7 x Ø 1.95 (= Ø 15.85) 26 x Ø 3.06 + 7 x Ø 2.38 (= Ø 19.38) 26 x Ø 3.60 + 7 x Ø 2.80 (= Ø 22.80) 54 x Ø 3.50 + 19 x Ø 2.10 (= Ø 31.50)
	Steel	< 60 daN/mm ²	Ø 18
	Copper	< 30 daN/mm ²	Ø 30
	Aluminum	< 25 daN/mm ²	Ø 32
	Aluminum	< 16 daN/mm ²	Ø 40

* Other dimensions and cables to be approved with tests.

Robust housing covered
with a non-slip layer.



2-speed tool:
- Fast advance
- High pressure.



Communicating
IntelLED system and
work area lighting.

Accessories	Description
AB18LI500	18V Li-Ion 5 Ah battery with power load indicator
AC18220	Charger 220V AC European plug

BC40

18V BATTERY OPERATED HYDRAULIC CABLE CUTTER Ø 40 MM

/ USE

Compact electro-hydraulic guillotine type cable cutter for copper, aluminium or steel cables up to Ø 40 mm.

/ TECHNICAL SPECIFICATIONS

- Cutting head with safe opening and closing, 180° rotation.
- Identical and replaceable blades and counterblades.
- Hanging ring for shoulder strap.
- 18V Li-Ion 5Ah battery with charge indicator.
- Delivered in a plastic case with 2 batteries and 1 charger.

Ref.	Force	Max. passage	Cables	Battery	Dimensions	Weight
BC40	88 kN	Ø 40 mm	Steel / Copper/ Alu	18 V - 5,0 Ah	480 x 85 x 325 mm	7,4 kg

Accessories	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug

BC45

Ø45MM GUILLOTINE CABLE CUTTER

/ USE

Electro-hydraulic cable cutter for cutting copper, aluminum or steel cables up to Ø45mm maximum.

/ TECHNICAL SPECIFICATIONS

- Double switch control : advance, hold, retract.
- Safety lock on switch button.
- Tool life management and maintenance cycle.
- Guillotine type cutting head, rotation >180°.
- Locking the head by pin.
- Hydraulic double speed for optimised operation.
- Batteries large capacity 18V 5A with power load indicator
- Safety lock on switch button.
- Delivered in a plastic case with 2 batteries and 1 charger.

Ref.	Force	Max. Ø	Dimensions	Weight
BC45	130 kN	Ø 45 mm	510 x 75 x 330 mm	8,5 kg

MAX. CUTTING CAPACITIES

* Other dimensions and cables to be approved with tests.

	TYPE OF CABLES	MAX. HARDNESS	MAX. Ø OF CUT (mm) *
CABLES	Copper	< 40 daN/mm ²	Ø 45
	Aluminum	< 20 daN/mm ²	Ø 45
	Almelec	< 34 daN/mm ²	Ø 45
	Steel	< 180 daN/mm ²	7 x Ø 3.0 (= Ø 9.0) 19 x Ø 2.1 (= Ø 10.5) 19 x Ø 2.3 (= Ø 11.5)
	Multi-steel strands	< 180 daN/mm ²	Ø 18 (strands quantities : 200)
	ACSR	< 180 daN/mm ²	26 x Ø 2.50 + 7 x Ø 1.95 (= Ø 15.85) 26 x Ø 3.06 + 7 x Ø 2.38 (= Ø 19.38) 26 x Ø 3.60 + 7 x Ø 2.80 (= Ø 22.80) 54 x Ø 3.50 + 19 x Ø 2.10 (= Ø 31.50) 54 x Ø 4.36 + 19 x Ø 2.62 (= Ø 39.20)
	(medium hard steel)		
	Inox	> Please contact us.	
	Steel	< 60 daN/mm ²	Ø 20
	Copper	< 30 daN/mm ²	Ø 33
BARS	Aluminum	< 25 daN/mm ²	Ø 35
	Aluminum	< 16 daN/mm ²	Ø 45



IntelLED communication system and work area lighting

New counterblade that reduces the deformation of the cable when cutting

2-speed tool:
- Fast advance
- High pressure

18V 5.0Ah

MAX. CUTTING CAPACITIES

TYPE OF CABLES	MAX. HARDNESS	SECTIONS	MAX. Ø OF CUT *
CABLES			
Copper leads cables		4 x 185 mm ² or 630 mm ² max.	Ø 51 mm
Underground aluminum		3 x 240 + 1 x 95 mm ²	Ø 55 mm
Telephone cables			Ø 16 - 18 mm
BARS			Ø 20 - 25 mm
Round annealed copper	< 20 daN/mm ²		
Round annealed aluminum (Al)	< 16 daN/mm ²		

* Other dimensions and cables to be approved with tests.

BC55

18V BATTERY OPERATED HYDRAULIC CABLE CUTTER Ø 55 MM

/ USE

Hydraulic cable cutter on 18V battery for cables with maximum Ø55 mm. Do not use this tool on live cables.

Delivered in a plastic case with 2 batteries and 1 charger.

/ TECHNICAL SPECIFICATIONS

- Quick opening and closing cutting head, 270° rotation.
- Blade and counterblade with tapered profiles.
- Hanging ring for shoulder strap.
- 18V Li-Ion 5Ah battery with charge indicator.

Ref.	Force	Max. passage	Cables	Battery	Dimensions	Weight
BC55	43 kN	Ø 55 mm	Copper / Alu	18V-5,0Ah	500 x 75 x 335 mm	6,4 kg

Accessories	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug

Communicating IntelLED system and work area lighting.

Tool control by double tilting switches and lock.

Robust housing covered with a non-slip layer.

18V 5.0Ah

Ref.	Force	Max. Ø	Dimensions	Weight
BC65C	60 kN	Ø 65 mm	395 x 80 x 330 mm	7,6 kg

Accessories	Description
AB18LI500	18V Li-Ion 5 Ah battery with power load indicator
AC18220	Battery charger Li-Ion 10,8-18V

BC65C

Ø65MM SCISSOR CABLE CUTTER

/ USE

Do not use to cut live cables. Electro-hydraulic cable cutter for cutting copper or aluminum cables up to Ø65mm maximum

/ TECHNICAL SPECIFICATIONS

- Double switch control : advance, hold, retract.
- Safety lock on switch button.
- Tool life management and maintenance cycle.
- Scissor type cutting head, rotation >180°.
- End access and direct to the cutting area.
- Hydraulic double speed for optimised operation.
- Batteries large capacity 18V 5A with power load indicator
- Delivered in a plastic case with 2 batteries and 1 charger.

MAX. CUTTING CAPACITIES

COPPER CABLES	Ø 65 mm
ALUMINUM CABLES	Ø 65 mm

Cut of aluminum or copper, steel reinforced cables is possible.

Double switch control : advance, hold, retract

Tool life management and maintenance cycle.

Safety lock on switch button

18V 5.0Ah

Ref.	Force	Max. Ø	Dimensions	Weight
BC85	55 kN	Ø 85 mm	580 x 85 x 340 mm	8,9 kg

BC85

Ø85MM GUILLOTINE CABLE CUTTER

/ USE

Electro-hydraulic cable cutter for cutting copper, aluminum or steel cables up to Ø85mm maximum. Do not use to cut live cables. Machinery directive 2006/42/EC, EMC 2014/30/CE.

/ TECHNICAL SPECIFICATIONS

- Guillotine type cutting head, rotation >180°.
- Locking the head by pin.
- Hydraulic double speed for optimised operation.
- Batteries large capacity 18V 5A with power load indicator

MAX. CUTTING CAPACITIES

TYPE OF CABLES	MAX. Ø OF CUT *
UNDERGROUND INSULATED ALUMINUM CABLES	3 x 240 mm ² + 1 x 95 mm ²
	1 x 630 mm ² > 800 mm ²
COPPER CABLES	630 mm ²
TELEPHONE CABLES	Ø 85 mm

* Other dimensions and cables to be approved with tests.



/ CRIMPING TOOLS BY CAPACITY

			Crimping tools						
			Mechanical press	P126	P125	PFCU6-50	PFCU6-120	PBGD3	P128
			Battery-powered press					BLP36	
			Manual hydraulic press					MP36	
			700-bar hydraulic press						
			Crimping tools						
			Force	26kN				50kN	35kN
Applications	Connectors type	Type of dies	Integrated E140	Punch + Barrel	2 Barrels	2 Barrels	W50	D36	D50
Industrial	NF C20-130 Hexagonal : CT,XCT,CU,MJ			6 - 70 mm ²	6 - 50 mm ²	6 - 120 mm ²		4 - 150 mm ²	4 - 120 mm ²
	NF C63-061 Cu/A Bimetal I : ACX,ICAU		35-50 mm ² E140					35 - 120 mm ² E140 - E173	35 - 120 mm ² E140 - E173
	Forged lug : HU								
	High intensity lugs : HUR,DPD7							16 - 150 mm ²	
LV insulated networks	Preinsulated : MJPB, CPTA, ERP		6-35 mm ² E140					6 - 150 mm ² E140 - E215	6 - 95 mm ² E140 - E173
	Junctions : MJPAS, JAS4R								
	Junctions : MJTAS, XN8S							50 - 150 mm ² E215	
LV-MV uninsulated bare networks	Aluminium alloy : JL, ABT, CBO							34,4 - 93,3 mm ² E120 - E173	
	ACSR conductors : JAR, ABAR								
	Copper conductors : JU							7,07 - 146 mm ² E54 - E215	
Underground Networks	NF C33-090 Deep indent crimp: CA, XCX, RJ, X8								
	Prerounding : Cu & Al							10 - 120 mm ²	
Earthing lines	C-Connectors : CC, RCC						C16 - C35 mm ²	C6 - C16 mm ²	C6 - C35 mm ²
	Earthing lug : CDCT								
DIN standard	DIN 48083 Lugs: Cu							4 - 150 mm ² K4 - K22	
	DIN 48083 Lugs: Al							25 - 120 mm ² K4 - K22	



	BLP55, BPE55	BLP62, BPE62	BLP80, BP80	BP13026, BP13038	BPU130				
	MP55	MP62	MP80	MP13026, MP13038	MPU130				
				XP13026, XP13038	XPU130	XPRU200	XP250	XP450	XPRH450
	55kN	62kN	80kN	130kN	130kN	200kN	250kN	450kN	
	D55	C60	C60 & C80	C130	C130 & U130	U210	H250	H450	RH450
	4 - 240 mm ²	6 - 300 mm ²	6 - 300 mm ²	6 - 400 mm ²	6 - 400 mm ²	25 - 630 mm ²	50 - 630 mm ²	95 - 1000 mm ²	
	35 - 120 mm ² E140 - E173	35 - 300 mm ² E140 - E260	35 - 300 mm ² E140 - E260	35 - 300 mm ² E140 - E260	35 - 300 mm ² E140 - E260				
				16 - 150 mm ² E180	16 - 150 mm ² E180	185 - 500 mm ² E270 - E330			
	16 - 150 mm ²	16 - 240 mm ²	16 - 240 mm ²	16 - 400 mm ²	16 - 400 mm ²	16 - 400 mm ²			
	6 - 150 mm ² E140 - E215		6 - 240 mm ² E140 - E280	6 - 240 mm ² E140 - E280	6 - 240 mm ² E140 - E280	6 - 240 mm ² E140 - E280			
			50 - 150 mm ² E260	50 - 150 mm ² E260	50 - 150 mm ² E260	50 - 150 mm ² E260			
	50 - 150 mm ² E215		50 - 240 mm ² E215 - E280	50 - 240 mm ² E215 - E280	50 - 240 mm ² E215 - E280	50 - 240 mm ² E215 - E280			
	22 - 117 mm ² E100 - E210		22 - 148 mm ² E100 - E230	22 - 228 mm ² E100 - E280	22 - 228 mm ² E100 - E280	22 - 228 mm ² E100 - E280			
	17,8 - 116,2 mm ² E54 - E210		17,8 - 147,1 mm ² E54 - E230	17,8 - 181,6 mm ² E54 - E250	17,8 - 181,6 mm ² E54 - E250	17,8 - 228 mm ² E54 - E285			
	7,07 - 146 mm ² E54 - E215		7,07 - 182 mm ² E54 - E230	7,07 - 182 mm ² E54 - E230	7,07 - 182 mm ² E54 - E230	7,07 - 182 mm ² E54 - E230			
					16 - 240 mm ² OE - 4E	16 - 630 mm ² OE - 6E			300 - 1600 mm ² 5E - 9E
	6 - 240 mm ²	25 - 240 mm ²	25 - 240 mm ²	25 - 300 mm ²	25 - 300 mm ²				
	C6 - C35 mm ²	C6 - C50 mm ²	C6 - C50 mm ²	C6 - C150 mm ²	C6 - C150 mm ²	C25 - C240 mm ²			
				75 - 240 mm ²	75 - 240 mm ²	75 - 185 mm ²			
	10 - 240 mm ² K6 - K28	10 - 300 mm ² K6 - K32		10 - 400 mm ² K6 - K38		10 - 400 mm ² K6 - K38	16 - 630 mm ² K8 - K44	50 - 1000 mm ² K14 - K60	
	25 - 240 mm ² K6 - K32	25 - 300 mm ² K6 - K34		25 - 400 mm ² K6 - K38		25 - 400 mm ² K6 - K38	25 - 500 mm ² K8 - K44	35 - 1000 mm ² K14 - K60	



P126

OUR SELECTION

HEXAGONAL E140
CRIMPING PLIERS 25 KN

Ratchet
mechanism
with fast
forward
handwheel



D-head with fixed E140
cavity, width 9 mm.



Anti-return system to
guarantee a complete cycle.

/ USE

Clamp used mainly on LV networks such as preinsulated sleeves and bi-metal connectors:

- MJPB, CPTA, EBPAU: up to 35 mm²,
- Al/Cu ACX, ICAU: up to 50 mm².

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head.

SIMPI tool equivalent.

Option : Belt holster with canvas protection ref.P126E

Ref.	Hexagonal crimping	Dimensions	Weight
P126	E140	260 x 75 x 30 mm	1,3 kg

Accessories	Description
P126M	Die E140/9
P126E	Canvas belt holster



• UNILEC tool equivalent.

• Cylinder locked by push-button system.

P125

INDENT CRIMPING PLIERS WITH CYLINDER 6 TO 70 MM²

/ USE

Manual indent crimping tool with cylinder for Cu connectors according to NFC20-130 : XCT, XG7T, CT, CU, MJ : up to 70 mm².

/ TECHNICAL SPECIFICATIONS

Tool equipped with a barrel with 7 cavities: 6, 10, 16, 25, 35, 50, 70 mm².

Ref.	Crimping	Dimensions	Weight
P125	Indent + barrel 7 positions	420 x 85 x 35 mm	2,5 kg



Tool equipped with a
cylinder with 7 cavities:
6, 10, 16, 25, 35, 50,
70mm².



Box containing a selection
of 85 Cu connectors (lugs +
sleeves).

P125CO

INDENT CRIMPING PLIERS P125 IN CASE WITH 85 TERMINALS AND LUGS

/ USE

Manual indent crimping tool with cylinder for Cu connectors according to NFC20-130.

- XCT, XG7T, CT, CU, MJ : up to 70 mm².

/ TECHNICAL SPECIFICATIONS

Contents :

- 1 plastic case with dividers
- 1 indent crimping pliers (ref. P125),
- 5 LV copper sleeves XG7T series 15 mm²,
- 5 LV copper sleeves XG7T series 25 mm²,
- 5 LV copper sleeves XG7T series 50 mm²,
- 5 LV copper sleeves XG7T series 70 mm²,
- 10 copper tubular lugs XCT series 10-8,
- 10 copper tubular lugs XCT series 10-6,
- 10 copper tubular lugs XCT series 6-6,
- 5 copper tubular lugs XCT series 16-6,
- 5 copper tubular lugs XCT series 16-8,
- 5 copper tubular lugs XCT series 25-8,
- 5 copper tubular lugs XCT series 25-10,
- 5 copper tubular lugs XCT series 35-8,
- 5 copper tubular lugs XCT series 50-10,
- 5 copper tubular lugs XCT series 70-10.

Ref.	Dimensions	Weight
P125CO	445 x 345 x 95 mm	5,1 kg

PFCU6-50

HEXAGONAL CRIMPING PLIERS
WITH CYLINDERS 6 TO 50 MM²

/ USE

Manual crimping tool for Cu
connectors according to NFC20-130.
- XCT, XG7T, CT, CU, MJ : up to 50 mm².

/ TECHNICAL SPECIFICATIONS

Crimping pliers with arm.
Cylinders locked by push-button
system.



• Tool equipped with 2
cylinders 6 cavities: 6,
10, 16, 25, 35, 50 mm².

Ref.	Crimping	Dimensions	Weight
PFCU6-50	2 barrels 6 cavities	400 x 135 x 45 mm	1,3 kg



Box containing a selection of 280 Cu lugs.



Tool equipped with 2 cylinders with 6 cavities: 6, 10, 16, 25, 35, 50mm²

PFCU6-50CO

HEXAGONAL CRIMPING PLIERS PFCU6-50 IN CASE WITH 280 LUGS


/ TECHNICAL SPECIFICATIONS

Contents :

- 1 PFCU6-50 crimping tool
- 25 lugs 6 mm² copper cable Ø6mm hole
- 25 lugs 6 mm² copper cable Ø8mm hole
- 25 lugs 10 mm² copper cable Ø6mm hole
- 25 lugs 10 mm² copper cable t Ø8mm hole
- 25 lugs 16 mm² copper cable Ø8mm hole
- 25 lugs 16 mm² copper cable Ø10mm hole
- 25 lugs 25 mm² copper cable Ø8mm hole
- 25 lugs 25 mm² copper cable Ø10mm hole
- 20 lugs 35 mm² copper cable Ø8mm hole
- 20 lugs 35 mm² copper cable Ø10mm hole
- 20 lugs 50 mm² copper cable Ø10mm hole
- 20 lugs 50 mm² copper cable Ø12mm hole.

Ref.	Dimensions	Weight
PFCU6-50CO	445 x 345 x 95 mm	5,1 kg

• Tool equipped with 2 cylinders with 9 cavities: 6, 10, 16, 25, 35, 50, 70, 95, 120mm².

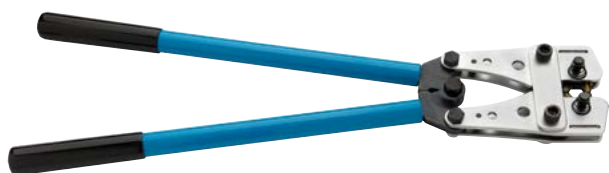

PFCU6-120

HEXAGONAL CRIMPING PLIERS WITH CYLINDERS 6 TO 120 MM²

/ USE

Manual crimping tool for Cu connectors according to NFC20-130. XCT,XG7T,CT,CU,MJ: up to 120 mm².

/ TECHNICAL SPECIFICATIONS

- Crimping pliers with arm.
- Cylinders locked by push-button system.

Ref.	Crimping	Dimensions	Weight
PFCU6-120	2 barrels 9 cavities	680 x 230 x 75 mm	2,9 kg

Tool equipped with 2 fixed cavities BG and D3



CP-PBGD3

The D3 cavity is equipped with a locking pin for W50 dies.

PBGD3

CRIMPING PLIERS BG AND D3 WITH COMPOSITE ARMS

/ USE

Manual mechanical press for crimping C connectors. Uses W50 dies. For crimping C connectors:
- BG die: C16, C25-10, C25PM connectors
- Die W50E173L5: C25, C25EGM, C35 connectors.

/ TECHNICAL SPECIFICATIONS

- Simple tool that crimps in one operation.
- 2 composite fibreglass arms.
- Easy calibration with a hand tool.
- Option: Plastic case ref. CP-PBGD3

Ref.	Crimping	Dimensions	Weight
PBGD3	BG & D3	635 mm	3,2 kg



P128

RATCHET CRIMPING PLIERS 50 KN

/ USE

For hexagonal crimping of C-shaped connectors, copper sleeves and lugs, copper/alu sleeves and lugs and connectors for insulated networks. Uses D50 die sets.

/ TECHNICAL SPECIFICATIONS

- D-head with stock and lock.
- Quick-feed, non-return ratchet.
- ISOLEC 2 tool equivalent.
- Option : Metal case ref.CM-P128

Ref.	Crimping	Dimensions	Weight
P128	4-120 mm ²	440 x 80 x 45 mm	2,5 kg



VALUE

MP36

OUR SELECTION

SINGLE HAND MANUAL HYDRAULIC CRIMPING TOOL 35 KN

The most compact hydraulic tool on the market

Very ergonomic, operated with one hand



Highly resistant aluminium clevis

/ USE

Lightweight and compact manual hydraulic press for crimping connectors up to 150 mm². Industrial applications and also suitable for preinsulated LV connectors. Uses D36 type dies.

/ TECHNICAL SPECIFICATIONS

- Quick opening and closing D-head, 180° rotation.
- Two-tone handle with anti-slip pads.
- Automatic release with audible "click".
- Piston return by release lever. Supplied in plastic case.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MP36	35 kN	8 mm	4 - 150 mm ²	215 x 50 x 175 mm	1,4 kg

Comfortable to use compared to a mechanical tool.

Accepts all brands of dies



Ergonomic handle allows for one-handed approach

Reversible dies with double indentations (except for large dimensions).

MP55

MANUAL HYDRAULIC CRIMPING TOOL 55 KN

/ USE

Lightweight and ergonomic manual hydraulic press for crimping connectors up to 240 mm². Industrial applications and electrical networks. Uses D55 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Adjustable ball plunger for 30 or 38 mm dies.

Automatic release with audible « click ». Piston return by discharge lever. Supplied in plastic case.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MP55	55 kN	13 mm	4 - 240 mm ²	380 x 65 x 140 mm	2,3 kg



2-speed tool: Fast advance / High pressure.

Quick opening and closing D-head.

Return control by simple trigger.

MP62

MANUAL HYDRAULIC CRIMPING TOOL 62 KN


/ USE

Lightweight and ergonomic manual hydraulic press for crimping connectors up to 300 mm². Mainly industrial applications. Uses C60 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Automatic release with audible « click ». Return of the piston by trigger located in the mobile handle. Delivered in a plastic case.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MP62	62 kN	13 mm	6 - 300 mm ²	420 x 53 x 150 mm	2,8 kg

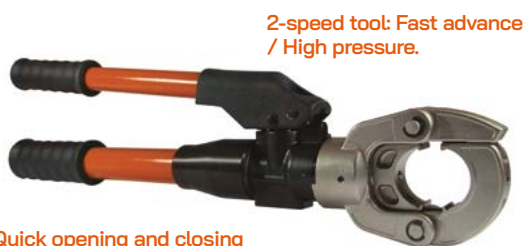

2-speed tool: Fast advance / High pressure.

Quick opening and closing D-head, 180° rotation.

MP80

MANUAL HYDRAULIC CRIMPING TOOL 80 KN

/ USE

Manual hydraulic press for crimping connectors up to 300 mm². Industrial applications and ENEDIS electrical networks. Uses C80 or C60 type dies.


/ TECHNICAL SPECIFICATIONS

Powerful and comfortable tool that develops 8 tons in crimping. Double composite handles. Automatic release with audible «click». Piston return by rotating and closing the mobile handle. Delivered in a plastic case.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MP80	80 kN	13 mm	6 - 300 mm ²	535 x 57 x 175 mm	3,9 kg



C head with direct access
for hexagonal crimping.

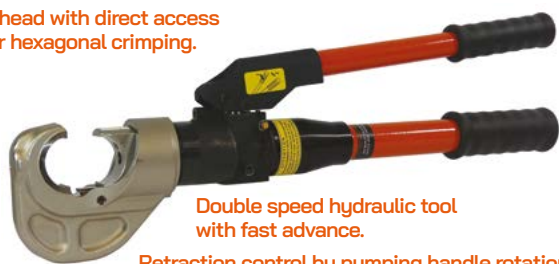

Double speed hydraulic tool
with fast advance.

Retraction control by pumping handle rotation.

Retraction control by
pumping handle rotation



Universal tool for deep indent
and hexagonal crimp.

Double speed hydraulic tool
with fast advance.

MP13026

130KN CRIMPING TOOL C HEAD

/ USE

Hydraulic crimping tool for cables up to 300mm².
Industrial and electrical networks applications.

/ TECHNICAL SPECIFICATIONS

- Open C head, rotation >180°.
- 2 hands pumping handles.
- Tool delivered in case: carrying case can contain 24 dies sets type C130



Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MP13026	130 kN	26 mm	up to 400mm ²	565 x 70 x 160 mm	5,2 kg

MPU130

130KN CRIMPING TOOL U HEAD

/ USE

Tool particularly suitable for deep indent crimping up to 240mm² underground lines.
Industrial and electrical networks applications.
No adapters supplied.
In conformity with NF C33-090-4.

/ TECHNICAL SPECIFICATIONS

- Robust U head, rotation >180°.
- U shape head according to specifications HN 68S.
- 2 hands pumping handles.
- Deep indent aluminium : up to 240mm².
- Tool delivered without adapter.



Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight
MPU130	130 kN	26 mm	up to 400mm ²	560 x 80 x 165 mm	5,2 kg

Quick opening and closing
D-head, 180° rotation.



2-speed tool: Fast advance
/ High pressure.

MP130-42KIT

120KN HYDRAULIC CRIMPING PRESS WITH 42MM STROKE SUPPLIED WITH DIE SETS FROM 16 TO 400 MM²

/ USE

Hydraulic crimping tool for cables up to 400mm².
Industrial and electrical networks applications.

/ TECHNICAL SPECIFICATIONS

- Hexagonal hydraulic crimping for copper and aluminium tubular terminals
- Interchangeable dies
- For ease of operation and operator comfort, the head swivels at 350°
- Dual-speed hydraulics: one fast speed to approach dies towards the connector and another slower speed for crimping
- Automatic return at the end of crimping
- Safety valve with bypass for automatic pressure release when maximum pressure is reached
- Dies supplied: 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400 mm²
- Carrying case: metal, 3,3 kg

Ref.	Force	Stroke	Hexagonal crimping	Weight
MP130-42KIT	120 kN	42 mm	up to 400mm ²	6,3 kg



XP13026/XP13038

HYDRAULIC CRIMPING HEAD

/ TECHNICAL SPECIFICATIONS

XP13026:

- Copper lugs and sleeves — NFC 20-130: 6 to 300 mm²
- Bare or insulated sleeves in copper or aluminum — EDF: E54 to E235
- Copper or aluminum lugs and sleeves — DIN 48083: KZ6 to KZ28
- C-shaped connectors: C10 to C70
- Pre-rounding die sets: 50 to 60 mm²
- Copper lugs and sleeves — NFC 20-130: 10 to 240 mm²

XP13038:

- Copper lugs and sleeves — NFC 20-130: 6 to 400 mm²
- Bare or insulated sleeves in copper or aluminum — EDF: E54 to E280
- Copper or aluminum lugs and sleeves — DIN 48083: KZ6 to KZ38
- C-shaped connectors: C10 to C70
- Pre-rounding die sets: 50 to 60 mm²
- Copper lugs and sleeves — NFC 20-130: 10 to 240 mm²

Ref.	Force	Stroke	Dimensions	Weight
XP13026	130 kN	26 mm	215×70×125 mm	3,750 kg
XP13038		38 mm	240×70×112 mm	4,250 kg



Tool supplied with U200PR
extender



Crimping head
interchangeable with
other hydraulic tools.

Large crimping
capacity

XPRU200-5

700 BARS HYDRAULIC CRIMPING TOOL 200KN EXTENDED U HEAD

STANDARDS

STANDARD NF C33-090 (FORMERLY HN 68-S-90)

/ USE

Crimping head mainly developed for deep indent crimping up to 630mm².
Single-acting 700 bars operating pressure.
Applications mainly underground electrical networks.

/ TECHNICAL SPECIFICATIONS

Product :

- U-shaped head with parallel arms for robustness.
- Single-acting press with spring piston return.
- Piston with lock to hold the indent.
- Tool equipped with a hydraulic quick coupling series 115.
- Delivered with extender U200PR.

Ref.	Force	Nominal pressure	Stroke	Weight	Dimensions
XPRU200-5	200 kN	700 bars	38 mm	6,7 kg	320 x 70 x 95 mm

Robust H-head
with locking pin



Crimping head interchangeable
with other hydraulic tools

XPH250

H-SHAPE HYDRAULIC CRIMPING HEAD 700 BAR 250 KN

/ USE

Portable and powerful hydraulic press for crimping connectors up to 630 mm².
Mainly industrial applications. Uses H250 type dies.

/ TECHNICAL SPECIFICATIONS

- H-head to withstand high loads. Leather strap to secure the locking pin.
- The tool is supplied with a hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XPH250	250 kN	28 mm	25 - 630 mm ²	287 x 130 x 100 mm	6,8 kg	XPH250-5	XPH250-7	XPH250-E

Interchangeable crimping head
with other hydraulic tools.



Robust
H-head with
locking pin.

Hydraulic connection on the side to
allow the head to be placed vertically
on the workbench.

XPH450

H-SHAPE HYDRAULIC CRIMPING HEAD 700 BAR 450 KN

/ USE

Portable and powerful hydraulic press for crimping connectors up to 1000mm². Mainly industrial applications. Uses H450 type dies.

/ TECHNICAL SPECIFICATIONS

H-head to withstand high loads. Leather strap to secure the locking pin.
H-head with anti-corrosion coating. The tool is supplied with a hydraulic nipple, which can be connected to the 700 bar hydraulic hoses and pumps available in the catalogue.

Ref.	Force	Stroke	Hexagonal crimping	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
XPH450	450 kN	35 mm	95 - 1000 mm ²	285 x 115 x 120 mm	11 kg	XPH450-5	XPH450-7	XPH450-E



Extended head that
allows deep indenting
up to 9E (1600 mm²).

Double handle
for improved
ergonomy.

H type head with
locking pin for
the upper die.

XPRH450-5

700 BARS HYDRAULIC CRIMPING TOOL 450KN H HEAD

/ USE

Crimping head mainly developed for deep indent crimping up to 1600mm².
Single-acting 700 bars operating pressure.
Applications mainly underground electrical networks.

/ TECHNICAL SPECIFICATIONS

- H type head with parallel arms for robustness.
- Single-acting press with spring piston return.
- Piston with lock to hold the indent.
- Tool equipped with a hydraulic quick coupling series 115.

Ref.	Force	Nominal pressure	Stroke	Dimensions	Weight
XPRH450-5	450 kN	700 bars	42 mm	300 x 120 x 386 mm	18,5 kg



Ergonomic and lightweight "Line" tool for one-handed crimping.

Double trigger control.

LED communication system and work area lighting.

BLP36

BATTERY OPERATED CRIMPING TOOL 35 KN

/ USE

Compact electro-hydraulic crimping machine for crimping connectors up to 150 mm². For industrial applications and LV network connections. Uses D36 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Dual triggers: advance, hold, retract. Sturdy, non-slip coated body with LED lighting on the front of the tool. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in a plastic case with 1 battery and 1 charger.

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BLP36	35 kN	8 mm	4 - 150 mm ²	18 V - 2 Ah	128 x 75 x 355 mm	2,2 kg

Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Charger 220V AC European plug



Ergonomic and light "Line" tool for one-handed crimping

Double trigger control, LED communication system and work area lighting.

Reversible dies with double cavities (except for large dimensions).

BLP55

BATTERY OPERATED CRIMPING TOOL 55 KN

/ USE

Compact electrohydraulic crimping machine for connectors up to 240 mm². Industrial applications and LV electrical networks. Uses D55 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Dual triggers: advance, hold, retract. Robust, non-slip coated shell. LED lighting on the front of the tool. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in plastic case with 1 battery and 1 charger.

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BLP55	55 kN	13 mm	4 - 240 mm ²	18 V - 2 Ah	128 x 75 x 390 mm	2,9 kg

Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Charger 220V AC European plug

BPE55

NEW

BATTERY OPERATED CRIMPING TOOL 55 KN PISTOL SHAPE

- Ergonomic and light allow crimping with one hand.
- Automatic return when crimping is complete.
- Led lighting of the work area.

/ USE

Compact electrohydraulic crimping machine for connectors up to 240 mm². Industrial applications and LV electrical networks. Uses D55 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation Dual triggers: advance, hold, retract. Robust, non-slip coated shell. LED lighting on the front of the tool. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in plastic case with 1 battery and 1 charger.



Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Battery charger Li-Ion 10,8-18V

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BLP55	55 kN	13 mm	4 - 240 mm ²	18 V - 2 Ah	285 x 60 x 270 mm	3,2 kg

**BLP62****NEW****BATTERY OPERATED CRIMPING
TOOL 62 KN PISTOL SHAPE**

- Ergonomic and light allow crimping with one hand.
- Led lighting of the work area.

/ USE

Compact electro-hydraulic press for crimping connectors up to 300 mm². Mainly for industrial applications. Uses C60 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Single trigger with automatic return. LED lighting of work area. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in plastic case with 1 battery and 1 charger.

Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Charger 220V AC European plug

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BLP62	62 kN	13 mm	6 - 300 mm ²	18V-2Ah	128 x 75 x 390 mm	3,2 kg

BPE62**NEW****BATTERY OPERATED CRIMPING
TOOL 62 KN PISTOL SHAPE**

- Ergonomic and light allow crimping with one hand.
- Automatic return when crimping is complete.
- Led lighting of the work area.

/ USE

Compact electrohydraulic crimping machine for connectors up to 300 mm². Mainly for industrial applications. Uses C60 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Single trigger with automatic return. LED lighting of work area. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in plastic case with 1 battery and 1 charger.

Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Charger 220V AC European plug

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BPE62	62 kN	13 mm	6 - 300 mm ²	18V-2Ah	290 x 60 x 285 mm	3,5 kg



- Ergonomics and lightness allow crimping with one hand
- Communicating led and work area lighting
- Hanging ring for shoulder strap or carabiner

BLP80

80KN BATTERY OPERATED HYDRAULIC CRIMPING TOOL

/ USE

Electrohydraulic crimping tool for cables up to 300 mm². ENEDIS power lines network. Uses C80 or C60 type dies.

/ TECHNICAL SPECIFICATIONS

Quick opening and closing D-head, 180° rotation. Single trigger with automatic return. LED lighting of work area. Lightweight 18V Li-Ion 2Ah battery with charge indicator. Supplied in plastic case with 1 battery and 1 charger.

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BLP80	80 kN	13 mm	6 - 300 mm ²	18V-2Ah	128 x 75 x 420 mm	3,7 kg

Accessoires	Description
AB18LI200	18V Li-Ion 2 Ah battery with power load indicator
AC18220	Charger 220V AC European plug



- Quick opening and closing D-head, 270° rotation.
- 2-speed tool: fast advance/high pressure.
- Tilting and locking double trigger control.
- IntelLED communication system and work area lighting.
- Very robust shell with anti-slip coating.

BP80

BATTERY OPERATED CRIMPING TOOL 80 KN

/ USE

Electro-hydraulic press for crimping connectors up to 300 mm². Industrial applications and electrical networks. Uses C80 or C60 type dies.

/ TECHNICAL SPECIFICATIONS

Double trigger: advance, hold, retract. Electronic crimping end control. INTELED LED ring. Hanging ring for shoulder strap. 18V Li-Ion 5Ah battery with charge indicator. Delivered in a plastic case with 2 batteries and 1 charger.

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BP80	80 kN	13 mm	6 - 300 mm ²	18V-5Ah	355 x 75 x 325 mm	5 kg

Accessoires	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug



- Open C-head with direct access, 180° rotation.
- 2-speed tool: fast advance/high pressure.
- Tilting and locking double trigger control

- IntelLED communication system and work area lighting.
- Very robust shell with anti-slip coating.



BP13026 - BP13038

C-SHAPE BATTERY OPERATED CRIMPING TOOL 130 KN

/ USE

Electro-hydraulic press for crimping connectors up to 400 mm². Industrial applications and power networks. Particularly suitable for crimping overhead lines. Uses C130 type dies but also C80 and C60.

/ TECHNICAL SPECIFICATIONS

Double trigger: advance, hold, retract. Electronic crimping end control. INTELED LED ring. Hanging ring for shoulder strap. 18V Li-Ion 5Ah battery with charge indicator. Delivered in a plastic case with 2 batteries and 1 charger.

Ref.	Force	Stroke	Hexagonal crimping	Battery	Dimensions	Weight
BP13026	130 kN	26 mm	6 - 300 mm ²	18 V - 5 Ah	400 x 75 x 310 mm	6,5 kg
BP13038		38 mm	6 - 400 mm ²			7 kg

Accessoires	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug



- IntelLED communication system and work area lighting.

- Very robust shell with anti-slip coating.

- Robust U-shaped head, 270° rotation according to NF C33-090.

- 2-speed tool: fast advance/high pressure.

- Tilttable and lockable double trigger control.

BPU130

U-SHAPE BATTERY OPERATED CRIMPING TOOL 130 KN

/ USE

Electro-hydraulic press particularly suitable for deep indenting of Al underground lines from 16 to 240 mm². Press for hexagonal crimping of connectors up to 400 mm². Industrial applications and electrical networks. Uses U130 and C130 type dies. Optional adapters U130C130 and C130PP (not supplied).

/ TECHNICAL SPECIFICATIONS

Double trigger: advance, hold, retract. Electronic crimping end control. INTELLED LED ring. Hanging ring for shoulder strap. 18V Li-Ion 5Ah battery with charge indicator. Delivered in a plastic case with 2 batteries and 1 charger.

Accessoires	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug
U130C130	Adapter for C130 dies
C130PP	Adapter for indenting dies

Ref.	Force	Stroke	Deep indenting	Crimping	Battery	Dimensions	Weight
BPU130	130 kN	26 mm	16 - 240 mm ²	6 - 400 mm ²	18 V - 5,0 Ah	415 x 75 x 310 mm	6,3 kg



BPU210

200KN ELECTROHYDRAULIC CRIMPING TOOL U HEAD 18V BATTERY

/ USE

Electrohydraulic crimping tool for deep indent crimping up to 400mm² underground lines. Hexagonal crimping aerial conductors up to 228 mm². Applications mainly electrical networks or grounding in substation.

/ TECHNICAL SPECIFICATIONS

- U-shaped head with parallel arms for robustness.
- Double switch control : advance, hold, retract.
- Cycle control and crimp validation.
- Tool life management and maintenance cycle.
- Hydraulic double speed for optimised operation.
- Battery large capacity 18V 5A with power load indicator.
- Delivered in a plastic case with 2 batteries and 1 charger.

Ref.	Force	Stroke	Dimensions	Weight
BPU210	200 kN	30 mm	460 x 98 x 345 mm	9,6kg



B62RM

INNOVATION

MULTIFUNCTION HYDRAULIC TOOL



- Tool with **RAPID** head change.
- **MULTI** tool for cutting, crimping and punching.

- **Communicating IntelLED** system and work area lighting.
- **Robust housing** covered with a non-slip layer.

/ USE

Electrohydraulic **MULTIFUNCTION** tool for crimping up to 300mm², cable cutting Ø50mm and hole punching. Industrial multifunction applications. Uses C60 crimping dies.

MULTIFUNCTION tool combinations			
FUNCTION	Capacity	Weight	Dimensions
CRIMP 62 kN	Stroke 13 mm	5,7 kg	435 x 85 x 335 mm
CABLE CUT Ø50mm	Force 62 kN	7,3 kg	540 x 85 x 335 mm
PUNCH-OUT	Force 6 T	4,9 kg	385 x 85 x 335 mm

/ TECHNICAL SPECIFICATIONS

Quick access head with locker, rotation rotative 360°. Double switch control : advance, hold, retract. Cycle control and crimp validation. Hydraulic double speed for optimised operation. Batteries large capacity 18V 5A with power load indicator. Delivered in a plastic case with 2 batteries and 1 charger.

MULTI tool B62RM delivered with :	
Reference	Description
AB18LI500 x2	Battery 18V Li-Ion 5A with power load indicator
AC18220	Battery charger Li-Ion 10,8-18V

Set of:

- 4 hexagonal impact sockets : 10, 13, 16, 19 mm
- 2 hexagonal male sockets
5 mm (l8mm)
6 mm (l19mm)



Tool with progressive trigger control.
Tri-LED integrated lighting.

VC-M18

CORDLESS IMPACT WRENCH 18V

/ USE

18V battery operated impact wrench, for underground shear bolt connectors.

/ TECHNICAL SPECIFICATIONS

- Impact wrench with 4 modes Drive Control to maximise versatility :
 - 3 impact modes 102 / 203 / 339 Nm
 - 1 control mode 34 Nm with auto shut-off
- Reversible belt hook
- Fast charger 1 hour for 18V Li-Ion 5A battery
- Tool delivered in carrynig case with 2 batteries 18V Li-Ion and a fast charger.

Ref.	Battery M18	Drive	Dimensions	Weight
Impact wrench M18FIW	18V Li-Ion 5A power load indicator	Square 1/2" (12,7 mm)	124 x 79 x 234 mm	1,8 kg with battery

Setting mode	Torque MAX	No-load speed	Impact range
Impact 1	102 Nm	0-900 rpm	0-1000/min
Impact 2	203 Nm	0-1650 rpm	0-2400/min
Impact 3	339 Nm	0-2400 rpm	0-3500/min
Torque control	34 Nm	0-1200 rpm	-



Phosphorescent bumper -
high visibility

Built-in LED light with
afterglow illuminates the
work area

Ergonomic rubberised grip
with non-slip dimples

Belt clip



BC.B18V

IMPACT DIVER

/ TECHNICAL SPECIFICATIONS

- Square drive : 1/2"
- No Load Speed (variable speed) : 0 - 2,100 rpm
- Impacts Per Minute (variable speed) : 0 - 3,200 ipm
- Maximum Torque : 170 ft.lbs./230 Nm
- Battery : 18V Lithium-Ion
- Battery charge time : 30 min
- Delivered in case with a battery charger, 2 batteries, a socket set (size 10/13/16/19) and 6 sided end fitting 6 mm.



CP-C130X15

CASE

/ TECHNICAL SPECIFICATIONS

- Case designed to hold a deep punching set 0E, 1E, 2E and 4E for lugs and connectors.
- Supplied empty.



CP-PPEU130

CASE

/ TECHNICAL SPECIFICATIONS

- Case suitable for storing deep punching sets 0E, 1E, 2E and 4E for lugs and connectors.



/ INDUSTRIAL DIN APPLICATION

			MP36, BLP36		MP55, BLP55, BPE55		MP62, BLP62, BPE62		MP130, XP130, BP130		XPH250		XPH450		
															
Hexagonal crimp Lugs and junctions	Sections (mm²)		lg	D36	lg	D55	lg	C60	lg	C130	lg	XPH250	lg	H450	
															
 	DIN 48083	Cu 4	5	D36K4L5											
		Cu 6	5	D36K5L5											
		Cu 10	5	D36K6L5	5	D55K6/20L5/5	5	C60K6L5	12	C130K6L12					
		Cu 16	5	D36K8L5	5	D55K8/16L5/5	5	C60K8L5	14	C130K8L14	12	H250K8L12			
		Cu 25	Al 10	5	D36K10L5	5	D55K10/18L5/5	5	C60K10L5	12	C130K10L12	12	H250K10L12		
		Cu 35	Al 25	5	D36K12L5	5	D55K12/14L5/5	5	C60K12L5	12	C130K12L12	12	H250K12L12		
		Cu 50	Al 35	5	D36K14L5	5	D55K12/14L5/5	5	C60K14L5	12	C130K14L12	12	H250K14L12	14	H450K14L14
		Cu 70	Al 50	5	D36K16L5	5	D55K8/16L5/5	5	C60K16L5	12	C130K16L12	12	H250K16L12	14	H450K16L14
		Cu 95	Al 70	5	D36K18L5	5	D55K10/18L5/5	5	C60K18L5	12	C130K18L12	12	H250K18L12	14	H450K18L14
		Cu 120		4	D36K20L4	5	D55K6/20L5/5	5	C60K20L5	12	C130K20L12	12	H250K20L12	14	H450K20L14
		Cu 150	Al 95-120	4	D36K22L4	5	D55K22L5	5	C60K22L5	14	C130K22L14	14	H250K22L14	14	H450K22L14
		Cu 185	Al 150			5	D55K25L5	5	C60K25L5	14	C130K25L14	14	H250K25L14	14	H450K25L14
		Cu 240	Al 185			5	D55K28L5	5	C60K28L5	14	C130K28L14	14	H250K28L14	14	H450K28L14
		Cu 300	Al 240			5	D55K32L5 (except Cu)	5	C60K32L5	5	C130K32L5	16	H250K32L16	18	H450K32L18
			Al 300					5	C60K34L5	5	C130K34L5	16	H250K34L16	18	H450K34L18
		Cu 400	Al 400							9	C130K38L9	16	H250K38L16	18	H450K38L18
		Cu 500										16	H250K42L16	18	H450K42L18
		Cu 630	Al 500									16	H250K44L16	18	H450K44L18
		Cu 800	Al 630											25	H450K52L25
		Cu 1000	Al 800											25	H450K58L25
			Al 1000											25	H450K60L25



CP-C130X15

Coffret plastique qui peut recevoir 15 jeux de matrices type C130
Plastic carrying case for 15 sets of C130 type of dies



CP-PPEU130

Coffret plastique qui peut recevoir poinçons 0E, 1E, 2E, 4E et matrices MC & MJ
Plastic carrying case for 0E, 1E, 2E, 4E indenters and MC & MJ opening dies



/ INDUSTRIAL (CU)

Hexagonal crimping and Cu indent crimp												
		P125	PFCU6-50	PFCU6-120	MP36, BLP36		P128		MP55, BLP55, BPE55		MP62, BLP62, BPE62	
												
Cable Cu Lungs and junctions	Sections (mm²)		2 barrels	2 barrels	lg	D36	lg	D50	lg	D55	lg	C60
NF C20-130 : XCT, XG7T, COT, CT, CU, MJ 	4				5	D36HFCU4L5	9	D50HFCU4/120L9/5	9	D55HFCU4/125L5/5		
	6				9	D36HFCU6L9	9	D50HFCU6/35L9/5	9	D55HFCU6/35L9/9	9	C60HFCU6L9
	10				9	D36HFCU10L9	9	D50HFCU10/50L9/5	9	D55HFCU10/50L9/5	9	C60HFCU10L9
	16				9	D36HFCU16L9	9	D50HFCU16/70L9/5	9	D55HFCU16/70L9/5	9	C60HFCU16L9
	25				9	D36HFCU25L9	9	D50HFCU25/95L9/5	9	D55HFCU25/95L9/5	9	C60HFCU25L9
	35				9	D36HFCU35L9	5	D50HFCU6/35L9/5	9	D55HFCU6/35L9/9	12	C60HFCU35L12
	50				5	D36HFCU50L5	5	D50HFCU10/50L9/5	5	D55HFCU10/50L9/5	12	C60HFCU50L12
	70				5	D36HFCU70L5	5	D50HFCU16/70L9/5	5	D55HFCU16/70L9/5	5	C60HFCU70L5
	95				5	D36HFCU95L5	5	D50HFCU25/95L9/5	5	D55HFCU25/95L9/5	5	C60HFCU95L5
	120				3,5	D36HFCU120L3	5	D50HFCU4/120L9/5	5	D55HFCU4/120L5/5	5	C60HFCU120L5
	150				3,5	D36HFCU150L3			5	D55HFCU150L5	5	C60HFCU150L5
	185								5	D55HFCU185L5	5	C60HFCU185L5
	240								5	D55HFCU240L5	5	C60HFCU240L5
	300										6	C60HFCU300L6
	400											
	500											
	630											
	800											
	1000											



MP80, BP80			MP130, XP130, BP130			MPU130, XPU130, BPU130			XPRU200			XPH250		XPH450		
																
lg	C80		lg	C130		lg	U130		lg	U200		lg	H250		lg	H450
																
9	C60HFCU6L9		9	C130HFCU6L9		9		C130HFCU6L9								
9	C60HFCU10L9		9	C130HFCU10L9		9		C130HFCU10L9								
9	C60HFCU16L9		9	C130HFCU16L9		9		C130HFCU16L9								
9	C60HFCU25L9		9	C130HFCU25L9		9		C130HFCU25L9	9		C130HFCU25L9					
12	C60HFCU35L12		12	C130HFCU35L12		12		C130HFCU35L12	12		C130HFCU35L12					
12	C60HFCU50L12		12	C130HFCU50L12		12		C130HFCU50L12	12		C130HFCU50L12	12	H250HFCU50L12			
5	C60HFCU70L5		12	C130HFCU70L12		12		C130HFCU70L12	12		C130HFCU70L12	12	H250HFCU70L12			
5	C60HFCU95L5		12	C130HFCU95L12		12		C130HFCU95L12	12		C130HFCU95L12	12	H250HFCU95L12	16	H450HFCU95L16	
5	C60HFCU120L5		12	C130HFCU120L12		12		C130HFCU120L12	12		C130HFCU120L12	12	H250HFCU120L12	16	H450HFCU120L16	
5	C60HFCU150L5		12	C130HFCU150L12		12		C130HFCU150L12	12		C130HFCU150L12	16	H250HFCU150L16	16	H450HFCU150L16	
5	C60HFCU185L5		12	C130HFCU185L12		12		C130HFCU185L12	5x3		U200HFCU185L5x3	16	H250HFCU185L16	22	H450HFCU185L22	
5	C60HFCU240L5		12	C130HFCU240L12		12		C130HFCU240L12	5x3		U200HFCU240L5x3	16	H250HFCU240L16	22	H450HFCU240L22	
6	C60HFCU300L6		12	C130HFCU300L12		12		C130HFCU300L12	5x3		U200HFCU300L5x3	16	H250HFCU300L16	25	H450HFCU300L25	
			9	C130HFCU400L9*		9		C130HFCU400L9	5x3		U200HFCU400L5x3	16	H250HFCU400L16	25	H450HFCU400L25	
				* T3038 only					5x2		U200HFCU500L5x2	16	H250HFCU500L16	25	H450HFCU500L25	
									5x2		U200HFCU630L5x2	16	H250HFCU630L16	18	H450HFCU630L18	
														6x3	H450HFCU800L6x3	
														18	H450HFCU1000L18	



/ INDUSTRIAL APPLICATION

		Hexagonal crimp							
		P126		MP36, BLP36		P128		MP55, BLP55, BPE55	
									
Aluminium cable Hexagonal crimp Al /Cu lugs	Sec- tions (mm ²)	lg	P126	lg	D36	lg	D50	lg	D55
NF C63-061 : ACX, ICAU, CBTAU 	35	9	E140	9	D36E140L9	9	D50E140/173L9/9	9	D55E140/173L9/9
	50			9					
	70								
	95			9	D36E173L9	9	D50E140/173L9/9	9	D55E140/173L9/9
	120								
	150								
	185								
	240								
	300								
Cable Cu Hexagonal crimp Forged lugs	Sec- tions (mm ²)								
HU 	16								
	25								
	35								
	50								
	70								
	95								
	120								
	150								
	185								
	240								
	300								
	400								
	500								
Cable Cu Hexagonal crimp High intensity lugs	Sec- tions (mm ²)			lg	D36	lg	D50	lg	D55
HUR, DPD7 	16								
	25								
	35			5	D36HFCU50L5	5	D50HFCU10/50L9/5	5	D55HFCU10/50L9/5
	50								
	70								
	95			3,5	D36HFCU150L3			5	D55HFCU150L5
	120								
	150								
	185								
	240								
	300								
	400								

pentaesp.com | 547



/ LV INSULATED NETWORKS ALUMINIUM

Hexagonal crimp										
		P126		MP36, BLP36		P128		MP55, BLP55, BPE55		
Cable Al Hexagonal crimp Preinsulated connectors	Sections (mm ²)	lg	P126	lg	D36 	lg	D50 	lg	D55 	
NF C33-021 MJPB, MJPT, MJT, EJPT, MJPBAS, CPTA, CPTAU, EJAS, DPCNA, DPCNU, EDASCNA, EDASCNU, ERP	6	9	E140	9	D36E140L9	9	D50E140/173L9/9	9	D55E140/173L9/9	
	10									
	16			9	D16 D36E140L9 D20 D36E173L9	9	D50E140/173L9/9	9	D55E140/173L9/9	
	25									
	35									
	50									
	54,6									
	70			9	D36E173L9	9	D50E140/173L9/9	9	D55E140/173L9/9	
	70N									
	95									
	120			9	D36E215L9			9	D55E215L9	
	150									
	185									
	240									
Cable Al Hexagonal crimp Preinsulated Junctions	Sections (mm ²)									
MJPAS, MJPASE, JAS4R	50									
	70									
	95									
	50									
Cable Al Hexagonal crimp Junctions	Sections (mm ²)			lg	D36 	lg		lg	D55 	
MJTAS, MJTASE, EJASE, XN8S	50			9	D36E215L9			9	D55E215L9	
	70									
	95									
	150									
	240/95N									



		MP80, BLP80, BP80		MP130, XP130, BP130		MPU130, XPU130, BPU130		XPRU200		
		C80		C130		U130		U200		
lg				lg		lg		lg		
9		C80E140L9	9	C130E140L9	9	 U130C130	C130E140L9	9	 U200C130U U200C130P	C130E140L9
9		D16 C80E140L9 D20 C80E173L9	9	D16 C130E140L9 D20 C130E173L9	9		D16 C130E140L9 D20 C130E173L9	9		D16 C130E140L9 D20 C130E173L9
9		C80E173L9	9 18	C130E173L9 C130E173L18	9 18		C130E173L9 C130E173L18	9 18		C130E173L9 C130E173L18
9		C80E215L9	9 18	C130E215L9 C130E215L18	9 18		C130E215L9 C130E215L18	9 18		C130E215L9 C130E215L18
9		C80E280L9	9	C130E280L9	9		C130E280L9	20		U200E280L9
		C80		C130		U130		U200		
lg				lg			lg			
9		C80E260L9	9	C130E260L9	9	 U130C130	C130E260L9	18	U200E260L18	
		C80		C130		U130		U200		
lg				lg			lg			
9		C80E215L9	9	C130E215L9	9	 U130C130	C130E215L9	9	 U200C130U U200C130P	C130E215L9
9		C80E280L9	9	C130E280L9	9		C130E280L9	20		U200E280L20



/ LV-MV UNINSULATED NETWORKS (ALU OR COPPER)



			MP36, BLP36		MP55, BLP55, BPE55		MP80, BLP80, BP80	
Cable Al Hexagonal crimp Alu. alloy conductor	Sections (mm ²)	lg	D36 	lg	D55 	lg	C80 	
	JL, CN2A, QN2A, ABT, CD, CB, CBO, AT, RDB	22		9	D55E54/100L9/9	9	C80E100L9	
		34,4	D36E120L5	9	D55E72/120L9/9	9	C80E120L9	
		43,1						
		54,6	D36E140L9	9	D55E140/173L9/9	9	C80E140L9	
		75,5						
		93,3	D36E173L9	9	D55E140/173L9/9	9	C80E173L9	
		117		5	D55E210L5	5	C80E210L5	
		148				5	C80E230L5	
		181,6						
		228						
Cable Cu Hexagonal crimp Cu junctions	Sections (mm ²)	lg	D36 	lg	D55 	lg	C80 	
	JU	7,07 (30/10 mm)	D36E54L5	5	D55E54/100L5/5	9	C80E54L9	
		9,6 (35/10 mm)						
		10,8	D36E68L5	9	D55E68/140L9/9	9	C80E68L9	
		12,56 (40/10 mm)						
		12,4						
		14,1						
		15,9 (45/10 mm)	D36E72L5	9	D55E72/120L9/9	9	C80E72L9	
		19,63 (50/10 mm)						
		17,8						
		22	D36E83L5	9	D55E83/173L9/9	9	C80E83L9	
		27,6						
		28,26 (60/10 mm)						
		29,3						
		38,2	D36E100L5	9	D55E54/100L9/9	9	C80E100L9	
		38,46 (70/10 mm)						
		48,3	D36E120L5	9	D55E72/120L9/9	9	C80E120L9	
		59,7						
		74,9	D36E173L9	9	D55E83/173L9/9	9	C80E173L9	
		93,3						
		116						
		146	D36E215L9	9	D55E215L9	9	C80E215L9	
		182				5	C80E230L5	



		MP130, XP130, BP130		MPU130, XPU130, BPU130		XPRU200	
							
	lg	C130	lg	U130	lg	U200	
							
	18	C130E100L18	18		18		C130E100L18
	18	C130E120L18	18		18		C130E120L18
	14	C130E140L14	14		14		C130E140L14
	14	C130E173L14	14		14		C130E173L14
	10	C130E210L10	10		10		C130E210L10
	10	C130E230L10	10		10		C130E230L10
	9	C130E250L9	9		20	U200E250L20	
	5	C130E280L5	5		20	U200E280L20	
	lg	C130	lg	U130	lg	C130	
							
	18	C130E54L18	18		18		C130E54L18
	18	C130E68L18	18		18		C130E68L18
	18	C130E72L18	18		18		C130E72L18
	18	C130E83L18	18		18		C130E83L18
	18	C130E100L18	18		18		C130E100L18
	18	C130E120L18	18		18		C130E120L18
	14	C130E173L14	14		14		C130E173L14
	18	C130E215L18	18		18		C130E215L18
	10	C130E230L10	10		10		C130E230L10



/ LV-MV UNINSULATED NETWORKS (ALU-STEEL)

		MP55, BLP55, BPE55		MP80, BLP80, BP80	
					
Cable Al Hexagonal crimp ACSR conductor	Sections (mm ²)	lg	D55 	lg	C80 
	Crimping on steel				
	17,8	5	D55E <u>54</u> /100L5/5	5	C80E54L5
	22				
	27,8				
	34,4				
	43,1				
	37,7	5	D55E <u>72</u> /120L5/5	5	C80E72L5
	54,6				
	58,9	5	D55E54/ <u>100</u> L5/5	5	C80E100L5
	80				
	69,3	5	D55E <u>72</u> /120L5/5	5	C80E72L5
	88				
	59,7	5	D55E72/ <u>120</u> L5/5	5	C80E120L5
	116,2				
	75,5				
	147,1				
	181,6				
	228				
	Crimping on aluminium				
	17,8	5	D55E72/ <u>120</u> L5/5	5	C80E120L9
	22				
	27,8				
	34,4				
	43,1	9	D55E <u>140</u> /173L9/9	9	C80E140L9
	37,7				
	54,6				
	58,9	9	D55E140/ <u>173</u> L9/9	9	C80E173L9
	80				
	69,3				
	88				
	59,7	5	D55E210L5	5	C80E210L5
	116,2				
	75,5			5	C80E230L5
	147,1				
	181,6				
	228				



		MP130, XP130, BP130		MPU130, XPU130, BPU130		XPRU200		
								
lg	C130		lg	U130		lg	U200	
								
	10	C130E54L10	10	 U130C130	C130E54L10	10	 U200C130U U200C130P	C130E54L10
	10	C130E72L10	10		C130E72L10	10		C130E72L10
	10	C130E100L10	10		C130E100L10	10		C130E100L10
	10	C130E72L10	10		C130E72L10	10		C130E72L10
	9	C130E120L9	9		C130E120L9	9	C130E120L9	
	5	C130E135L5	5		C130E135L5	10	U200E135L10	
						10	U200E160L10	
	9 18	C130E120L9 C130E120L18	9 18	 U130C130	C130E120L9 C130E120L18	9 18	 U200C130U U200C130P	C130E120L9 C130E120L18
	14	C130E140L14	14		C130E140L14	14		C130E140L14
	14	C130E173L14	14		C130E173L14	14		C130E173L14
	10	C130E210L10	10		C130E210L10	10		C130E210L10
	10	C130E230L10	10		C130E230L10	10	C130E230L10	
	5	C130E250L5	5		C130E250L5	18	U200E260L18	
						18	U200E285L18	



/ UNDERGROUND NETWORK APPLICATIONS (LV OR MV), ALUMINIUM OR COPPER PRE-ROUNDING

			MP36, BLP36		MP55, BLP55, BPE55		MP62, BLP62, BPE62	
								
Cable Al & Cu	Sections (mm²)	lg	D36 	lg	D55 	lg	C60 	
 	6			12	D55MR6L12			
	10	9	D36MR10L9	12	D55MR10L12			
	16	9	D36MR16L9	12	D55MR16L12			
	25	9	D36MR25L9	12	D55MR25L12	35	C80MR25L35	
	35	9	D36MR35L9	12	D55MR35L12	35	C80MR35L35	
	50	9	D36MR50L9	12	D55MR50L12	35	C80MR50L35	
	70	9	D36MR70L9	12	D55MR70L12	35	C80MR70L35	
	95	9	D36MR95L9	12	D55MR95L12	35	C80MR95L35	
	120	9	D36MR120L9	12	D55MR120L12	35	C80MR120L35	
	150			12	D55MR150L12	35	C80MR150L35	
	185			12	D55MR185L12	35	C80MR185L35	
	240			12	D55MR240L12	35	C80MR240L35	
	300							

pentaesp.com | 555



/ LV-MV UNDERGROUND NETWORKS ALU-COPPER

		MPU130, XPU130, BPU130							
									
Cable Al (Cu) Deep indent crimp (hexagon on Cu) Lungs and junctions	Sec- tions (mm²)	Indents 	Lugs dies 	Junctions dies 	lg	Cu hexagonal crimp 			
NF C33-090 : C.A, Q.A, C.AU, Q.AU, R.J.A, CXA., CXU., R.J.AU, E.AU, XCX, XDX, XEX, XLX, XGX, XGB, XN8, XDB 	16	 C130PP	POE	U130MCOE	U130MJOE	9	 U130C130	C130E140L9	
	25		P1E	U130MC1E	U130MJ1E	9		C130E173L9	
	35		P2E	U130MC2E	U130MJ2E	9		C130E215L9	
	50		P4E	U130MC4E	U130MJ4E				
	70								
	95								
	120								
	150								
	185								
	240								
	300								
	400								
	500								
	630								
	800								
	1000								
	1200								
	1600								



XPRU200									XPRH450							
																
	Indents	Lugs dies		Junctions dies		Cu hexagonal crimp			Indents	Lugs dies		Junctions dies		Cu hexagonal crimp		
						lg								lg		
	POE	U200U130	U130MC0E	U200U130	U130M-J0E	9		C130E140L9								
	P1E		U130MC1E		U130M-J1E	9		U200C130U U200C130P	C130E173L9							
	P2E		U130MC2E		U130M-J2E	9			C130E215L9							
	P4E		U130MC4E		U130M-J4E	5 x2	U200E280L5X2									
	PM5E	RU200MC5E		RU200MJ5E		10	U200E330L10		PM5E	RH450U200	RU200MC5E	RU200MJ5E		25	RH450E330L25	
	PM6E	RU200MC6E		RU200MJ6E					PM6E		RU200MC6E	RU200MJ6E		20	RH450E400L20	
									PM7E	RH450MC7E		RH450MJ7E		10	RH450E440L10	
									PM8E	RH450MC8E		RH450MJ8E		15	RH450E530L15	
									PM9E	RH450M9	RH450M-C9E			10	RH450E600L10	



/ EARTHING LINES



Hexagonal crimping and C-connectors

MP36, BLP36



PBGD3



P128



MP55, BLP55, BPE55



C-connectors C crimping	Sections	lg	D36 	lg	W50 	lg	D50 	lg	D55 
CC, RCC	C6	9	D36HFCU10L9			9	D50HFCU10/50L9/5	9	D55HFCU10/50L9/5
	C10	9	D36HFCU25L9			9	D50HFCU25/95L9/5	9	D55HFCU25/95L9/5
	C16	5	D36HFCU70L5			5	D50HFCU16/70L9/5	5x2	D55CC16L5x2
	C25-10			5	BG	5	D50HFCU25/95L9/5	5	D55HFCU25/95L9/5
	C25PM								
	C25								
	C25EGM			5	W50E173L5	5	D50E173L5	5	D55CC35L5
	C35								
	C50								
	C70-35								
	C70								
	C75								
	C95-35								
	C95								
	C120								
	C150								
	C185-95								
	C185								
	C240								
Cable Cu Hexagonal crimp Earth lugs	Sections (mm²)								
CDCT	75								
	95								
	116								
	147								
	181								
	240								
Cable Cu Hexagonal crimp Earth lugs	Sections (mm²)	lg	D36 			lg	D50 	lg	D55 
DPD7 29/25	25/29	5	D36HFCU50L5			5	D50HFCU10/50L9/5	5	D55E54/100L5/5





MP62, BLP62, BPE62			MP80, BLP80, BP80			MP130, XP130, BP130			MPU130, XPU130, BPU130			XPRU200		
														
lgC60 			lgC80 			lgC130 			lgU130 			lgU200 		
9	C60HFCU10L9		9	C60HFCU10L9		9	C130HFCU10L9		9		9	C130HFCU10L9		
9	C60HFCU25L9		9	C60HFCU25L9		9	C130HFCU25L9		9		9	C130HFCU25L9		
5x2	C60CC16L5x2		5x2	C60CC16L5x2		12	C130HFCU70L12		12		12	C130HFCU70L12		
5	C60HFCU95L5		5	C60HFCU95L5		12	C130HFCU95L12		12		12		C130HFCU95L12	
5x2	C60CC50L5x2		5x2	C60CC50L5x2		12	C130HFCU150L12		12		12	C130HFCU150L12		
						18	C130CC70L18		18	U130C130	18	C130CC70L18		
						9	C130CC95L9		9		4x2	U200CC95L4X2		
						5	C130CC150L5		5		4x2	U200CC150L4X2		
											4	U200CC185L4		
						lgC130 			lgU130 			lgU200 		
						14	C130HCT75L14		14		15	U200HCT75L15		
						14	C130HCT95L14		14		15	U200HCT95L15		
						14	C130HCT116L14		14		15	U200HCT116L15		
						12	C130HCT147L12		12		11	U200HCT147L11		
						12	C130HCT181L12		12		17	U200HCT181L17		
						12	C130HCT240L12		12					
lgC60 			lgC80 			lgC130 			lgU130 			lgU200 		
5	C80E100L5		5	C80E100L5		18	C130E100L18		18		18		C130E100L18	
										U130C130		U200C130U U200C130P		



ESSENTIAL

PH700

OUR SELECTION

700 BAR HYDRAULIC
FOOT PUMP

- Compact foot pump for better ergonomics.
- Robust design.
- 2 speed tool: fast forward / work forward.
- 1000 bar graduated pressure gauge

/ USE

Hydraulic foot pump with two speeds, developing a maximum pressure of 700 bar. Connection of all types of hydraulic heads 700 bar.

/ TECHNICAL SPECIFICATIONS

- Automatic release at 700 bar.
- Discharge lever for return to the tank. Hook to hold the pedal in the off position.
- Metal base for better stability.
- Supplied with a hydraulic quick coupling.
- Pressure : 700 bar

Accessories	Description
EASYCASE-NUE	Black pastic case for PH700

Ref.	Dimensions	Weight	Ref. series 115	Ref. series 117	Ref. series EDF
PH700	730 x 200 x 180 mm	8 kg	PH700-5	PH700-7	PH700-E

ESSENTIAL

BH702N

OUR SELECTION

HYDRAULIC PUMP 700 BAR
WITH BATTERY

- On-board control system : cutting or crimping selector and steering.
- Excellent weight/power and weight/autonomy ratios < 6 kg.
- 2-button wired remote control (3m): advance, hold, retract.

/ USE

18V Li-Ion 5A battery hydraulic unit with a pressure of 700 bar. Can be connected to the hydraulic heads available in the catalogue. Designed for intermittent operation.

/ TECHNICAL SPECIFICATIONS

- ON/OFF button for power on. LED indicator: battery charge level, cycle indication, maintenance.
- 400W motor controlled with automatic stop at 700 bars.
- Auto OFF after 10 minutes of inactivity.
- Electronic and mechanical protection in case of overpressure or overheating.
- Robust plastic shell with protection level: IP 42 according to NF EN 60529. Manual emergency pressure relief.
- Pump delivered in plastic case with: 2 batteries 18V Li-Ion 5Ah, 1 charger 220V, 1 wired remote control 3m and 0,5L of oil XV32. This pump is supplied with a hydraulic quick coupling.

Accessories	Description
AB18LI500	18V Li-Ion battery 5Ah with power load indicator
AC18220	Charger 220V AC European plug
82801	2 function remote control
82809	Insulating hydraulic oil XV32 0,5L
82814	Foot control pedal
CP-BH702	Black plastic case 768 x 490 x 476 mm for BH702

Ref.	Dimensions	Weight	Ref. series 115	Ref. series 117
BH702N	330 x 160 x 250 mm	5,7 kg	BH702N-5	BH702N-7



- Industrial engine for heavy duty use
- Large oil volume to contain oil heating.
- Drain plug or oil filling and level control.
- 2-button wired remote control (3m): advance, hold, retract.

EH706

220V ELECTRICAL HYDRAULIC PUMP 700 BARS

/ USE

Electric hydraulic unit 220 V with a pressure of 700 bar. Connection with hydraulic heads available in the catalogue.

Accessories	Description
82801	2 function remote control
82809	Insulating hydraulic oil XV32 0,5L
82814	Foot control pedal
CP-BH702	Black plastic case 768 x 490 x 476 mm for BH702

/ TECHNICAL SPECIFICATIONS

- Designed for intensive use: S3/S6 service of 40%. 550 W single-phase 220 V 50 Hz motor with starting capacitor.
- Automatic motor stop at 700 bar.
- Thermal circuit breaker for protection against overload of the electric motor. Robust one-piece plastic housing: IP 55 according to NF EN 60529.
- Manual emergency decompression and manual return of the piston.
- Pump delivered with 1 wired remote control 3m, 0,5L of XV32 oil and 2 fuses.
- Supplied with a hydraulic quick coupling.

Ref.	Power supply	Dimensions	Weight	Ref. series 115	Ref. series 117
EH706	220 V	380 x 200 x 420 mm	17 kg	EH706-5	EH706-7



- Flexible hose mechanically reinforced with coil spring and anti-pinch sleeves.

FHM

700 BAR HIGH PRESSURE HOSE

/ USE

For use with all pumps and hydraulic heads in this catalogue.

/ TECHNICAL SPECIFICATIONS

Supplied with nipples and couplings.

Ref.	Length	Ref. series 115	Ref. series 117	Ref. series EDF
FHM030	3 m	FHM030-5	FHM030-7	FHM030-E
FHM050	5 m	FHM050-5	FHM050-7	FHM050-E
FHM100	10 m	FHM100-5	FHM100-7	FHM100-E

For other lengths, please contact us.

- Kevlar reinforced flexible hose with anti-pinch cuffs.
- Quick-connect coupling with captive dust caps.
- 60 kV insulation



FHI

INSULATING 700 BAR HIGH PRESSURE HOSE

/ USE

For use with all pumps and hydraulic heads in this catalogue. FHI100-5 is a 10 meter flexible hose certified by DGUV. It can be used with cable cutting tools according to DIN EN 50340 and GS-ET-23 on cables with nominal voltages up to 60 kV at 60 Hz.

/ TECHNICAL SPECIFICATIONS

Supplied with nipples and couplings.



Series 115

Series 117

Series EDF

Ref.	Hose length	Ref. series 115	Ref. series 117	Ref. series EDF
FHI030-..	3 m	FHI020-5	FHI020-7	FHI020-E
FHI050-..	5 m	FHI040-5	FHI040-7	FHI040-E
FHI100-..	10 m	FHI076-5	FHI076-7	FHI076-E

For other lengths, please contact us.

Ref.	Hydraulic couplings
FHI...-5	Hydraulic hose with 115 series couplings
FHI...-7	Hydraulic hose with 117 series couplings
FHI...-E	Hydraulic hose with EDF series couplings



- Excellent battery life and no memory effect.
- LED charge indicator on the battery.
- Very good weight to energy ratio.

AB18LI

18V RECHARGEABLE BATTERY

/ USE

These batteries are suitable for all electro-hydraulic tools such as cable cutters, crimping tools and 700 bar pumps in the catalogue.

/ TECHNICAL SPECIFICATIONS

Increased autonomy for maximum productivity.

Ref.	Voltage	Capacity	Dimensions	Weight
AB18LI200	18 V	2 Ah	115 x 75 x 45 mm	0,36 kg
AB18LI500		5 Ah	115 x 75 x 65 mm	0,62



- 2-stage charging to provide performance and durability to the battery.
- Battery state of charge diagnostic system with LED indicator.

AC18220

BATTERY CHARGER 18 V

/ USE

Recharges 10,8 V - 14,4 V and 18 V Li-Ion batteries.

/ TECHNICAL SPECIFICATIONS

- Variable and self-adjusting charging power depending on the battery.
- Diagnostic system: battery charged, battery charging, voltage drops and problems with battery too cold or too hot.

- Reduced charging time:
 - 40 min for full charge: 2.0 Ah battery
 - 90 min for full charge: 5.0 Ah battery

Ref.	Voltage	Dimensions	Weight
AC18220	220 V AC European plug	200 x 140 x 75 mm	0,54 kg
AC18012	12 V car charger	180 x 120 x 80 mm	0,66 kg



EASYLOC

UTILITY LINE LOCATION SYSTEM

/ USE

Utility location system to detect and trace cable runs and pipe networks.

/ TECHNICAL SPECIFICATIONS

Contents : receiver, transmitter, earthing kit, earthing spike, carrying bag, operating instructions

Receiver			
Location depth	Power supply	Dimensions	Weight
0,3 to 7 m	10 x IEC R6 1.5 V	100 x 670 x 260 mm	2,5 kg
Transmitter			
Transmitted power	Power supply	Dimensions	Weight
0,1 W / 0,5 W (switchable)	6 x IEC R20 1.5 V	140 x 260 x 255 mm	2,6 kg



- Lightweight and easy to use.
- Requires only one operator, with no special skills.
- Saves time

SUP600 SUP600E

OVERHEAD CABLE HEIGHT AND CLEARANCE METER / ULTRASONIC RANGE FINDER

/ TECHNICAL SPECIFICATIONS

- Very accurate : 99%.
- Measures heights up to 23 m.
- Measures the distances between up to 6 cables.
- Min. clearance 150 mm.
- Measures distances from other objects (e.g.: posts, walls... up to 23 m).
- Operating temperature : -10 °C to +40 °C.
- Automatic temperature compensation between -10°C and +40°C.

Ref.	Height measurement	Dimensions	Weight
SUP600	Up to 15 m	205 x 100 x 70 mm	0,5 kg
SUP600E	Up to 25 m		



PMT63

MEASURING STICK

/ USE

The PMT63 telescopic insulating stick is designed to carry out measurement operations on overhead networks:

- The height by means of a hook (PMT634: optional accessory).
- The diameter of conductors from 3 to 13 mm by means of a gauge (PMT632: optional accessory)

Ref.	Description
SBH1001	Pouch
PMT632	Gauge for use with M8 adaptor
PMT631	1m epoxy resin insulating end rod with M8 male/female end fittings
PMT634	Hook

TOGETHER

#WEARE **PENTASTIC**



FOLLOW US !



@PENTAESP



ADA-TETRA

MALE PLUG ADAPTER

/ USE

For semi-permanent and permanent tests and measurements on three-phase industrial power outlets.

/ TECHNICAL SPECIFICATIONS

CEE 3P+N+E 6h 415 volts: monitor network voltages with a network analyser, measure insulation resistances, measure loop impedances, measure earthing resistances, etc.

Reference	Safety sockets	Weight
ADAFM-TETRA16	16A-4mm	0.35 kg
ADAFM-TETRA32	32A-4mm	0.45 kg
ADAFM-TETRA6	Pilot 63A-4	0.70 kg



380-IEC

4 MM IP2X TEST PROBE

/ USE

For temporary measurements up to 1000 V CAT III / 600 V CAT IV while benefiting from IP2X safety.

/ TECHNICAL SPECIFICATIONS

4 mm safety connector
Lockable/retractable sheath



606MG6.6-IEC3IV

6.6MM ANGLED MAGNETIC ADAPTER

/ USE

For semi-permanent tests and measurements on circuit breakers, RCDs, etc. without having to loosen their screws: measuring voltages, measuring insulation resistances, checking the operation of RCDs, etc. 1500V CAT III electrical safety protection



217/600V

4 MM LEAD WITH RETRACTABLE SLEEVE

/ USE

Lead particularly recommended for use with safety fuse holders ref TP83 for all appliances with 4 mm Ø sockets and clamp ref TP51.

/ TECHNICAL SPECIFICATIONS

- Stackable lead fitted at each end with a 4 mm plug with retractable sleeve, compatible with 4 mm safety and non safety sockets.
- Extra flexible double-insulated PVC cable, section 2.5 mm².
- Dedicated Intensity : Max. 32 A.
- Limit stipulated by IEC 61010-031 . 600V CAT II



402-IEC-CATIV

TEST PROBE FOR TEMPORARY MEASUREMENTS UP TO 1000 V CAT IV

/ USE

Designed for contacts that are hard to reach, small, remote, or covered with oxidation, paint, dirt, or varnish.



2617-IEC

IP2X 4 MM STACKABLE SAFETY LEAD

/ USE

Recommended for use with safety fuse holders ref. TP 83, all appliances with Ø 4 mm socket and clamp ref. TP51.

/ TECHNICAL SPECIFICATIONS

- Safety lead fitted at each end with a 4 mm safety plug (with rigid sleeve)
- Extra-flexible double-insulated PVC cable, section 2.5 mm².
- Dedicated Intensity : Max. 32 A.
- Dedicated voltage: 600V CAT III - 1000V CAT II



2352-IEC

IP2X 4 MM SAFETY LEAD WITH RIGHT-ANGLED PLUG

/ TECHNICAL SPECIFICATIONS

- Ø 4 mm safety lead fitted with a straight plug and a 90° angled plug
- Extra flexible double-insulated PVC cable, section 1 mm².
- Dedicated Intensity : Max. 19 A
- Dedicated voltage: 1000V CAT III - 600V CAT IV
- Length: 1.50mh



2CEE7/7/ 2310B150

MALE PLUG CABLE 2P+E SCHUKO TYPE

/ USE

- Used for semi-permanent and permanent testing and measurement on French (CEE7/5) and German Schuko (CEE7/3) sockets.
- Enables monitoring of voltages with a network analyzer, insulation resistance measurement, loop impedance measurement, and earth resistance testing



2312/PV4MAUNI

1500V DC CAT III PV TEST LEADS

/ USE

For semi-permanent and permanent testing and measurement on photovoltaic panels with MC4 connectors, such as voltage and power measurement.

/ TECHNICAL SPECIFICATIONS

- Connector type: MC4, 4 mm
- Length: 100 cm



5066-IEC

ALLIGATOR CLIP WITH 4 MM FEMALE BANANA SOCKET

/ USE

Safety crocodile clip with wide jaw opening, equipped with a 4 mm rear banana socket for secure connection to safety leads.

/ TECHNICAL SPECIFICATIONS

- Length : 92 mm.
- Jaw opening : up to 41 mm on end and on round, Ø 25 mm max
- Current : 36 A maxi.
- Voltage : 1000V CAT III / 600V CAT IV.



5004/LM-IEC

ALLIGATOR CLIP

/ USE

Designed for semi-permanent testing and measurement applications up to 1000 V CAT III / 600 V CAT IV.

/ TECHNICAL SPECIFICATIONS

- Connection: 4 mm safety socket
- Rated voltage: 1000 V CAT III / 600 V CAT IV
- Category: safety test accessory
- Compact and robust for versatile use



1067


ALLIGATOR CLIP

/ USE

Designed for quick field repair of 4 mm male banana connectors without the need for soldering.

/ TECHNICAL SPECIFICATIONS

- Connector type: 4 mm banana plug
- Orientation: angled
- Fixation: screw connection
- Robust and reusable construction



1087

TOOL TO REPAIR 4 MM MALE BANANA CONNECTORS

/ USE

Designed for field repair of 4 mm male banana connectors without the need for soldering.

/ TECHNICAL SPECIFICATIONS

- Connector type: 4 mm male banana plug
- Connection: quick-connect with rear entry
- Robust, reusable construction
- Compact dimensions for easy integration



6005-IEC

4 MM CLAMP-TYPE SAFETY WIRE GRIP

/ USE

Self-locking wire grips designed for secure test connections during semi-permanent and temporary measurements. Compatible with 4mm safety test leads.

/ TECHNICAL SPECIFICATIONS

- Rated current: 6 A
- Length: 159 mm
- Protection rating: 1000 V CAT II
- Equipped with 4 mm safety socket for test leads
- Flexible sheath guiding the clamps



6009-IEC

4 MM SAFETY WIRE-GRIP WITH INSULATED CROC CLIPS TO IP2X

/ USE

Safety wire grip with insulated crocodile clips for secure semi-permanent or temporary test connections. Compatible with 4 mm safety leads.

/ TECHNICAL SPECIFICATIONS

- Length: 155 mm
- Clamp opening: up to 20 mm
- Rated current: 20 A max
- Rated voltage: 1000 V CAT III
- Equipped with 4 mm safety socket
- IP2X insulated design



6007-IEC

FLEXIBLE TEST GRIP, IP2X

/ USE

Flexible IP2X test grip designed for temporary or semi-permanent measurements up to 1000 V CAT III. Connects directly to 4 mm safety leads.

/ TECHNICAL SPECIFICATIONS

- Rated current: 6 A
- Rated voltage: 1000 V CAT III
- Compatible with Ø 4 mm safety leads (IEC)
- IP2X protection for safe contact



TP51

TESTER CLAMP FOR FLAT CONTACTS

/ USE

The TP51 clamp is designed for safe and fast connections on flat contacts such as busbars in LV installations.

/ TECHNICAL SPECIFICATIONS

- Fully insulated tester clamp
- 4 mm output for safety leads
- Rated voltage: 600 V CAT III
- Max current (TP51N1): 32 A
- Max current (TP51N2 with fuse): 20 A
- Jaw opening: 0–10 mm (TP51N1), 4–12 mm



6001-IECIV

TEST GRIP

/ USE

The 6001-IECIV is a rigid test grip designed for semi-permanent testing and measurement up to 1000 V CAT IV. It firmly holds rod-shaped contacts, bare wires, pins, and similar conductors to ensure safe and stable measurements.

/ TECHNICAL SPECIFICATIONS

- Rated voltage: 1000 V CAT IV
- Rigid insulated hook design
- 4 mm safety connection socket
- Available in red or black




PREMIUM

ADABV140

NEW

TEST TIP

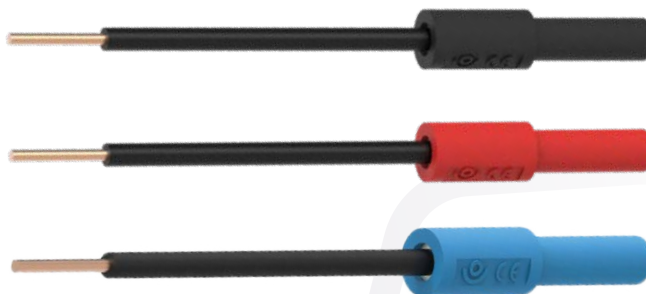

/ USE

For testing and measuring on screw terminals. The stripped side passes as a cable and connects to a screw terminal block, ultimately converting it to a standard 4mm female banana fitting.

/ TECHNICAL SPECIFICATIONS

- 1.8mm flexible rod,
- 4 mm female coupling.

VALUE

/ XTRIO-2B085 • XTRIO-3B216 • PERCHTELE

PREMIUM TELESCOPIC STICK AND TELESCOPIC PROBE



XTRIO-2B085



XTRIO-3B216



PERCHTELE

- Adjust very quickly the length of the probe thanks to its twist locking system.

/ XTRIO-2B085

PREMIUM 2-SECTION TELESCOPIC STICK

/ USE

For testing continuity and measuring the resistance of protective conductors and equipotential bonding on sockets, luminaires, metal frames, etc.

/ TECHNICAL SPECIFICATIONS

4 mm socket.
Extended length : 85 cm.

/ XTRIO-3B216

PREMIUM 3-SECTION TELESCOPIC STICK

/ USE

For testing continuity and measuring the resistance of protective conductors and equipotential bonding on sockets, metal frames, etc.

/ TECHNICAL SPECIFICATIONS

4 mm socket.
Extended length : 216 cm.

/ PERCHTELE

TELESCOPIC PROBE FOR CONTINUITY TEST AND NO VOLTAGE DETECTION

/ USE

This stick allows to make a continuity test on hard-to-reach points such as ceiling lights.

/ TECHNICAL SPECIFICATIONS

1 000V CAT III, 600V CAT IV.
4 mm female connector socket.

Reference	Description	Folded dimensions	Extended dimensions	Weight
PERCHTELE	Economic Telescopic probe 85cm	47 cm	85 cm	300 g
XTRIO-2B085	Premium telescopic probe 85cm	51 cm		350 g
XTRIO-3B216	Premium telescopic probe 216cm	85 cm	216 cm	750 g



REEL IEC3 2715 100

REEL FOR CONTINUITY TEST, 100 M

/ USE

In combination with a tellurometer as an extension reel

/ TECHNICAL SPECIFICATIONS

- 100 meters of PVC insulated cable.
- Cross-section : 1,5 mm².
- 1000V CAT III - 600V CAT IV.
- Connector socket: 4 mm.
- Plastic handle.

Reference	Dimensions	Weight
REELIEC3-2715-100J	19 x 28 x 37cm	4,5 kg

Keep your hands
free thanks the belt !



STB-REEL

BELT REEL FOR CONTINUITY TEST

/ USE

This reel is commonly used during electrical and inspection testing.


/ TECHNICAL SPECIFICATIONS

- 30m ou 50m 0.75mm² wire. 1000V CAT III.
- ABS plastics material.

Reference	Colour	Length
STB-REEL2310-30V	Green	30 m
STB-REEL2310-30JV	Yellow/green	
STB-REEL2310-50N	Black	50 m

ADAFMSECT

GROUNDING WALL SOCKET ADAPTOR

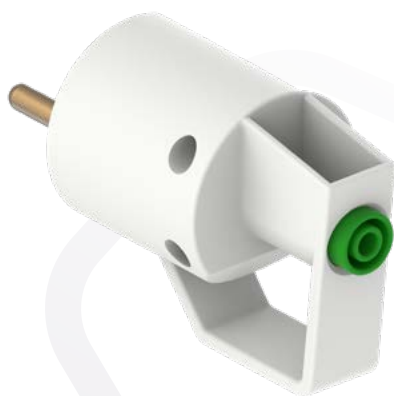

- Dedicated to ease electrical continuity measuring for electrical diagnostic inhouses.

/ USE

By connecting this adapter to the Schuko socket type of a house, the technician can use the earth pole of the socket as reference to test the other sockets with their earth tester.

/ TECHNICAL SPECIFICATIONS

- Current : 16 A.
- 150V AC CAT II

Ref.	Dimensions
AdaFMSECTDE-T-F4-JV	80 x 36mm

- The ULD-40 enables making remote acoustic inspections with great accuracy.
- User friendly
- Works just as well in noisy environments.



ULD-40

ULTRASONIC CORONA/ARCING DETECTOR

/ USE

The ULD-40 accurately pinpoints and identifies corona effects and arcs that may be encountered on any type of high voltage installation simply by scanning around the suspected area. An optional external parabolic sensor, enables the user to pinpoint electrical defects from a longer distance. It easily connects on the side of the ULD and it is equipped with a laser pointing device which enables pinpointing the ultrasound emission source. The dismountable parabolic antenna and the small dimensions of the ULD facilitate its use in the field and allow access to any type of installations.

/ TECHNICAL SPECIFICATIONS

- Display : 7-segment display in relative dB-mode
- Display Range : 90 dB
- Sensor : Built-in with 5 degrees conical directivity
- Audio : Integrated Speaker & Audio output for headset or PC recording
- Centre Frequency : 40 KHz
- Bandwidth : 38 kHz-48 kHz
- Detection : Detects 0.127 mm dia. leak at 5 psi at a distance of 8m
- Battery : Rechargeable Lithium-ion battery
- Delivered with case, battery charger and product manual.

Reference	Description
ULD401	Parabolic sensor
ULD403	Noise simulator
ULD404	Audio cable for PC
ULD405	Headset



VALUE

T2-FR100

OUR SELECTION



SOCKET TESTER FOR FAULTY WIRING, CONTROL OF THE EARTH ELECTRODE (TT) AND 30mA RCDS TEST



IMMEDIATE : No setting up, immediate display. No batteries, no risk of failure.

CORRECT: No possible mistakes thanks to the colour screen switch.

FLEXIBLE: The rotating plug allows easy readings.

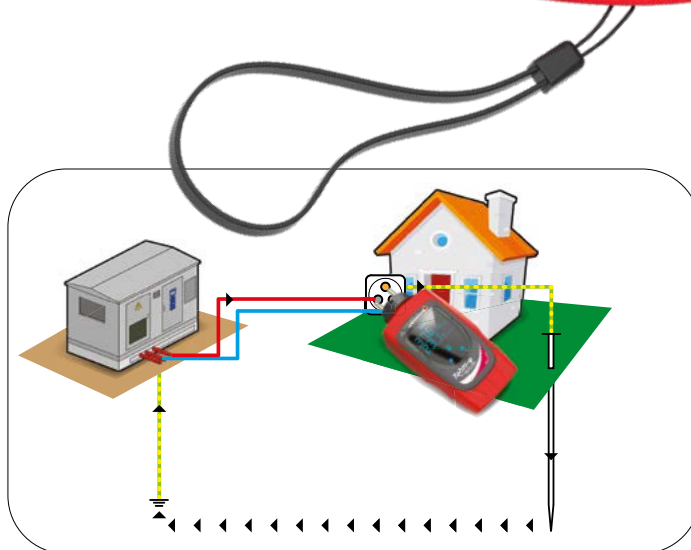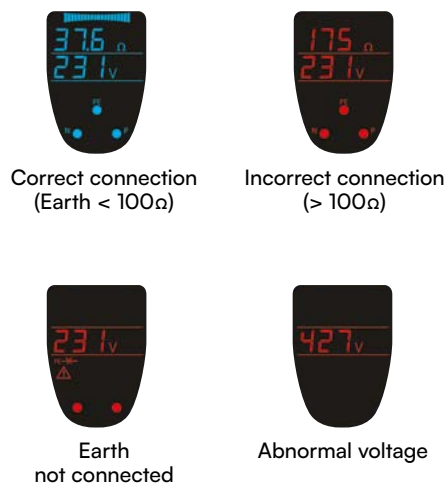

/ USE

LV electrical systems must comply with the installation rules of standard NFC 15-100. Compliance must be guaranteed upon initial commissioning, and also after periodic inspections.

In particular, the value of the EARTH CONNECTION must be inspected. Tohm-e can measure that value from a simple power socket. The device can also check if the socket is wired correctly (position of phase, neutral and earth).

/ TECHNICAL SPECIFICATIONS

- Measurement using the earth loop principle
- Device designed for TT earth systems
- Earth connection measurement: 0.0 Ω to 2kΩ
- Voltage measurement: 50V to 440V (actual RMS value)
- Indication of the position of phase, neutral and earth
- Usage temperature: -20°C to +55°C
- 30mA RCDs test

Ref.	Description	Specificity	Dimensions (mm)	Weight (kg)
TE-FR100	Power socket tester, earth connection impedance meter	IP2X, CAT III, 300V	170 x 75 x 63 mm	250



WHEEL-E

NEW : CALIBRATION SERVICE AVAILABLE

CONTINUITY TESTER AND REEL

STANDARDS

CEI 61010-031 / NF C15-100 ET XPC 16-600

- Worn at the belt to free the operator's hands
- Integrated reel for unhindered movement in the inspected premises
- Original display system (red or blue depending on the quality of continuity) doubled by an audio signal
- Single button for all functions
- Available in two versions:
 - 30m (domestic environments)
 - 50m (industrial environments)



/ USE

Testing and measuring the continuity of protective conductors and equipotential bonding.
In accordance with standard NF C 15-100, Wheel-e makes it possible to make sure that the resistance measured between all frames and equipotential bonding is below 2Ω.
Because it is worn at the belt, Wheel-e is particularly suited to inspecting large buildings, industrial facilities and offices.

/ TECHNICAL SPECIFICATIONS

PROTECTION

- 600V~ CAT III
- 300V~ CAT III
- Compliant with EN 61010-1
- IP2X
- Class 2
- Voltage alert
- Replaceable 0.5A fuse
- Double-sleeved 1mm² PVC cable
- Protection inspected by an accredited outside laboratory in France (LCIE)

MEASUREMENTS

- Automatic polarity inversion (complies with EN 61557-4)
- Measurement range 0.00Ω to 20.0Ω (resolution 0.01Ω)
- Intensity 200mA direct current (complies with EN 61557-4)
- Voltage from 4V to 6V (complies with EN 61557-4)
- Supplied with verification certificate
- Precision ±10% ±0.02 from 0.50 to 2.00.

Supplied complete with belt.

Starting up kit supplied (coiled lead, crocodile clamp, tip and adapter). Cells supplied.

Accessory not supplied : Telescopic probe such as PERCHTELE or X-TRIO lines



Wheel-e
by (electro)RJP

Large range of action	Battery life 10,000 presses	Resistance value
Measurement lead compensation	Cable guide	Beep (can be disabled)
Calibration	Fault voltage display	Worn at the belt

Reference	Weights	Specifications
W2-20H301235	1.8 Kg	30m version, PVC cable 1mm² green
W2-20H501235	2.2 Kg	50m version, PVC cable 1mm² green
EtaElec-X07-011-W20H30V	-	Calibration, adjustment, verification Wheel-e 2 Ohm 30m green
EtaElec-X07-011-W20H50V	-	Calibration, adjustment, verification Wheel-e 2 Ohm 50m green



CPM D H M T

FOLDING KEY CPM

/ USE

Folding key CPM are specially made to adapt to your composition. 21 different codes which can be combined by 2, 3, 4 or 5 on the same key. The disposition of elements is determined by our cares according to number and components selected. All combinations are possible such as : CPM-B-J-T-M, CPM-E-H-N-T and CPM-B-G-H-M-T.

/ TECHNICAL SPECIFICATIONS

Made in bronze.

Elements	Section	Description	Code	Use
FEMALE KEY	Square	6 x 6	A	For square lock 6 mm male
		8 x 8	B	For square lock 8 mm male
		14 x 14	C	Opening and closing of polyvalent cases
		15 x 15	D	
		16 x 16	E	
	Triangular	11	H	Access to the technical area of phone box
		13	J	For electrical boxes and cabinets
		15	L	Old openings
		18	P	
		8	K	For triangular lock 8 mm
		5	G	Opening padlock
		7	I	For fixing screw to triangular head (TTR)
	1/2 moon	1/2 moon Ø 5	X	Opening padlock
MALE KEY	Square	7 x 7	T	Opening technical sheaths and old openings for female lock from 6 to 8 mm
	Right-angled	4.5 x 9 Long	M	Opening door of sheaths S 300
		4.5 x 9 Short	N	
	Teat	Boob Ø 1.8 setting over with guide Ø 10	R	Opening building electrical cabinets
	Cross	Cross 1.2	S	Opening Belgian electrical boxes and cabinets
		Double teat Ø 2.3	Y	Gas riser apparatus
	Double bar	Bit 2.2	V	For female double bit safety lock 3 mm
		Bit 2.9	W	



TP71

SUPPORT RODS FOR CURRENT METER PANELS

/ USE

This set is used to put up or put down electricmeters or to maintain it in a sloped position.

/ TECHNICAL SPECIFICATIONS

Kit content:

- Two rods for right position, Ø 5 mm Length : 340mm
 - Two rods for left position , Ø 5 mm Length : 170mm
 - One screwdriver handle Ref. TP 71MV
- Max. weight of 50 daN on the 4 rods.

Reference	Dimensions	Weight
TP71	380 x 40 x 40 mm	350 g

Spare parts	Description
TP71T	Case
TP71VD	Rod for right position
TP71M	Screwdriver handle
TP71VC	Rod for left position (bent rod)



P109

LEAD PLIERS WITHOUT TEXT BLOC

/ TECHNICAL SPECIFICATIONS

- Pliers made from black steel for 10 mm leads.
- Engraving block possible on one or two sides, until 10 text blocks : please contact us.
- The lead pliers (ref. P109) are delivered without accessories.

Reference	Lenght	Weight
P109	15 cm	190 g

Spare parts	Description
P109BG	Single block engraved with text
P109BV	Single block without engraving
P109V	Bag of 10 spare screws
P109P	Lead Ø 10 mm (in bag of 1000 pieces)
P109PF	Lead Ø 8 mm on 200 mm rod (in bag of 1000 pieces)
P109F 1000	Wire seals n° 1 Ø 1,11 mm (on reel)



P109A

PLASTIC CABLE TIES

/ USE

The seal is done with the same pliers used for lead (ref. P109).

/ TECHNICAL SPECIFICATIONS

- Head: 10 mm.
 - Length 160 mm (240 mm on demand, by 100 pieces).
 - Wire Ø 1,2 mm.
- Bag of 300 pieces.

Reference	Color
P109ABE	Blue
P109AR	Red
P109AB	White
P109AJ	Yellow
P109AN	Black
P109AG	Gray



- Lightness, ergonomic, stainless steel blade to maintain durability and sharpness.

C365-C370-C375-C371

ELECTRICIAN POCKET KNIVES

Ref.	Handle	Version	Blade length	Overall length	Weight
C365	Bubinga handle	1 straight blade	80 mm	180 mm	65 g
C370	Varnished wooden handle	1 curved blade	75 mm	175 mm	70 g
C371	Black ABS handle	1 straight blade	80 mm	180 mm	60 g
C375	Bubinga handle	1 straight blade + 1 curved blade	straight blade : 80, curved blade : 75	180 mm	100 g



A02

SHARPENING STEEL

/ USE

Its shape makes it easy to sharpen electrician knives, pruning blades, axes, etc.

/ TECHNICAL SPECIFICATIONS

This sharpening stone comes complete with a protective plastic handle.

Reference	Lenght	Weight
A02	250 mm	220 g



P97

SELF ADJUSTING CUT AND STRIP TOOL

/ USE

The tool can be operated with one hand and ensures quality stripping and cutting of the cable.

/ TECHNICAL SPECIFICATIONS

- Wire cutting notch.
- Stripping length : 4 to 18 mm
- Stripping capacity : 0,02 mm² to 10 mm².

Reference	Lenght	Dimensions in blister	Weight
P97	200 mm	250 x 115 x 30 mm	150 g



O03

ROUND WIRE STRIPPER

/ USE

For stripping of outer insulation from cables. Spring loaded gripping arm, blade has adjustable cutting depth. Blade can be turned by pushing the side knob, to cut along the length of cable.

/ TECHNICAL SPECIFICATIONS

- Spring loaded gripping arm, blade has adjustable cutting depth.
- Blade can be turned by pushing the side knob, to cut along the length of cable.

Reference	Lenght	Weight
O03	135 mm	140g



- Each tool is delivered with a spare blade in the handle.
- The blade is adjustable to the insulation thickness.

C366 - C366 A

SELF ADJUSTING CUT AND STRIP TOOL

/ USE

Stripping tool for regular cables. Capacity Ø 8 to 28 mm. Circular and longitudinal cut.

/ TECHNICAL SPECIFICATIONS

- Rotating blade for circular and longitudinal cut.
- Adjustable cutting depth with a red knurled nut.
- The cable to be stripped is positioned by a guiding « V » slot with return spring.
- Handle made of PA (Polyamide).
- Special hardened steel blade.

Ref.	Number	Overall length	Weight
C366	28	170 mm	75 g
C366 A	27	130 mm	70g



C368

JACKET REMOVER WITH RETRACTABLE BLADE

/ USE

Longitudinal cut.

/ TECHNICAL SPECIFICATIONS

- Lightweight, retractable blade with guiding security tip.
- For a longitudinal cut of maximum 3,5 mm thick insulation cable.
- Insulated PA handle (PA - Polyamide)

Reference	Lenght	Weight
C368	170 mm	90 g



A13AV

STRAP BANDING TOOL

/ USE

Tool used for banding steel or stainless-steel straps.

/ TECHNICAL SPECIFICATIONS

- Delivered in cardboard box.
- No repair of the A13AV banding tool is done.
- Forged steel body protected by paint.
- Maximum tensioning force : 1100 daN

Ref.	Dimensions	Weight
A13AV	270 x 93 x 90 mm	1,95 kg



T-PASS

STEEL STRAP PASSING TOOL

/ USE

The T-PASS is a non-conductive tool designed to make the installation of steel strapping on poles safer and easier, even when an existing cable run is present. Its shape has been engineered to slide under cable ducts, even when tightly secured to the pole, without any risk of damaging the existing cables. The T-PASS therefore acts as a safe guide for passing the strapping, and also keeps it in place throughout the entire banding operation. This allows the technician to keep both hands free while working.

/ TECHNICAL SPECIFICATIONS

- Sold in pairs with an attachment cord
- 100% insulating material: reinforced polyamide
- Patented product.



1 x 60 mm



2 x 120 mm



1 x 120 mm



2 x 60 mm



Ref.	Dimensions of one "T"	Weight
T-PASS	190 x 100 x 21 mm	120 g



C119

STEEL STRIP SHEARS

/ TECHNICAL SPECIFICATIONS

Equipped with a return spring, designed to cut steel strip at the desired length. Its specific shape facilitates collar fixation.

Reference	Length	Weight
C119	230 mm	490 g



A13

MANUAL TENSIONER

/ USE

For fixing and cutting steel strip from 10 mm to 20mm wide, and 4/10e to 7/10e thick.

Reference	Dimensions	Weight
A13	305 x 85 x 65 mm	1.370 kg



P115

CLAMPING TOOL FOR STEEL STRIP

STANDARDS

C33-226, UTE C33-223
NF C 33-223, HN33S23

/ USE

Specific pliers used to bind all types of pipes, cables, ropes, boxes, etc...
It allows to cut metallic strip thanks to a cutting part.

/ TECHNICAL SPECIFICATIONS

- For steel strips up to 10 mm wide.
- Suitable for all Øs and sections.

Reference	Dimensions	Weight
P115	160 x 25 x 56 mm	240 g



F06 C

CLASP FOR METAL STRIP

/ TECHNICAL SPECIFICATIONS

Clasp for 20 mm stainless steel strip.
Bag of 100 pieces.

Reference	Weight (kg)
F06 C	1 kg



PE9Y

PLASTIC-COATED
PLIERS FOR
INSULATED
CONNECTORS

/ USE

Used in telephone field for multi pair wires.

Reference	Lenght	Weight
PE9Y	150 mm	150 g



P110

PLIERS FOR
PLASTIC COLLARS

/ USE

For fixing and cutting Rilsan plastic collars.

/ TECHNICAL SPECIFICATIONS

Steel pliers, lacquer finish.

Reference	Lenght	Weight
P110	200 mm	320 g



F06-4 / F06-7

STAINLESS STEEL
STRIP

/ TECHNICAL SPECIFICATIONS

Reel of stainless steel strip 20 mm wide.

Reference	Thickness	Dimensions	Weight
F06 4	4/10e	230 x 230 x 25 mm	3 kg
F06 7	7/10e		5 kg



• No vibration : belt
driven wheel.

002

TOPOMETER

/ USE

For road and field measurements.

/ TECHNICAL SPECIFICATIONS

- Counter capacity : 9 999.99 m
- Centimetres display : precision 0.05%
- Wheel Ø : 318,5 mm
- Belt width : 20 mm Locking device and cleaning device.
- Support stand and removable handle.
- Accessory : case Ref. 002M (not supplied)



• 100% safe :
no conductive
metallic parts.

NCT

NON-CONDUCTIVE TAPE MEASURER

/ TECHNICAL SPECIFICATIONS

- Tape is constructed of highest quality FRP — Fibre Reinforced Plastic material.
- The material will not stretch and when used correctly will allow years of use.
- Standard length : 3 m.

Ref.	Length	Dimensions	Weight
NCT	3 m	83 x 73 x 29 mm	150 g



D60

INSULATED PLASTIC FOLDING
RULES

STANDARDS

CERTIFIED EC - CLASS 3

/ TECHNICAL SPECIFICATIONS

- 10 section insulated folding rulers, made of ABS plastic.
- Extended length : 2 m.
- Double-sided graduation.
- Delivered in blister.



P135P

ROUND PAINTBRUSH

/ TECHNICAL SPECIFICATIONS

Dielectric round paintbrush with plastic ring.

Ref.	Ø	Length	Weight
P135 P23	23 mm	200 mm	15 g
P135 P30	30 mm		20 g



L10

HACKSAW SPARE BLADE "ULTRA MAJOR"

/ USE

Especially designed for engineering, workshops, etc.

/ TECHNICAL SPECIFICATIONS

Super High Speed Steel with molybdenum - rustproof treated.
High cutting performances, maximum precision.

Reference	Number of teeth	Length
L10 08D	8 teeth/cm	300 mm
L10 10D	10 teeth/cm	
L10 12D	12 teeth/cm	

Alphabetical index

O-9

1.5m screw type earth rod with double split connectors	390
1.5m screw type earth rod with single split connector	390
1000V 3/8" SQ female hex socket	298
1000V Fully Insulated adjustable spanner	297
1000V Fully Insulated adjustable spanner	293
1000V Fully Insulated diagonal cutting pliers	286
1000V Fully Insulated half-round 45 bent nose pliers	283
1000V Fully Insulated half-round long nose pliers	284
1000V fully Insulated long flat nose pliers	285
1000V fully Insulated side cutting pliers	286
1000V fully Insulated stripping pliers	280
1000V fully Insulated universal pliers	282
1000V Hybrid cable cutting pliers	277
1000V Hybrid Insulated female hexagonal cross spanner	297
1000V Hybrid long flat nose pliers	276
1000V insulated 12-sided female socket 3/8" (9,53 mm) square drive	298
1000V insulated 12-sided female socket - long series 3/8" (9,53 mm) square drive	298
1000V insulated 90° bent male hex key	297
1000V insulated adapter 1/2" - 1/4" (12,7 mm - 6,35 mm)	299
1000V insulated adapter 1/2" - 3/8" (12,7 mm - 9,53 mm)	299
1000V insulated adjustable spanner	297
1000V insulated bent TORX key T50	292
1000V insulated cable cutter	294
1000V insulated cable cutting and stripping pliers for remote energy meter	280
1000V insulated cable cutting pliers	281
1000V insulated cable cutting pliers	279
1000V insulated connector pliers	282
1000V insulated diagonal cutting pliers	285
1000V insulated double head 12-sided ratchet spanner	296
1000V insulated double rack and pinion pliers with mechanical locking	316
1000V insulated double slip-joint adjustable pliers	278
1000V insulated electrician scissors	307
1000V insulated end cutting pliers	287
1000V insulated female hexagonal socket - 1/2" (12,7 mm) square drive	299
1000V insulated female hexagonal socket - 3/8" (9,53 mm) square drive	298
1000V insulated female hexagonal socket 1/4" (6,35 mm) square drive	298
1000V insulated female hexagonal socket, long series, 1/2" (12,7 mm) square drive	299
1000V insulated female hexagonal socket, long series, 1/2" (12,7 mm) square drive	299
1000V insulated female magnetic hexagonal socket 3/8"	298
1000V insulated flat nose pliers	285
1000V insulated frontal ratchet cable-cutter Ø35mm	328
1000V insulated half-round 45° bent nose pliers	283
1000V insulated half-round long nose pliers	284
1000V insulated handle with flexible shaft and magnetic tip	292
1000V insulated hexagonal screwdriver	321
1000V insulated lineman universal pliers	283
1000V insulated long extension 1/2"	299
1000V insulated long extension 1/4"	298
1000V insulated long extension 1/4" with handle	298
1000V insulated long socket extension 3/8"	298
1000V insulated long socket extension 3/8" with mechanical locking	298
1000V insulated LV Pliers for connection cable CC 1.2 LC 1.6	402
1000V insulated magnetic male hexagonal socket 3/8" (9,53 mm) square drive	299

1000V insulated male hexagonal socket - 1/2" (12,7 mm) square drive	299
1000V insulated male hexagonal socket - 3/8" (9,53 mm) square drive	298
1000V insulated male hexagonal socket 1/4" (6,35 mm) square drive	298
1000V insulated male T-handle hex keys - Short and long version	297
1000V insulated male Torx socket 3/8" (9,53 mm) square drive	299
1000V insulated multifunction tool	305
1000V insulated Phillips screwdriver with smart diameter blade	290
1000V insulated Pozidriv screwdriver with smart diameter blade	291
1000V insulated ratchet cable-cutter Ø40mm	327
1000V insulated ratchet cable-cutter Ø60mm	327
1000V insulated ratchet ring spanner 6-sided	297
1000V insulated ratchet spanner 1/2" square drive with mechanical locking	299
1000V insulated reversible ratchet spanner 1/2" (12,7 mm) square drive	299
1000V insulated reversible ratchet spanner 1/4" (6,35 mm) square drive	295
1000V insulated reversible ratchet spanner 3/8" with mechanical locking	298
1000V insulated reversible ratchet spanner 3/8" with mechanical locking	298
1000V insulated reversible ratchet spanner 3/8"	298
1000V insulated round nose pliers	284
1000V insulated scissor clamp	307
1000V insulated screwdriver for round headed or conical square countersunk screws	292
1000V insulated screwdrivers	288
1000V insulated short extension 1/2" (12,7 mm)	299
1000V insulated short extension 1/2" with mechanical locking	299
1000V insulated short extension 1/4"	298
1000V insulated short extension 3/8"	298
1000V insulated short socket extension 3/8" with mechanical locking	298
1000V insulated side cutting pliers	286
1000V insulated single head bent socket spanner 6-sided	293
1000V insulated single head socket spanner 12-sided	296
1000V insulated single open ended ratcheting wrench	296
1000V insulated SLIP-JOINT ADJUSTABLE PLIERS	279
1000V insulated SLIP-JOINT ADJUSTABLE PLIERS	279
1000V insulated slotted screwdriver with smart diameter blade	290
1000V insulated socket adapter 3/8" to 1/4"	299
1000V insulated socket adapter 3/8" to 1/4"	299
1000V insulated socket set 1/4" - 3 tools with ratchet spanner	303
1000V insulated socket set 1/4" - 5 tools with ratchet spanner	299
1000V insulated socket set 1/4" - 5 tools with ratchet spanner	302
1000V insulated socket set 1/4" - 5 tools with ratchet spanner	302
1000V insulated socket set 1/4" - 5 tools with ratchet spanner and extension	302
1000V insulated socket set 3/8" - 13 tools with ratchet spanner and extension	301
1000V insulated socket set 3/8" - 17 tools with ratchet spanner and extension	300
1000V insulated socket set 3/8" - 18 tools with ratchet spanners and extension	300
1000V insulated socket set 3/8" - 19 tools with ratchet spanners and extension	301
1000V insulated socket set 3/8" - 23 tools with ratchet spanner and extension	301
1000V insulated socket set 3/8" - 24 tools with ratchet spanners and extension	301
1000V insulated socket set 3/8" - 6 tools with ratchet spanner and extension	300
1000V insulated socket set for confined spaces	303
1000V insulated socket to be used with external hexagon screws	289
1000V insulated strip saw	400
1000V insulated T wrench 1/2"	299

Alphabetical index

1000V insulated torque limiting screwdriver 4,5 Nm and 5 Nm	293	850mm steel copper clad spiked earth rod	390
1000V insulated torque limiting socket 3/8" (9,53 mm)	299	8ft (2.44m) bottom pole section	381
1000V insulated Torx female socket - 3/8" (9,53 mm) square drive	299	8ft (2.44m) pole (2x4ft sections joined by chain)	381
1000V insulated Torx screwdriver with smart diameter blade	291	8ft (2.44m) top pole section	381
1000V insulated triangular socket spanner 11 mm with handle	296	8ft/16ft telescopic pole with OLI socket & sling	382
1000V insulated T-wrench 12-sided	296	8ft/16ft telescopic pole	382
1000V insulated T-wrench 3/8" square drive with mechanical locking	299	A	
1000V insulated T-wrench 3/8" square drive with mechanical locking	299	Adapter for reel holder with u end fitting	182
1000V insulated T-wrench 6-sided	296	Additional earthing equipment	199
1000V insulated T-wrench, long version	296	Additional earthing equipment	199
1000V insulated universal pliers	282	Adhesive tape	477
1000V insulating bent brush	295	Adjustable and removable straps	56
1000V insulating cable cutting pliers with double cutting edges	280	Adjustable climbers for round poles	520
1000V insulating fuse-puller pliers with adjustable jaws	278	Adjustable electrician face shield with support for helmet	16
1000V insulating handle for earth rods	222	Adjustable fixed points for vertical or oblique conductors	247
1000V insulating innovation long bent nose pliers	275	Adjustable hook spanner	329
1000V insulating long bent nose pliers	275	Adjustable lockout cable	88
1000V insulating long flat nose pliers	276	Adjustable lockout device for 1/4 turn valve	94
1000V insulating notche pliers	277	Adjustable safety glasses and sunglasses	17
1000V insulating pliers made of composite dedicated to lead sheath stripping	401	Adjustable scoring stylus for peelable semiconductor with chamfered transition	425
1000V Reinforced hybrid cable cutting pliers	278	Adjustable scoring stylus for peelable semiconductor with chamfered transition	425
1000V Universal insulating pliers	274	Adjustable work positioning lanyard 2 m	65
110—1000 V Voltage Detector	145	Adjustable, clear safety goggles	17
11kA Snap-on earthing kit	368	Aei henley fuse head	385
120kN hydraulic crimping press with 42mm stroke supplied with die sets from 16 to 400 mm²	535	Aerial earthing lifting device	235
120sqmm Arctic Orange Aluflex Lead	387	Air bag protection kit (lv and hv)	74
120sqmm Clear Aluflex Lead	387	Ajustable valve lockout	89
120sqmm Strain relief	389	All purpose safety lashing system	508
120sqmm Tension spring	389	Alligator clip	565
150sqmm Arctic Orange Aluflex Lead	387	Alligator clip	565
150sqmm Tension spring	389	Alligator clip with 4 mm female banana socket	565
1-69 kV voltage detector Dual range	109	Aluminium alloy connector opening 24 mm	71
18V rechargeable battery	562	Aluminium alloy connector, opening 61 mm	71
20-100 Insulated reversible ratchet torque wrench 1/2" square drive	303	Aluminium and copper earthing and short circuit cables	238
220V electrical hydraulic power unit	561	Aluminium cable connections	241
25m rope with pulley and hook WLL:50daN	497	Aluminium cable winch	488
2ft bridging pole	382	Aluminium hook ladder	517
2ft special pole assemblies for earth tape bridging kits	381	Aluminium plier for LV cable	399
3 elements rescue stick 50 kv	455	Aluminium service rope hook	497
30-150 Nm Insulated non reversible ratchet torque wrench 1/2" square drive	298	Aluminium strip saw	403
33kV DLE kit	369	Ammeter for Low Voltage single core Insulated cables	268
33kV kit with s9a ring type line end clamps	368	Anchor clamp	508
4 mm clamp-type safety wire grip	565	Anchorage connector for telescopic pole, opening 110mm	70
4 mm IP2X Test Probe	564	Anchorage ring	70
4 mm lead with retractable sleeve	564	Anchoring stirrup	501
4 mm safety wire-grip with Insulated croc clips to ip2x	565	Angled ball fixed contact point	247
50sqmm arctic blue aluflex lead	387	Anti-impact nitrile gloves	30
50sqmm arctic orange aluflex lead	387	Anti-UV protective cover for helmet with flip-up screen	16
50sqmm reflect aluflex lead	387	APE set with earthing clamp (CDTA) with magnetic lock	236
50sqmm strain relief	389	Arc flash coat, APC 1, ATPV 11 cal/cm², ELIM 9,1 cal/cm²	46
50sqmm tension spring	389	Arc flash coverall with retroreflective tapes	47
6.6mm angled magnetic adapter	564	Arc flash coverall with retroreflective tapes	50
6FT operating pole without sling	382	Arc flash coverall with retroreflective tapes and double zip fastening	46
6FT pole with sling	382	Arc flash grey face shield ATPV 12 OR 25 cal/cm2	16
700 bar flexible hose, 1/4 bsp	561	Arc flash hood for parkas	56
70sqmm strain relief	389	Arc flash jeans	46
80 mm plastic badge "Equipment out of order, do not operate"	95	Arc flash lift front hood	58

Alphabetical index

Arc flash long coat with retroreflective tapes	50	Brush with handle	333
Arc flash polo shirt	44	Bucket bag for temporary carrying	347
Arc flash set	54	Bucket bag for temporary carrying	347
Arc flash set	52	Bucket for working at height	360
Arc flash set	59	C	
Arc flash set	58	Cabin bag for PPE - 42 L	342
Arc flash set	59	Cable anchorage for telescopic pole, length 1,5m.	70
Arc flash set and ARC-LFH40 hood	58	Cable clamp for optimum weight	501
Arc flash set with or without retroreflective tapes	48	Cable clamps with aluminium alloy jaws	501
Arc flash set with retroreflective tapes	47	Cable grip with steel jaws	500
Arc flash set with retroreflective tapes	47	Cable location system	255
Arc flash set with retroreflective tapes	57	Cable ratchet winch hoist WLL:500/1000kg cable length:4/2m	487
Arc flash set with retroreflective tapes	46	Cable ratchet winch hoist WLL:500/1000kg cable length:9/4,5m	487
Arc flash set with retroreflective tapes	50	Cable ratchet winch hoist WLL:800/1600kg cable length:6/3m	487
Arc flash softshell with retroreflective tapes	56	Cable test and identification — core identifiers — paac cable core identifier	264
Arc flash sweatshirt > APC 1 > ATPV 15 cal/cm² > ELIM 15 cal/cm²"	44	Cable's screen cutting pliers	400
ATEX flashlight - zone 0	483	Cable-spiking equipment for single pole and three poles Insulated cables	132
ATEX headlamp - zone 0	483	Cantilever toll box 5-tray	351
ATEX Zone 1 penlight PELI™	483	Canvas bag	346
B		Canvas funny pack	346
Backpack 20l	346	Canvas soft case	346
Backpack for PPE transporting - 40 L	339	Canvas storage bag for electrician's gloves	28
Bag for insulating caps	360	Capacitive voltage detectors proving unit	112
Bag for insulating sleeves	360	Cape chisel	334
Bag for transporting rescue equipment	75	Capsran winch for pulling and lifting	489
Base for rod	472	capstan winch kit	490
Battery charger 18V	562	Capstan winch kit - Pulling	489
Battery operated cable cutter Ø45mm 130kn guillotine - cu, al, acsr	528	Carry bag for shorting cluster kit	392
Battery operated cable cutter Ø65mm 60kN scissor - Cu, Al	529	Carrying bag for earthing device	223
Battery operated crimping tool	537	Carrying case for earthing device	223
Battery operated crimping tool	539	Carrying trolley bag for PPE - 100 L	339
Battery operated crimping tool 55 kN pistol shape	537	Cartridge cable spiker	132
Battery operated crimping tool 62 kN pistol shape	538	Case for safety glasses	17
Battery operated crimping tool U head 200kN for dies U210	540	Case for safety glasses and safety goggles	17
Battery operated hydraulic cable cutter Ø 25 mm	527	"Caution buried cables" sign	468
Battery operated hydraulic cable cutter Ø 40 mm	528	CATU dispenser head with p&b adaptor	384
Battery operated hydraulic cable cutter Ø 55 mm	529	CE10 cross arm/steelwork clamp	372
Battery operated hydraulic cable cutter Ø 85 mm	529	CE10/A2 earth end clamp	373
Battery operated indent crimping tool	540	CE13 line end clamp	377
Battery operated in-line cable cutter Ø35mm 45kN scissor	527	CE15 line end clamp	378
Belt reel for continuity test	566	CE16/120 line end clamp	379
Bending tool for 50 to 300 mm² solid aluminium conductor under-ground cables	309	CE16/140 line end clamp	379
Black aluminium connector side opening 27 mm	71	CE18/A bridging clamp	373
Black leather tool bag	348	CE20 ESI-E1 earth end clamp	374
Block with rolls for ROTO-TMG	419	CE20/2 38-50 earth end clamp	374
Bolt on corona shields for spigots	393	CE20/2 50-60 earth end clamp	374
Bolted type ball stub	375	CE20/2/A/S/RT earth clamp	374
Bonded semiconductor removal tool complete with chamfer cut and Auto-Stop function	422	CE21 earth end clamp	374
Bowthorpe style 4ft (1.22m) bottom pole section	380	CE22/A ESI-S1 line end clamp	378
Bowthorpe style 4ft (1.22m) intermediate pole section	380	CE22/A&B ST line end clamp	378
Bowthorpe style 4ft (1.22m) top pole section	380	CE22/B ESI-L2 line end clamp	378
Box of 10 filters cartridges for half mask	19	CE22/C ESI-L3 line end clamp	378
Branch pruner	181	CE23/A running earth clamp	373
Branch saw	181	CE25 line end clamp	378
Brass body padlocks with removable nylon shell	83	CE27 line end clamp	378
Brass padlock	83	CE28 line end clamp	378
Brass padlock with ABS shell	83	CE35 earth clamp	375
Brush for copper or aluminium conductors	180	CE50 line end clamp	379

Alphabetical index

CE51 line end clamp	379	Coupling wrench	331
CE57 drain earth clamp	374	Cradle kit for LV and MV spliced ladders	517
CE60 sparrow plate MK1 (PRE-2014)	395	Crepe paper	
CE60 sparrow plate MK2 (POST-2014)	395	Crimping pliers	532
CE61 deas bar	395	Crimping pliers 4 to 120 mm ² CU	533
CE69 line end clamp	377	Crimping tool kit for substations	461
CE71 line end clamp	379	Crucifix platform (21 PATT)	392
CE81 line end clamp	377	C-shape battery operated crimping tool 130 kN	539
CE84 dress tee connector for bonds with PB120F ferrules	395	Current flow probe for energy distribution cables	269
CEA : ESI-S2 operating socket	384	Cut-resistant gloves with PU coated palm	29
Chain lever hoist	488	Cutting pliers for plastic cable ties	281
Chain sling	504	D	
Chisel	334	“Danger - Keep out - Electrical station” Aluminium sign	468
Circuit breaker lockout device molded case circuit breaker (480/600V)	92	Demarcation tape in coated fabric	477
Circuit breaker lockout device molded case circuit breaker (480/600V)	93	“De-energized Electrical Work” High voltage lockout	467
Clamp	473	“De-energized Electrical Work” Low voltage lockout	467
Clamping hand with insulating body	498	Device for earthing, short-circuiting and equipotentiality MT	208
Clamping tool for steel strip	421	Device for passing a rope over a conductor	183
Clamping tool for steel strip	572	DH1A applicator head	383
Clamps on insulating sticks for equipotential bonding	245	Dielectric rubber overboots up to 20kV	36
Clampstick - external rode with or without universal adapter	171	Dielectric safety rubber boots 20 Kv & arc flash protection	36
Clasp for metal strip	572	Dielectric safety rubber boots 30 Kv	37
Classic version	170	DIN bayonet socket	384
Classic version	170	Direct current bipolar voltage detectors (500 to 3,600 V DC)	122
Clear protective goggles, interchangeable lens	17	Direct current bipolar voltage detectors (500 to 3,600 V DC)	122
Clear safety glasses, with flat temples and sunglasses	17	Direct current bipolar voltage detectors (500 to 3,600 V DC)	122
Climbers for rectangular concrete poles	517	Direct current voltage detector	120
Climbers for wooden poles	518	Direct discharge module	175
Climbing iron with gaffs for wooden poles	518	Discharge stick	174
Climbing irons for metal poles	520	Disconnected cable and phase identifier	252
Climbing irons for metal towers and profiled supports	520	Disjoncted live LV cable identifier	256
Climbing irons for pruners	520	Disposable earplugs SNR 36 dB	18
Climbing irons with gaffs for wooden poles	518	Disposable hairnet restraint for helmet	15
Climbing protection kit with absorber	66	DLE kit S9B/RT & new cluster	369
Climbing protection kit with retractable fall arrester	66	DLE kit with cross arm clamp	368
Combinaition spanner	330	DLE/CAC cluster bar assembly	391
Comfort safety cable cutters	134	DLE2/A earthing kit	368
Compact group lock box	85	DLE2/B earthing kit	369
Compact telescopic insulating pole for work at great heights	162	Double articulated insulating ladder for live working	514
Compact voltage detector stick	446	Double braided polyester rope, spliced Ø12mm L:200m BL:3300kg	490
Complete earthing and short-circuiting device	205	Double cone sharpener 2000/150 ² -240 ²	428
Complete linemen set for electrical distribution	64	Double earth clamp	460
Complete linemen set for electrical distribution	64	Double loop galvanized steel pulling sleeve or cable puller	502
Complete suspension linemen set (electrical transport)	64	Double winged earth clamp	460
Composite plier for LV cable	398	Double-layer nitrile handling gloves, fully coated and watertight	30
Composite pliers for outer sheath	401	Dress tee connector assembly	395
Cone shaping tool for the end of insulation on 50 mm ² 12/20 kV cable	428	E	
Cone sharpeners case 50 mm ² to 240 mm ²	428	Ear protection system for helmets SNR 26 dB	18
Connectable insulating poles made of Ø 32 mm hollow tube	164	Ear protection system for helmets SNR 33 dB	18
Connectable insulating poles made of Ø 32 mm tube	163	Earmuffs SNR 27 decibel	18
Consignment trolley	248	Earmuffs SNR 36 dB	18
Container for insulating sleeves	360	Earth clamp	460
Convertible insulating ladder 2 et 3 sections	513	Earth Nest Kit No Bag	390
Copper cable connections	241	Earth tape repair kits for nie	370
Cordless Impact Wrench 339Nm 18V + sockets	541	Earthing and short-circuit device at fixed points equipped with mobile perforating terminals for lv cables	197
Corner unwinding rollers	499	Earthing and short-circuit device for MV substations and electrical stations with universal contact clamps	206
Cotton inner gloves	29		

Alphabetical index

Earthing and short-circuit device for MV systems in bare conductors of secondary substations MV	207
Earthing and short-circuit device MV	207
Earthing and short-circuiting (e&s) system with padlock interlock for earth clamp	206
Earthing and short-circuiting clamp	192
Earthing and short-circuiting clamp for LV overhead lines	198
Earthing and short-circuiting device	220
Earthing and short-circuiting device	219
Earthing and short-circuiting device for ball fixpoint	205
Earthing and short-circuiting device for cells MC500, FLUAIR 24G and 24F	205
Earthing and short-circuiting device for low voltage switchboards	191
Earthing and short-circuiting device for low voltage switchboards in industry	190
Earthing and short-circuiting device for lv switchboards or cabinets	188
Earthing and short-circuiting device from the earth for bare mv overhead lines	215
Earthing and short-circuiting device of lv overhead lines	197
Earthing and short-circuiting device overhead lines	221
Earthing and short-circuiting device with spring clamps for overhead lines	217
Earthing and short-circuiting device with spring clamps for overhead lines	218
Earthing and short-circuiting device, 18 ka/1 s	206
Earthing and short-circuiting devices MV	220
Earthing and short-circuiting equipment for bare lv overhead lines	198
Earthing and short-circuiting equipment for bare lv overhead lines	199
Earthing and short-circuiting system for mv substations	205
Earthing arrester for energy cables	254
Earthing device for rgb abb station, 25 ka/1s	205
Earthing device for switchboards, enclosures and cabinets	191
Earthing from the ground with insulating rope	237
Earthing system with clamp-to-vice servo control for 69/90kv and 225kv tension towers	236
Earthing system with locking between clamp and jaw isc : 39 ka/0,3s	236
Earthing, short-circuit and equipotentiality device MV	220
Edge unwinding rollers	499
Electrical accident response - safety sign for electrical areas	466
Electrical hazard warning signs and earth signs	470
Electrical injury first aid safety sign for electrical areas	466
Electrical insulating blankets class O	358
Electrical meter replacement tool set - Excellium kit	315
Electrical plug lockouts	88
Electrical safety kit	452
Electrician face shield with headband and brow-guard	16
Electrician leather bag	349
Electrician leather tool bag	348
Electrician pocket knives	571
Electro-alert detector for safe approach of distribution installation (LV/HV)	144
Electronic capacitive detector of medium voltage presence/absence	110
Electronic capacitive detector of voltage presence/absence	116
Electronic traction dynamometer	493
ELECTROVOLT natural rubber insulating gloves	23
Emergency kit for 20 m	73
End fittings for pruner	176
Equipment carrier bag - 42 L	342
“Equipment containing SF6” sign	471
Equipotential bonding	243
Equipotential bonding set for construction companies	244
Equipotentiality device of overhead lines MV	245
Equipotentiality parking bar on post	214

Evacuation harness	73
Evacuation kit with hand wheel and 20 m rope	72
Explosion sign	470
Extension for clampstick	172
Extra flexible copper and aluminium	240
Extra large safety pin for warning mesh	472
F	
Fall arrest kit for industrial maintenance	67
Fall arrest kit specially designed for work on catenary lines and overhead structures	67
Fall arrester	70
Ferrule type terminations	389
Fingerless cotton undergloves	27
Fire blankets	457
Fire extinguishing ball with automatic release	456
Fire set	457
First aid kit	453
First intervention break-in bag for firefighters	74
Fixed earthing rod for high busbar sets	234
Fixed point system for earthing	247
Fixing rod with adjustable straps	474
Fixing rod with hooks	474
Fixing rod with metal base	476
Fixing rod with penetration tip	474
Fixing rod with penetration tip, for fences	474
Fixing rod with penetration tip, for warning lantern	474
Flame resistant inner gloves	27
Flame-retardant fleece lining for parka	56
FLASH&GRIP composite insulating gloves with arc flash protection	23
Fleece beanie	15
FLEX&GRIP composite insulating gloves	23
Flexible test grip, IP2X	565
Flexible version	170
Flexible version	170
Foldable FFP2 mask against fine particles and dust	19
FFP3 soft-shell mask against fine particles and dust	19
FFP3 soft-shell mask against fine particles and dust	19
Folding key CPM	570
Folding rescue stretcher set	454
Full body harness "pro" maintenance	68
Full body harness for works in suspension	69
Full body harness with 180° seat belt for electrician works	68
Full body harness with 180° seat belt for HVa live working	68
Full case 50 mm ² to 240 mm ² without TC	431
Full case 50 mm ² to 630 mm ² with TC630	432
Full case for lv/mv impregnated paper insulation cable	406
Full kit for 20kv 1200 mm ² cable (peelable semiconductor)	433
Full kit for distribution underground cable 50 mm ² up to 240 mm ² with penciling tool	432
Full kit for distribution underground cable 50 mm ² up to 400 mm ²	431
Full kit for distribution underground cable 50mm ² up to 630mm ²	431
Full kit for medium voltage underground cable 50 mm ² up to 400 mm ²	432
Full kit for medium voltage underground cable 50 mm ² up to 630 mm ²	433
Full kit for medium voltage underground power cables	433
Fully Insulated toolbox	350
Fuse extractor	176
Fuse puller handle with sleeve	195
Fuse puller stick (fuse extraction stick)	195

G		Hydraulic cutting head Ø 25 mm		525
Galvanized steel connector opening 18 mm	71	Hydraulic cutting head Ø 40 mm		525
Gauge for distribution conductors (Gauge in metric)	179	Hydraulic cutting head Ø 55 mm		526
“General requirements” sign	467	Hydraulic cutting head Ø 85 mm		526
Golf type earthing bag	380	Hydraulic cutting head Ø 85 mm		526
Gradually adjustable work positioning lanyard	71	Hydraulic cutting head Ø 85 mm		526
Grounded wall socket adaptor	566	Hydraulic foot pump		560
Group lock box	86	I		
Group lockout box	85	Impact diver		542
Group lockout centre	85	Impact resistant handling gloves, high visibility		30
GS1 operating socket	384	Indent crimping pliers		532
Guided type fall arrester	69	Indent crimping pliers in case with 85 terminals and lugs		532
Guided type fall arrester with energy absorber	70	Indirect discharge module		175
H		"Individual voltage alarm with headlamp		138
Hacksaw spare blade "ULTRA MAJOR"	573	Individual voltage warning		140
Half mask kit against gases, vapours and dusts	19	Industry 3-point fall arrest harness		68
Hand mechanical crimper with 2 composite handles BG/D3 for W50 dies	533	Insulated adhesive tapes		362
Handle for mesh clamps	473	Insulated anchor connector opening 83 mm		70
Handling leather gloves with cuff	31	Insulated angled box-end wrench		279
Hard canvas tool bag for working at height	346	Insulated bolt cutter		328
Hardwood cylindrical handle	491	Insulated frame to delimit the working zone		473
Harness for linemen with moving belt 180° and automatic buckles	68	Insulated fuse extractor screwdriver		309
Hexagonal socket wrench	330	Insulated fuse extractor screwdriver		308
Hexagonal type socket/head assy	386	Insulated hacksaw		305
Hexagonal crimping pliers PFCU6-50	533	Insulated handle with hand guard		308
Hexagonal crimping pliers with cylinders 6 to 120 mm²	533	Insulated junior hacksaw		307
Hexagonal crimping pliers with cylinders 6 to 50 mm²	532	Insulated knife with long blade		306
Hexagonal earth rod	222	Insulated Knife With Short Blade		306
Hexagonal key	330	Insulated plastic folding rules		573
High resistance bag for earthing cable	248	Insulated pliers for lv cable		399
High strenght chain shackle	505	Insulated ratchet cable cutter for steel cable		327
High strenght anchor shackle	505	Insulated ratchet cable cutter ø 32 mm		327
High-visibility arc flash rain set with retroreflective tapes	56	Insulated ratchet cable cutter ø 35 mm (end cutting) with protective head cover		328
High-visibility arc flash sets with retroreflective tapes	57	Insulated ratchet cable cutter Ø 45 mm		327
High-voltage detector	114	Insulated ratchet cable cutter Ø 52 mm		327
High-voltage detector for distribution system	106	Insulated ratchet cable cutter Ø 52 mm		327
Hinged clampstick	172	Insulated ratchet cable cutter Ø 52 mm		327
Holdall bag	344	Insulated ratchet cable cutter Ø 55 mm		327
Holding clamp	473	Insulated ratchet cable cutter Ø 80 mm		327
Hook type socket	383	Insulated return pulley for service ropes, force 60 DaN		497
Hook with safety latch BL:3000kg	490	Insulated rope-operated hoist 240 DaN		486
Hook wrench	331	Insulated shear type cable cutter Ø 16 mm		328
Horizontal pull winch plate	490	Insulated shear type cable cutter Ø 20 mm		328
Hot stick tester	178	Insulated shear type cable cutter Ø 30 mm		328
H-shape hydraulic crimping head 700 bar 250 kN	536	Insulated single head cranked ring spanner (12 sided)		
H-shape hydraulic crimping head 700 bar 450 kN	536	Insulated socket set 3/8" - 18 tools with ratchet spanner and extension		301
HV DC detector	123	Insulated stepladder		516
Hybrid reel-tester of continuity Wheel-e	569	Insulated stranded nylon polyester rope tie		504
Hybrid universal plier with steel cutters	274	Insulated T wrench 1/2" with mechanical locking		299
Hydraulic 18V battery pump	560	Insulated V-shaped lifting antenna		182
Hydraulic crimping tool 2 hands 130kN C head 26mm for dies C130	535	insulating adhesive tape		357
Hydraulic crimping tool 2 hands 130kN C head 38mm for dies C130	531	Insulating bag for connectors		361
Hydraulic crimping tool 2 hands 130kN U head for dies U130	535	Insulating bending tool for low voltage underground cables		309
Hydraulic crimping tool 700 bars 130kN C head 26mm for dies C130	535	Insulating cap for LV insulator		360
Hydraulic crimping tool 700 bars 130kN C head 38mm for dies C130	535	Insulating extensions for PENTA POLE		160
Hydraulic crimping tool 700 bars 200kN extended U head for dies U200	536	Insulating knife with ceramic blade		306
Hydraulic crimping tool 700 bars 450kN H head for dies RH450	536	Insulating ladders - Value range		512

Alphabetical index

Insulating magnet	357	LED headlamp up to 150 lumens	478
Insulating mat	355	LED headlamp up to 50 lumens	478
Insulating mat	354	LED photoluminescent flashlight PELI™	479
Insulating natural rubber gloves + Arc flash APC2	27	Lever screwdriver with flat blade Ø8 mm	292
Insulating operating hook	180	Lifting bracket that can be positioned on top of poles	506
Insulating plastic stool for inside use	448	Lifting fork for metal posts delivered with cover, without handle	491
Insulating plastic stool for outside use	448	Lifting fork for wooden poles	491
Insulating pliers for electrical panels	277	Lifting pulley for steel cables	496
Insulating rescue stick	455	Lightweight rolling individual platform	515
Insulating safety boots, class 1	37	Lightweight rolling individual platform in fibreglass and aluminium	515
Insulating screen 20 kV for substation	362	Line ice breaker rod	181
Insulating sheet 3/10 mm	356	Live line detector HV non contact type	110
Insulating sheet 3/10 mm	356	Live line stripping pliers for Low-Voltage secondary distribution cable's outer jacket (3 adjustable cutting depths)	402
Insulating sheet 8/10 mm	356	Live line tapping socket	384
Insulating sheet with velcro strips	357	Live working boots with insulating soles	33
Insulating single piece plastic stool for inside use	448	Live working safety boots	37
Insulating sleeve for lv conductor wire	359	Lockout device for handles on 1/4 turn valve	94
Insulating sleeve for lv conductor wire	359	Lockout device for ultra fine holes of electrical installations	94
Insulating sticks	167	Lockout hasp	87
Insulating storage box for electrician gloves	28	Lockout hasp 4 mm	87
Insulating stringing block LV life live	496	Lockout padlock with interchangeable shackle - keyed alike	78
Insulating tape	356	Lockout station	86
Insulating transport hook 50 daN	497	Lockout tags	95
Insulating universal stick	173	Long composite insulating gloves	27
Insulating wedge	310	Long insulating	344
Insulating wedge separator	310	Long length LV notched insulating sleeve	359
Insulation chamfering stylus	427	LV detector	98
Insulation piercing connectors for GDDTORS device	199	LV earthing arrester TPBT and phase indicator visutpbt	254
Insulation remover 14 - 40 mm	426	LV live working case	403
Integrated safety cable cutters	136	LV spliced ladder kit	516
Integrated safety cable spiker&cutters	137	LV tool set	322
Interchangeable longitudinal cutting head with 1 or 3 cutting depth positions	437	LV earthing device for switchboards, enclosures and cabinets	192
Intermediate earthing stick for connections at great height, max isc 31,5 ka/1s	228	LV short-circuit and earthing device for switchboards and cabinets	193
IP2X 4 mm safety lead with right-angled plug	564	LV circuit breaker lockout	92
IP2X 4 mm stackable safety lead	564	LV circuit breaker lockout	89
J		LV circuit breaker lockout	90
Jacket remover with retractable blade	571	LV circuit breaker lockout 3 holes	93
JB1030 fuse head	385	LV circuit breaker lockout kit	95
JBONDEN PMR re-closer head	385	LV earthing and short-circuiting device for panel boards and cabinets 4,3 kA/0,5s	194
Jib for installing and removing twisted overhead HV conductors	506	LV earthing kits	369
JOKARI stripping knife	571	LV insulating blanket	
K		LV insulating cap for conductor ends	361
Knife	332	LV Insulating cap for conductor ends	361
Knife with retractable blade - 1000V for TPC cable protection tubes	304	LV insulating protective screen for out-of-reach protection	363
KOALA guying device	523	LV short-circuiting and earthing device for panel	193
L		LV test lamps - 2 floating chisel point probes	265
Lanyard securing rope with connector	71	LV test lamps - 2 rounded point floating probes	266
Large panhandle	375	LV test lamps - fixed chisel tip with round floating probe	265
Large transport bag for insulating mats	343	LV test lamps - fixed rounded tip with floating peg probe	266
Lead pliers without text bloc	570	LV test lamps - round tip with floating long probe	265
Lead sheath spreader (LV-MV)	404	LV/MV Cable Sheathing/ Insulation Removal Tool	426
Lead sheath stripping tool	403	M	
Leather overglove with cuff & self-gripping band	31	M10 to U end fitting adapter compatible with an APV3	170
leather/textile fabric bag for electrician tools large model	349	Mach op-socket adapter	386
LED chest light	480	Magnetic plate lifter with heels	507
LED flashlight kit with hoster	479	Maintaining tool for mechanical fitting connectors	419
LED headlamp 251 lumens	478	Maintenance case	351

Alphabetical index

Male plug adapter	564
Male plug cable 2P+E schuko type	564
Mandatory safety signs	470
Manhole magnetic manual lifter MINI+ with telescopic handle	507
Manual hydraulic cable cutter Ø 25 mm	524
Manual hydraulic cable cutter Ø 40 mm	524
Manual hydraulic cable cutter Ø 55 mm	524
Manual hydraulic cable cutter Ø 85 mm	525
Manual hydraulic crimping tool	534
Manual hydraulic crimping tool 62kN	534
Manual hydraulic crimping tool 80kN	534
Manual hydraulic crimping tool 55kN	534
Manual safety cable cutter	134
Manual safety cable cutter	133
Manual tensioner	572
Manually-operated hydraulic pump with petrol engine	
Manually-operated insulating extension ladder with 2 sections	510
Marking of the Minimum Approach Distance	471
Marking ok the minimum approach distance	363
Measuring stick	562
Mechanical reel lifter with central axis	492
Mechanical traction dynamometer	493
Medium panhandle	375
Medium voltage single pole phaser	262
Metal saw frame for 300mm blades	332
Metallic reel	477
Meter tester	268
Middle voltage spliced ladder kit	516
Miniature circuit breaker lockout device	90
Mobile continuity and equipotentiality device	245
Mobile device for earthing, short-circuiting and equipotentiality of disconnectable single-pole "I" terminals and shunts, with 400/630 a contact plug of overhead cable lines mv	208
Mobile equipotentiality device support-carrier and support-bridge	245
Mobile ground device	221
Mobile uninterruptible power supply device for MV overhead lines in bare conductors	221
Monofunction tool for MV cables insulation	427
Multifonction tool for outer sheath, peelable semiconductor with chamfer and insulation	430
Multifunction hydraulic tool	541
Multi-function tool for bonded and peelable semiconductor	424
Multi-function tool for bonded and peelable semiconductor	424
Multifunction tool for covering, semi-conductor peelable and thick insulating	430
Multifunction tool for outer sheath and insulation	429
Multifunction tool for outer sheath, peelable semiconductor and thick insulation	429
Multifunction tool for outer sheath, peelable semiconductor with chamfer and insulation	429
Multi-head bung wrench	331
Multiple locking device	84
Multi-purpose telescopic insulating pole PENTA POLE	154
Multi-purpose telescopic insulating pole PENTA POLE	156
Multi-purpose telescopic insulating pole PENTA POLE	159
Multi-purpose telescopic insulating pole PENTA POLE	158
Multi-purpose telescopic insulating pole PENTA POLE	157
Multi-purpose telescopic insulating pole PENTA POLE	155
MV overhead insulated cable midspan stripper Ø10-45 mm	435
MV overhead insulated cable midspan stripper Ø10-45 mm	435

N

Needles on reel	508
Net and chain winder/unwinder	474
Net with rigid mesh	472
Net with tennis like mesh	472
Non-conductive tape measure	573
Notching pliers	359
NSI24 earth tape repair kit with clear leads	370
NSI24 temporary earth bond kit	370
Nylon composite lock-out hasp	86

O

Offset ring spanner	330
OL1 operating socket with concealed joint	384
One-piece reel unwinder	492
Open ended spanner	329
Operating hooks	180
Operating repeater for personal voltage alarm	141
Other padlocks with numbered keys	82
Outer sheath and aluminium screen spreaders	420
Outer sheath and aluminium screen spreaders	420
Outer sheath opener	407
Overgloves for insulating gloves touch-e	27
Overgloves for insulating gloves touch-e	27
Overhead cable height and clearance meter/ultrasonic range finder	562
Oversized plug control cover	95

P

P&B style 4ft (1.22m) bottom pole section	380
P&B style 4ft (1.22m) intermediate pole section	380
P&B style 4ft (1.22m) top pole section	380
P331 operating socket	383
P3313 operating socket	383
P3380 J&P fuse cut-out head	385
P3437 universal pole head	385
P3458 fuse cut-out head	385
Pack of 5 reusable anti-fog wipes	17
Padlock rack	84
Padlock rack - 30 padlocks	84
Padlocks stations	86
Paint scraper	333
Pair of cable drum unwinders on base	492
Pair of knee pads	56
Pair of shell blocks with hook	498
Parallel jaws tensioner	500
PB331 operating socket	383
PB50/ 70/ 120 type Alu. termination	388
PB50/95/120/150T type termination	388
Peak scraper	334
Peelable semiconductor lifter	425
Pentagonal clampstick - external rode with or without universal adapter	171
Permanent voltage indicator	112
Phase comparator for MV panels	263
Phase detector for linky G1 G3 smart grid	257
Phase sequence - contact - phase detector 100-600 V	104
Phase sequence tester	102
PHILLIPS screwdriver	332
Photovoltaic male test lead type MC4	564
Picking bar	333

Alphabetical index

Pickaxe	335
Pipe wrench	331
Plastic cable ties	570
Plastic case (empty) for deep indent die sets OE,1E,2E,4E	541
Plastic case: capacity 15 die sets C130	541
Plastic case for carrying equipment	65
Plastic case for carrying equipment.	66
Plastic clip for insulating sheets and bands	357
Plastic sign for "work zone" in french	476
Plastic tag 80 mm "do not operate - disconnection"	95
Plastic-coated pliers for Insulated connectors	573
Plastic-coated unwinding pulley	494
Plastic-coated unwinding pulley with hook	494
Plastic-coated unwinding pulley with hook and opening clevis	495
Plate removing hammer	507
Platform for wooden poles	522
Pliers for HV cable outer sheath	418
Pliers for industrial cable sheath 10-28 mm cc 0.9 Mm cl 1.1 Mm	436
Pliers for industrial cable sheath 10-28 mm cc 1.0 Longitudinal cutting head trl serie, to be ordered separately.	436
Pliers for industrial cable sheath 28-52 mm cc 2;0 longitudinal cutting head trl serie, to be ordered separately	437
Pliers for MV cable outer sheath	418
Pliers for MV cable outer sheath left-handed & right-handed	407
pliers for MV cable outer sheath left-handed & right-handed	407
Pliers for MV cable outer sheath with 3 adjustable longitudinal cutting depths	418
Pliers for plastic collars	573
Pliers for removing the sheath from underground and overhead LV cables	405
Pliers for removing the sheath of low-voltage underground and overhead cables.	404
Pliers to remove the primary insulation of lv/mv pilc cable	437
Plumber leather bag with carrying handle	348
Pneumatic gloves tester	26
Pneumatic tester for insulating gloves	26
Pole extractor jack	491
Pole turning in steel 2 directions with 1,2m strap delivered without handle	491
Poltpropylene case with handle	443
Polyamide or white nylon braided rope (8 reels)	505
Polypropylene rope (4 strands)	505
polypropylene tool chest	351
Polypropylene toolbox	350
Positioning foot-rest for concrete poles	521
Positioning girder	522
Post mount anchoring system Ø30 to 90cm	490
Power cables spiking and cutting tool - comfort range	135
PPE backpack - 35 L	342
PPE transport bag - 100 L	343
PPE transport bag - 80 L	343
PPE transport soft bag - 80 L	342
PPE trolley bag - 80 L	343
Premium 2-section telescopic stick	566
Premium 3-section telescopic stick	566
Professional work light	480
Prohibition electrical hazards + symbol magnetic disc Ø300 mm	471
Protection bag for electrical cabinets S22	362
Protective cover	363
Protective cover for helmet	16
Protective glasses for live working, welding assistance work - infrared scale 3	17

Protective helmet for electricians with rack-and-pinion adjustment system	15
Proximity not contact voltage detector LV-MV-HV	117
Proximity voltage detector	117
PU coated handling gloves	29
Pulley with hook d:110mm w:12-16mm WLL:3,2T	496
Pulley with hook d:110mm w:12-16mm WLL:5,4T	496
Pulley with hook d:150mm w:16-20mm WLL:5,4T	496
Pulley with hook d:200mm w:20-22mm WLL:8,0T	496
Pulley with hook d:80mm w:9-11mm WLL:2,5T	496
Pulley with revolving flange opening for steel cables	496
Pulling sleeve or cable puller in galvanized steel for LV and MV underground networks	502
Pulling sleeve or LV and MV cable-puller for overhead networks	502
Pulling sleeve or rilsan single loop cable pulling device	503
PVC bag for shorting kit	392
PVC phase marking tapes	362
PVC strip for junctions	
PVC-coated flag	249
Pylon mount anchoring system for steel angle 10 to 30cm	490

R	
Rainshield for operating poles	382
Ratchet cable cutters	327
Ratchet cable cutters	327
Ratchet strap support L:2,0m for P227 pulley block	494
Ratchet torque wrench kit with graduated sector for gas worker - 5 tools	329
Rechargeable ATEX spotlight - Zone 0	483
Rechargeable flashlight	479
Rechargeable inspection lamp 12 LEDs, 520 lumens	480
Rechargeable LED headlamp up to 1,000 lumens	478
Rechargeable LED headlamp up to 330 lumens	478
Rechargeable LED spotlight	481
Rechargeable portable 4 LED lantern PELI™	481
Red and white strap dispenser for traffic cones	477
Red warning banner - electrical hazard	476
Red warning flag - electrical hazard	476
Reel equipped with an earth clamp	217
Reel for continuity test, 100 m	566
Reel run off ROLLERS	499
Reflective safety tape	477
Reinforced PVC-coated canvas tool bag	341
Reinforced pvc-coated canvas tool bag for working at height	347
Remote area lighting system PELI™	482
Remote area lighting system PELI™ ATEX - zone 0	483
Remote electrical field detector	118
Removable handle for fuses	195
Removable pole end plug	381
Retractable lockout cable	88
Retractable webbing fall arrester	70
Retractable webbing fall arrester with energy absorber	70
Return pulley for service ropes	498
Return pulley with hook d:56mm w:16mm WLL 1 strand 250daN - hook 500daN	497
Reusable earplugs with cord SNR 34 dB	18
Rigid insulator pulley block	495
Rolling earth device for cables unreeling	237
Roll-up kit for storing and transporting tools	345
Roll-up sorft case	345
Rope bag XL with 2 handles Ø37cm x H60cm capacity 200m	490

Alphabetical index

Rope for warning mesh	472
Rope pulley block tackle hoist 550 daN and 1300 daN with synthetic blocks	486
Rope-operated hoist 1300 DAN	487
Rope-operated hoist 550 DAN	487
Rope-operated insulating extension ladder with 2 or 3 sections	510
Rotating gate valve lockout devices	89
Round paintbrush	573
Round wire stripper	571
Roundsling	504
RT/TL operating socket	383
Rubber cleaner	28
S	
S9A clamp with rocker block and tommy bar	372
S9A long taper steelwork earth end clamp	372
S9A short handle clamp with hardened tip	372
S9A short handle clamp with rocker block	372
S9B DLE CEB assembly	376
S9B long handle line end clamp	376
S9B ring type line end clamp	376
S9BS short taper line end clamp (no collar)	376
S9BS short taper line end clamp (with collar)	376
S9D: ESI-SI operating socket	384
Safety boots	36
Safety boots	35
Safety boots with quick release system	35
Safety cap	15
Safety cap short visor	15
Safety footwear	35
Safety footwear	36
Safety footwear	35
Safety footwear	34
Safety footwear for small sizes	34
Safety footwear with insulating sole up to 20kV	33
Safety Helmet for electricians with 4 point chinstrap	14
Safety Helmet for linemen with 4 point chinstrap and chin protector	15
Safety helmet for linemen with chinstrap	15
Safety helmet with grey Arc Flash face shield ATPV 12 cal/cm ² or 25 cal/cm ²	14
Safety kit	442
Safety rangers designed for live working	33
Safety rangers for linemen	34
"Safety Requirements" sign	467
Safety set for substation equipment	440
Safety set for substation equipment	441
Safety set for substation equipment	441
Safety set for substations with bare conductors	440
Saw blade	332
Scissor type snatch pulley	496
Scraper for semiconductor residues	422
Scraper without handle	333
Scraper with angled blade	334
Screw in earth rod	222
Sectional clampstick	173
Sectional clampstick	174
Self adjusting cut and strip tool	571
Self maintenance kit for CNPT/240-1-MV-NG & CNPT/240-2-MV-NG case	434
Self maintenance kit for CNPT/630-1-MV-NG case	434

Self-braking descender up to 200KG	72
Self-centering lifting spreader beam	498
Semi-static rope 10,5 mm	505
Set of 10 P2 pre-filters for DM171N half mask	19
Set of 12 tools	323
Set of 2 triangular earthing flags	249
Set of cables for short-circuiting and earthing devices	204
Set of tools in transport case	310
Set of tools in transport case	326
Set of tools in transport case	312
Set of tools in transport case	312
Set of tools in transport case	313
Set of tools in transport case	313
Set of tools in transport case	314
Set of tools in transport case for low voltage	320
Set of tools in transport case for connections	318
Set of tools in transport case for connections or public lightning	317
Set of tools in transport case for underground connections	319
Sharpening steel	571
Sheath abrading cassette to be mounted on ROTO-TMG	398
Sheath abrading block for ROTO-TMG tool	419
Sheathing guide	359
Short-circuiting and earthing device for bare lv overhead lines	198
Short-circuiting and earthing device for substations with plug-in type bushings	207
Short-circuiting and earthing device from the ground with insulating cord	216
Short-circuiting equipment	199
Shovel with handle	335
Side spindle adaptor	385
Sign for post office door	468
Silicone-coated cloth	179
Single gloves stick tester	26
Single open ended spanner	329
Single section insulating ladder	509
Slotted screwdriver	332
Slugging and fork wrench	334
Slugging box wrench	334
Small capacity toolbox	344
Small panhandle	375
Small plastic clip for insulating sheets and bands	357
Smart portable earth, earthing system with interlocking between the line clamp and the earth clamp	229
Snap-on line end clamp	376
Snatch block for wire rope, pulleys for lifting, pulling and returning force	496
Socket adaptor assembly	386
Socket tester for faulty wiring, control of the earth electrode (TT) and 30ma rcds test	569
Special "Rivaux" type grip	507
Special heavy duty extendable insulating sticks made of Ø 39 mm foam tube	165
Special heavy duty extendable insulating sticks made of Ø 39 mm hollow tube	166
Spindle bar for mechanical reel lifter	492
Splash plate head	384
Split connector for earth rod m12 x 90mm	390
split leather tool bag with shoulder strap	348
Splitter for outer sheath 50-630 mm ²	420
Square mallet	335
Square mallet	335
Stackable base for fixing rod XE9107 and XE9107N	473

Alphabetical index

Stainless steel strip	573	Tester clamp for flat contacts	565
Stand for MV fuses	444	Textile bag for transport of equipment	344
Stand-alone led lighting system pelli™	482	Textile bucket with individual inside tool positioning for working at height	351
Static rope	73	Textile bucket with internal tool holders for work at height	347
Station signaling kit - in french language	469	Textile case for 7 single open ended spanners	345
Station signaling kit - in french language	469	Textile storage bag for long insulating gloves	28
Station signalling kit - in french language	469	Thermal handling gloves, with cold protection	30
Station signalling kit - in french language	469	Thermoregulating vest against heat risk and heat stress	59
Station signalling kit in french language	468	Three-way cluster bar	391
Steel cable retractable type fall arrester	70	“Tirvit” tensioner	486
Steel locking carabiners BL:2550kg	490	TMAC 5 A load unit with leads and bag	264
Steel lockout hasps	87	TMAC 9 A load unit with leads, probes and bag	264
Steel sling with thimble eye at each end	504	TMAC LV temporary crossarm Adjustable 4 or 5 wire	358
Steel strap passing tool	572	Tool case for industrial cable	434
Steel strip shears	572	Tool for LV cables insulation Ø6-21mm with K7 depth 1mm	406
Stick access hole	444	Tool for non peelable semi-conductor with chamfer	422
Stick lifter	176	Tool to chamfer insulation	427
Stick lifter	176	Tool to make an incision on the peelable semi-conductor of the cable	432
Stickers for lockout or disconnection padlocks	95	Tool to make an incision on the peelable semi-conductor of the cable	423
Stop for tools	426	Tool to perform controlled longitudinal scoring on peelable semi-conductor	424
Storage box for unsulating gloves	443	Tool to remove bonded semiconductor with chamfer on the semi-conductor cutback	421
Straight fixed ball contact point	247	Tool to remove peelable semiconductor and stop for MV cable	423
Straight unwinding rollers	499	Tool to repair 4 mm male banana connectors	565
Strap kit for LV and MV spliced ladders	517	Toolbox	350
Strengthened artillery padlock	84	Topometer	573
Stringing block for LV aerial bundle d:140mm w:80mm WLL:-800daN	494	TOUCH-E Natural rubber insulating gloves	22
Stringing pulley for bare cables, with hook	495	Towing balls anchoring system Ø50mm	490
Stripping body for Insulated overhead aerial cables	436	TRC insulating telescopic pole with top lock	162
Stud type ball stub	375	Triangular earthing flag	248
Stud type t bar stub	375	Tripod anchorage system for confined space	70
Support rods for current meter panels	570	Trolley backpack for PPE and tools	345
Survival blanket	454	True phase identification system (GPS)	258
Suspended busbar spigot	393	Turning flag holder	248
Swing side snatch block with sheave Ø100mm BL:9185kg	490	TYPE A & B aluminium spigot	393
Synthetic flat webbing sling	504	Type A terminal plate	391
T		Type B crucifix terminal plate with chain	391
Tactile cut-resistant handling gloves (level F)	29	TYPE C spigot	393
Tactile cut-resistant handling gloves (level f), high visibility	29	Type C terminal plate	392
Talcum bottle	28	TYPE D spigot	394
Tear webbing energy absorber with fixed safety lanyard	69	TYPE D terminal plate	392
Tear webbing energy absorber, with fixed double elastic safety lanyard	69	TYPE E spigot	394
Tear webbing energy absorber, with fixed double rope safety lanyard	69	TYPE H suspended busbar alu. spigot	394
Tear-off equipotential bonding	244	TYPE M spigot	394
Tele rod uni-adaptor	386	U	
Telephone cable stringing pulley	496	U - APV adapter	170
Telescopic adjustable traind & LGV	168	U - Bayonet adapter	170
Telescopic poles	161	U - Flexible U version*	170
Telescopic probe for continuity test and no voltage detection	566	U - Polish bayonet adapter	170
Temporary short-circuiting and earthing device from the earth, for bare low voltage overhead networks	197	Ultra-safe cable piercing and cutting tools — ULTRASAFE SAFETY RANGE	130
Tensioning tool	571	Ultrasafe cable spicking and cutting tools — SAFETY RANGE	128
Test grip	565	Ultra-safe waterproof cable cutting and piercing tools — ULTRASAFE range	126
Test lamp spare part - 15w/25w bulb	267	Ultrasonic corona/arcing detector	566
test lamp spare part - approved fuse ceramic 2a	267	Universal adapter castellated head	386
Test lamp spare part - probe cap banana plug	267	Universal circuit breaker lockout	92
Test probe for temporary measurements up to 1000 V CAT IV	564	Universal fuse handle	182
Test tip	566		

Universal head adapter	386
Universal insulated pole platform	521
Universal miniature circuit-breaker lockout (LV)	90
Universal outer sheath stripping tool/hybrid 1000v	402
Universal outer sheath stripping tool/hybrid 1000v	398
Universal stick stand	177
Unwinding swivel	503
Unwinding trolley	473
Utility line location system	562
Various other padlocks	82

V

Version with locking system on the bayonet end fitting	170
Vertical pull winch support	490
VISARC Electrician helmet with integrated arc-flash face shield	12
VISARC Electrician helmet with integrated arc-flash face shield	12
VISARC Electrician helmet with integrated arc-flash face shield	12
Voltage Absence Detector with air gap arrester for indoor use	445
Voltage alarm for gas pipe bypass	142
Voltage alarm for Mobile Elevating Work Platform (MEWP) for high-voltage networks	147
Voltage detector	112
Voltage detector	116
Voltage detector	100
Voltage detector	145
Voltage detector 5-36 kV with compact stick	446
Voltage detector for capacitive test point of elbow connector MTAG BC	111
Voltage detector for MV substation	447
Voltage detector kit & insulating pole	108
Voltage detector multi range	108
Voltage detector replacement head	386
Voltage detector stick with air gap arrester for indoor use	445
Voltage indicator with display on smartphone via an android application	146
Voltage limiting device	237
Voltage limiting device	255

W

Wall bracket for storage	248
Wall brackets for sticks	444
Wall-mounted rescue kit	450
Warning mesh for buried cables	473
Water-Repellent Goat leather glove	31
Webbing retractable fall arrester with energy absorber 2,25m	70
Welding tent	335
Winged earth clamp	460
Wire rope gripper	500
Wireless phase comparator	260
Wireless phase comparator for overhead lines	263
Wireless phasing comparator set mv	146
Wooden post 10m guying device delivered in canvas bag	523
Work light for intervention	442
Work platform for electricity poles	521
Work positioning belt	72
Work positioning belt	72
Work positioning belt set	65
Work positioning kit - textile belt	65
Work positioning lanyard in braided rope	71
Work positioning lanyard in twisted rope	71
"Working area limit" in french language magnetic disc ø 300 mm	471

Wrecking bar	333
--------------	-----

Y

Yellow triangular flag with no marking and no shaft	248
---	-----

Alphabetical index

0-9

701	222
1067	565
1087	565
4906	389
4927	386
6132	392
7805	248
32738	170
217600V	564
2312/PV4MAUNI	564
2352-IEC	564
2617-IEC	564
2B3	188
2CEE7/7/2310B150	564
2CLPAR	460
2CPAR	460
32715V	170
380-IEC	564
402-IEC-CatIV	564
4814-01	375
4814-02	375
4815-03	375
5004/LM-IEC	565
5066-IEC	565
6001-IECIV	565
6005-IEC	565
6007-IEC	565
6009-IEC	565
606MG6.6-IEC3IV	564
6112-01	389
6112-02	389
802-842	498

A

A02	571
A045	508
A060	508
A090	508
A13	572
A13AV	571
A2617-A	393
A3214-A	391
A3478-B	391
AB126N	18
AB127N	18
AB18LI	562
ABD1	69
ABD1Y	69
ABSY	69
AC18220	562
ACTPI50	70
ADABV140	566
ADaFMsect	566
Ada-TETRA	564
ADC-BDBM	92
ADC-CA74	88
ADC-CDG12	85
ADC-CDG8	85

ADC-CGLB	85
ADC-MDC4 - ADC-MDC6	87
AFBRE	56
AFCAP23	56
AFG	23
AF-HVJ - AF-HVO	57
AFHVJ-10	47
AFHVO-7	47
AF-LEO - AF-LEO20	57
AFLEXB	170
AFLEXU	170
AFPLUI-HVO - AFPLUI-HVJ	56
AFPRO-41	54
AFPRO-9-BR	46
AFPRO-COM10B - AFPRO-COM10G	47
AFPRO-COM13OR-BR	50
AFPRO-COM9B - AFPRO-COM9G	46
AFPRO-JEANS15	46
AFPRO-SS-M16 - AFPRO-SS-HVO16 - AFPRO-SS-HVJ16	56
AFPTA-COAT12-BR	50
AFPTA-POLO10	44
AFPTA-SWEAT15	44
AFSIB-12 - AFSIB-12-BR	48
AFSIB-25	52
AGPB3 — AGPB4	403
AGPB3-1000V — AGPB4 — 1000V	401
ALADIN	138
ALROC-FENTE	420
ALUMINIUM AND COPPER EARTHING AND SHORT CIRCUIT CABLES	238
AMD1	69
AMT1	70
AMT50	206
ANGLED BALL FIXED CONTACT POINT	247
ANS2	70
APVFLEX	170
ARC	70
ARC100	59
ARC40	58
ARC53	58
ARC65	59
ARCBLOUSE11-B-BR	46
ARC-LFH40	58
ARS1	70
ARS3	70
ARS4	70
ART161V	350
ART162N	350
ART17048HN	351
AUTOCLAM	217
AV042	492

B

B102P-V64V	350
B107N	15
B134ENS	454
B62RM	541
B7604	84
B88-B89	453
B96M	351

Numerical index

BACKUP	70	C325	505
BC.B18V	542	C347	454
BC40	528	C348	457
BC45	528	C348	457
BC55	529	C365 — C370 — C375 — C371	571
BC65C	529	C366 — C366A	571
BC85	529	C368	571
BEHRALIFT	506	C390	491
BEXT-DA	456	C4200	18
BH702N	560	C43	15
BIO1	457	C43-MINIVIS	15
BINARD	474	C4500N	18
BLANKET BT BOGUMA		C45--CR	15
BLC25	527	C4D	72
BLC35C	527	C5	71
BLP36	537	C6210 + C6000	325
BLP55	537	C62C1 - C62A	71
BLP62	538	C65-TM	72
BLP80	539	C67N2	65
BMT100-LINE	220	C67N3	65
BMT18-CAB	220	C7	71
BMT18-LINE	221	C800 - C801	35
BP13026-BP13038	539	C80BSN - C80HSN	36
BP13026KITCDT	461	C85	502
BP80	539	C85B - C85H	35
BPE55	537	C86	502
BPE62	538	C90	502
BPU130	540	C90B - C90H	34
BPU210	540	C91	503
BRASS BODY PADLOCKS WITH REMOVABLE NYLON SHELL	83	C91H	35
BRASS PADLOCK	83	C91HN	35
BRASS PADLOCK WITH ABS SHELL	83	C92LADY - C92BLADY	34
BRASS PADLOCKS	83	C975N	34
BRMRD1E	426	CAB33	18
BSC/25-40	422	CAP CONNECTIONS	241
BT318_N	198	CAX-CBX	247
BT324	198	CD-BINARD	248
BTA800-5	197	CE62	376
BTC1000	268	CESTEX	245
BUCHHOLZ RELAYS RANGE	462	CHC31	228
BVSI	180	CI85	70
BVU	170	CIR001	434
BVUI	170	CKM-HTA-240-NG	434
C		CKM-HTA-630-NG	434
C1	71	CLPAR	460
C100H	36	CM	180
C119	572	CM535	223
C182	329	CMTBT	199
C2	71	CNPT/1200	433
C20B-ISOL - C20H-ISOL	33	CNPT/240-1-MV-NG	431
C20-C20DL-C21PT	84	CNPT/240-2-MV-NG	432
C259NM	351	CNPT/630-1-MV-NG	432
C26GB/C26RGB	95	CNPT/HTA-400-RSM	432
C274	351	CNPT/HTA-630-RSM	433
C279	15	CO110	70
C28-250	281	COMPOSITE BODY PADLOCKS	82
C319	505	CORATRIF	205
C320	505	CORSTA105	73

Numerical index

COT-PM	344	E30-APC1	16
CPAR	460	E35	504
CP-C130X15	541	E41	503
CPI-BT/HTA3	406	E62	17
CPITORS	199	EA4BS11	501
CPM D H M T	570	EAD-20074	390
CPM-TC223-NG	428	EAR-18103/1	380
CP-PPEU130	541	EAR-18103/2	380
CPROBE-LV - CPROBE-MV	268	EAR-18106	381
CPV-TST-BT	403	EARTHING LEADS WITH THEIR CONNECTIONS	240
CREPPK		EASYLOC	255
CRY02	182	EASYLOC	562
CRYOVEST	59	EBB-14510	380
CS-KA/CS-KD	78	EBB-18507	392
CWB/12-44	421	EBD-20070	390
CWB/18-60-S	422	EBL-16548	389
CWE/14-50-MVS	423	EBP-14714	389
CWI-R	426	EBPU	170
D		EBR-14502	382
D2001	517	EBR-18101/4	380
D25	492	EBR-18161	380
D260	492	EBR-18162/1	380
D60	573	EBR-18163	380
D85C	493	EBT-16112	389
D86	493	EBTMP	192
DC36	122	EBTOK	191
DC3600	122	EBTPC	191
DC3600BPM	122	EBTUA	192
DCAP54-148	436	ECBT	199
DCC	120	EDFM	473
DCEDB382	118	EFD-11764/2	372
DCG54-148 - DCG54-70	435	EFD-13218/3	376
DDS	477	EFD-16730	391
DLT8	237	EFD-16731/2	383
DLT8	255	EFD-16737	392
DM17IN	19	EFD-16748	391
DM17IN-ABEK	19	EFD-16795	392
DM17IN-FFP2	19	EFD-20030	392
DMCCTBTI	190	EFD-20137/1	390
DMTBT324	198	EFD-20137/2	390
DMTBTMCTR	194	EFMT	176
DMTBTT	193	EFP-11173/1	373
DMTBTTR	193	EFP-11868	377
DMTPC	207	EFP-13727	374
DMTTP69	199	EFP-16702	379
DOUBLEFR	56	EFP-16703	379
DPC/10-45	435	EFP-16705	374
DR706	102	EFP-16708	374
DROPOVER	183	EFP-16710	395
DSP	425	EFP-16711	395
DV3	93	EFP-16743	377
E		EFP-16749	379
E17NM	517	EFP-16783	395
E22E	16	EFP-16785	395
E24	16	EFP-16790	377
E25	504	EFP-17528	395
E26	504	EFR-18104/3	381
E27	504	EFR-18109	382

Numerical index

EFR-18114	381	EOS	26
EFR-18360	386	EPPIPE	472
EFS-11203	384	EPROLLOWDOWN	363
EFS-12541	384	EQUI18	245
EFS-13376	386	ERS3437	181
EFS-16637	383	ERSO3908	181
EFS-18304	383	ETI-01GB	95
EFS-18314	383	EV/NPT	420
EFS-18315	386	EV/NPT-4F	420
EFS-18319	383	EVP	404
EFS-18321	386	EY322 RANGE	218
EFS-18323	385	EY322NFC	219
EFS-18326	384	EY322NG	219
EFS-18330	385	F	
EFS-18334	385	F05	474
EFS-18339	384	F06	474
EFS-18352	386	F06 C	572
EFS-18362	384	F06-4/F06-7	573
EFT-20126	384	F10	476
EH706	561	F60	491
ELISOL	471	F60MH	491
ELISOL	363	FA1076-A	372
EMC-07887	388	FA1076-F	372
EMF-20083	393	FA1097-B	384
EMP-07880/1	388	FA1200-B	384
EMP-07880/2	388	FA1322-H	381
EMP-07880/3	388	FA1346-E	381
EMP-07881/1	388	FA1816-A-01	382
EMP-07881/2	388	FA1816-B	382
EMP-07881/3	388	FA1817-A	382
EMP-07882	388	FA1817-B	382
EMP-07882/2	388	FA2004-A	379
EMP-07883/1	388	FA2043-C	373
EMP-07883/2	388	FA2120-B	374
EMP-07883/3	388	FA2121-B	374
EMP-07884/1	388	FA2127	373
EMP-07885	388	FA2143-A	378
EMP-07885/1	388	FA2143-B	378
EMP-07886	389	FA2169-B	378
EMP-07889	388	FA2173-B	374
EMP-07889/1	388	FA2180	378
EMP-07889/2	388	FA2191-A	378
EMP-07891	389	FA2277-A	393
EMP-07892	388	FA2277-B	393
EMP-07892/1	388	FA2367-A	378
EMP-07893	389	FA2369-A	393
EMP-07897	389	FA2369-B	393
EMP-20066	375	FA2438-A	393
EMP-20066/1	375	FA2438-B	393
EMP-20066/2	375	FA2447-A	394
EMS-18301	385	FA2447-B	394
EMS-18317	385	FA2448-A	394
EMS-18368	385	FA2528-A	394
EMS-18372	385	FA2738-A	378
EMS-18380	386	FA2739-A	378
EMT550APT70005-020NB8C	206	FA2973-A	379
END FITTINGS FOR PRUNER	176	FA3129-A	375
ENSTPBT	254	FA3213-A	376

Numerical index

FA3218-A	376	GS1100	331
FA3218-B	376	GS1110	329
FA3344-A	376	GS1120	329
FA3650	394	GS1150	330
FA3714-A	383	GS1160	330
FA3726-A	372	GS1170	330
FC ULTIMATE	252	GS1180	330
FC5300	256	GS1190	334
FHI	561	GS1200	334
FHM	561	GS1250	332
FINCH+SHELTER	71	GS1260	332
FIXED DEVICE	234	GS152	334
FTPICLO	474	GS153	333
FTRUB		GS155	333
G		GS157 4	335
G08 — G09 — G10 — G12	501	GS158	335
G115N	29	GS160	332
G116N	29	GS164	334
G15	501	GS166	333
G18A	500	GS172	332
G18AC	500	GS3100240	335
G18C	500	GS3100470	335
G20	518	GS80	334
G21	518	GS86B	333
G22	520	gs88	334
G23	520	GS95	331
G24	518	GWIRE	216
G25	520	H	
G26	520	H125D	343
G32AN	499	H195	344
G32AR	499	H1AC	68
G32DR	499	H1AL	68
G32ST	499	H1A-TST	68
G80	359	H3N	69
G86	29	H6	68
G86SP	27	H6CPRO	68
GAZEL	142	H6PRO	68
GDDTORS	199	H8	69
GENPOLY	56	HBPVD	117
GFE-TMG	419	HELIX	245
GFLAG	197	HL-1216/2ESC	490
GICN	23	HL-1257XL	490
GICN80	27	HL-1263	490
GLE	23	HL-1264	490
GLFR	27	HL-1266	490
GLV-COLD	30	HL-1268	490
GLV-CUTF	29	HL-1274	490
GLV-CUTF-HV	29	HL-1276	490
GLV-ETN	30	HL-1281	490
GLV-IMP-HV	30	HL-1806	490
GLV-IMP-NIT	30	HMALT	223
GRI	422	HMALTROUL	223
GS100-2-20	335	HOUTC25	16
GS1050	332	HOUTC42R	16
GS1060	333	HTAG	114
GS1070	331	HTLC4 - HTLC5	293
GS1075	331	HTSMALT	248
GS1080	329	HVDC	123

I	
IC18DB	290
I-COVER-010/I-COVER-012	358
I-MAT	355
IP18DB	291
IPROBE GRUNTER	269
IS18DB	290
IS22	305
IS23TPC - IS23TPL	297
IS39	297
IS47	84
IS53U	278
IS64	294
IS64DB	321
IS67-IS87	289
IS77	306
IS79	306
IS80C	306
IS82R	304
IS87S	299
ISMAG	357
ISPI	222
ISPI	308
IT18DB	291
J	
J1R1	406
JBG100BV	181
JFO	22
K	
K100RH6PRO	66
K110RH6PRO	66
K130RH6PRO	67
K310H1A	64
K310H1AC	64
K340H1A	67
K37218188	517
K37238373	517
K600H3N	64
k7/gbt	398
K7/GRATT	419
K700H6PRO	66
KAIRBAG	74
KCT2D	72
KCT2D-1200	65
KIT MTAG	108
KIT-07	310
KIT-400-2020	431
KIT-630-2020	431
KIT-AMSUD	433
KITPCH1000TOP	490
KITPCW5000	489
KITSO-01	326
KITSO-02	312
KITSO-03	312
KITSO-04	313
KITSO-05	313
KITSO-06	314

KITSO-07	315
KITSO-180I	324
KITSO--220I	317
KITSO-350I	318
KITSO-490I	319
KITSO-520I	320
KLEQTP	244
KOALA	523
KSAFE01-20	73
L	
L10	573
L5600	17
LAB300X5	17
LD1	71
LEQ	243
LEQ35DB	244
LGT-BAP5M	480
LGT-bar-sfn	480
LGT-HL200	483
LGT-LAX117	483
LGT-LPL142	480
LGT-PEX350	483
LGT-SPOT800N	481
LGT-TRL300	479
LH2	427
LHA	427
LHM1R 30/45E	432
LHM2R 30/60	423
LP9054	176
LP-LIFTPLAQ	507
LP-MINI-PLUS	507
LSR1200	65
LT1	71
LTAG	145
LV LADDER KIT	516
LW03-01	171
LW03-02	171
LW03-03	172
LW03-04	172
LW03-05	173
LW03-06	173
LW03-07	174
LW08-05-ALU	497
LW08-16	498
LW11-36	179
LW11-37	179
LW11-38	179
LWA146	522
LWA455PB	214
M	
M120	505
M220	505
M25	491
MALTAC1050	237
MARTAP	507
MC1ICE	276
MC1IH	276
MC13CE	275

Numerical index

MC13H	275	MS13E	283
MC25	524	MS15	284
MC40	524	MS16	296
MC45I	277	MS16Q	296
MC45IR	278	MS19	296
MC4CE	274	MS19S	296
MC4H	274	MS20	296
MC55	524	MS21	
MC70	277	MS220	279
MC85	525	MS22J	307
MCPTI	277	MS23	297
MDD	175	MS241	296
MDI	175	MS25NM	328
MEMPHASE	262	MS27	278
MF1PLUS/25-SRC	424	MS27VM	316
MF1PLUS/60-SRCD	424	MS29D	328
MF2/40	429	MS2P	307
MF2/45 - MF2/60	429	MS2XL - MS2E-XL	307
MF3/40-SR - MF3/60-SR	430	MS30S	280
MF3/45-C	429	MS34	296
MF3/60-C - MF3/60-SRC	430	MS35V2	345
MGPI	359	MS36T	296
MISC-00006	368	MS38	297
MISC-00018	369	MS4	282
MISC-00020	390	MS41	297
MISC-00021	370	MS41-12P	297
MISC-00022	369	MS4-250	283
MISC-00029	369	MS43	279
MISC-00060	368	MS43E	280
MISC-00066	368	MS45	279
MISC-00100	370	MS45SP	294
MISC-00103	368	MS46C	328
MISC-00137	370	MS46S2	328
MISC-00169	369	MS4E	282
MOBY22	221	MS5	286
MP13026	535	MS51	293
MP13038	531	MS51T	292
MP130-42KIT	535	MS54	298
MP15	65	MS54L	298
MP36	534	MS55	295
MP55	534	MS56	298
MP62	534	MS57	298
MP80	534	MS58	298
MPHASE	260	MS59	299
MPU130	535	MS59A	302
MR50	237	MS59M	303
MRP355 - MRP353 - MRP352	19	MS59S	302
MS10	284	MS59T	302
MS100N0	298	MS59V01	303
MS100N0VM	298	MS5E	286
MS100N1-3/8	298	MS6	287
MS100N15	303	MS60	285
MS100N15-1/2	298	MS60E	286
MS100N2 - 1/2	298	MS61	328
MS10E	284	MS65	299
MS11	285	MS65P	299
MS11E	285	MS66-6P	299
MS13	283	MS66L 12P	299

Numerical index

MS66L-6P	299
MS67	299
MS7	297
MS70	299
MS71	299
MS71L	299
MS71LP	299
MS72J	299
MS72JLC4	299
MS72Jp	299
MS72S	299
MS72SP	299
MS755R	327
MS76GM	327
MS76GMR	327
MS76S	327
MS76SR2	327
MS77	298
MS77E	299
MS77L	298
MS77MAG	298
MS78	328
MS780	327
MS790	327
MS792	327
MS79A2	327
MS79ALG	327
MS79GM	327
MS79GM2	327
MS7S	297
MS7SC	293
MS8	279
MS80	282
MS84	298
MS84L	298
MS84LC	299
MS84LP	298
MS84P	298
MS85	298
MS85P	298
MS85PC	298
MS86	298
MS86L	298
MS87	298
MS87MAG	299
MS87T	299
MS89	300
MS89-V01	300
MS89-V02	300
MS89-V04	301
MS89-V05	301
MS89-V06	301
MS89-V07	301
MS89-V08	301
MS90	299
MS91	299
MS96	299
MS99SR	327

MSE2	328
MSPC	295
MT100-CAB	207
MT50-CAB	207
MTAG	106
MTAG BC	111
MTAG DR	109
MTAGX	108
MV LADDER KIT	516
MVI	146
MV-PHASER-ELEC	263
MVS	426

N

NCT	573
NE23	176
NEVERS	215

O

O02	573
O03	571
ODIN	140
OGA	407
OMF	305
ONBAL	205
ORACL	424
OSO	402
OSO-1000V	398

P

P101	507
P109	570
P109A	570
P11	488
P110	573
P115	421
P115	572
P125	532
P125CO	532
P126	532
P128	533
P135P	573
P220	495
P222	496
P223	496
P224	496
P224C25T	496
P224C32T	496
P224C52T	496
P224C54T	496
P224C80T	496
P225	494
P226	494
P227	494
P229	495
P230	496
P25F300	495
P85	359
P97	571
PA12055	264

Numerical index

PA12057	264	PPOLE STANDARD	155
PA12746	267	PPU	177
PA12748 - PA12745	267	PRE	165
PA12755	267	PRG3/C22-L222833 — PRG4/C25-L252830	418
PAAC CABLE CORE IDENTIFIER	264	PRG3/CIR20	437
PBGD3	533	PRL	166
PBU	182	PROXY TESTER	117
PCC20-1000V	280	PRUNEL BUCKET	147
PCCR1000 V	281	PS2	450
PCH1000	489	PTT130	222
PCMT 95	132	PTUM	162
PDD	174	PVI	112
PDL	498	PXL	164
PDRE	496	PXV	163
PE9Y	573	R	
PEC	168	RBCL	354
PEF	400	RED SET	50
PERCHTELE	566	REEL IEC3 2715 100	566
PERF	195	RESCUEWHEEL-20	72
PFCU6-120	533	R-FASER	146
PFCU6-50	532	RGX-1704/200	28
PFCU6-50CO	533	RGX-BG - RGX-BGT	28
PG0/CIR0911	436	RGX-BGT	443
PG3BT/2020	399	RGX-CP	443
PG3EC/2020	398	RGX-MC	27
PG3EW/2828	399	RGX-SAC	28
PG3NHTA/2020	407	RGX-SG	27
PG3NHTA/2833	407	RGX-SGL	28
PG4HTA/3033	418	RGX-SGT	27
PG5HTB/3535	418	RI-PPOLE	160
PH700	560	RL1-PH-10x200	289
PHANTOM	258	RL1-PH-4x150	289
PHASE DETECTOR 100-600V	104	RL1-PH-4x75	289
PHILINK	257	RL1-PH-5x100	289
PICOUP 110 EXP	128	RL1-PH-6x125	289
PICOUP 50, 65 & 80 MAK EXP	126	RL1-PH-8x150	289
PIMT	205	RL1-PL-10x150	289
PIMT49S•SP	205	RL1-PL-10x250	289
PIMTRGB	205	RL1-PL-12x200	289
PINTEL4/CIR10	436	RL1-PL-2x70	289
PINTEL4BT/1216	404	RL1-PL-35x120	289
PINTEL4BT/1216-1000V	402	RL1-PL-3x100	289
PINTEL4BT/1216-R	405	RL1-PL-4x120	289
PINTEL4BT/1216R-1000V	402	RL1-PL-55x100	289
PINTEL4EC/2020	401	RL1-PL-55x150	289
PINTEL4PI/465	437	RL1-PL-65x150	289
PLATFORM FOR WOODEN POLES	522	RL1-PL-8x150	289
PLH1000-4	487	RL1-PL-8x200	289
PLH1000-9	487	RL1-PZ-10x200	289
PLH1600-6	487	RL1-PZ-4x150	289
PMT63	562	RL1-PZ-4x75	289
POT150	506	RL1-PZ-5x100	289
POTAMAR	523	RL1-PZ-6x125	289
PPOLE	154	RL1-PZ-8x150	289
PPOLE COMPACT	156	RL1-TX-T10*	289
PPOLE MEASURE	159	RL1-TX-T20	289
PPOLE LIGHT	158	RL1-TX-T27	289
PPOLE REINFORCED	157	RL1-TX-T30	289

Numerical index

RL1-TX-T45	289	S15MM	348
RL2-PH-10x200	289	S15PM	348
RL2-PH-4x150	289	S168	474
RL2-PH-4x75	289	S170 - S170S	477
RL2-PH-5x100	289	S175JRNGP	477
RL2-PH-6x125	289	S182	362
RL2-PH-8x150	289	S1POACAMA	236
RL2-PL-10x150	289	S1P7AGTMA	236
RL2-PL-10x250	289	S1P8RGTMA	236
RL2-PL-12x200	289	S20T	346
RL2-PL-2x70	289	S20TGMR	347
RL2-PL-35x120	289	S20TGMR	341
RL2-PL-3x100	289	S318RV	323
RL2-PL-4x120	289	S31N	346
RL2-PL-55x100	289	S32	346
RL2-PL-55x150	289	S33PM-S33GM	346
RL2-PL-65x150	289	S349-S350 C11	95
RL2-PL-8x150	289	S350 GBC11	95
RL2-PL-8x200	289	S4310	442
RL2-PZ-10x200	289	S505	350
RL2-PZ-4x150	289	S509NM	342
RL2-PZ-4x75	289	S520SF	342
RL2-PZ-5x100	289	S600N	479
RL2-PZ-6x125	289	S621 - S632	470
RL2-PZ-8x150	289	S67	477
RL2-TX-T10	289	S737AL-GB	471
RL2-TX-T20	289	S750ALGB	468
RL2-TX-T27	289	S753ALNM-GB	467
RL2-TX-T30	289	S754ALNM-GB	467
RL2-TX-T45	289	S755ALNM-GB	467
RL-36	297	S756ALNM-GB	467
RL3-PH-10x200	289	S757AL-GB	468
RL3-PH-8x150	289	S759AL-NEU	468
RL3-PL-10x150	289	S773AL-NEU	469
RL3-PL-10x250	289	S774AL-NEU-GB	469
RL3-PL-12x200	289	S784AL-NEU	469
RL3-PL-8x150	289	S786AL-NEU	469
RL3-PL-8x200	289	S80A--	466
RL3-PZ-10x200	289	S80ALPAS	466
RL3-PZ-8x150	289	S80ALPR1ONEU-GB	468
RL3-TX-T45	289	S81 - S72 - S73 - S74	470
RL-LAMP	479	S82R10	476
RMT3090/U	116	S83M	471
RODIN-RS	141	S84M-GB	471
ROLLER20	221	S85	476
ROTOLINE	288	S87	470
ROTO-TMG	419	S951SAFE	478
RT1030/u-ad	110	S952SAFE	478
RTTE	167	S953SAFE	478
R-VISOR	110	S954SAFE	478
S		S955SAFE	478
S10	348	SAD-20	346
S120	249	SAD409	342
S120D - S120E	476	SADT-25	345
S120J2	249	SBA	403
S120L	248	SBI	400
S120LV	248	SC2	84
S126AR	473	SCH	427

Numerical index

SDP-40	339	SUP600 - SUP600E	562
SDTJ-LS	75	SWING	247
SEPI	74	T	
SERPAT	235	T04	477
SFE148	86	T104	345
SFE420N-SFE421N	87	T270	335
SFE428N	86	T2-FR100	569
SFE48	89	T420	488
SFE485	89	T43F2 - T44F3 - T45F4	486
SFE487-SFE488	88	T47	500
SFE491BN-SFE493BN	92	T51	500
SFE9410N	481	T702	217
SFE9430	482	T88F	487
SFE9435N	483	T89	508
SFE9440N	482	TAG100	112
SFE9460	482	TAG330	116
SFEKDCMGB	95	TAG5000 - 4-500 kV - TAG5000 - 4-230 kV	263
SFES1900	86	TAG780	100
SFES2390N-SFES2391N	89	TAGDP	447
SFES2392N	90	TAGLITE	98
SFES2393N	90	TB05 — TB10	363
SFES2394N	90	TB11D	444
SFES3068MLP	94	TB19	37
SFES3080	94	TB19BT - TB19BTE	37
SFES3823	93	TB20KV-AF	36
SFES430	87	TB20-TB25	180
SFES453L	95	TB30KV - TB30KV-LG	37
SFES503RED	86	TBOB	36
SFES806	88	TC12	521
SFESCG	92	TC120	310
SH700		TC135	360
SINGLE GLOVES STICK TESTER	26	TC15 — TC20	360
SK081008-0/1	372	TC151P	195
SLTA01	483	TC151PM	195
SMACE	206	TC155	504
SMAPE	229	TC160H	497
SP20	494	TC25 — TC30 — TC35 — TC40 — TC41	361
SPARROW 200R	72	TC4	292
SPC	132	TC42AB	18
SPCC100SMC	134	TC43	361
SPCC50, 65 AND 80	136	TC45N	14
SPCCEP	134	TC47N	15
SPCCM	133	TC4812-TC4825	14
SPCCS 50, 65 and 80 SI	137	TC48N	15
SPCCS140WI	130	TC50 — TC95 — TC150 — TC240 — TC400 — TC630	428
SPCCSEP	135	TC52	33
SRC	425	TC53	179
SRC-D	425	TC55	33
ST-100	343	TCD2000	428
ST-80	343	TD386	223
STB-REEL	566	TDP	145
STH-13	347	TDP536 — TDP572	445
STH-29	347	TE04	310
STHCF-15	347	TE08	362
STRAIGHT FIXED BALL CONTACT POINT	247	TE10AUD	514
STT-100N	339	TE13AUD	509
STT-80	343	TE13VAL - TE17VAL - TE12VAL - TE22VAL	512
SUBKITEXP	442	TE17AUD - TE12AUD	510

Numerical index

TE18AUD — TE20AUD	513	TP95	496
TE22AUD	510	T-pass	572
TE30AUD	515	TR	70
TE32	516	TR - TRL	161
TE40-TE45-TE50	508	TR055	362
TE41AUD	515	TR20	345
TE4400U - TE4400UN	17	TRC	162
TE4500	17	TRIF	204
TFA	292	TRL SERIE	437
TFK/TSF CONNECTIONS	241	TS05	360
TFM10	309	TS10GL	344
TFM8	308	TS10T	28
TG05	31	TS20 — TS21	361
TG40 TO TG48	31	TS26	360
TG73 TO TG76	31	TS280	322
TK3C	440	TS28H	344
TK3C-EXP-LIGHT	441	TS28V	349
TK3GT	441	TS30	360
TK3S	440	TS33GM	349
TL06	444	TS33N	348
TL100	265	TS48	444
TL102	265	TS52	17
TL11	245	TS75	342
TL19 - TL19S	17	TSAFE	73
TL200	265	TTO15M	448
TL25 - TL25S	17	TTO16	448
TL300	266	TTO18	448
TL500	266	TTR2 - TTR2LW	178
TLF8	292	TV10	26
TM05N	498	TWISTER120	309
TMAC LV TEMPORARY CROSSARM ADJUSTABLE 4 OR 5 WIRE	358	TWISTER90	309
TN02R	356	U	
TN05R-TN10R	356	UBF	170
TN08	356	UFAPV2	170
TN15AD	357	UFH	182
TN15R	356	ULD-40	566
TN17	357	UNITAG	144
TN200	362	UNIVERSAL INSULATED POLE PLATFORM	521
TP051R	17	USB14X200	94
TP10	486	V	
TP105	359	V CHECK	112
TP11	487	V042	492
TP115R	359	V16	491
TP12	455	V1-BK	12
TP13C	446	V2-12	12
TP13CS	446	V2-25	12
TP13P — TP13T	445	VARIOUS	387
TP2300	254	VC-M18	541
TP31ST2	455	VES	452
TP51	565	W	
TP550 - TP1300	486	WBT537	197
TP60P	357	WHEEL-E	569
TP60PS	357	WI332	220
TP71	570	WIG250	208
TP73	521	WIT400	208
TP90	497	X	
TP90C-25	497	XC100S-5	526
TP92	497		

Numerical index

XC120W-5	526
XC25W	525
XC40W	525
XC55N	526
XC85N	526
XE90	472
XE9060	473
XE9066	473
XE9067	473
XE9068	473
XE9070	472
XE9070X	473
XE9072C	472
XE91	472
XE9107	474
XE9107N	474
XE9109	248
XP13026-5	535
XP13038-5	535
XP250	536
XP450	536
XPRH45-5	536
XPRU200-5	536
XTRIO-2B085	566
XTRIO-3B216	566