

THE SELECT
EXPLORE

—
BLOQ
creative
carpet tiles




EXPLORE 924 METAL




EXPLORE 923 BASALT



EXPLORE 523 NAVY

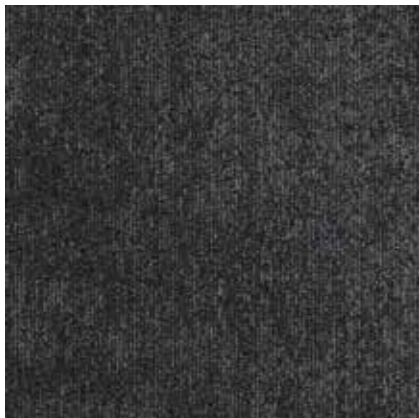

EXPLORE 929 ONYX

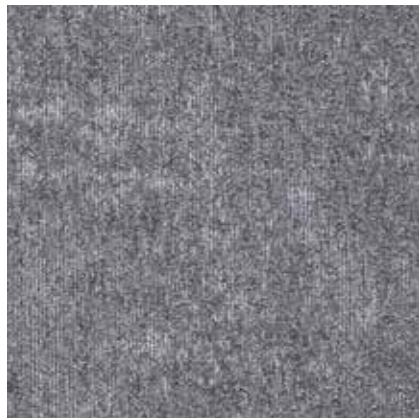

EXPLORE 922 SILVER



EXPLORE 126 SAND



EXPLORE 923 BASALT

BLOQ

creative
carpet tiles


THE SELECT
EXPLORE

SPECIFICATIONS

TYPE OF MANUFACTURE	Tufted Patterned Loop Pile 1/10"
ISO 2424	
PILE FIBER COMPOSITION	100% Polypropylene
ISO 2424	Solution Dyed
SECONDARY BACKING	Bitback, Modified Bitumen
ISO 2424	70% Recycled Content
DIMENSION	50 x 50 cm
EN ISO 24342	
PILE WEIGHT	550 g/m ²
ISO 8543	
SURFACE PILE WEIGHT	369 g/m ²
ISO 8543	
TOTAL WEIGHT	4 200 g/m ²
ISO 8543	
TOTAL THICKNESS	6.5 mm
ISO 1765	
PILE HEIGHT	3.4 mm
ISO 1766	
PILE DENSITY	0.109 g/m ³
ISO 8543	
NUMBER OF TUFTS	160 000 /m ²
ISO 1763	
DIMENSIONAL STABILITY	≤ 0.2%
ISO 2551	
NUMBER OF COLOURS	6
PACKAGING	Box: 20 tiles / 5 m ² Pallet: 200 m ²

PERFORMANCE

CLASSIFICATION	31
EN 1307	
LUXURY RATING	LC1
EN 1307	
CASTOR CHAIR RATING	B: Occasional use
EN 985	
FIRE CLASSIFICATION	C _{fl} -s1
EN 13501-1	
IMPACT SOUND INSULATION	ΔL _w : 24 dB
EN ISO 10140-3	
SOUND ABSORPTION	Frequency Hz 125 250 500 1000 2000 4000
EN ISO 354	α _s 0.01 0.02 0.06 0.15 0.35 0.38
NOISE REDUCTION	α _w : 0.15
EN ISO 354	
PERMANENT ANTISTATIC	≤ 2 kV
ISO 6356	
THERMAL RESISTANCE	0.080 m ² K/W
ISO 8302	
COLOUR FASTNESS TO LIGHT	≥ 5-6
EN ISO 105-B02	
COLOUR FASTNESS TO WATER	≥ 4-5
EN ISO 105-E01	
RUBBING FASTNESS	≥ 4
EN ISO 105-X12	
GUT N° PRODIS	EEEEAFFEO



All rights reserved to alter technical specifications.