

SELECTPRO BOLT-ON KEYED QUICK-EXIT



- Quick-Exit Push Pad
- 2-Year Warranty
- Adjustable Latchbolt

Suitable for metal gate frames.


INCLUDED IN THE BOX

- 1x3mm hex key
- M8 fixing bolts
- Face plate
- Latchbolt
- Strike plate (self-drilling fasteners)
- A set of keys (3)



Combine security and rapid exit with the SelectPro Bolt-On Quick-Exit Lock with key access.

Purpose-built for metal gates, this lock offers robust performances, ease of installation, and reliable automatic latching for maximum convenience.

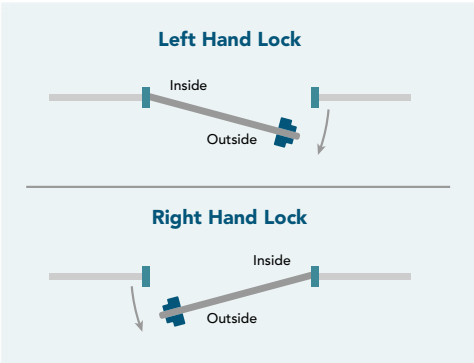

Product code	Description
SBQEKLL01	To fit 10-30mm (½" - 1 ¼") gate frames, left hand
SBQEKLR01	To fit 10-30mm (½" - 1 ¼") gate frames, right hand
SBQEKLL02	To fit 40-60mm (1 ½" - 2 ¼") gate frames, left hand
SBQEKLR02	To fit 40-60mm (1 ½" - 2 ¼") gate frames, right hand

WHAT DOES KEYLATCH MEAN?

Lock Type	What happens when the gate closes?	What do I need to do next to lock the gate?	Best for:
Keylatch	Latches shut automatically, but doesn't lock	Use the key if you want to lock the gate	Best for convenience, when you want the gate to catch and open conveniently with the handle, then choose when to fully lock it.

TECHNICAL SPECIFICATIONS

Lock type	Keyed gate lock
Keypad type	Quick-exit
Handing	Left-handing, right-handing
Latchbolt throw	20mm (3/4")
Lock case width	98mm (3-3/4")
Fixing method	3-hole drilling. Bolt-on
Fixings included	Yes
Warranty	2 years
Compatible Keeps	BSKG
Compatible Shroud	SBQES

HELP & SUPPORT

UK: +44 1243 558580 US: +1 214 872 9687


www.gatemasterlocks.com

support@gatemasterlocks.com


INSTALLATION INSTRUCTIONS

1. Drill 2 x 9mm (3/8") holes at 92mm (3 2/3") centres for fixing bolts provided.
2. Drill a 18mm (3/4") clearance hole for the latchbolt at 22mm (7/8") centres down from the top fixing hole.
3. Fix lock in place using stainless steel clamp plate, bolt support plate and 2 stainless steel countersunk fixing bolts supplied.
4. Adjust the latchbolt length required and lock it in place with the hex key.


Step 1 & 2:



Step 3:




Step 4:



Installing the keep:

1. Drill clearance hole in keep or outer frame to receive the latchbolt. Slot this hole vertically to allow for the gate sag. Fit strike plate by either welding or screw fixing it to the gate post.
2. Ensure latchbolt moves freely without binding on gate or frame.

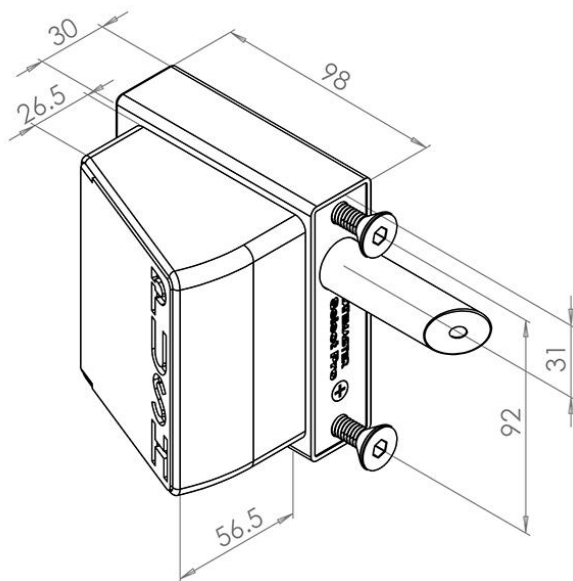

MAINTENANCE

Every 2 months:

Lubricate the latchbolt with light oil.

Annually:

Dismantle the lock and spray mechanism with light oil.

COMPATIBLE PRODUCTS

© Copyright Gatemaster 2026

To help improve gate security and overall performance, The SelectPro can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.



Superlock Gapless Keep (BSK)

- Slim profile enables a small gap between gate and post.
- Simple and easy to fit to a wide range of applications.
- Incorporates two rubber bump stops to ensure the gate makes minimal noise when shutting.
- Improves gate appearance as the narrow profile blends in well with the gate.
- Expanding fasteners supplied with the keep.



SelectPro Quikc-Exit Security Shroud (SBQES)

- Designed to prevent access from outside the gate
- Stops intruders from reaching around and operating the gate lock
- Compatible with our SelectPro Quick-Exit gate lock range and with the SelectPro Code Single-Sided Gate Lock (DGLS)



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.