
COPPER
Bars

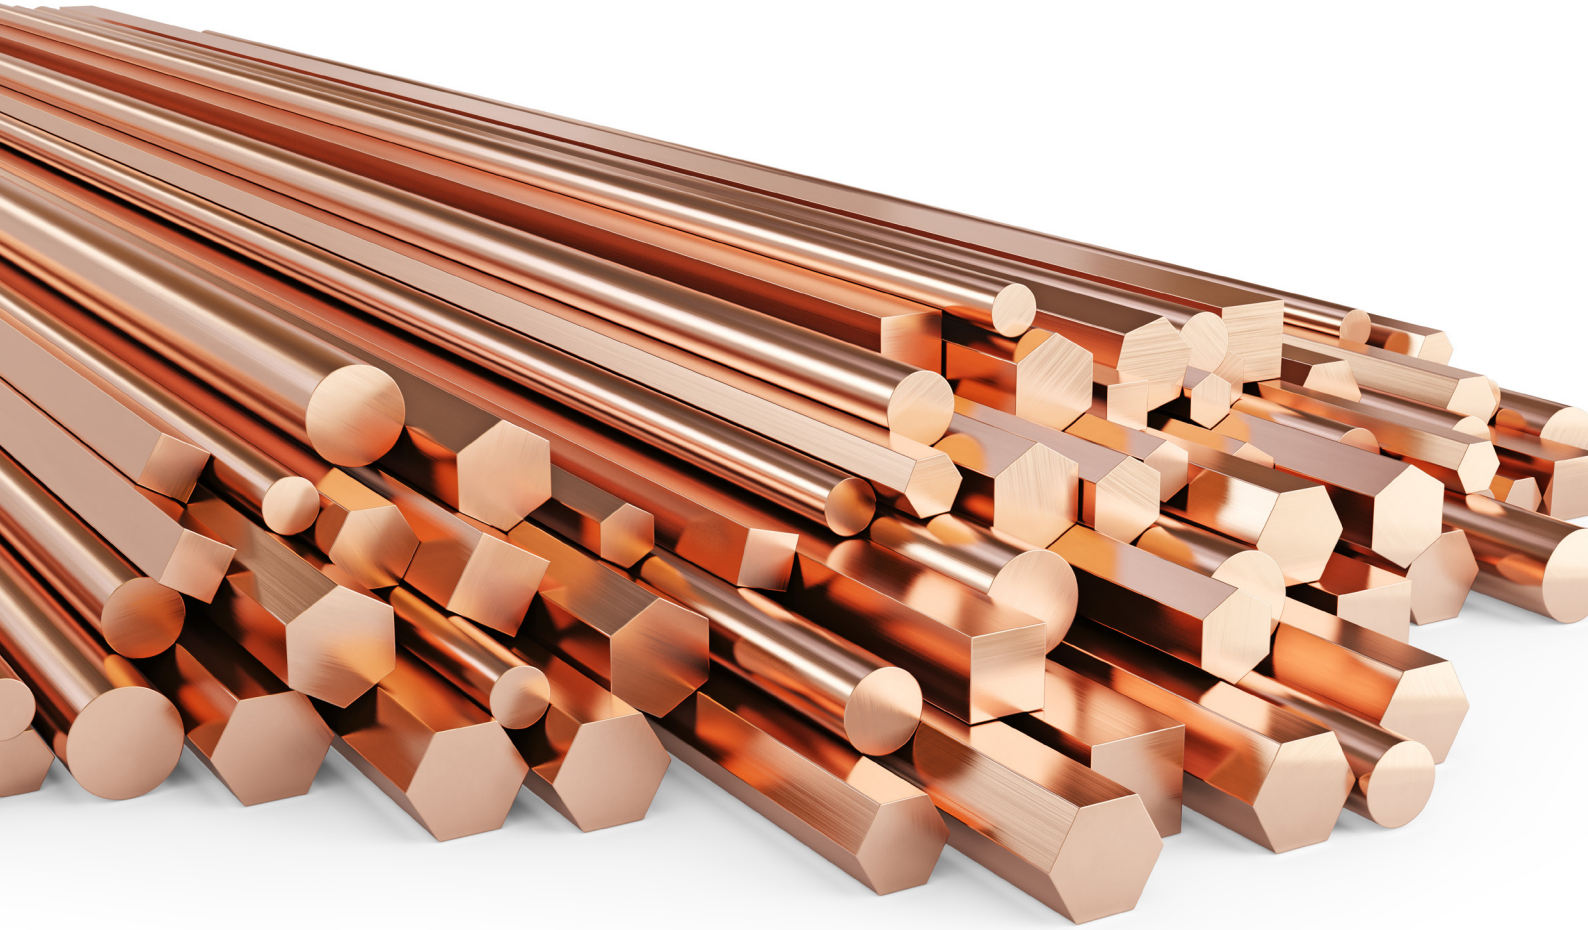

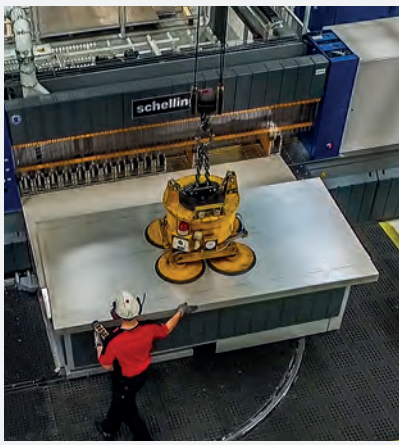
alumeco

TABLE OF CONTENTS

ROUND BARS	2
Round bars CW118C, CuTeP	**3**
Round bars CW008A, Cu-OF	**3**
Round bars CW004A, Cu-ETP	**3**
FLAT BARS	4
Flat bars CW008A, Cu-OF	**5**
Flat bars CW004A, Cu-ETP	**5**
SQUARE BARS	6
Square bars CW004A, Cu-ETP	**7**
Square bars CW008A, Cu-OF	**7**

ABOUT ALUMECO GROUP



Alumeco is a global wholesaler, founded in 1983 with headquarters in Odense, Denmark.

Alumeco Group offers a wide range of aluminium, stainless steel, copper, brass, bronze and other metals to meet all your metal needs. We offer both standardized and customized products, and we are ready to support you from idea to finished product.

SUBSIDIARIES

- Alumeco A/S
- Alumeco NL B.V.
- Alumeco Norge AS
- Alumeco Sverige AB
- Alumeco CZ s.r.o.
- UAB Alumeco Baltic
- Alumeco Finland OY Ab
- Metalcenter Group OY Ab
- Alumeco Austria GmbH
- Alumeco Service GmbH
- Metallcenter West GmbH
- Alcobra GmbH
- Metalcenter Group GmbH
- Aluteam-Alumeco Sp. z o.o.
- Alumeco Metal Products (Jiangmen) Co.,Ltd.

1028 (2023)
Employees

878 (2023)
mio. EUR

40.000
m^2 stock



Round bars

IN ELECTRICAL POWER DISTRIBUTION, A ROUND COPPER BARS IS A BAR THAT CONDUCTS ELECTRICITY WITHIN A SWITCHBOARD, DISTRIBUTION BOARD, SUBSTATION, BATTERY BANK, OR OTHER ELECTRICAL APPARATUS. ITS MAIN PURPOSE IS TO CONDUCT A SUBSTANTIAL CURRENT OF ELECTRICITY, AND NOT TO FUNCTION AS A STRUCTURAL MEMBER. THE MATERIAL COMPOSITION AND CROSS-SECTIONAL SIZE OF THE BUSBAR DETERMINE THE MAXIMUM AMOUNT OF CURRENT THAT CAN BE SAFELY CARRIED.

All stated weights are theoretical which may vary | For inventory status see alumeco.com
All materials marked with bold are standard stock material

ROUND BARS CW118C, CUTEP

Diameter	Weight (kg)	Diameter	Weight (kg)	Diameter	Weight (kg)
5	0.17	**19**	**2.52**	35	8.56
6	**0.25**	**20**	**2.80**	**40**	**11.18**
8	**0.45**	**21**	**3.08**	45	14.15
10	**0.70**	22	3.38	**50**	**17.48**
11	0.85	**25**	**4.34**	54	20.37
12	1.01	26	4.73	60	25.16
13	**1.18**	28	5.48	70	34.25
16	**1.79**	**30**	**6.29**	100	5.36
18	2.16	32	7.16		

ROUND BARS CW008A, CU-OF

Diameter	Weight (kg)	Diameter	Weight (kg)	Diameter	Weight (kg)
10	**0.70**	28	5.50	**62**	**26.99**
12	**1.01**	**30**	**6.32**	**65**	**29.67**
14	**1.38**	**32**	**7.19**	**70**	**34.40**
15	**1.58**	**35**	**8.60**	75	39.50
16	**1.80**	36	9.06	**80**	**44.94**
18	**2.28**	38	10.14	**100**	**70.21**
20	**2.81**	**40**	**11.23**	**120**	**101.11**
22	**3.40**	**45**	**14.22**	140	137.62
23	3.71	49	16.86	150	157.20
24	4.03	**50**	**17.55**	160	179.00
25	**4.39**	**55**	**21.24**		
26	**4.75**	**60**	**25.28**		

ROUND BARS CW004A, CU-ETP

Diameter	Weight (kg)	Diameter	Weight (kg)	Diameter	Weight (kg)
3	0.06	21	3.08	75	39.32
4	0.11	22	3.40	80	44.71
5	0.18	23	3.71	85	50.73
6	**0.25**	24	4.04	**90**	**56.59**
7	0.34	26	4.75	100	70.22
8	**0.45**	32	7.30	110	84.96
9	0.28	35	8.60	120	100.61
10	0.70	40	11.23	130	118.07
12	1.01	42	12.33	140	136.94
13	1.19	45	14.22	150	157.20
14	1.38	49	16.86	160	178.94
15	1.57	50	17.55	180	12.92
16	1.80	60	25.28	200	279.46
18	2.26	65	29.52		
20	**2.81**	70	34.23		



Flat bars

IN ELECTRICAL POWER DISTRIBUTION, A COPPER FLAT BAR IS A BAR THAT CONDUCTS ELECTRICITY WITHIN A SWITCHBOARD, DISTRIBUTION BOARD, SUBSTATION, BATTERY BANK, OR OTHER ELECTRICAL APPARATUS. ITS MAIN PURPOSE IS TO CONDUCT A SUBSTANTIAL CURRENT OF ELECTRICITY, AND NOT TO FUNCTION AS A STRUCTURAL MEMBER. THE MATERIAL COMPOSITION AND CROSS-SECTIONAL SIZE OF THE BUSBAR DETERMINE THE MAXIMUM AMOUNT OF CURRENT THAT CAN BE SAFELY CARRIED. COPPER RODS ARE FOUND IN VARIOUS APPLICATIONS IN MECHANICAL AND ENGINEERING PRODUCTS - SOME OF THEM ARE: ELECTRICAL INDUSTRIES, ENGINEERING INDUSTRIES, HOT PRESSING, MOTORS, HOUSEHOLD ELECTRICAL APPLICATIONS


All stated weights are theoretical which may vary | For inventory status see alumeco.com
All materials marked with bold are standard stock material

FLAT BARS CW008A, CU-OF

Width x Thickness (mm)	Weight (kg)	Width x Thickness (mm)	Weight (kg)	Width x Thickness (mm)	Weight (kg)
10 x 3	**0.27**	35 x 5	1.56	**90 x 6**	**4.83**
12 x 3	0.32	**40 x 8**	**2.86**	**100 x 10**	**8.94**
15 x 3	**0.40**	**42 x 12**	**4.51**	110 x 8	7.87
18 x 12	**1.93**	**50 x 8**	**3.58**	**120 x 10**	**10.73**
20 x 10	**1.79**	**60 x 8**	**4.29**	125 x 5	5.59
24 x 12	**2.57**	**66 x 12**	**7.08**	**150 x 10**	**13.41**
25 x 10	**2.22**	**75 x 10**	**6.70**	160 x 10	14.30
30 x 8	**2.15**	**80 x 8**	**5.72**		

FLAT BARS CW004A, CU-ETP

Width x Thickness (mm)	Weight (kg)	Width x Thickness (mm)	Weight (kg)	Width x Thickness (mm)	Weight (kg)
10 x 3	**0.27**	**25 x 4**	**0.89**	**75 x 6**	**4.02**
12 x 3	**0.32**	**30 x 3**	**0.80**	**80 x 5**	**3.58**
15 x 3	**0.40**	**35 x 5**	**1.56**	**100 x 6**	**5.36**
17 x 3	**0.46**	**40 x 3**	**1.07**	**120 x 10**	**10.73**
18 x 12	1.93	**50 x 5**	**2.24**	**150 x 10**	**13.41**
20 x 3	**0.54**	**60 x 5**	**2.68**	**160 x 10**	**14.30**
22 x 6	**1.18**	**63 x 5**	**2.82**	180 x 8	12.87
24 x 12	2.57	**70 x 10**	**6.26**	**200 x 10**	**18.16**

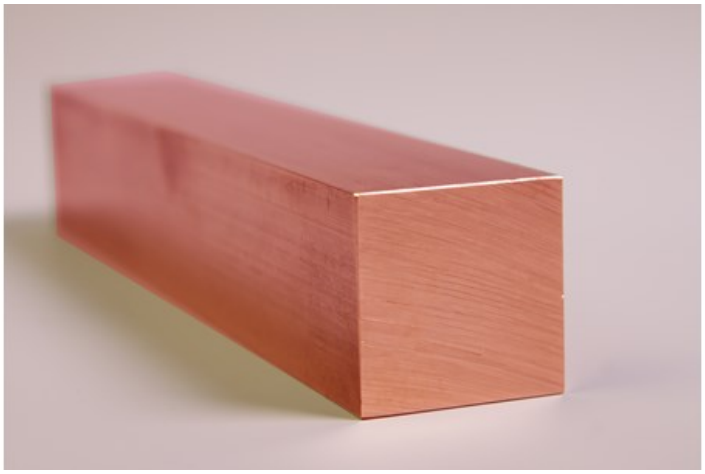

Square bars

IN ELECTRICAL POWER DISTRIBUTION, A SQUARE COPPER BAR IS A BAR THAT CONDUCTS ELECTRICITY WITHIN A SWITCHBOARD, DISTRIBUTION BOARD, SUBSTATION, BATTERY BANK, OR OTHER ELECTRICAL APPARATUS. ITS MAIN PURPOSE IS TO CONDUCT A SUBSTANTIAL CURRENT OF ELECTRICITY, AND NOT TO FUNCTION AS A STRUCTURAL MEMBER. THE MATERIAL COMPOSITION AND CROSS-SECTIONAL SIZE OF THE BUSBAR DETERMINE THE MAXIMUM AMOUNT OF CURRENT THAT CAN BE SAFELY CARRIED.

All stated weights are theoretical which may vary | For inventory status see alumeco.com
All materials marked with bold are standard stock material

SQUARE BARS CW004A, CU-ETP

Width	Weight (kg)	Width	Weight (kg)	Width	Weight (kg)
	2.01	18	2.90	60	32.18
5	0.22	**20**	**3.58**	70	43.80
6	**0.32**	**25**	**5.59**	80	57.00
8	0.57	**30**	**8.05**	90	31.18
10	**0.89**	35	10.95	100	77.00
15	2.01	**40**	**14.30**		
16	2.29	**50**	**22.35**		

SQUARE BARS CW008A, CU-OF

Width	Weight (kg)	Width	Weight (kg)	Width	Weight (kg)
	32.18	**20**	**3.58**	**50**	**22.35**
5	0.22	25	5.59	**60**	**32.18**
10	**0.89**	**30**	**8.05**		
12	**1.29**	**40**	**14.24**		



Alumeco ApS Naesbyvej 26 DK-5000 Odense C Tlf. +45 66 17 81 17 Fax +45 66 14 58 71 mail@alumeco.dk www.alumeco.com