

NSK


Surgic AP2

Elevate Surgical Precision



The ultimate fusion of precision and simplicity


Surgic Ap2, NSK's Designed specifically for oral and implant surgery, Surgic AP2 delivers all the power and performance you will ever need for these procedures. 80N of torque, together with a wide speed-range of 200-40,000min-1 offers the flexibility and fast response required for a variety of surgical procedures. The compact console is user-friendly, simple to operate and has been specifically designed for the aseptic theatre environment.

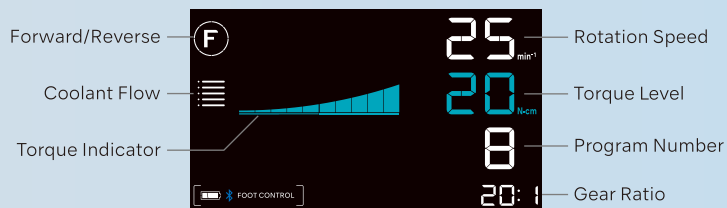

Superb visibility and operability Large color LCD panel: Visibility is guaranteed with the large, back-lit, high-contrast, LCD panel. The display can be adjusted in 10 brightness levels. The display's intuitive and easy-to-understand icons allow for smooth operation.

A more compact yet powerful motor and minimized handpiece head reduce strain.



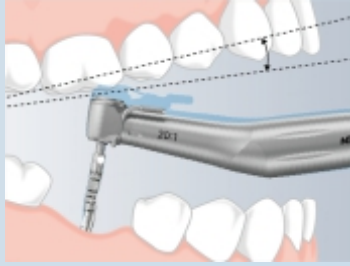

This new handpiece has been reduced in size by 2mm (compared to the previous model), making it much easier to create holes using surgical guides. This also allows for a wider field of view for practitioners, significantly improving accessibility to the oral cavity. Additionally, the reduced size dramatically minimizes discomfort for patients during procedures, allowing for a more comfortable overall experience.


Maximum Torque

Surgic AP **50** N·cm

Surgic AP2 **80** N·cm


Silent and Smooth Irrigation Pump

The irrigation pump provides consistent and steady flow operating quietly in the background. Irrigation tube set-up is simple and straight-forward and the pump fits seamlessly in the compact and elegant design of Surgic Ap2.

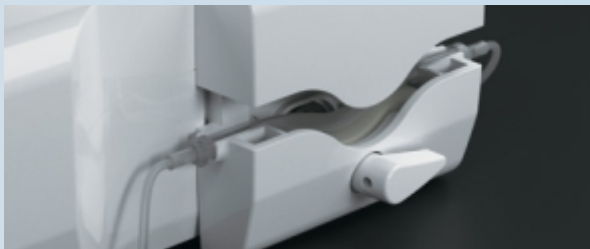

User-Friendly Foot Control (FC-84)

Foot Control wireless connectivity has been incorporated through Bluetooth®. Without cables, practitioners can freely select their optimal pedal position. It has also been made even lighter, making it easier to quickly adjust positioning.

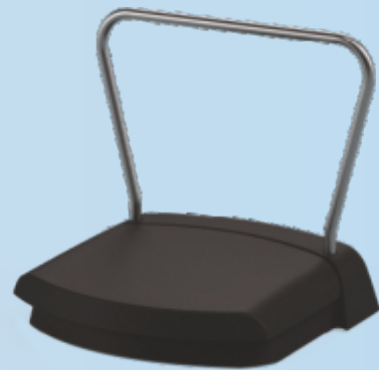

Contents

- Control Unit • Non-Optic Micromotor (SG80MS)
- S-Max SG20M Handpiece (20:1 Reduction)
- FC-84 Foot Control • Handpiece Stand
- Irrigation Tube (3 pcs.) and Other Accessories

Specifications:

Control Unit

- Power Supply : AC100-240V 50/60 Hz
- Max. Pump Output : 75 mL/min
- Programs : 8
- Dimensions : W 245 x D 235 x H 90 mm

Micromotor

- Motor Speed : 200-40,000 min⁻¹
- Non-optic
- Brushless

Foot Control

- Speed Control : Variable



3 Local Shopping Centre, MOR Land, Near J Block, DDA Market,
New Rajender Nagar, New Delhi – 110060

 9205557487  sales@unicorndenmart.com

 www.unicorndenmart.com      /unicorndenmart

Ver 6/2025

