




FlowGuard®

PLUMBING SYSTEMS



The Bacteria-Safe Pipe



- ✓ FAREWELL TO LEGIONELLA DISEASE
- ✓ FAREWELL TO BIRDFLU
- ✓ FAREWELL TO S.A.R.S.
- ✓ FAREWELL TO VIRUS



FlowGuard® is a Hot and Cold Potable Water Distribution System made of chlorinated polyvinyl chloride (CPVC) for use in single and multi-family homes, apartments, high-rises, hotel/motels and commercial installations.

FlowGuard® CPVC has been used for hot and cold water distribution in the United States since 1960. It has a history of superior performance and competitive prices compared to metal and other alternative piping systems. CPVC pipe and fittings are jointed by solvent cementing which, through chemical bonding, essentially makes the pipe and fitting become one continuous piece.

FlowGuard® CPVC is the only piping material that meets requirement of **NSF/ANSI Standard 61 - Drinking Water System** components.

Atlanta Industries Inc. is the licensed manufacturer of Lubrizol USA, formerly BF Goodrich, for **FlowGuard®** CPVC plumbing systems in the Philippines. **FlowGuard®** pipes & fittings are made from specialty plastic, chemically known as **Chlorinated Polyvinyl Chloride (CPVC)**. This CPVC compound meets cell class 24448 B as defined by ASTM D1784 and have a design stress of 2000 PSI and a maximum service temperature up to 93°C.

STANDARDS & SPECIFICATIONS AND APPROVALS



ASTM D1784 Standard Specification for Rigid Polyvinyl Chloride (PVC) Compounds and Chlorinated Polyvinyl Chloride (CPVC) Compounds.

ASTM D2846 Specification for Chlorinated Polyvinyl Chloride (CPVC) Plastic Hot & Cold water distribution systems.

ASTM F493 Standard Specification for Solvent Cements for Chlorinated Polyvinyl Chloride (CPVC) Plastic Pipe & Fittings.

ASTM F441 Standard Specification for Chlorinated Polyvinyl Chloride (CPVC) Plastic Pipe, SCH

ASTM F438 Socket-Type Chlorinated Polyvinyl Chloride Plastic Pipe Fittings. SCH 40.

ASTM F439 Socket-Type Chlorinated Polyvinyl Chloride Plastic Pipe Fittings. SCH 80.

IS 15778 Chlorinated Polyvinyl Chloride (CPVC) pipe for potable hot & cold water distribution.

ADVANTAGES


FLOWGUARD® PIPE & FITTINGS: THE PREMIERE CHOICE

BIOFILM FORMATION RESISTANCE

Biofilm is a glue-like substance that forms when bacteria adhere to surfaces in aqueous environments. Multiple international studies have confirmed the superior antimicrobial performance of CPVC over other piping materials, especially polypropylene (PPR).


Biofilm Formation Potential (BFP): Potential growth of bacteria on a material surface that is in contact with water (e.g., pipes, flushing containers, storage containers).

Comparison of BBP (Biomass Production Potential)
Values* Observed at 30°C and 50°C

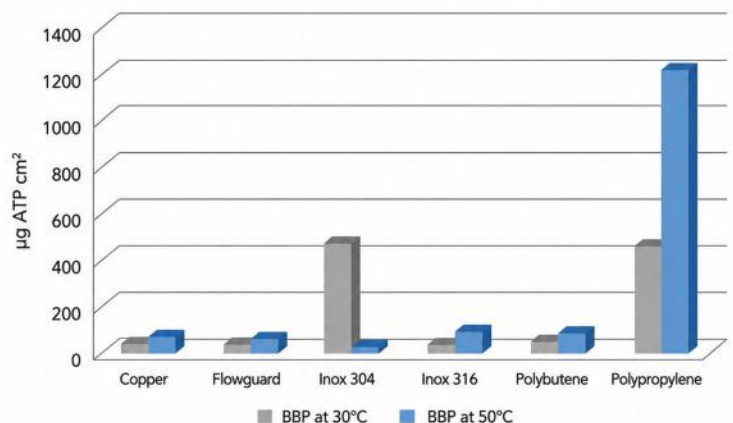

SCIENCE HAVE PROVEN THE FOLLOWING:

A.) LOW BACTERIAL BUILD-UP

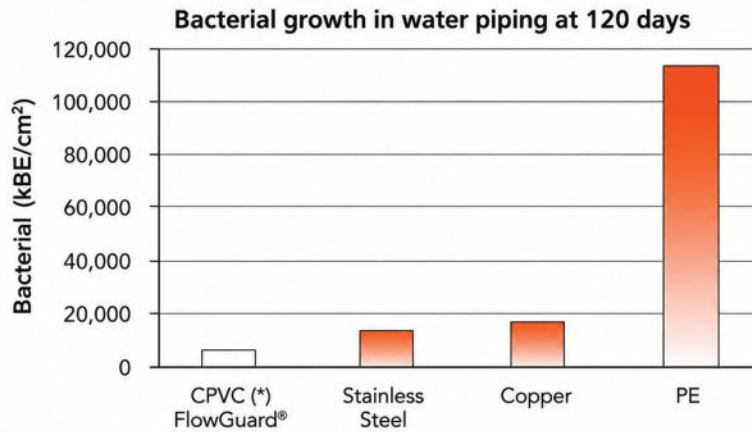


Studies have shown that bacteria build up with CPVC is far lower than with alternative piping materials - copper, steel and other thermoplastics.

"CPVC piping supports the lowest bacterial growth compared with traditional piping material." - based on the study conducted by Dr. Georg-Joachim Tuschewitzki, Institute of Private Hygiene, University of Bonn, Germany.

- Dr. GJ. Tuschewitzki


B.) HEALTH CONCERNS / LEGIONELLA PROOF

Number of Legionella Bacteria in the test water (average after 8,12 and 16 weeks - static test, no flow)

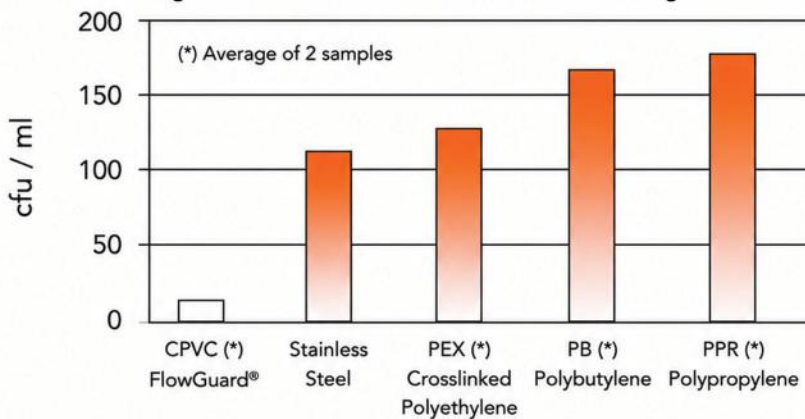

"In the presence of two cPVC materials, the growth of Legionella bacteria in the water was low."

WHY OTHER PIPES HAVE BACTERIA?

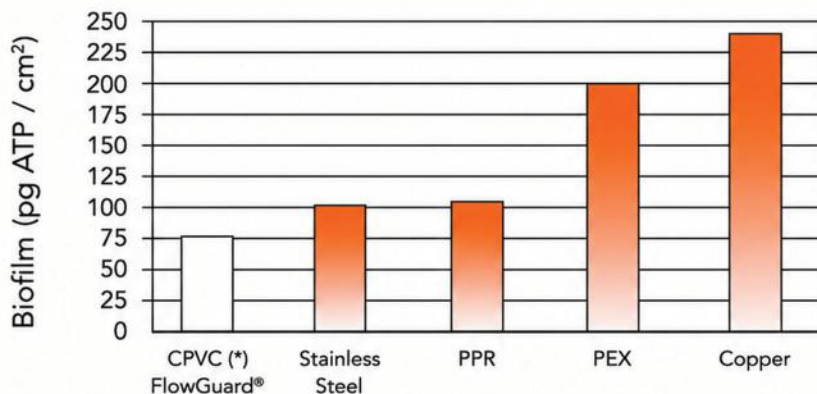

Study 3:

Biofilm-forming characteristics of pipe materials for drinking water installation *

(*) Study: "Biofilm Formation Potential of Pipe Materials in internal installation" by order of VROM. Authors: H. R. Veenendaal and D. Van de Kooly KIWA N.V - division Chemistry and Biology. June 1999. (KIWI is the Netherlands approvals agency for potable water piping systems).

In the case of PPR, cross-link & other pipes, the germs bacteria will stay, eat & live there.



DURABILITY

FlowGuard® Pipes and fittings has been tested for chlorine resistance according to NSF P171 Protocol. After 23 years of use, there was no erosion of the pipe wall and no decrease in long-term hydrostatic performance.

FlowGuard® CPVC Testing PPR & PB Testing Wall erosion same phenomenon as seen in PPR tubes.

CORROSION RESISTANCE

Unlike other materials, like metals, FlowGuard® will not corrode and deteriorate due to oxidation.

FlowGuard® CPVC Testing




Metal Pipe




Atlanta cPVC FlowGuard® has a 50-year life span, probably 40 years more than other materials. With a record of more than 45 years of continuous, trouble-free service, the cPVC Hot & Cold-water piping system withstands aggressive water conditions of high pressures and high temperatures. It also conforms to ASTM D-2846, the same standard being used in the US. Now, almost 40% of American household highly prefer cPVC-made pipes for their water system.

LTHS (Long Term Hoop Stress) Performance at 82°C

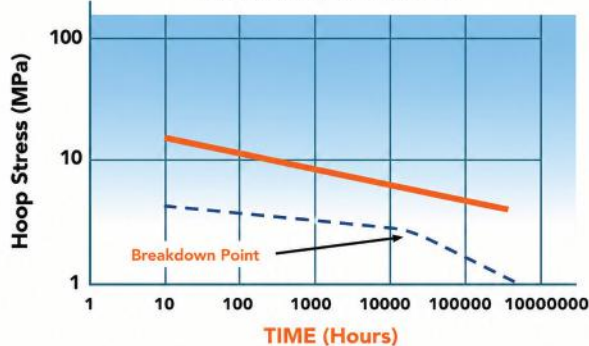

LTHS (Long Term Hoop Stress) Performance at 95°C

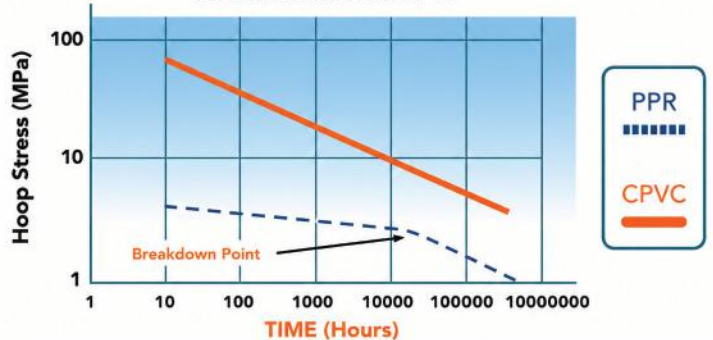

FlowGuard® CPVC



Other Plastics


FIRE THREAT SAFETY AND TOXICITY

CPVC resists ignition, as evaluated and tested by fire protection organization in US. The results of CPVC fire tests indicates that CPVC is not as toxic than forest wood and much less toxic compared to everyday items such as wool and cotton.

Environmental impact reports also indicated that smoke toxicity of plastic pipe is low compared with that of common building materials present present in homes and furnishings.

FlowGuard® Pipe and Fittings have a Limiting Oxygen Index (LOI) of 60. Thus, FlowGuard® Pipe and Fittings do not support combustion, no flaming drips and won't spread flames or generate smoke like other plastics. It also does not increase the fire load of a property.


Thermal Conductivity Factor (w/mk)

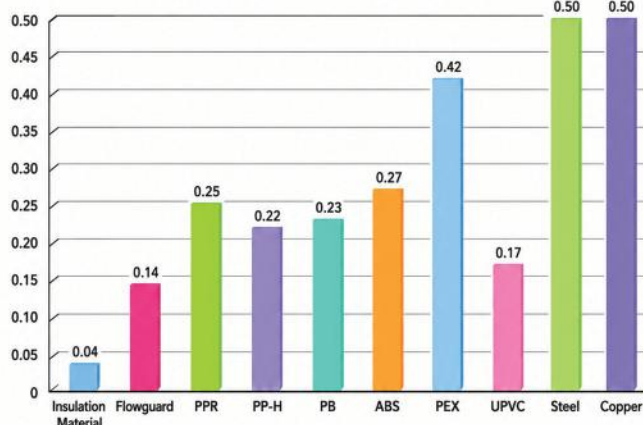

THERMAL CONDUCTIVITY

FlowGuard® plumbing systems have low thermal conductivity, helping hot water run more efficiently.

Effect of Direct Sunlight on Material Temperature and Pressure Rating using ASTM D4803

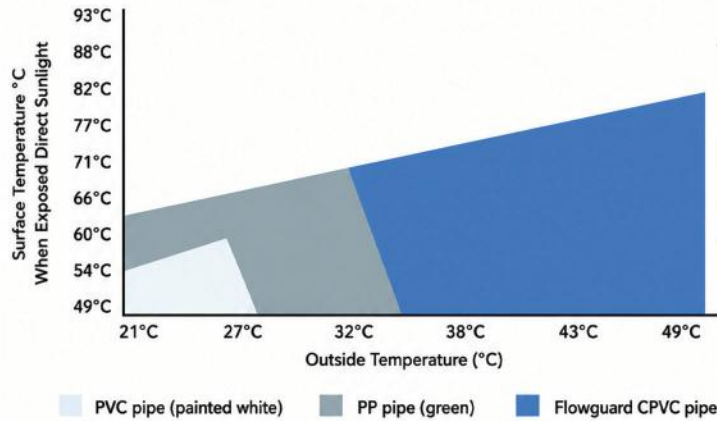

WEATHER RESISTANCE

In-use applications, including many long-standing outdoor installations, demonstrate that FlowGuard® Pipes and Fittings can withstand long-term exposure to environmental elements without significant adverse effects.

CUSTOMER BENEFITS

HEALTH CERTIFICATES

FlowGuard® piping systems are recognized by a variety of domestic and international water quality organizations that test and monitor drinking water quality.


- USA (NSF International) - National Sanitation Foundation
- Germany (DVGW) - Deutscher Verein des Gas-und Wasserfaches
- The United Kingdom (WRC) - Water Research Council
- Canada (CAS) - Canadian Standards Association
- Holland (KIWA) - Keuiingsinstituut voor Waterleidingartikelen
- China - Disease Prevention and Control Center in TianJin, Beijing, Shanghai, Guangdong and Zhejiang, etc.



QUIET OPERATION



Transport water four times quieter than copper.

Velocity of Sound	m/s
FlowGuard®	1350
Copper	3600
Water	1473

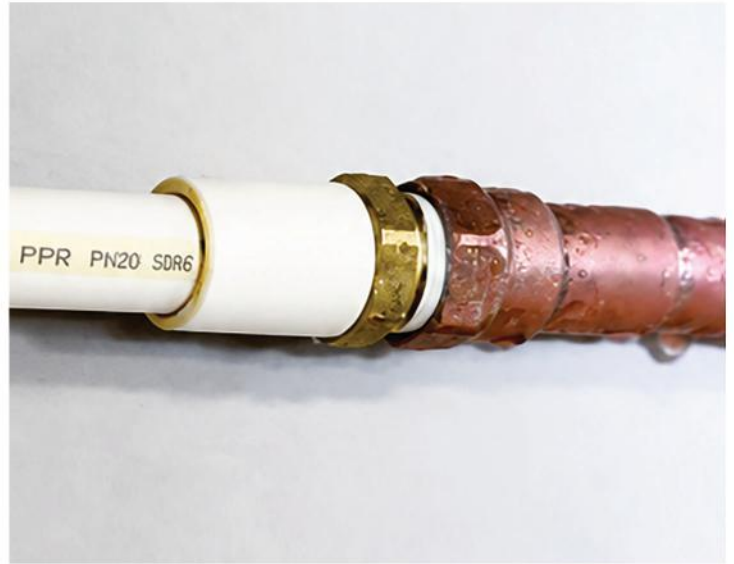


CONDENSATION RESISTANCE

When tested alongside copper piping, FlowGuard® Pipes and Fittings produce less condensation at the same ambient air temperature, water temperature and humidity level.

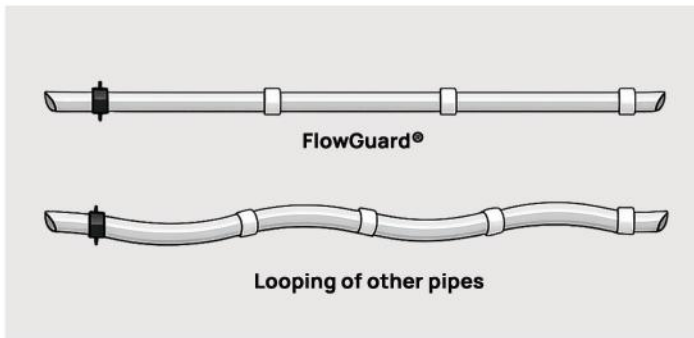

EASY INSTALLATION

- Needs less hanger and supports
- No unsightly looping of the pipe
- Higher pressure bearing capability.
- Leads to same flowrate with smaller pipe size
- Suitable for vertical riser

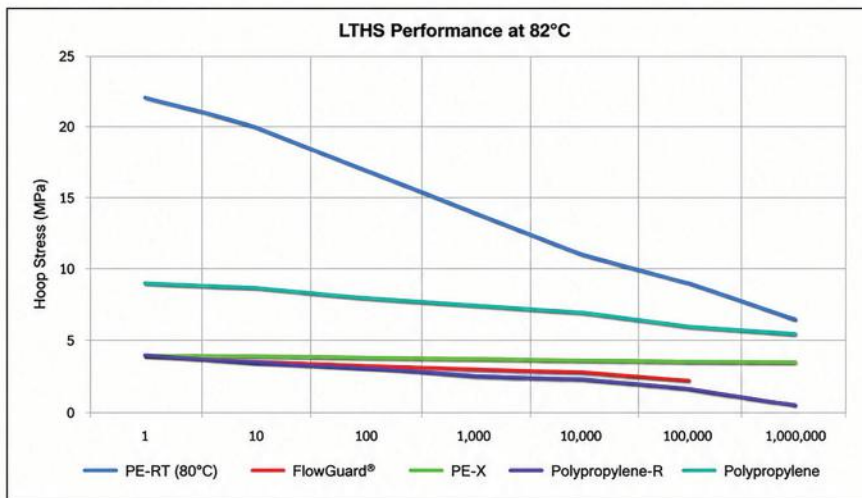

LONG TERM PERFORMANCE

Compared to other non-metal materials, FlowGuard® Pipes and Fittings provide consistent pressure ratings at elevated temperatures for longer - meaning greater reliability and less maintenance.



EASY INSTALLATION

- Requires fewer hangers to support the pipe
- No unsightly pipe drop
- Higher Pressure bearing capability: smaller pipe sizes provide equivalent flowrate to larger, alternative material pipes.
- Suitable for vertical risers
- Does not require electricity or specialized tools

INSTALLATION SOLVENT WELDING

JOINT STRENGTH


Adhesion: Glues bond to part A on one side and to part B on the other side. The glue bond does not work properly when there is space between part A and part B.

Solvent Welding: Some components in a solvent cement penetrate, melt and/or swell the material and then evaporate, which allows the substrates to regain crystallinity and with it all of their physical property. 80 percent of the bond strength in a solvent weld comes by fusing part A into part B.

ADHESION



SOLVENT WELDING

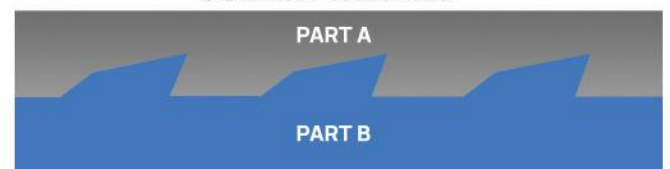




CPVC: SOLVENT WELDING

- Tools required are simple and cheap.
- Solvent welding process allows for fast and easy assembly.
- Same procedure for CPVC as for PVC.
- Chemically welded joints are the strongest part of the system.
- No need for electrical source.

CPVC is listed for Potable & Non-Potable line application:



Nation Plumbing
Code of the Phil.




Uniform
Plumbing Code



Building Officials
Code
Administrators

PRODUCT RANGE: PIPES & FITTINGS

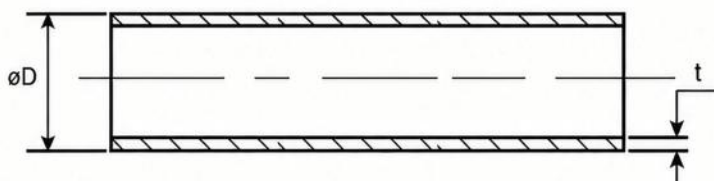

Specification: conforms to ASTM 2846 (CTS) SDR11,
ASTM F442 (CTS) SDR 13.5
ASTM F441 (Schedule 40)

Standard Cutting Length: 3 meters

Joining Method: CPVC 1 - Step Solvent Cement

Color: Beige with Red Strip (for SDR 11)
Beige with Red Strip (for SDR 13.5)
Beige with Red Strip (for SCH 40)

COPPER-TUBE SIZE (CTS) SDR 11 AS PER ASTM D-2846

NOMINAL SIZE		OD (mm)		Wall Thickness (t) (mm)		PRESSURE RATING PSI	
in	mm	ave.	tolerance	min	tolerance	23°C	82°C
1/2	15	15.9	0.08	1.73	0.51	400	100
3/4	20	22.2	0.08	2.03	0.51	400	100
1	25	28.6	0.08	2.59	0.51	400	100
1 1/4	32	34.9	0.08	3.18	0.51	400	100
1 1/2	40	41.3	0.10	3.76	0.51	400	100
2	50	54.0	0.10	4.90	0.58	400	100

COPPER-TUBE SIZE (CTS) SDR 13.5 AS PER ASTM F442

NOMINAL SIZE		OD (mm)		Wall Thickness (t) (mm)		PRESSURE RATING PSI	
in	mm	ave.	tolerance	min	tolerance	23°C	82°C
1/2	15	15.9	0.08	1.40	0.51	320	80
3/4	20	22.2	0.08	1.65	0.51	320	80
1	25	28.6	0.08	2.12	0.51	320	80
1 1/4	32	34.9	0.08	2.59	0.51	320	80
1 1/2	40	41.3	0.10	3.06	0.51	320	80
2	50	54.0	0.10	4.00	0.58	320	80

SCHEDULE 40 PIPING SYSTEM AS PER ASTM F441

NOMINAL SIZE		OD (mm)		Wall Thickness (t) (mm)		PRESSURE RATING PSI
in	mm	ave.	tolerance	min	tolerance	
2-1/2	65	73.0	0.18	5.16	0.61	300
3	80	88.9	0.20	5.49	0.66	280
4	100	114.3	0.23	6.02	0.71	220
6	150	168.3	0.28	7.11	0.86	180

COPPER TUBE AS PER ASTM D-2846

ELBOW 90°	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

ELBOW 45°	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

CROSS TEE	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

TEE	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

END CAP	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

COUPLING	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

MALE ADAPTER	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

FEMALE ADAPTER	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

UNION COUPLING (PLASTIC/PLASTIC)	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

REDUCER COUPLING	in	mm	REDUCER BUSHING	in	mm
	3/4 x 1/2	20 x 15		3/4 x 1/2	20 x 15
	1 x 1/2	25 x 15		1 x 1/2	25 x 15
	1 x 3/4	25 x 20		1 x 3/4	25 x 20
	1-1/4 x 1/2	32 x 15		1-1/4 x 1/2	32 x 15
	1-1/4 x 3/4	32 x 20		1-1/4 x 3/4	32 x 20
	1-1/4 x 1	32 x 25		1-1/4 x 1	32 x 25
	1-1/2 x 1/2	40 x 15		1-1/2 x 1/2	40 x 15
	1-1/2 x 3/4	40 x 20		1-1/2 x 3/4	40 x 20
	1 1/2 x 1	40 x 25		1 1/2 x 1	40 x 25
	1-1/2 x 1-1/4	40 x 32		1-1/2 x 1-1/4	40 x 32
	2 x 1/2	50 x 15		2 x 1/2	50 x 15
	2 x 3/4	50 x 20		2 x 3/4	50 x 20
	2 x 1	50 x 25		2 x 1	50 x 25
	2 x 1-1/4	50 x 32		2 x 1-1/4	50 x 32
	2 x 1-1/2	50 x 40		2 x 1-1/2	50 x 40

MALE ADAPTER W/ BRASS	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

FEMALE ADAPTER W/ BRASS	in	mm
	1/2	15
	3/4	20
	1	25
	1 1/4	32
	1 1/2	40
	2	50

ELBOW REDUCER 90°	in	mm
	3/4 x 1/2	20 x 15
	1 x 1/2	25 x 15
	1 x 3/4	25 x 20

TRANSITION BUSHING (IPS/CTS) SPIGOT X SOCKET	in	mm	THREADED FEMALE TEE W/ BRASS	in	mm
	1/2 x 1/2	15 x 15		1/2 x 1/2 x 1/2	15 x 15 x 15
	3/4 x 3/4	20 x 20		3/4 x 3/4 x 1/2	20 x 20 x 15
	1 x 1	25 x 25		3/4 x 3/4 x 3/4	20 x 20 x 20
	1-1/4 x 1-1/4	32 x 32		1 x 1 x 3/4	25 x 25 x 15
	1-1/2 x 1-1/2	40 x 40		1-1/4 x 1-1/4 x 1-1/4	32 x 32 x 32
	2 x 2	50 x 50		1-1/4 x 1-1/4 x 1/2	32 x 32 x 15
	2-1/2 x 2	65 x 50			
	3 x 2	80 x 50			
	4 x 2	100 x 50			

BALL VALVE	in	mm	GATE VALVE	in	mm	BRASS FPT COUPLING	in	mm
	1/2	15		1/2	15		3/4 x 1/2	20 x 15
	3/4	20		3/4	20		1 x 1/2	25 x 20
	1	25						
	1 1/4	32						
	1 1/2	40						
	2	50						

FEMALE ELBOW ADAPTER W/ BRASS	in	mm	TEE REDUCER	in	mm	in	mm
	1/2 x 1/2	15 x 15		3/4 x 1/2 x 1/2	20 x 15 x 15	1-1/2 x 1/2 x 1-1/2	40 x 15 x 40
	3/4 x 1/2	20 x 15		3/4 x 1/2 x 3/4	20 x 15 x 20	1-1/2 x 3/4 x 1-1/2	40 x 20 x 40
	3/4 x 3/4	20 x 20		1 x 1/2 x 1/2	25 x 15 x 15	1-1/2 x 1 x 1-1/2	40 x 25 x 40
	1 x 1/2	25 x 15		1 x 1/2 x 3/4	25 x 15 x 20	1-1/2 x 1-1/4 x 1-1/2	40 x 32 x 40
	1-1/2 x 1/2	32 x 32		1 x 3/4 x 3/4	25 x 20 x 20	2 x 1-2 x 2	50 x 15 x 50
	1-1/4 x 1-1/4	32 x 15		1 x 1/2 x 1	25 x 15 x 25	2 x 3/4 x 2	50 x 20 x 50
				1 x 3/4 x 1	25 x 20 x 25	2 x 1 x 2	50 x 25 x 50
				1-1/4 x 1/2 x 1-1/4	32 x 15 x 32	2 x 1-1/4 x 2	50 x 32 x 50
				1-1/4 x 3/4 x 1-1/4	32 x 20 x 32	2 x 1-1/2 x 2	50 x 40 x 50
				1-1/4 x 1 x 1-1/4	32 x 25 x 32		

UNION COUPLING MALE THREAD (BRASS/PLASTIC)	in	mm	UNION COUPLING FEMALE THREAD (BRASS/PLASTIC)	in	mm	STEP OVER BEND	in	mm
	1/2	15		1/2	15		1/2	15
				3/4	20		3/4	20
				1	25		1	25
				1 1/4	32		1 1/4	32
				1 1/2	40		1 1/2	40
				2	50		2	50

SCH - 40 FITTINGS AS PER ASTM F-438 / F-439

ELBOW 90°	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

END CAP	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

COUPLING	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

ELBOW 45°	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

TEE	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

FLANGE	in	mm
	2- 1/2	65
	3	80
	4	100
	*6	150

REDUCER TEE	in	mm
	2-1/2 x 1	65 x 25
	2-1/2 x 1-1/2	65 x 40
	2-1/2 x 2	65 x 50
	3 x 1	80 x 25
	3 x 1-1/4	80 x 32
	3 x 1-1/2	80 x 40
	3 x 2	80 x 50
	3 x 2-1/2	80 x 65
	4 x 1-1/2	100 x 40
	4 x 2	100 x 50
	4 x 2-1/2	100 x 65
	4 x 3	100 x 80

REDUCER BUSHING	in	mm
	2-1/2 x 1-1/2	65 x 40
	2-1/2 x 2	65 x 50
	2-1/2 x 2-1/2	65 x 65
	4 x 2	100 x 50
	4 x 2-1/2	100 x 65
	4 x 3	100 x 80
	*6 x 4	150 x 100

COUPLING REDUCER	in	mm
	3 x 2	80 x 50
	4 x 2	100 x 50
	4 x 3	100 x 80
	*6 x 4	150 x 100

Note: Above 4" Subject to Availability

ACCESSORIES

CUTTER	in	mm
	1/2 - 1-1/4	15 - 32

CPVC CEMENT YELLOW - MEDIUM BODIED	Size
	1/2 pint
	1 pint

DEBURRING TOOL	Size
	12 - 20

PVC/PVC CEMENT PURPLE - WATER THIN	Size
	1 pint

Note: Use Primer for 2-1/2" and above

JOINING FLOWGUARD® PIPES AND FITTINGS



1.) CUT

Tubing cuts easily with a wheel-type plastic tubing cutter, a hacksaw or other fine-toothed hand or power saw.



2.) DEBURR

Remove any burrs and filings, as these can prevent proper contact between the tube and fitting during assembly.



3.) PREPARE THE FITTING

Wipe any dirt or moisture from the fitting sockets and tubing end.



4.) CLEAN THE BONDING AREA

Use primer or cleaner to prep the bonding area.



5.) APPLY SOLVENT

When the pipe and fitting surfaces are dry, apply a heavy, even coat of solvent weld cement on the end of the tubing. Without replacing the dauber in the can, apply a coat of solvent weld cement to the inside of the fitting.



6.) ASSEMBLE

Immediately insert the tubing into the fitting socket, rotating the tubing 1/4 to 1/2 way around while inserting.

PROJECTS



AREZZO PLACE



DANSALAN GARDEN ROCKWELL



DAYS HOTEL TAGAYTAY



NAKPIL DORMITORY



ASYA ENCLAVES



HIDALGO TOWER
CENTER ROCKWELL



ATLANTA CENTRE



SOPHIA BELLEVILLE



Unit 35th Atlanta Centre, #31 Annapolis St.
Greenhills, San Juan City
Tel. nos.: 8723 07 81 to 88
Fax no.: 7744 47 03 | 8584 29 97
Website: <http://www.atlanta.ph>
Email: marketing@atlanta.ph
Like us on Facebook [atlantaindustriesinc](https://www.facebook.com/atlantaindustriesinc)

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained. The information often is based on laboratory work with small-scale equipment and does not necessarily indicate end product performance or reproducibility. Formulations presented may not have been tested for stability and should be used only as a suggested starting point. Because of the variations in methods, conditions and equipment used commercially in processing these materials, no warranties or guarantees are made as to the suitability of the products for the applications disclosed. Full-scale testing and end product performance are the responsibility of the user. Atlanta Industries, Inc. shall not be liable for and the customer assumes all risk and liability for any use or handling of any material beyond Lubrizol Advanced Materials, Inc.'s direct control. The SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein is to be considered as permission, recommendation, nor as an inducement to practice any patented invention without permission of the patent owner.