



CONSTRUCTION



◀ DUPONT ▶

DOWSIL™

DOWFROST™

FROTH-PAK™

GREAT STUFF

LUCAS OIL



MOLYKOTE™

LentusLLC.com

Sales@LentusLLC.com

+1-270-765-2212

400 Ring Road, Suite 101
Elizabethtown, KY 42701

Table of Contents

DOWSIL™ Sealants	1
Dow Glycol-Based Heat Transfer Fluids	6
MOLYKOTE® Specialty Lubricants	8
Lucas Oil®	10
LENTEK™ Sealants	13
GREAT STUFF™ Foams	14
GREAT STUFF™ Foams and Wipes	15
GREAT STUFF™ Gloves	16

SCAN TO EXPLORE OUR FULL
CONSTRUCTION PRODUCT LINE



DOWSIL™

DOWFROST™

LUCAS OIL.



GREAT STUFF

FROTH-PAK™



MOLYKOTE®

While Lentus strives to make the information in this catalog as timely and accurate as possible, we make no claims or guarantees about the accuracy, completeness, or adequacy of the contents, and expressly disclaim liability for errors and omissions in the content of this catalog.



**BEST
SELLER**



DOWSIL™ Glazing Sealant

One-part professional quality silicone sealant specifically formulated to bond and adhere to many common substrates. Remains flexible and will not become brittle, crack, shrink, or chalk.

APPLICATIONS:

- General glazing applications, backlight replacement, and skylight installations
- Repairing weatherstripping and gaskets
- Sealing most glass, plastics, metal, repainted surfaces, fiberglass, ceramics, and aluminum substrates

FEATURES:

- Resistant to sunlight and weather extremes
- High strength and excellent adhesion
- Supplied in removable, reusable, resealable nozzle that saves time and sealant

PART N°	SIZE	COLOR	CASE / PALLET
4045025	305 mL	Aluminum	12 / 1,296
4045026	305 mL	Black	12 / 1,296
4045027	305 mL	Bronze	12 / 1,296
4045028	305 mL	Clear	12 / 1,296
4045029	305 mL	Trans White	12 / 1,296
4045030	305 mL	White	12 / 1,296

DOWSIL™ 999A Silicone Glazing Sealant

An easily applied sealant that cures in the presence of atmospheric moisture to produce a durable and flexible glazing and curtain wall seal.

APPLICATIONS:

- General weatherproofing and sealing for construction materials, such as glass, plastic, and metal
- May be applied as a primary seal

FEATURES:

- Resistant to sunlight, rain, sleet, snow, ultraviolet radiation, ozone, and temperature extremes
- Retains design properties even after years of exposure
- Seals remain watertight and weatherproof
- Wide service temperature range from -76°F to 350°F (-60°C to 177°C) with intermittent temperatures up to 392°F (200°C)
- 900-day shelf life
- ASTM C920, Class 25



PART N°	SIZE	COLOR	CASE / PALLET
3138500	305 mL	Aluminum	12 / 1,296
2231476	305 mL	Black	12 / 1,296
2641372	305 mL	Bronze	12 / 1,296
2211009	305 mL	Clear	12 / 1,296
2377870	305 mL	Light Bronze	12 / 1,296
2323311	305 mL	White	12 / 1,296

DOWSIL™ 730 FS Solvent Resistant Sealant

Solvent-resistant silicone adhesive/sealant. For bonding and sealing applications where resistance to the swelling effects of fuels, solvents, and oils is required.

APPLICATIONS:

- Formed-in-place gaskets for compressors and equipment
- Applications where ordinary seals fail under harsh conditions
- Fuel systems - sealing lines and tanks
- Bonding or sealing of components exposed to moisture, vibration, shock, fuels, solvents, and oils for long periods

FEATURES:

- One-component fluorosilicone adhesive/sealant
- Cures at room temperature when exposed to moisture in the air
- Non-sag, paste consistency for vertical or overhead use
- Easy to apply
- Cures to a tough, flexible rubber
- Good adhesion to many substrates
- Stable and flexible from -85°F to 500°F (-65°C to 260°C)



PART N°	SIZE	COLOR	CASE / PALLET
4097353	90 mL	White	12 / 3,000
4097354	170 mL	White	12 / 3,000
4095684	23 KG	White	1 / 24

DOWSIL™ 733 Glass & Metal Sealant

Conventional one-part RTV sealant with adhesion promoter, designed for use in OEM bonding and sealing applications.

APPLICATIONS:

- Industrial sealing and bonding
- Heavy equipment enclosures, covers, and weather seals
- Recreational vehicles - indoor and outdoor
- Marine equipment

FEATURES:

- Enhanced unprimed adhesion to cleaned substrates, including glass, metals, and plastics
- Good resistance to weathering, vibration, moisture, ozone, and extreme temperatures
- Continuous temperature: -70°F to 350°F (-57°C to 177°C)
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, NSF 51, and NSF 61 requirements
- UL 94 HB compliant (low-flammability)



PART N°	SIZE	COLOR	CASE / PALLET
99179264	300 mL	Aluminum	12 / 1,296
99179189	300 mL	Black	12 / 1,296
99179322	300 mL	Clear	12 / 1,296
2468379	17.7 KG	Clear	1 / 24
99179245	300 mL	White	12 / 1,296
2468336	17.7 KG	White	1 / 24

DOWSIL™ 786 Silicone Sealant

Designed to seal non-porous surfaces where high humidity and temperature extremes exist.

APPLICATIONS:

- Ideal for ceramic tile grouting
- Sealing around showers, tubs, and sinks
- Strong seal around plumbing fixtures
- Refrigeration units and cold storage areas

FEATURES:

- Cured sealant is mildew-resistant
- Remains permanently flexible without shrinking, cracking, crumbling, or drying out
- Resists staining, spotting, and color changes
- Retains original design properties even after years of exposure
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 requirements
- 900-day shelf life



PART N°	SIZE	COLOR	CASE / PALLET
99179247	300 mL	Clear	12 / 1,296
99179249	300 mL	Trans White	12 / 1,296
99179321	300 mL	White	12 / 1,296
4011651	17.7 KG	White	1 / 24
4023914	205 KG	Clear	1 / 4

DOWSIL™ Tub/Tile/Ceramic Sealant

Designed for non-porous surfaces. Ensures long-lasting performance in kitchens, bathrooms, and other moisture-prone areas.

APPLICATIONS:

- High humidity and extreme temperature areas
- Installing showers, sinks, and plumbing fixtures
- Sealing drains and piping
- Adhesive, sealant, or grout for ceramic tiles

FEATURES:

- Cured sealant is mildew-resistant
- Remains permanently flexible without shrinking, cracking, crumbling, or drying out
- Resists staining, spotting, and color changes
- Meets FDA Reg 21 CFR 177.2600 requirements
- 900-day shelf life



PART N°	SIZE	COLOR	CASE / PALLET
4045034	305 mL	Almond	12 / 1,296
4045036	305 mL	Clear	12 / 1,296
4045038	305 mL	Trans White	12 / 1,296
4045039	305 mL	White	12 / 1,296

DOWSIL™ HVAC/R Sealant

A one-part RTV sealant. Remains flexible; will not become brittle, crack, shrink, or chalk.

APPLICATIONS:

- Heating, ventilation, air conditioning, and refrigeration installations
- Forming watertight seals on outdoor vents and pipe openings
- Sealing around electrical boxes and equipment

FEATURES:

- Adheres to most glass, plastic, metal, painted surfaces, fiberglass, and ceramic substrates
- Tack-free in 15-20 minutes
- Resistant to sunlight and weather extremes
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 requirements
- UL Listed
- 900-day shelf life



PART N°	SIZE	COLOR	CASE / PALLET
4045031	305 mL	Aluminum	12 / 1,296
4128471	305 mL	Black	12 / 1,296
4045032	305 mL	Clear	12 / 1,296
4045033	305 mL	White	12 / 1,296



DOWSIL™ 700 Industrial Grade Silicone Sealant

Designed for general industrial sealing and adhesive applications.

APPLICATIONS:

- Caulking, bonding, adhering, and formed-in-place gasketing
- Weatherproofing outdoor spaces
- Protecting electrical conduits
- General industrial sealing and adhesive tasks

FEATURES:

- One-part room temperature cure - indoor and outdoor
- Free of any petroleum distillates
- Resistant to weathering and adverse conditions
- Long-lasting, airtight seals
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 food contact requirements
- UL 94 HB compliant (low-flammability)
- 900-day shelf life

PART N°	SIZE	COLOR	CASE / PALLET
4060123	300 mL	Aluminum	12 / 1,296
4060067	300 mL	Clear	12 / 1,296
4060071	17.4 KG	Clear	1 / 24
4060070	205 KG	Clear	1 / 4
4060069	300 mL	Black	12 / 1,296
4060122	17.4 KG	Black	1 / 24
4060068	300 mL	White	12 / 1,296
4066044	205 KG	Red	1 / 4

DOWSIL™ 732 Multi-Purpose Sealant

One-component, RTV adhesive sealant engineered for general industrial sealing and bonding applications. Features extensive technical specifications for more regulated applications.

APPLICATIONS:

- Sealing and preventing water infiltration and air leakage
- Applications exposed to varying weather conditions
- Sealing roof joints, skylights, flashings, and around chimneys
- Filling gaps or expansion joints between materials

FEATURES:

- Non-sag, paste consistency
- Easy to apply
- Cures to a tough, flexible rubber
- Good adhesion to many substrates
- Excellent dielectric properties
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, NSF 51, and NSF 61 requirements
- UL Listed
- 900-day shelf life

PART N°	SIZE	COLOR	CASE / PALLET
1891961	90 mL	Aluminum	12 / 3,000
99179259	300 mL	Aluminum	12 / 1,296
2112531	90 mL	Black	12 / 3,000
99179209	300 mL	Black	12 / 1,296
3138356	90 mL	Clear	12 / 3,000
99179271	300 mL	Clear	12 / 1,296
3140717	90 mL	White	12 / 3,000
99179246	300 mL	White	12 / 1,296



**BEST
SELLER**



DOWSIL™ 736 Heat Resistant Sealant

Non-slumping sealant designed for sealing and bonding applications exposed to temperatures up to 600°F (316°C).

APPLICATIONS:

- Electrical enclosures and connections
- Sealing and encapsulating heating elements
- Aerospace gasketing
- Moving oven belts
- Bag filters on smokestacks

FEATURES:

- One-component silicone that will not sag or run
- Can be applied overhead or on side walls
- Designed to meet MIL-A-46106 Rev. B Spec
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 requirements
- UL 94 HB compliant (low-flammability)
- 900-day shelf life

PART N°	SIZE	COLOR	CASE / PALLET
2423472	90 mL	Red	12 / 3,000
99179248	300 mL	Red	12 / 1,296
3145824	17.7 KG	Red	1 / 24
4023912	205 KG	Red	1 / 4

DOWSIL™ Hi-Temp Sealant Red

One-part silicone sealant with iron oxide to resist extreme heat exposure.

APPLICATIONS:

- Fired heaters
- Access doors and flanged pipe joints
- Flues on gas appliances
- Appliance heating elements

FEATURES:

- High temperature
- Resistant to sunlight and weather extremes
- Fast cure, high strength
- Performs in high temperature applications, up to 500°F (260°C) continuously, and 550°F (288°C) intermittently
- Remains flexible; will not become brittle, crack, shrink, or chalk
- 900-day shelf life



PART N°	SIZE	COLOR	CASE / PALLET
99150445	90 mL	Red	12 / 3,000
4045040	305 mL	Red	12 / 1,296

DOWSIL™ Q3-1566 Heat Resistant Adhesive / Sealant

A high temperature resistant silicone sealant that cures at room temperature when exposed to moisture in the air and forms a tough, flexible silicone rubber.

APPLICATIONS:

- Ovens, cookers, and other heating equipment
- Automotive oil and coolant sealing applications
- Flange sealing and heat resistant joints

FEATURES:

- High temperature
- Non-sag, paste consistency
- Easy to apply
- Unprimed adhesion on glass, metals, and most common plastics
- Stable and flexible from -58°F to 527°F (-50°C to 275°C), with short peaks up to 662°F (350°C)



PART N°	SIZE	COLOR	CASE / PALLET
4101935	310 mL	Black	12 / 1,296
4101934	21 KG	Black	1 / 24

DOWSIL™ 737 Neutral Cure Sealant

Oxime-cure RTV adhesive/sealant with primerless adhesion to most substrates.

APPLICATIONS:

- Substitute for mechanical fasteners on large and small appliances
- Adhering plastic moldings to plastic substrates for trim and decal applications
- Waterproofing electrical components
- Sealing coaxial connectors
- Protecting instrumentation assemblies

FEATURES:

- UV and weather-resistant
- Low odor and non-corrosive to metals and alkalines when compared to alkoxy-based RTVs
- UL 94 HB compliant (low-flammability)



PART N°	SIZE	COLOR	CASE / PALLET
99180484	300 mL	Black	12 / 1,296
4099910	17.6 KG	Black	1 / 24
4098499	90 mL	Clear	12 / 3,000
99180483	300 mL	Clear	12 / 1,296
4098497	17.6 KG	Clear	1 / 24
4098496	205 KG	Clear	1 / 4
99180646	300 mL	White	12 / 1,296
4099876	17.6 KG	White	1 / 24

DOWSIL™ 832 Multi-Surface Adhesive Sealant

RTV sealant with a built-in adhesion promoter for strong, reliable bonding to a wide range of substrates without primer.

APPLICATIONS:

- Sealing and repairing roof penetrations and gutters
- Sealing concrete floor seams
- Repairing windows
- Sealing pipes and threaded connections
- Assembling original equipment components

FEATURES:

- Superior unprimed adhesion to glass, metal, masonry, concrete, most rubber, and plastics, including ABS, PVC, and polycarbonate
- Low odor
- Will not corrode metal or other corrosion-sensitive materials
- Use temperatures from -67°F to 300°F (-55°C to 149°C); intermittent to 350°F (177°C)
- Forms a flexible, long-lasting seal
- Indoor and outdoor use

**BEST
SELLER**



PART N°	SIZE	COLOR	CASE / PALLET
99180523	300 mL	Black	12 / 1,296
4059470	22.7 KG	Black	1 / 24
99180620	300 mL	Gray	12 / 1,296
2654580	22.7 KG	Gray	1 / 24
2823501	228.1 KG	Gray	1 / 4
99180648	300 mL	Off-White	12 / 1,296
4031452	22.7 KG	Off-White	1 / 24

DOWSIL™ 9-1374 Silicone Sealant

One-part adhesive/sealant that cures at room temperature when exposed to moisture in the air. When cured, it becomes a tough, flexible rubber.

APPLICATIONS:

- Flexible sealing where movement or thermal cycling occurs
- Formed-in-place gaskets
- Environmental sealing

FEATURES:

- Low odor
- Easy to apply
- Adheres to most common substrates
- Unprimed adhesion
- Stable and flexible from -67°F to 356°F (-55°C to 180°C)



PART N°	SIZE	COLOR	CASE / PALLET
4077018	305 mL	Black	12 / 1,296
3119556	305 mL	Clear	12 / 1,296
4062929	18 KG	Clear	1 / 24

DOWSIL™ 738 Electrical Sealant

One-part, non-flowing moisture cure adhesive. A durable general-purpose sealant/adhesive where electrical insulation is important.

APPLICATIONS:

- Electrical assemblies and components
- Printed circuit boards
- Housings, terminals and leads, compressor pumps and gear boxes
- Wire and conduit sealing

FEATURES:

- Room temperature cure when exposed to moisture
- High elongation for added stress relief
- Faster in-line processing with optional heat acceleration
- UL 94 recognition
- MIL-A-46146



PART N°	SIZE	COLOR	CASE / PALLET
1949101	90 mL	White	12 / 3,000
99180508	300 mL	White	12 / 1,296
1907824	17.6 KG	White	1 / 24

Glycol-Based Heat Transfer Fluids



PROPYLENE GLYCOL

DOWFROST™ Heat Transfer Fluid

A formulation of 96% food-grade propylene glycol plus 4% food-grade corrosion inhibitors. Acceptable for use as a heat transfer fluid where there is a possibility of incidental food contact.

APPLICATIONS:

- HVAC
- Chill water and hydronic heating loops
- Geothermal
- Snow melt, defrosting, and turf heating
- Solar hot water heating
- Fire water sprinkler systems
- Food and beverage processing
- Cold room dehumidifying
- Refrigeration and freezing
- Ice skating rinks
- Secondary heat transfer loops

FEATURES:

- Industrially inhibited heat transfer fluid with an operating range of -50°F to 250°F (-46°C to 121°C)
- Made with pharmaceutical grade DOW PuraGuard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Made entirely from food grade raw materials conforming to FDA Reg 21 CFR 177.2600 and NSF guidelines
- Clear DOWFROST™ is Generally Regarded As Safe (GRAS) by the FDA

**BEST
SELLER**



DOWFROST™ HD Heat Transfer Fluid

A formulation of 94% propylene glycol and a specially designed 6% package of industrial corrosion inhibitors.

APPLICATIONS:

- HVAC
- Chill water and hydronic heating systems
- Geothermal
- Snow melt and turf heating systems
- Solar hot water heating
- Fire water sprinkler systems
- Refrigeration
- Ice skating rinks
- Large-scale chiller systems
- Cold storage, refrigerated warehouse
- Thermal Energy Storage (TES)

FEATURES:

- Engineered for closed-loop HVAC systems with operating range of -50°F to 325°F (-46°C to 163°C)
- Made with pharmaceutical grade DOW PuraGuard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Industrial corrosion inhibitors offer additional protection for systems containing copper components
- Widely used wherever low toxicity, environmentally friendly heat transfer fluids are needed - schools and hospitals
- Fluorescent yellow for leak detection

PART N°	PRODUCT	SIZE	COLOR	CASE / PALLET
9992103	DOWFROST™ HD	1 Gal Bottle	Yellow	4 / 108
9992102	DOWFROST™ HD	5 Gal Pail	Yellow	1 / 24
9992101	DOWFROST™ HD	55 Gal Drum	Yellow	1 / 4
9992158	DOWFROST™ HD 70	1 Gal Bottle	Yellow	4 / 108
9992157	DOWFROST™ HD 70	5 Gal Pail	Yellow	1 / 24
9992156	DOWFROST™ HD 70	55 Gal Drum	Yellow	1 / 4
9990323	DOWFROST™	1 Gal Bottle	Blue	4 / 108
9990321	DOWFROST™	5 Gal Pail	Blue	1 / 24
9990221	DOWFROST™	55 Gal Drum	Blue	1 / 4
9990623	DOWFROST™ 70	1 Gal Bottle	Blue	4 / 108
9990621	DOWFROST™ 70	5 Gal Pail	Blue	1 / 24
9990521	DOWFROST™ 70	55 Gal Drum	Blue	1 / 4
9995006	DOWCAL™ 200	1 Gal Bottle	Blue	4 / 108
9995005	DOWCAL™ 200	5 Gal Pail	Blue	1 / 24
9995000	DOWCAL™ 200	55 Gal Drum	Blue	1 / 4
9996003	DOWFROST™ LC 25	5 Gal Pail	Yellow	1 / 24
9996002	DOWFROST™ LC 25	55 Gal Drum	Yellow	1 / 4
9996005	DOWFROST™ LC 25	265 Gal Tote	Yellow	1 / 1

Only select part numbers displayed. Contact Lentus for additional sizes.



DOWCAL™ 200 Heat Transfer Fluid

Aluminum-safe glycol used in a wide range of industrial, construction, and infrastructure applications. Its low acute toxicity makes it especially suitable for applications where toxicity is a concern.

APPLICATIONS:

- Solar heating
- Floor heating
- Snow melting systems
- Process heating
- Heat recovery
- Cooling of electronic systems and components
- Wind turbine systems
- Photo-voltaic (PV) inverters
- Data center cooling
- Ice skating rinks

FEATURES:

- Provides long-lasting and efficient corrosion protection, particularly for aluminum alloys
- Low acute oral toxicity
- Free of nitrite, borax, and CMR (carcinogenic, mutagenic, and reprotoxic)
- Recommended operating temperature range of -50°F to 350°F (-46°C to 177°C)



DOWFROST™ LC 25 Heat Transfer Fluid

The optimal fluid for efficient heat removal in Datacom Equipment Cooling Systems (DECS) and Coolant Distribution Units (CDUs) located within server racks. A customized inhibitor package provides superior corrosion protection for liquid-cooled, direct-to-chip applications with high surface area copper components.

APPLICATIONS:

- Direct-to-chip liquid cooling systems
- Liquid-based Datacom Equipment Cooling System (DECS)
- Glycol Cooled Computer Room AC Units (CRAC)
- Pumped refrigerant and glycol loop heat exchangers

FEATURES:

- Engineered and optimized to specifically serve the emerging liquid cooling needs of the data center and AI industries
- Manufactured using USP/EP grade propylene glycol
- Provides freeze protection for the system loop down to 14°F (-10°C)
- Compatible with a wide range of metals and elastomers used in DECS hardware
- Maintains functionality and protection in extreme conditions
- Fluorescent yellow for easy leak detection
- Thermal stability from -14°F to 195°F (-26°C to 91°C)

ETHYLENE GLYCOL

DOWTHERM™ SR-1 Heat Transfer Fluid

A formulation of 95.5% ethylene glycol and has a specially designed 4.5% package of industrial corrosion inhibitors.

APPLICATIONS:

- Solar heating
- Ice skating rinks
- FSRU (Floating Storage Regasification Unit) for chillers, heat pumps, temperature-sensitive materials, deicing, defrosting, and dehumidifying
- HVAC systems

FEATURES:

- Manufactured with 100% virgin ethylene glycol and formulated with heavy-duty industrial inhibitor packages that prevent corrosion
- Provides exceptional freeze protection down to -60°F (-51°C) and burst protection down to -100°F (-73°C)
- Specifically engineered for metal components with a high copper surface area
- Cost-effective cooling solution vs air cooling systems
- Fluorescent pink for easy leak detection
- Recommended temperature range of -60°F to 250°F (-51°C to 121°C)



PART N°	PRODUCT	SIZE	COLOR	CASE / PALLET
99092000	DOWTHERM™ SR-1	55 Gal Drum	Pink	1 / 4

**BEST
SELLER**



MOLYKOTE® 111 Compound

A silicone-based valve lubricant/sealant compound with a heavy consistency. Used for protecting and conditioning rubber and plastic components exposed to water, chemicals, and harsh environments.

APPLICATIONS:

- Valve and O-ring lubrication
- Sealing vacuum and pressure equipment
- Transformer gaskets and equipment enclosures

FEATURES:

- NLGI Grade 3-4
- Meets FDA Reg 21 CFR 175.300, NSF 51, and NSF 61 requirements
- Wide service temperature range of -40°F to 392°F (-40°C to 200°C)
- Excellent water and washout resistance
- Low vapor pressure and volatility
- Elastomer compatibility
- 5-year shelf life

PART N°	SIZE	COLOR	CASE / PALLET
12122063	100 G	White	12 / 1,080
4109803	400 G	White	10 / 450
4111557	3.6 KG	White	1 / 96
4109896	18 KG	White	1 / 24
4109923	200 KG	White	1 / 4

Only select part numbers displayed. Contact Lentus for additional sizes.

MOLYKOTE® 7 Release Compound

Used primarily as a release agent or cable-pulling lubricant.

APPLICATIONS:

- Mold release agent for foundry shell and core molds
- Release agent for adhesives and glues
- Cable-pulling lubricant to draw rubber-covered cable through conduit
- Release agent for plastic extruders and processing equipment
- Food processing equipment and potable water

FEATURES:

- NLGI Grade 1
- Very robust thermal stability from -40°F to 400°F (-40°C to 204°C)
- Excellent release and sealing properties
- Resistant to oxidation and moisture
- Shows little tendency to dry out in service
- Meets FDA Reg 21 CFR 175.300, NSF 51, and NSF 61 requirements
- 5-year shelf life

PART N°	SIZE	COLOR	CASE / PALLET
12122071	100 G	Trans White	12 / 1,080
1922602	3.6 KG	Trans White	1 / 96

Only select part numbers displayed. Contact Lentus for additional sizes.



MOLYKOTE® 4 Electrical Insulating Compound

Silicone-based compound with semi-flowable, grease-like consistency that exhibits excellent dielectric strength and electrical insulating properties.

APPLICATIONS:

- Cable systems
- Electrical connectors
- Valves, packings, seals, and O-rings
- Industrial controls: switches, electrical cabinets, control equipment

FEATURES:

- NLGI Grade 2-3
- Good adhesion to most dry materials, including metals, elastomers, polymers, and ceramics
- Low volatility and evaporation
- Good moisture-resistance, water repellency, and thermal oxidation stability
- Meets FDA Reg 21 CFR 175.300, NSF 51, and NSF 61 requirements
- Material tested to AMS8660 Tables 1-4
- 5-year shelf life



PART N°	SIZE	COLOR	CASE / PALLET
12122072	100 G	Trans White	12 / 1,080

Only select part numbers displayed. Contact Lentus for additional sizes.

MOLYKOTE® 33 Medium Extreme Low Temperature Grease

Grease for use under a wide range of temperature conditions for light-load applications where there is metal-to-metal, metal-to-plastic, or plastic-to-plastic friction at low to high speeds.

APPLICATIONS:

- Control systems
- Cold storage equipment
- Electrical equipment
- Plain bearings, bushings, and sleeves
- Plastic gears, bearings, cams, bushings
- Rolling element bearings
- Rubber and elastomer lubrication
- Slides, guides, and tracks

FEATURES:

- NLGI Grade 2
- Good oxidation resistance
- Wide service temperature range from -99°F to 356°F (-73°C to 180°C)
- Superior low-temperature characteristics
- Compatible with most plastics and elastomers
- Water-resistant



PART N°	SIZE	COLOR	CASE / PALLET
4016024	100 G	Off-White	10 / 780
4016034	400 G	Off-White	10 / 450

Only select part numbers displayed. Contact Lentus for additional sizes.

MOLYKOTE® BG-20 Synthetic Bearing Grease

High-performance grease for metal-on-metal combinations involving rapid movements and medium to heavy loadings.

APPLICATIONS:

- High speed spindles, blower bearings, and calendar-roller bearings
- Plain bearings, bushings, and sleeves
- Motor bearings operating at high RPM
- Rolling element bearings
- Slides, guides, and tracks

FEATURES:

- NLGI Grade 2
- Contains no lead or nickel
- High load-carrying capacity
- Suitable for long-term lubrication by virtue of low oil evaporation and low tendency towards oxidation
- Wide service temperature range from -49°F to 356°F (-45°C to 180°C)
- Suitable for very high rotational speeds
- 5-year shelf life



PART N°	SIZE	COLOR	CASE / PALLET
2405831	400 G	Beige	10 / 450

Only select part numbers displayed. Contact Lentus for additional sizes.

MOLYKOTE® BR-2 Plus High Performance Grease


High-performance grease with solid lubricants for metal-on-metal combinations involving slow to fast movements, particularly with medium to high loads.

APPLICATIONS:

- Machine tools, conveyors, and processing equipment
- Multi-purpose penetrant
- Plain bearings, bushings, and sleeves
- Power screw drives
- Rolling element bearings
- Slides, guides, and tracks

FEATURES:

- NLGI Grade 2
- Lithium-soap-thickened mineral oil grease
- High load-carrying capacity
- Suitable for long-term lubrication
- Good oxidation resistance
- Extreme pressure performance



PART N°	SIZE	COLOR	CASE / PALLET
4112876	400 G	Black	10 / 450

Only select part numbers displayed. Contact Lentus for additional sizes.

GREASE

**BEST
SELLER**



Lucas Red “N” Tacky Grease

Smooth, tacky, red lithium complex grease fortified with rust and oxidation inhibitors.

APPLICATIONS:

- Reduce friction between moving metal parts
- Plain bearings, sliding parts, and open gears
- Industrial
- Automotive
- Agricultural

FEATURES:

- NLGI Grade 2
- Water-resistant
- Excellent mechanical stability
- Long storage life
- Suitable for heavy loads over extended periods
- Enhanced tackiness enables longer performance
- Multi-purpose extreme pressure grease

PART N°	SIZE	COLOR	CASE / PALLET
11025	11 OZ Aerosol	Red	12 / 1,296
10005-30	14 OZ Cartridge	Red	30 / 1,800
10574	1 LB Tub	Red	12 / 1,200
10027	35 LB Pail	Red	1 / 24
10028	120 LB Keg	Red	1 / 9
10029	400 LB Drum	Red	1 / 4

Lucas Heavy Duty Mining & Construction Grease

Lithium complex grease fortified with 5% molybdenum disulfide provides excellent shock loading protection in the most adverse operating conditions.

APPLICATIONS:

- Centralized dispensing systems and heavy-duty equipment
- Pins, bushings, and sleeves
- Heavy-duty, top-loading mining equipment
- Construction equipment - loaders, haul trucks, and shovels

FEATURES:

- NLGI Grade 2
- Works in the most adverse operating conditions
- Protects booms, pins, and pivot points from wear
- Extends equipment life
- Excellent shock-load and water resistance



PART N°	SIZE	COLOR	CASE / PALLET
10881-30	14 OZ Cartridge	Gray	30 / 1,800
10922	120 LB Keg	Gray	1 / 9

Lucas White Lithium Grease

A high-quality formulation with selective additives and virgin base oils, blended to provide outstanding long-term lubrication.

APPLICATIONS:

- Garage doors, hinges, openers, and springs
- Chassis, trucks, tractors, and contractor equipment
- Cables and chains
- Latches and hinges

FEATURES:

- NLGI Grade 2
- Long-lasting and reduces wear
- Extreme friction reducer



PART N°	SIZE	COLOR	CASE / PALLET
10533	8 OZ Tube	White	12 / 840
10535	35 LB Pail	White	1 / 24

Lucas X-tra Heavy Duty Grease

EP-fortified grease that exceeds OEM specifications and is virtually water and washout-proof, featuring a robust extreme pressure additive package.

APPLICATIONS:

- Hard-working equipment with irregular maintenance schedules
- High-speed motor bearings
- Industrial equipment lubrication
- Automotive chassis points, wheel bearings, and suspension components
- Agricultural equipment

FEATURES:

- NLGI Grade 2
- Excellent high-temperature stability
- Lasts four times longer than regular grease
- The ultimate grease for high-speed bearings



PART Nº	SIZE	COLOR	CASE / PALLET
10301-30	14.5 OZ Cartridge	Green	30 / 1,800
10330	1 LB Tub	Green	12 / 1,200
10305	35 LB Pail	Green	1 / 24
10316	120 LB Keg	Green	1 / 9
10335	400 LB Drum	Green	1 / 4

Lucas Marine Grease

Premium, multi-purpose, Overbased Calcium Sulfonate (OBCS) grease containing unique polymers, anti-wear agents, and tackifiers with inherent rust and oxidation resistance to provide the highest-performance properties.

APPLICATIONS:

- Freshwater and saltwater corrosion protection
- Trailer wheel bearings
- Trailer chassis lubrication
- Outboards
- Automotive wheel bearings

FEATURES:

- NLGI Grade 2
- Extreme pressure properties, water resistance, and shock-loading protection
- Typical weld point of 500 kg; the minimum industry standard is 200 kg
- Timken Load 65 lbs
- Dropping point 570°F (299°C)



PART Nº	SIZE	COLOR	CASE / PALLET
10320-30	14 OZ Cartridge	Blue	30 / 1,800
11148	1 LB Tub	Blue	12 / 1,200
10321	35 LB Pail	Blue	1 / 24
10322	120 LB Keg	Blue	1 / 9
10660	400 LB Drum	Blue	1 / 4

OIL AND LUBRICANT

Lucas Air Tool Lubricant

A complex blend of oils and additives specially formulated to reduce rust and increase RPMs as it coats the working parts with a cushion of waterproof lubricants.

APPLICATIONS:

- Air-powered tools and compressed air systems
- Construction and pneumatic tools

FEATURES:

- Protects under extreme operating temperatures
- Disperses water
- Resists blowout
- Extends tool life by reducing friction and wear



PART Nº	SIZE	COLOR	CASE / PALLET
10216	1 Pint	Clear Yellow	12 / 1,680
10200	1 Quart	Clear Yellow	12 / 840

Lucas Penetrating Oil

A high-performance penetrant that dissolves rust and corrosion without drying, reaching into the smallest crevices to lubricate metal parts.

APPLICATIONS:

- Nuts, bolts, and hinges
- Bearings
- Motorcycle and bicycle chains

FEATURES:

- Fortified with powerful corrosion inhibitors and wetting agents
- Slow evaporation that leaves a tenacious film that fights water and corrosion
- Use in any position, even upside down
- Low odor



PART Nº	SIZE	COLOR	CASE / PALLET
11043	11 OZ Aerosol	Amber	12 / 1,296

OIL AND LUBRICANT

**BEST
SELLER**



Lucas Heavy Duty Oil Stabilizer

A pure petroleum multi-use oil supplement. Controls noise, heat, and wear. Number one in the heavy duty and high-performance industries.

APPLICATIONS:

- Engines
- Manual transmissions
- Rear differentials
- Use in gear oil to stop leaks

FEATURES:

- Increases oil life by at least 50%
- Reduces oil consumption
- Eliminates dry starts
- Raises oil pressure
- Increases power and miles per gallon

PART N°	SIZE	COLOR	CASE / PALLET
10001	1 Quart	Amber	12 / 840
10002	1 Gal	Amber	4 / 240
10015	5 Gal Pail	Amber	1 / 24
10091	55 Gal Drum	Amber	1 / 4

Lucas Fuel Treatment

A powerful blend of oils and additives that contain no solvents. Designed to increase power and fuel mileage and lower exhaust emissions through a more complete combustion.

APPLICATIONS:

- Gasoline and diesel engines, carbureted or fuel injected
- Use it to pass smog tests
- Replaces the benefits of lead in gasoline without causing harmful emissions

FEATURES:

- Cleans and lubricates fuel system
- Increases life of pumps, valves, rings, and injectors
- Solves low sulfur diesel fuel problems
- Increases MPG and decreases cylinder wear



PART N°	SIZE	COLOR	CASE / PALLET
10020	5.25 OZ	Yellow	24 / 768
10003	1 Quart	Yellow	12 / 840
10013	1 Gal	Yellow	4 / 240
10080	5 Gal Pail	Yellow	1 / 24
10090	55 Gal Drum	Yellow	1 / 4
10023	330 Gal Tote	Yellow	1 / 1

Lucas Hydraulic Oil Booster & Stop Leak

One-of-a-kind, long-lasting blend of oils and petroleum-extracted additives that add lubricity and thermal stability to any hydraulic oil.

APPLICATIONS:

- Stops leaks
- Prevents major overhauls
- Reduces heat
- Adds life to pumps, rams, seals, and the treated hydraulic fluid
- Stops slip, chatter, and fading

FEATURES:

- Designed for correcting existing problems
- Treat rate for preventative maintenance is only 5-10%
- Anti-foam agents present



PART N°	SIZE	COLOR	CASE / PALLET
10019	1 Quart	Red	12 / 840
10018	1 Gal	Red	4 / 240
10039	5 Gal Pail	Red	1 / 24
10040	55 Gal Drum	Red	1 / 4

Lucas Chain Lube

Low-odor, semi-synthetic spray lubricant, keeps your chain in perfect, long-lasting condition with minimal sling-off.

APPLICATIONS:

- Motorcycle chains and sprockets
- Garage doors
- Suitable for use on all chains, including O-ring types

FEATURES:

- Excellent rust and corrosion inhibitor, as well as water-resistant
- Leaves protective film to ensure minimal wear and drag



PART N°	SIZE	COLOR	CASE / PALLET
10393	11 OZ Aerosol	Amber	12 / 1,296

LENTEK™ Acrylic Pro

A siliconized acrylic sealant that delivers strong adhesion and lasting performance professionals can trust.

APPLICATIONS:

- Windows and doors
- Tubs and showers
- Baseboards and molding
- Ductwork and vents
- Countertops and sinks
- Trim
- Fixtures
- Tile

FEATURES:

- Indoor and outdoor
- Mildew- and water-resistant
- Crack proof
- Paintable
- Low odor
- Easy application
- 40-year durability



PART N°	SIZE	COLOR	CASE / PALLET
7400003	10.5 FL OZ	Clear	12 / 1,296
7400004	10.5 FL OZ	White	12 / 1,296

LENTEK™ Plumbers Pro

A siliconized acrylic sealant that is easy to apply and built for clean, long-lasting results.

APPLICATIONS:

- Tubs and showers
- Countertops and sinks
- Vanities and cabinets
- Fixtures
- Tile
- Windows and doors
- Baseboards and molding
- Ductwork and vents

FEATURES:

- Mildew- and water-resistant
- Paintable
- Flexible and durable
- Indoor and outdoor
- One-component
- Forms a water-resistant layer after curing
- Does not affect the application surface
- Adheres to wood, PVC, aluminum, glass, tile, stone, concrete, brick, and plaster



PART N°	SIZE	COLOR	CASE / PALLET
7400001	5.5 FL OZ	Clear	24 / 1,248
7400002	5.5 FL OZ	White	24 / 1,248

LENTEK™ Insulating Foam Sealant

Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam. Provides a simple, cost-effective solution to eliminate unwanted airflow and improve energy efficiency.

APPLICATIONS:

- Wider gaps, joints, and cavities
- Insulating door and window frames
- Penetrations in walls
- Insulating electrical outlets, water pipes, ducts, refrigerant lines, and condensate drain pans
- Vibration dampening
- Expansion joint filling
- Sealing and air barrier

FEATURES:

- 18-month shelf life
- Triple expanding
- Indoor and outdoor use
- Long-lasting, airtight, and weather-resistant seals
- Adheres to wood, metal, masonry, glass, and most common building materials
- UL Classified



PART N°	SIZE	COLOR	CASE / PALLET
2299120	12 OZ Straw	Tan	12 / 912

LENTEK™ Fireblock Foam Sealant

Impedes spread of fire and smoke through service penetrations. Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam.

APPLICATIONS:

- Seals service penetrations between floors and electrical runs through wall studs
- HVAC equipment penetrations
- Ductwork in walls, floors, and ceilings
- Fire damper installations

FEATURES:

- 18-month shelf life
- Cost-effective polyurethane foam sealant
- B2 fire rating
- Adheres to wood, metal, masonry, glass, and most common building materials
- UL Classified



PART N°	SIZE	COLOR	CASE / PALLET
2299121	12 OZ Straw	Orange	12 / 912
2299200	24 OZ Gun	Orange	12 / 684

**BEST
SELLER**



GREAT STUFF™ Window & Door

This polyurethane foam sealant is a specially formulated, minimal-expanding foam with a low-pressure build that remains soft and flexible after curing.

APPLICATIONS:

- Windows and their rough openings
- Doors and their rough openings

FEATURES:

- Bonds to vinyl, wood, and metal frames
- Forms without trimming to create a long-lasting, airtight, and water-resistant seal proven not to bow window or door frames

PART Nº	SIZE	COLOR	CASE / PALLET
99108862	12 OZ Smart Dispenser	Yellow	12 / 768
00187273	20 OZ PRO Gun Foam	Yellow	12 / 768
00197711	20 OZ Straw	Yellow	12 / 768

GREAT STUFF™ Gaps & Cracks

Minimize airflow in holes, gaps, and cracks all around the home. It's ready to use and creates seals made to last.

APPLICATIONS:

- Seal basements and attics
- Pipe penetrations
- Ducting
- Plumbing penetrations
- Electrical outlets and panels
- Rim joists

FEATURES:

- Adheres to wood, metal, masonry, glass, and most plastics
- Helps keep insects, moisture, condensation, and allergens out
- Paintable, stainable, and sandable
- Takes the shape of gaps and cracks
- Water-resistant around plumbing and electrical
- UL Classified



GREAT STUFF™ Multipurpose Black

The jack-of-all-trades solution for discreetly filling unwanted gaps across a wide range of projects, both inside and outside of the home.

APPLICATIONS:

- Exterior of electrical lines
- Service penetrations, air conditioning lines, refrigerant lines, and gas lines
- Repair of masonry walls, sidewalks, and porches
- Outdoor landscaping

FEATURES:

- Expands to fill, seal, and insulate gaps up to 1" (25 mm)
- Reduces unwanted noise and vibration
- All-direction dispensing
- Black color blends into environment
- Creates a long-lasting, airtight, weather-resistant seal
- Paintable, stainable, and sandable
- UL Classified



PART Nº	SIZE	COLOR	CASE / PALLET
99108824	12 OZ Smart Dispenser	Yellow	12 / 768
00157911	20 OZ Straw	Yellow	12 / 768
00157901	12 OZ Straw	Yellow	12 / 768
00341557	24 OZ PRO Gun Foam	Orange	12 / 768
00341558	30 OZ PRO Gun Foam	Orange	12 / 768

PART Nº	SIZE	COLOR	CASE / PALLET
99112876	12 OZ Smart Dispenser	Black	12 / 768

GREAT STUFF™ Big Gap Filler

Fills, seals and insulates bigger gaps, to help minimize unwanted airflow and improve energy efficiency in high-loss areas.

APPLICATIONS:

- Rim joists and sill plates
- Exterior openings
- Pipe penetrations
- Ducting

FEATURES:

- Expands up to 3" (76 mm)
- Adheres to wood, metal, masonry, glass, and most plastics
- Forms a long-lasting, airtight, weather-resistant seal
- Paintable, stainable, and sandable
- Interior and exterior use
- UL Classified



PART N°	SIZE	COLOR	CASE / PALLET
00157906	12 OZ Straw	Yellow	12 / 768
99108860	12 OZ Smart Dispenser	Yellow	12 / 768

GREAT STUFF™ Heavy Duty Work Wipes

Durable and strong scrub removes uncured GREAT STUFF™ foams and more.

APPLICATIONS:

- Removes uncured foams, adhesives, silicone, and fillers
- Cleans up oil, paint, grease, grime, and other heavy messes
- Heavy duty cleaning jobs that regular wipes can't handle

FEATURES:

- Large size: 9.8" x 7.9"
- Lint-free
- Active cleaning solution
- 30 wet wipes per reusable package
- Made with sustainable materials



PART N°	SIZE	CASE
7500104	Case	24 Packs (2 Shelf Ready Boxes)
5900004	1/4 Pallet Display	8 Cases (192 Packs)

GREAT STUFF PRO™ Foam Cleaner

Uniquely formulated to dissolve uncured polyurethane foam from project surfaces and applicators for easy removal.

APPLICATIONS:

- Clean GREAT STUFF PRO™ Dispensing Guns from the inside
- Remove any uncured GREAT STUFF™ product residue

FEATURES:

- Threaded cap
- Comes with spray nozzle and gun adapter attachment
- Point and spray foam removal



PART N°	SIZE	COLOR	CASE / PALLET
12084890	12 OZ	Clear	12 / 1,080

GREAT STUFF PRO™ Dispensing Guns

No-drip, precision application, the GREAT STUFF PRO™ Dispensing Gun provides total control over every seal, ensuring professionals get the maximum yield out of every can.

APPLICATIONS:

- Applying GREAT STUFF PRO™ products
- Sealing and insulating gaps, cracks, and window and door jams

FEATURES:

- Lightweight, high-strength aluminum body with a metal trigger
- Flow-control mechanism dispenses beads from 1/8" to 3"
- Provides greater precision and access to hard-to-reach areas
- Large flow control knob with a secured back-crew system
- Replaceable smooth dispensing nozzle
- Maximum foam yield and minimal waste



PART N°	PRODUCT	CASE
00230408	13" Gun	1
99046685	14" Gun Blister Pack	3

**BEST
SELLER**



GREAT STUFF™ Construction Work Gloves

Offers high visibility, abrasion resistance, and unparalleled grip in wet and dry conditions. The lightweight, 18-gauge liner enhances dexterity, allowing for precise handling of tools and materials. The reinforced thumb saddle provides added durability.

APPLICATIONS:

- Handling of tools and materials
- Heavy machinery operation
- Concrete work and masonry
- Automotive assembly and repair

FEATURES:

- Sandy nitrile coating
- High visibility
- Breathable, comfortable, and flexible for long wear
- Silicone- and latex-free

PART Nº	SIZE	PACK	CASE / PALLET
5000148	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000150	L	12 Pairs	72 Pairs / 2,592 Pairs
5000151	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000152	XXL	12 Pairs	72 Pairs / 2,592 Pairs



Touchscreen
Compatible



GREAT STUFF™ Multi Purpose Work Gloves


The sandy nitrile coating offers abrasion resistance and ensures excellent performance in challenging environments, including those with grease, oils, and hydrocarbons. The elastic knit wrist fits securely, preventing dirt and debris from entering.

APPLICATIONS:

- Material handling
- Maintenance tasks
- Construction

FEATURES:

- Sandy nitrile coating
- Enhanced dexterity
- Comfortable and breathable
- Lightweight, 15-gauge liner
- Silicone- and latex-free

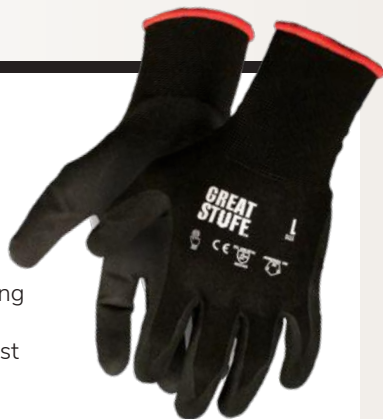

Touchscreen
Compatible



PART Nº	SIZE	PACK	CASE / PALLET
5000141	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000102	L	12 Pairs	72 Pairs / 2,592 Pairs
5000103	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000104	XXL	12 Pairs	72 Pairs / 2,592 Pairs

GREAT STUFF™ Cut Protection Work Gloves

Crafted with an HPPE/steel/fiberglass blend shell and 360° cut resistance, these gloves provide reliable protection in demanding environments.

APPLICATIONS:

- Installing panels, gears, trim pieces, and windshields or mirrors
- Working with sheet metal, wire, utility knives, glass, lumber, and saws

FEATURES:

- Sandy nitrile coating
- Breathable, comfortable, and flexible for long wear
- Lightweight, 18-gauge liner
- Silicone- and latex-free
- Reinforced thumb saddle



Touchscreen
Compatible



PART Nº	SIZE	PACK	CASE / PALLET
5000143	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000112	L	12 Pairs	72 Pairs / 2,592 Pairs
5000113	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000114	XXL	12 Pairs	72 Pairs / 2,592 Pairs

GREAT STUFF™ Impact Protection Work Gloves

Engineered for impact and cut resistance while ensuring a superior grip. With an HPPE/steel/fiberglass blend shell and high visibility back-of-hand impact guards, this glove is designed to protect against smash and pinch hazards while safeguarding your hands from all angles.

APPLICATIONS:

- Operating machinery or heavy materials
- Handling sharp tools or materials like bricks or stones
- Working with sheet metal, wire, utility knives, and saws

FEATURES:

- High-visibility back-of-hand impact guards
- HPPE/steel/fiberglass blend shell provides 360° cut resistance
- Sandy nitrile coating
- Reinforced thumb saddle
- Lightweight, 18-gauge liner
- Silicone- and latex-free



Touchscreen
Compatible



ANSI/ISEA 105



PART N°	SIZE	PACK	CASE / PALLET
5000144	S/M	12 Pairs	36 Pairs / 1,440 Pairs
5000117	L	12 Pairs	36 Pairs / 1,440 Pairs
5000118	XL	12 Pairs	36 Pairs / 1,440 Pairs
5000119	XXL	12 Pairs	36 Pairs / 1,440 Pairs

GREAT STUFF™ Nitrile with TentaGrip™ Disposable Gloves

Patent-pending TentaGrip™ texture that revolutionizes grip, ensuring a secure hold in various applications and wet or dry conditions.

APPLICATIONS:

- Working with oily or greasy parts
- Handling small components
- Food and beverage processing

FEATURES:

- Safe for ESD-sensitive applications
- Meets FDA Reg 21 CFR 177.2600 requirements
- Puncture-resistant
- Latex-, powder-, and silicone-free
- Ambidextrous



Industrial Grade
Thickness



Touchscreen
Compatible



Chemical
Resistance

PART N°	SIZE	EACH	CASE / PALLET
5000153	S/M	100 Gloves	10 Boxes / 480 Boxes
5000154	L	100 Gloves	10 Boxes / 480 Boxes
5000155	XL	100 Gloves	10 Boxes / 480 Boxes
5000156	S/M	10 Gloves	20 Packs / 1,920 Packs
5000157	L	10 Gloves	20 Packs / 1,920 Packs
5000158	XL	10 Gloves	20 Packs / 1,920 Packs

GREAT STUFF™ Latex / Nitrile Blend Disposable Gloves

The puncture resistant gloves have the comfort and dexterity of latex and the durability and strength of nitrile, offering industrial grade protection.

APPLICATIONS:

- Construction
- HVAC and plumbing
- Automotive
- Warehousing and manufacturing

FEATURES:

- Puncture-resistant
- Powder-free and polymer-coated
- Ambidextrous



Industrial Grade
Thickness



Touchscreen
Compatible

PART N°	SIZE	EACH	CASE / PALLET
5000089	L	100 Gloves	10 Boxes / 480 Boxes
5000090	XL	100 Gloves	10 Boxes / 480 Boxes
5900005	L	10 Gloves	20 Packs / 1,920 Packs
5900002	1/4 Pallet Display	100 Gloves	8 Cases (80 Boxes)



LENTUS



9/2026



LentusLLC.com

Sales@LentusLLC.com

+1-270-765-2212

400 Ring Road, Suite 101
Elizabethtown, KY 42701