
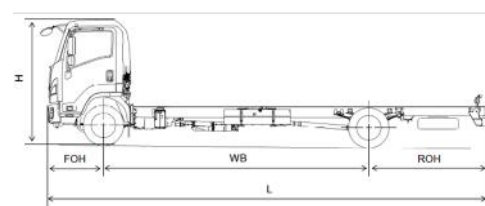



Chassis Cab

F110.240

11.00 TONNE GVW / 4X2 RIGID TWIN REAR WHEELS / MANUAL GEARBOX



Axle Weights (kg)		
UK maximum Vehicle Weights (kg)	GVW	11000
	GTW*	14500
UK Axle design weights (kg)	Front	4000
	Rear	7600
Weights* (kg)		
Cab type		day
Wheelbase	WB	3410
Vehicle Mass Unladen	Front	2380
	Rear	1249
Total		3629
GVW		11000
Body & Payload Allowance		7371
Max. Permissible Trailer Weight*		3500

Dimensions* (mm)		
Wheelbase	WB	3410
Overall Length to Chassis End	OAL	6000
Overhang - Front	FOH	1165
Overhang - Rear	ROH	1425
Cab Gap	CB	125
C/L Front Axle to Rear of Cab	CA	556
Recommended Body Length	BL	4154
Maximum Body Length		4424
Chassis Frame Width		840
Recommended Body Width (Standard Mirrors)		2550
Recommended Maximum Body Width		2550
Cab Width (Excludes Mirrors)	OW	2195
Overall Height (Unladen)	OH	2570
Chassis Height Rear of Frame (Unladen)	EH	899
Minimum Road Clearance	HH	165
Track - Front	AW	1795
Track - Rear	CW	1660
Rear Axle Width	BW	2170

* NOTES

1. Unladen weights based on Mass in Running Order (MIRO) and includes 75kg for driver. (Tolerance +/- 5%). 2. Body lengths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met. 3. Recommended and Maximum Body Lengths are calculated in accordance with the Isuzu's Bodybuilder Guidelines. 4. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations. Pictures shown are for illustrative purposes only. 5. Published 01/09/2026.

ISUZU F110.240 - 11 TONNE TWIN REAR WHEELS WITH MANUAL GEARBOX

POWER, TORQUE & CHASSIS DETAILS	
Engine	Isuzu 2-stage turbo intercooled OHC 4-cylinder diesel engine
Bore × Stroke	115 x 125mm
Capacity	5193CC. Max Power: 240PS / 177 kW (at 2400pm)
Transmission	Isuzu 6-speed manual
Clutch	Dry plate diaphragm type
Electrical	24V system, 2x 115E41L battery 110Ah, 820CCA
Tyres	235/75 R17.5 radial.
Spare Wheel	1 x wheel and tyre.
Frame Type	Parallel ladder type.
Rear Axle Ratio	5.125:1 (with Diff Lock)
Axles	Front: Rigid beam. Rear: Rigid with hypoid final drive.
Suspension	Front: Rigid axle multileaf spring. Rear: Rigid axle multileaf spring.
Brakes	System: Air over hydraulic. Front: Drum. Rear: Drum. Park: Rear wheel spring brake.
Fuel Tank Capacity	140 Litres
AdBlue® Capacity	16 Litres
DRIVER & SAFETY FEATURES	
DWS Distance Warning System	Intersection AEBS
FVSN Forward Vehicle Start Notification	ISA Intelligent Speed Assist
DDAW Driver Drowsiness and Attention Warning	LDWS Lane Departure Warning System
MOIS Moving Off Information System	EVSC Electronic Vehicle Stability Control
Intersection Warning	
BSIS Blind Spot Information System	
TSR Traffic Sign Recognition	
TPMS Tyre Pressure Monitoring System	

FEATURES	
Cab Exterior	Hexapod, all-steel. Manual tilt to 45 deg. Tinted windscreen and windows. Chrome grille. Plastic resin non-slip entry steps. Steel reinforced 3-part front bumper. LED - Headlamps, Daytime running lamps, Fog lamps and Rear lamps. Headlamp washers. Front mudguards with spray suppression. Keyless entry.
	Flame-resistant interior trim. Vinyl floor matting. Pillar mounted entrance grab handles both sides. Driver and passenger SRS airbags. Air-conditioning. Engine Immobiliser.
	Isringhausen® heated and cooled driver air suspension seat. Rigid passenger seat with head restraint and 3-point red seatbelt with pre-tensioner. Red centre seat lap belt.
	Large foldable mirrors. Front underview mirror & kerb mirror. Interior rear-view mirror on collapsible mounting with camera feed when in reverse mode. Driver and passenger sun visors. Deep cut side windows to reduce blind spots. Electric windows with driver control and lock. Heated and electrically adjustable rear-view mirrors.
Infotainment	Multi-function infotainment system with 9-inch touchscreen with Apple CarPlay®, Android Auto® and connects via Bluetooth®.
Instrument	7-inch Multi-Information Display (MID).
Tool Kit	Jack with a small selection of hand tools.
WARRANTY	
All chassis cabs come with a 3-Year Unlimited Mileage Warranty and roadside assistance, as standard. Terms & Conditions apply.	
Isuzu-backed Repair and Maintenance contracts available upon request.	
OTHER	
Rear Bumper	Aluminium rear under run bar.

